


The game begins with no moves in its history, hence the aggregation relationship rather than composition.

The chess board itself is a two dimensional array of ChessSquares that have a multiplicity of 8 columns and 8 rows.

Technically if someone sucks at chess they could have none of their own pieces and also not captured any of their opponents. Hence aggregation rather than composition.

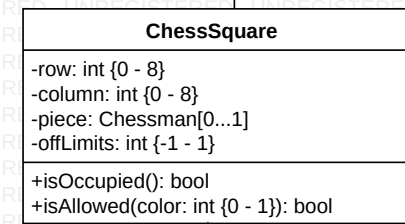

Assumes the original piece attribute inherited from Move will be of type Pawn.

The piece attribute's getters are setters are important to know if a capture is happening and to communicate with the Chessman currently on the space to give them the boot.

Associated with Player class because a method in Player has a return type of ChessMove

Color is an int because the only two options are white (represented by 0) and black (represented by 1).

List of ChessSquares to support visuals of possible moves.

Communicates with Player to know when movement is required.