Entity relation diagram #1 of “northwind.db”:

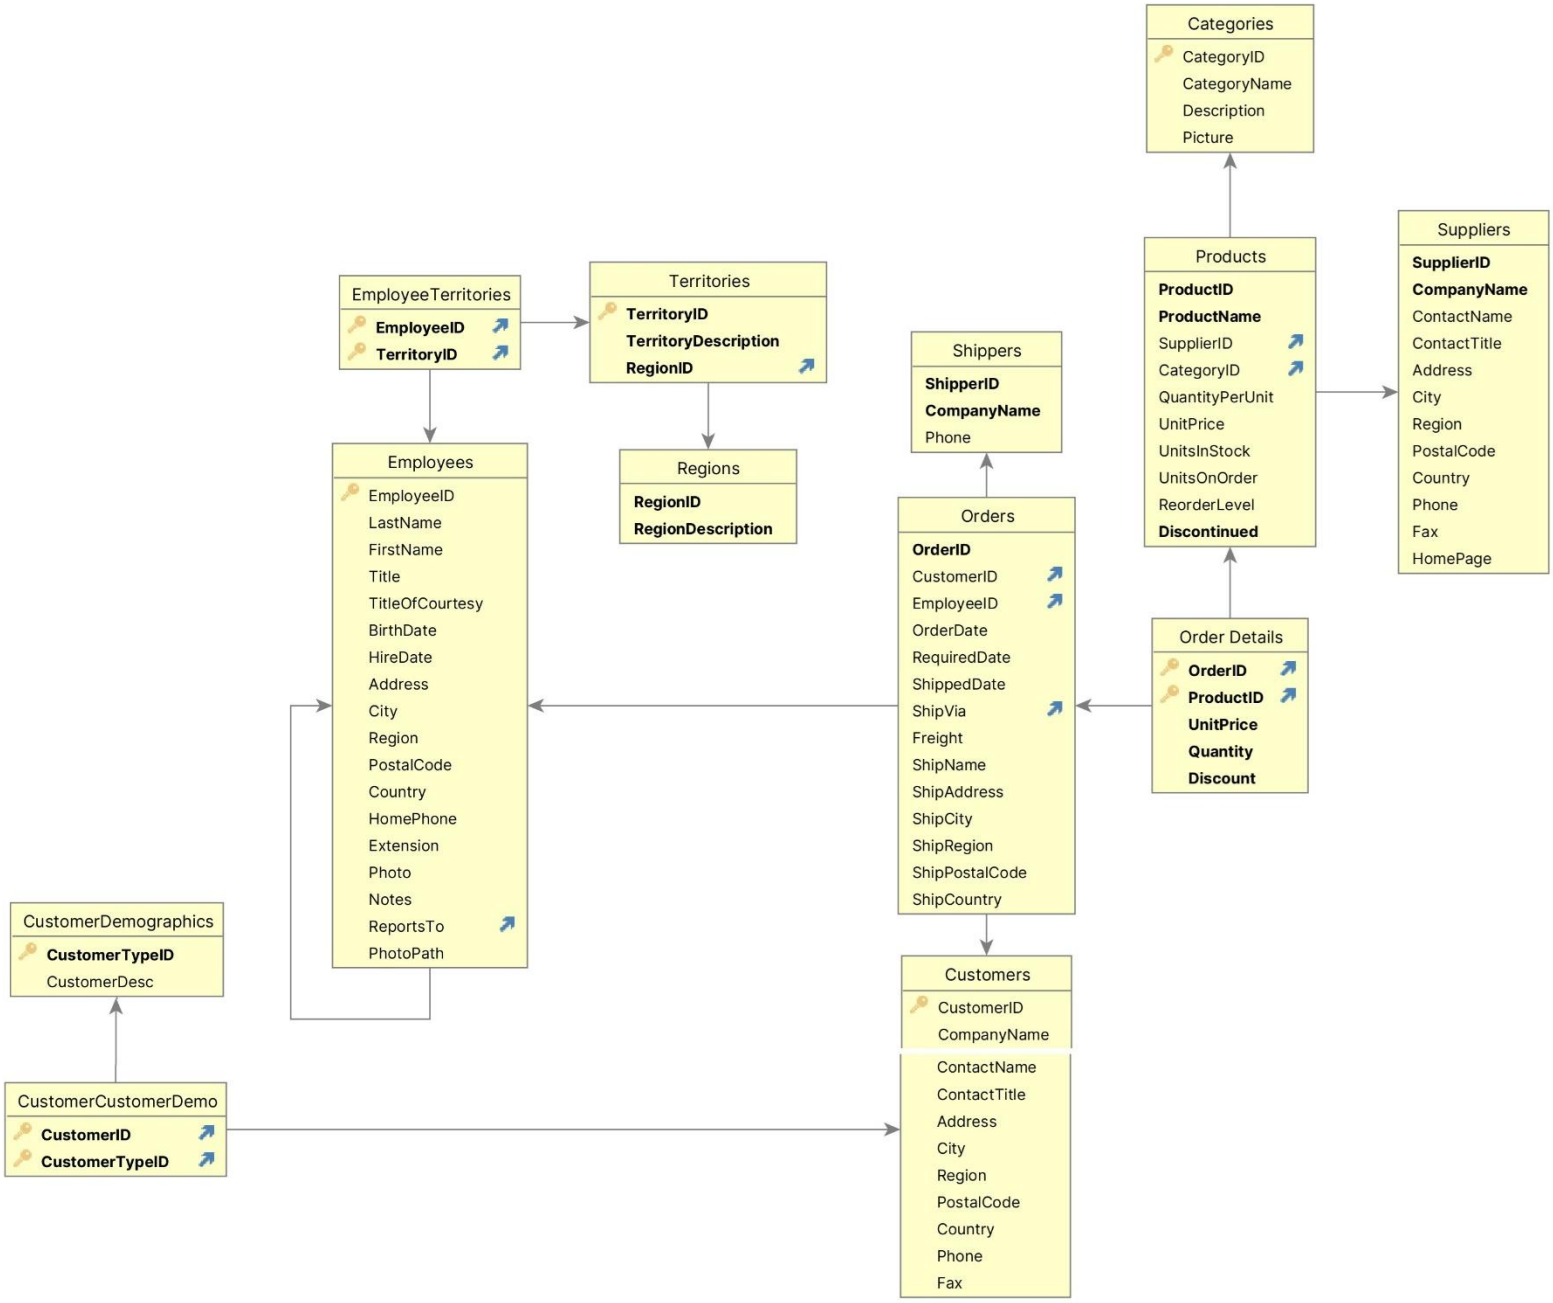

Entity relation diagram #2:

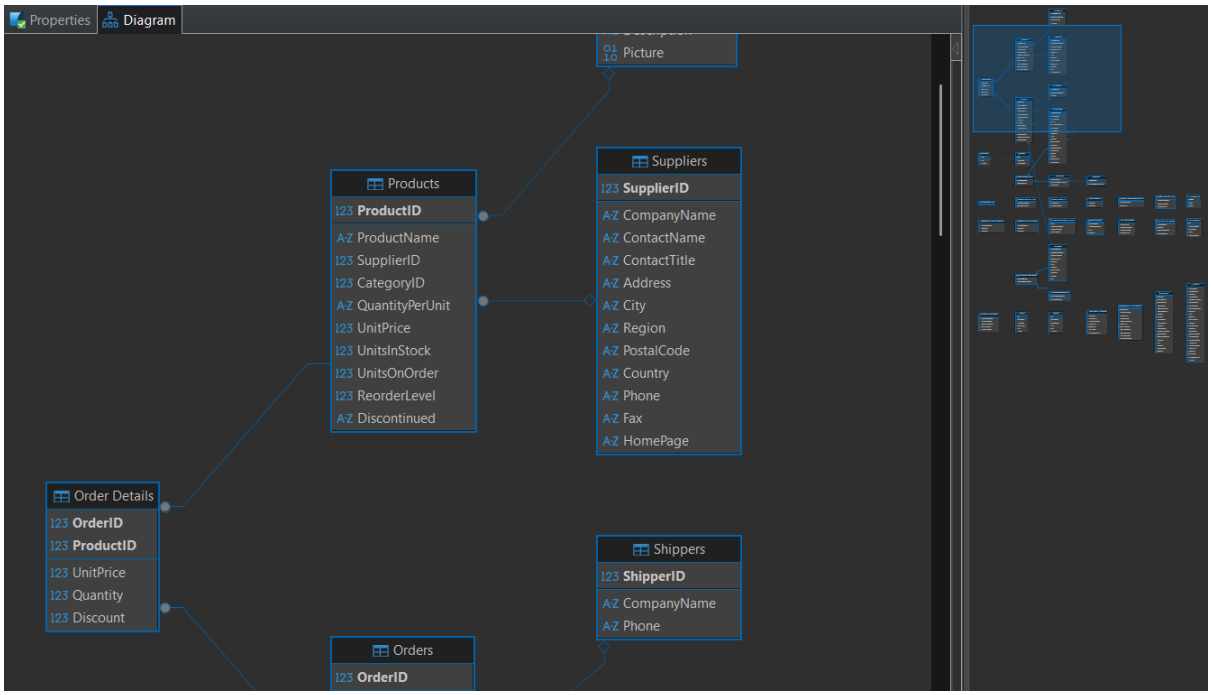

Generated by:

Entity relation diagram #2 in full image:

Categories
CategoryID
CategoryName
Description
Picture
Products
ProductID
ProductName
SupplierID
CategoryID
QuantityPerUnit
UnitPrice
UnitsInStock
UnitsOnOrder
ReorderLevel
Discontinued
Suppliers
SupplierID
CompanyName
ContactName
ContactTitle
Address
City
Region
PostalCode
Country
Phone
Fax
HomePage
Order Details
OrderID
ProductID
UnitPrice
Quantity
Discount
Shippers
ShipperID
CompanyName
Phone
Orders
OrderID
CustomerID
EmployeeID
OrderDate
RequiredDate
ShippedDate
ShipVia
Freight
ShipName
ShipAddress
ShipCity
ShipRegion
ShipPostalCode
ShipCountry
Employees
EmployeeID
LastName
FirstName
Title
TitleOfCourtesy
BirthDate
HireDate
Address
City
Region
PostalCode
Country
HomePhone
Extension
Photo
Notes
ReportsTo
PhotoPath
rechnung
rid
kid
datum
Kunde
kid
vorname
nachname
EmployeeTerritories
EmployeeID
TerritoryID
Territories
TerritoryID
TerritoryDescription
RegionID
Regions
RegionID
RegionDescription
ProductDetails_V
Category Sales for 1997
CategoryName
CategorySales
Current Product List
ProductID
ProductName
Order Subtotals
OrderID
Subtotal
Products Above Average Price
ProductName
UnitPrice
Product Sales for 1997
CategoryName
ProductName
ProductSales
sqlean_define
name
type
body
Summary of Sales by Quarter
ShippedDate
OrderID
Subtotal
Summary of Sales by Year
ShippedDate
OrderID
Subtotal
Customer and Suppliers by City
City
CompanyName
ContactName
Relationship
Quarterly Orders
CustomerID
CompanyName
City
Country
Sales by Category
CategoryID
CategoryName
ProductName
ProductSales
Sales Totals by Amount
SaleAmount
OrderID
CompanyName
ShippedDate
Artikel_Einfach
id
bezeichnung
kategorie
preis
umsatz_2022
Customers
CustomerID
CompanyName
ContactName
ContactTitle
Address
City
Region
PostalCode
Country
Phone
Fax
CustomerCustomerDemo
CustomerID
CustomerTypeID
CustomerDemographics
CustomerTypeID
CustomerDesc
Invoices
ShipName
ShipAddress
ShipCity
ShipRegion
ShipPostalCode
ShipCountry
CustomerID
CustomerName
Address
City
Region
PostalCode
Country
Salesperson
OrderID
OrderDate
RequiredDate
ShippedDate
ShipperName
ProductID
ProductName
UnitPrice
Quantity
Discount
ExtendedPrice
Freight
Orders Qry
OrderID
CustomerID
EmployeeID
OrderDate
RequiredDate
ShippedDate
ShipVia
Freight
ShipName
ShipAddress
ShipCity
ShipRegion
ShipPostalCode
ShipCountry
CompanyName
Address
City
Region
PostalCode
Country
Alphabetical list of products
ProductID
ProductName
SupplierID
CategoryID
QuantityPerUnit
UnitPrice
UnitsInStock
UnitsOnOrder
ReorderLevel
Discontinued
CategoryName
Order Details Extended
OrderID
ProductID
ProductName
UnitPrice
Quantity
Discount
ExtendedPrice
Products by Category
CategoryName
ProductName
QuantityPerUnit
UnitsInStock
Discontinued
football
id
prename
surname
postcode
city
street
handball
id
vorname
nachname
plz
ort
strasse

Entity relation table by ***DB Blowser***:

```
-- To have an overview on all tables of the file
SELECT sql FROM sqlite_master WHERE type='table';
```

-- To have an overview on all tables of the file

SELECT sql FROM sqlite_master WHERE type='table';

	sql
1	CREATE TABLE [Categories]…
2	CREATE TABLE sqlite_sequence(name,seq)
3	CREATE TABLE [CustomerCustomerDemo](…
4	CREATE TABLE [CustomerDemographics](…
5	CREATE TABLE [Customers]…
6	CREATE TABLE [Employees]…
7	CREATE TABLE [EmployeeTerritories](…
8	CREATE TABLE [Order Details](…
9	CREATE TABLE [Orders](…
10	CREATE TABLE [Products](…
11	CREATE TABLE [Regions](…
12	CREATE TABLE [Shippers](…
13	CREATE TABLE [Suppliers](…
14	CREATE TABLE [Territories](…
15	CREATE TABLE sqlean_define(name text primary key, type text, body text)
16	CREATE TABLE Kunde …
17	CREATE TABLE rechnung…
18	CREATE TABLE Artikel_Einfach…
19	CREATE TABLE handball…
20	CREATE TABLE football…

DB Schema

Name	Type	Schema
Tables (20)		
Artikel_Einfach		CREATE TABLE Artikel_Einfach (id int primary key, bezeichnung varchar(50), kategorie char(1), preis decimal(10,2), umsatz_2022 decimal(19,2))
Categories		CREATE TABLE [Categories] ([CategoryID] INTEGER PRIMARY KEY AUTOINCREMENT, [CategoryName] TEXT, [Description] TEXT, [Picture] BLOB)
CustomerCustomerDemo		CREATE TABLE [CustomerCustomerDemo]([CustomerID]TEXT NOT NULL, [CustomerTypeID]TEXT NOT NULL, PRIMARY KEY ("CustomerID","Custome
CustomerDemographics		CREATE TABLE [CustomerDemographics]([CustomerTypeID]TEXT NOT NULL, [CustomerDesc]TEXT, PRIMARY KEY ("CustomerTypeID"))
Customers		CREATE TABLE [Customers] ([CustomerID] TEXT, [CompanyName] TEXT, [ContactName] TEXT, [ContactTitle] TEXT, [Address] TEXT, [City] TEXT, [R
EmployeeTerritories		CREATE TABLE [EmployeeTerritories]([EmployeeID]INTEGER NOT NULL, [TerritoryID]TEXT NOT NULL, PRIMARY KEY ("EmployeeID","TerritoryID"), F
Employees		CREATE TABLE [Employees] ([EmployeeID] INTEGER PRIMARY KEY AUTOINCREMENT, [LastName] TEXT, [FirstName] TEXT, [Title] TEXT, [TitleOfCou
Kunde		CREATE TABLE Kunde (kid int primary key, vorname varchar(30), nachname varchar(40))
Order Details		CREATE TABLE [Order Details]([OrderID]INTEGER NOT NULL, [ProductID]INTEGER NOT NULL, [UnitPrice]NUMERIC NOT NULL DEFAULT 0, [Quantity
Orders		CREATE TABLE [Orders]([OrderID]INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT, [CustomerID]TEXT, [EmployeeID]INTEGER, [OrderDate]DAT
Products		CREATE TABLE [Products]([ProductID]INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT, [ProductName]TEXT NOT NULL, [SupplierID]INTEGER, [
Regions		CREATE TABLE [Regions]([RegionID]INTEGER NOT NULL PRIMARY KEY, [RegionDescription]TEXT NOT NULL)
Shippers		CREATE TABLE [Shippers]([ShipperID]INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT, [CompanyName]TEXT NOT NULL, [Phone]TEXT)
Suppliers		CREATE TABLE [Suppliers]([SupplierID]INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT, [CompanyName]TEXT NOT NULL, [ContactName]TEXT,
Territories		CREATE TABLE [Territories]([TerritoryID]TEXT NOT NULL, [TerritoryDescription]TEXT NOT NULL, [RegionID]INTEGER NOT NULL, PRIMARY KEY ("Ter
football		CREATE TABLE football (id int primary key, prename char(20), surname char(20), postcode int, city char(50), street char(50))
handball		CREATE TABLE handball (id int primary key, vorname char(20), nachname char(20), plz int, ort char(50), strasse char(50))
rechnung		CREATE TABLE rechnung (rid int primary key, kid int references kunde(kid), datum smalldatetime)
sqlean_define		CREATE TABLE sqlean_define(name text primary key, type text, body text)
sqlite_sequence		CREATE TABLE sqlite_sequence(name,seq)