GP8001 · GROUP K3 Seunghwan Jang, Team member 2, Team member 3, Team member 4

Can an AI spot brainrot if we just tell it what brainrot is?


We gave an off-the-shelf video-language model a short written definition of split-screen “sludge” — no training at all — and measured how its judgement changed on 267 short videos. It reads each clip’s frames *and* the text of what is said in it.

267
test clips from TikTok and YouTube

0.637 → 0.989
accuracy, before → after adding the definition

0
training — the definition is just prompt text

Try the feed ↓ How it works

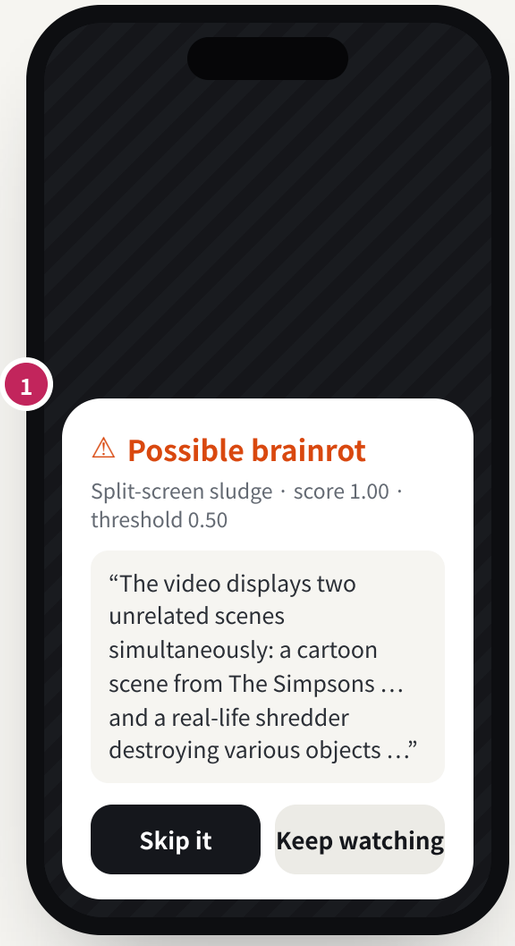

1 **히어로 영상 자리** — 데모 영상의 경고 장면을 짧게 반복 재생합니다. 영상이 정해지기 전까지는 회색 자리표시입니다. 경고 카드 문구는 c044의 실제 결과입니다.

T **텍스트 입력 표시** — 첫 문단에 “frames *and* the text of what is said”를 넣어, 전사문(텍스트)도 입력으로 쓴다는 점을 첫 화면부터 밝힙니다.

? **팀원 2–4**는 자리표시라 연한 회색입니다. 이름은 site.json 한 곳에서 바꿉니다.

THE PROBLEM

Platforms flag what is illegal, not what is empty.

TikTok, Instagram and YouTube already remove scams and label deepfakes. Brainrot breaks no rule — it is exactly what a feed tuned for watch time is built to serve — so nothing tells the viewer when a clip is merely hollow. We ask whether a model can give that signal, and say why in one sentence.


ALREADY FLAGGED
Scams, deepfakes, illegal content

NO SIGNAL TODAY
Hollow, attention-bait content (“brainrot”)

METHOD

One clip, three inputs, one sentence back.

IMAGE what the model sees TEXT what the model reads and writes

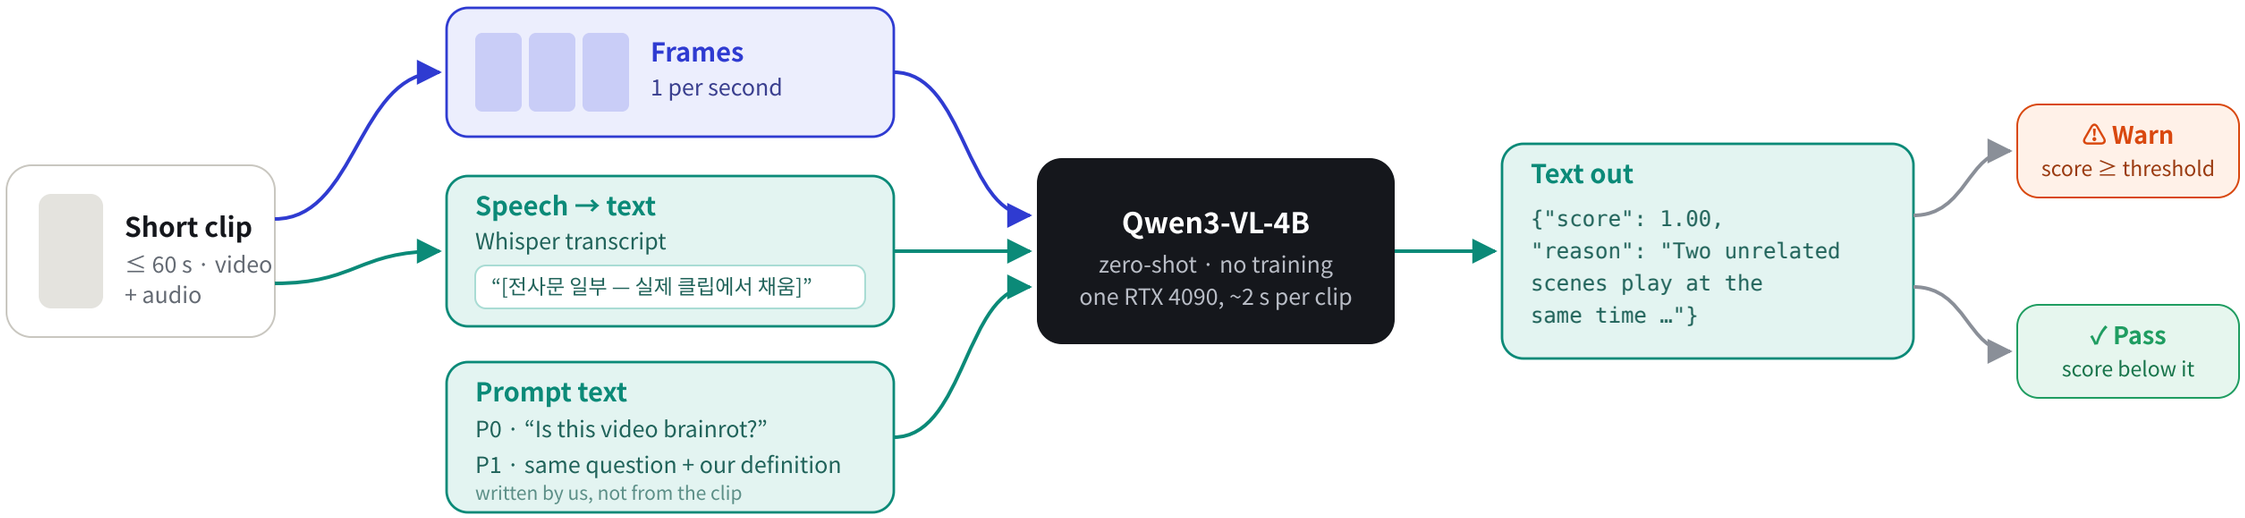

Text is used three times: the clip's speech goes in as a transcript, our definition goes in as prompt text, and the verdict comes out as a score with a one-sentence reason.

Our definition, in five cases

This exact text is what P1 adds to the prompt.

Split-screen sludge
BRAINROT
Unrelated videos on one screen, e.g. gameplay under a TV clip

Reaction or duet
NOT BRAINROT
One panel responds to the other

Co-op split screen
NOT BRAINROT
Every panel shows the same game

Picture-in-picture
NOT BRAINROT
A streamer's camera over the gameplay

Single feed
NOT BRAINROT · OUT OF SCOPE
Any style, incl. fast-cut edits or AI characters

Same clip, same model — only the prompt text changed

프레임 4장 자리 · 클립 c020 (영화 장면 + DIY 공예)

P0 · NO DEFINITION 0.03 ✓
"The video is a creative DIY craft tutorial with a nostalgic gaming theme, not promoting harmful or inappropriate content."

P1 · WITH DEFINITION 1.00 ⚠
"The video displays two unrelated scenes simultaneously: a movie clip featuring a woman and a boy playing a video game, and a DIY craft tutorial …"

Without a definition, the model judged *harm*. With it, the model looked at the screen layout.

메모 텍스트가 쓰이는 곳(전사문 입력, 프롬프트 입력, 결과 출력)을 초록색 TEXT로 칠해 그림에서 바로 구분되게 했습니다. 전사문 칸의 문장은 실제 클립(c020)의 전사문으로 바꿔 넣습니다.

RESULTS

The definition did most of the work.

267 test clips (146 sludge, 121 not), each run once with each prompt after both prompts were frozen. A clip is flagged when its score reaches 0.5.

메모 결과 수치는 제안서 Table 4 그대로입니다. “The model reads what is said, not how it sounds” 한 줄로, 텍스트(전사문)는 쓰지만 목소리 자체는 안 쓴다는 점을 밝힙니다.

Accuracy

P0 · no definition **0.637**

P1 · with our definition **0.989**

94 more clips judged correctly. P1 missed no sludge clip; P0 missed 36.

PROMPT	TP / FP / FN / TN	PRECISION	RECALL	ACCURACY
P0 · no definition	110 / 61 / 36 / 60	0.643	0.753	0.637
P1 · definition	**146 / 3 / 0 / 118**	**0.980**	**1.000**	**0.989**

TP: sludge clip flagged · FP: normal clip flagged. For scale only: a model fine-tuned on this dataset reports 96.67% on the full 300-clip test split.

We checked by hand

7 / 7
dataset labels correct

9 / 10
reasons match the screen

3
false positives, all explained

ERROR · 2 CLIPS

Streamer camera over gameplay

The screen is split, but the panels belong together. Our definition excludes this case; the model still called them “unrelated”.

No image: real faces.

ERROR · 1 CLIP

A split that was not there

프레임 자리 · c012

Single-screen anime clip; the model described several close-ups shown at once.

Limits

- The test set keeps only clips whose labels were clear-cut, so 0.989 is optimistic for a real feed.
- One brainrot type only: split-screen sludge.
- The model reads what is said, not how it sounds — the voice itself is not an input.
- Both prompts start with “You are a content-safety assistant”, which may push P0 toward judging harm.

Next

Other types — AI-generated characters, AI-voiced slideshows, fast-cut edits — need labelled clips that no public dataset we found provides. A model that hears audio would be needed to judge synthetic voices.

TRY THE FEED


Tap a clip. The filter checks it as it plays.

Clean clips get a small check and keep playing. Split-screen sludge gets a warning with the model's one-sentence reason — skip it or keep watching.

Switch the prompt at the top of the phone to replay the same clips **without** our definition and see which verdicts change.

- ✓ Checked — score below the threshold
- ! Possible brainrot — warning shown


> Simulated feed: results were computed offline with Qwen3-VL-4B and are replayed here. Nothing runs in your browser.

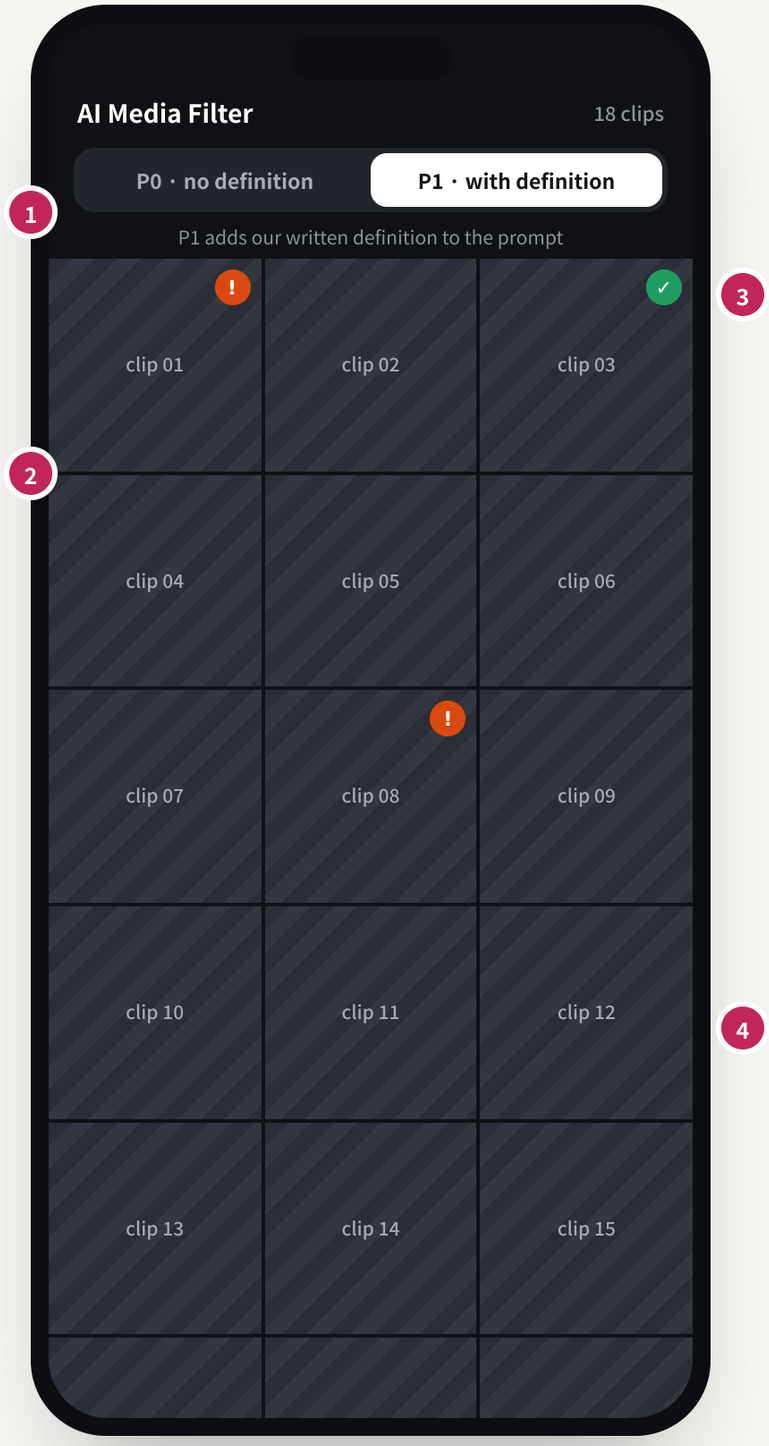

1. **프롬프트 토글** — 미리 저장한 P0 결과와 P1 결과를 바꿔 끼웁니다. 기본은 P1. 바꾸면 이미 본 배지가 지워집니다.
2. **3열 정사각 썸네일** — 휴대폰 화면 안에서만 세로로 스크롤됩니다. 처음에는 판정 표시가 없습니다.
3. **배지** — 클립을 열어 본 뒤에만 ✓ 또는 ! 배지가 붙습니다.
4. **클립 구성** — test 클립 18개(각 12초). sludge 8, 일반 8, 모델이 틀린 c012 1, 자유 1. 그중 3개 이상은 P0와 P1 판정이 다른 클립이라 토글을 바꾸면 차이가 보입니다. 일반인 얼굴이 크게 나오는 클립은 빼고, @계정명은 블러.
5. **자리표시** — 썸네일은 지금 회색 칸입니다. 클립이 정해지면 1초 지점 프레임으로 바뀝니다.


썸네일을 누르면 휴대폰 화면을 꽉 채워 재생됩니다 (사이트 문구는 영어, 아래 상태 이름은 목업 설명용)

A · 분석 중 (1.2–3초)

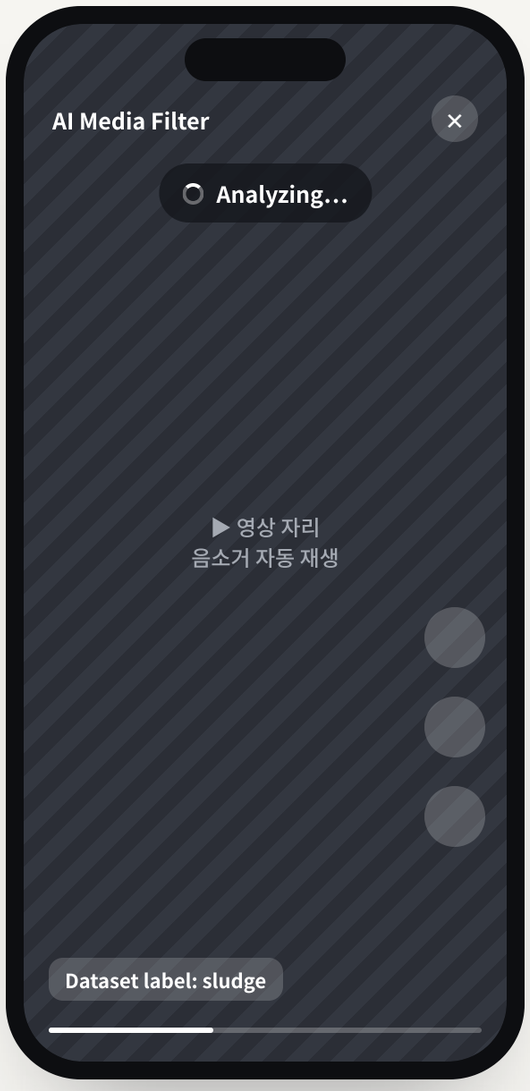


분석 시간 — 클립마다 실제로 잰 모델 처리 시간을 1.2–3초로 잘라 씁니다. 실시간 분석이 아니라 저장해 둔 결과를 다시 보여 주는 것입니다.

B · 통과 (점수 < 0.5)

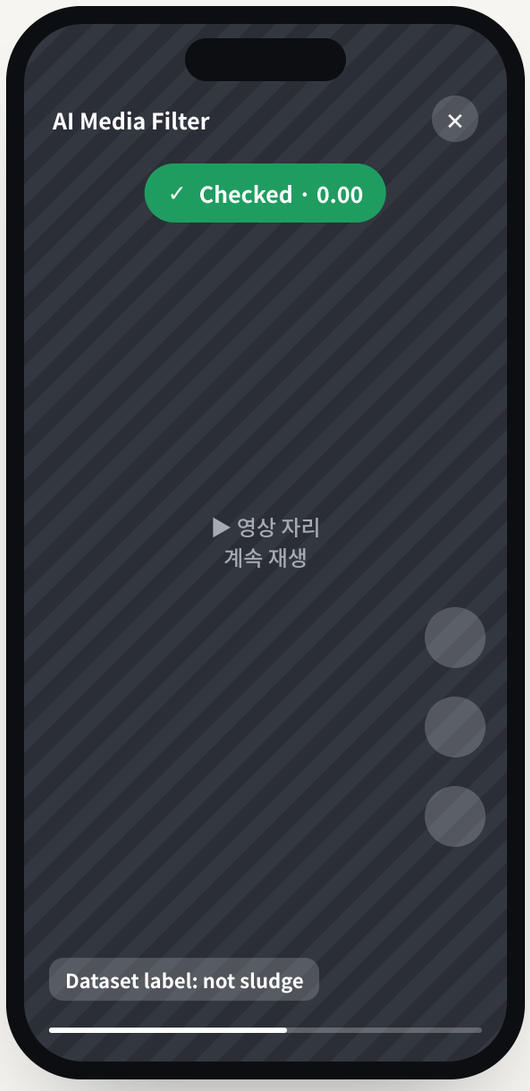


버튼 — Skip it은 다음 클립으로, Keep watching은 카드를 닫고 계속 재생합니다.

C · 경고 (점수 ≥ 0.5)

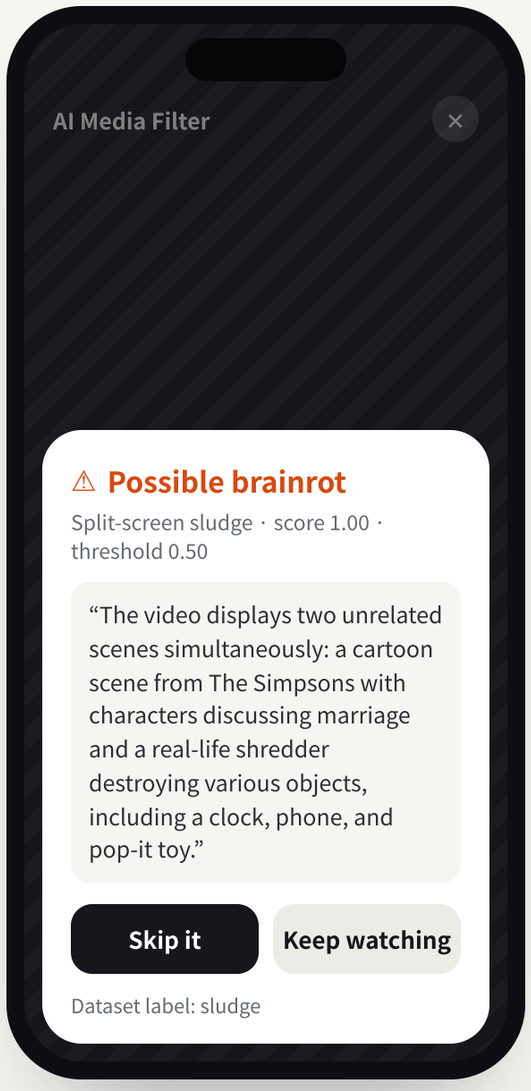

넘기기·닫기 — 위·아래 스와이프, 마우스 휠, 화살표 키로 이전·다음 클립. ×, 아래로 끌기, Esc로 그리드로 돌아갑니다.

D · 모델이 틀린 클립 (c012)

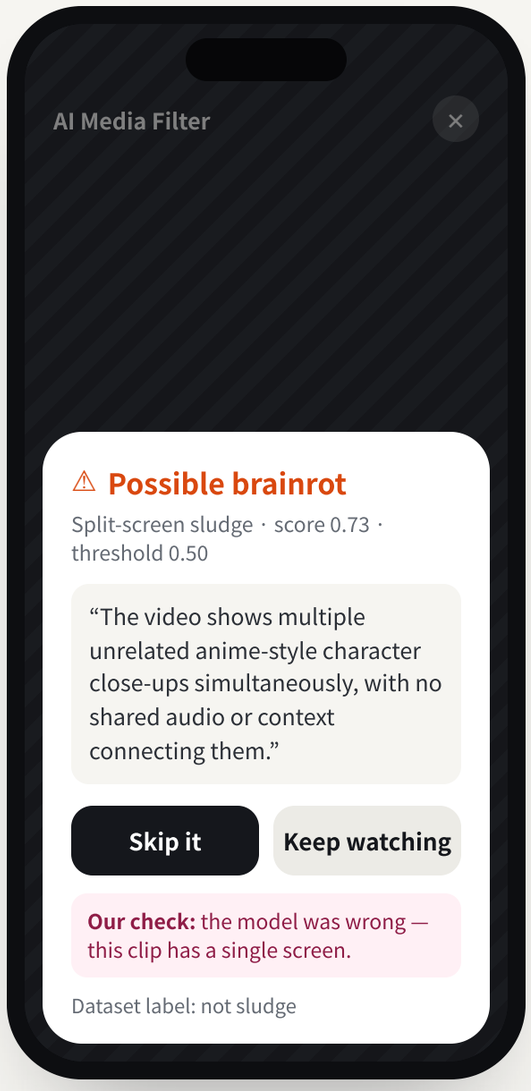

정직한 표시 — 데이터셋 라벨은 항상 보이고, 사람이 확인해서 모델이 틀린 것으로 본 클립에는 “Our check” 줄을 덧붙입니다.

소개 (세로로 쌓임)

AI Media Filter

Can an AI spot brainrot if we just tell it what brainrot is?

An off-the-shelf model, a short written definition, no training — tested on 267 short videos, reading both frames and speech text.

0.637 → 0.989
accuracy, before → after the definition

267
test clips

0
training

Try the feed ↓

방법 (그림이 세로로 바꿈)

METHOD

One clip, three inputs, one sentence back.

Short clip · ≤ 60 s

Frames · 1 per second — IMAGE

Speech → text · Whisper — TEXT

Prompt text · P0 or P1 — TEXT

↓

Qwen3-VL-4B · no training

↓

Text out · score + one-sentence reason — TEXT

⚠ Warn | ✓ Pass

피드 (휴대폰 틀 없이 전체 화면)

AI Media Filter — 18 clips

P0 · no definition | P1 · definition

01 02 03
04 05 06
07 08 09
10 11 12
13 14 15

바닥글 (모든 화면 공통)

AI Media Filter

Clips: “YouTube & TikTok Sludge/Non-Sludge Dataset 2000” (Kaggle), CC BY-NC-SA 4.0.
Model: Qwen3-VL-4B-Instruct. Transcripts: faster-whisper.

Results were computed offline and are replayed on this page.
Clips are shown for a course project and will be removed after grading.

GP8001 · Group K3
Seunghwan Jang, Team member 2, Team member 3, Team member 4

1. **폭 900px 미만**에서는 휴대폰 틀이 사라지고, 그리드와 보기 화면이 실제 휴대폰 화면 전체를 씁니다.
2. **방법 그림**은 좁은 화면에서 위→아래 흐름으로 바뀌고, TEXT/IMAGE 색 구분은 그대로 유지합니다.
3. **검색 노출 막기**(noindex)를 넣고, 채점이 끝나면 저장소째 지웁니다.