


// 3.1 新增收支记录

@PostMapping("/add")

```
public Result add(@Valid @RequestBody BillAddDTO dto) {  
    return billService.add(dto);  
}
```

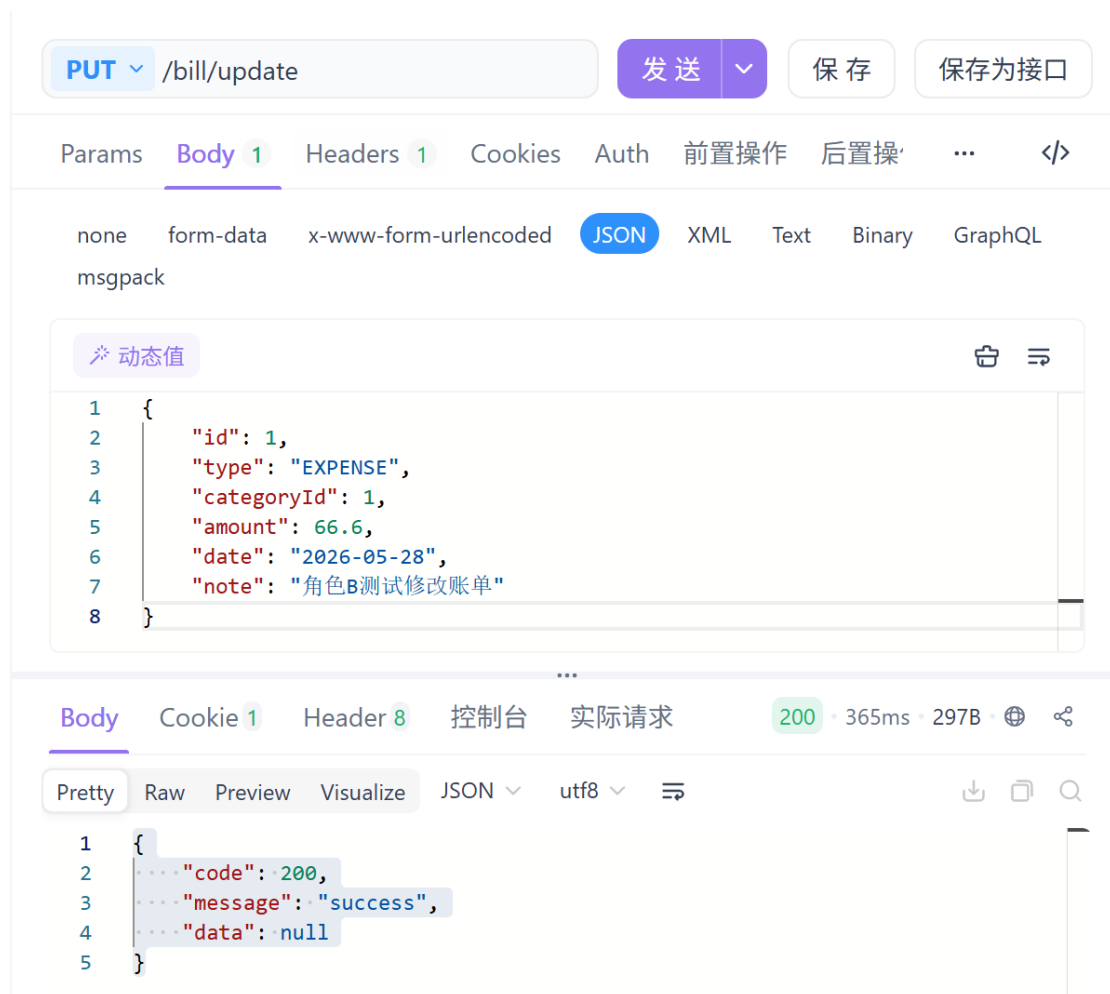


// 3.2 修改收支记录

@PutMapping("/update")

```
public Result update(@Valid @RequestBody BillUpdateDTO dto) {  
    return billService.update(dto);  
}
```

```
}
```

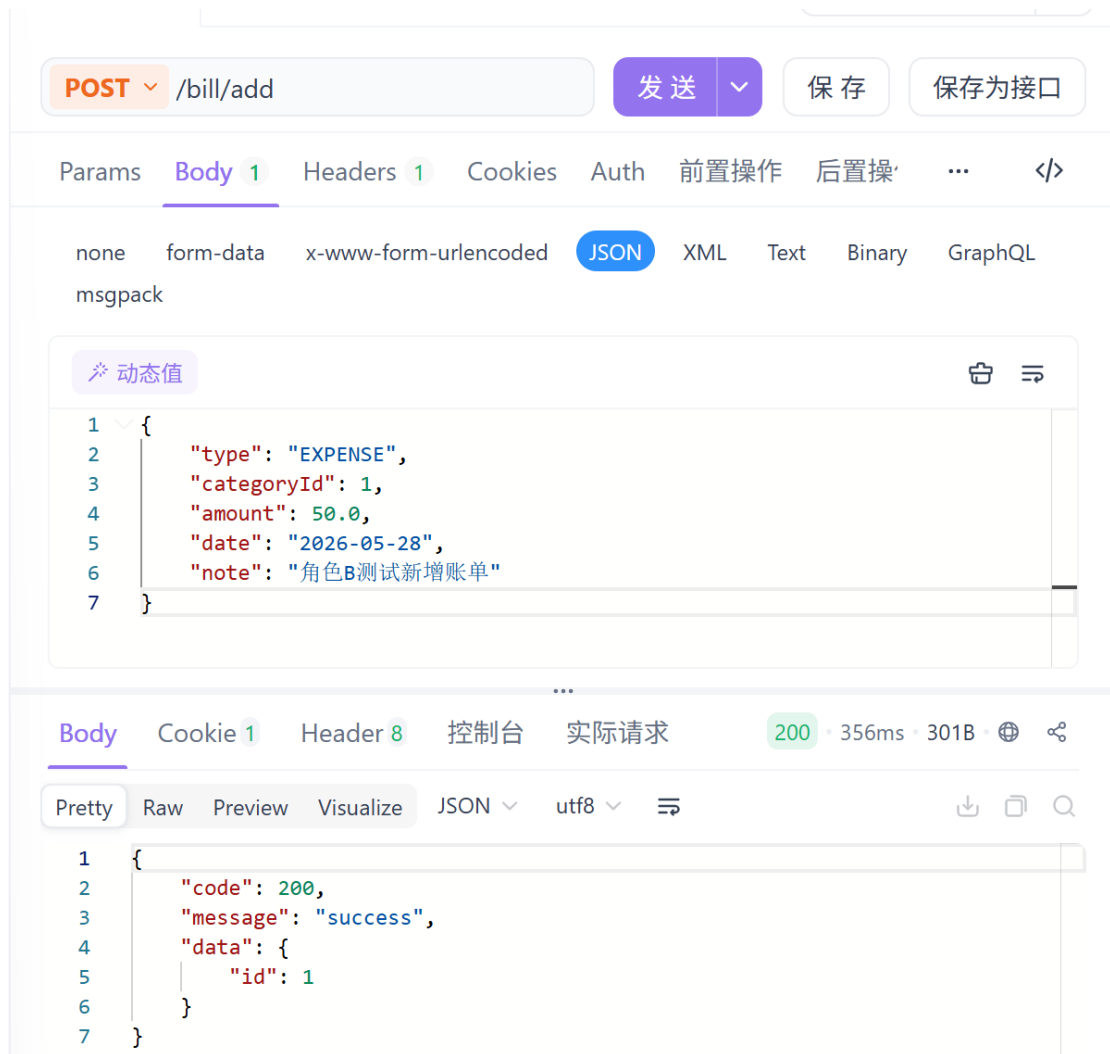


// 3.3 删除收支记录

```
@DeleteMapping("/delete/{id}")
```

```
public Result delete(@PathVariable Long id) {
```

```
    return billService.delete(id);
```

```
}
```

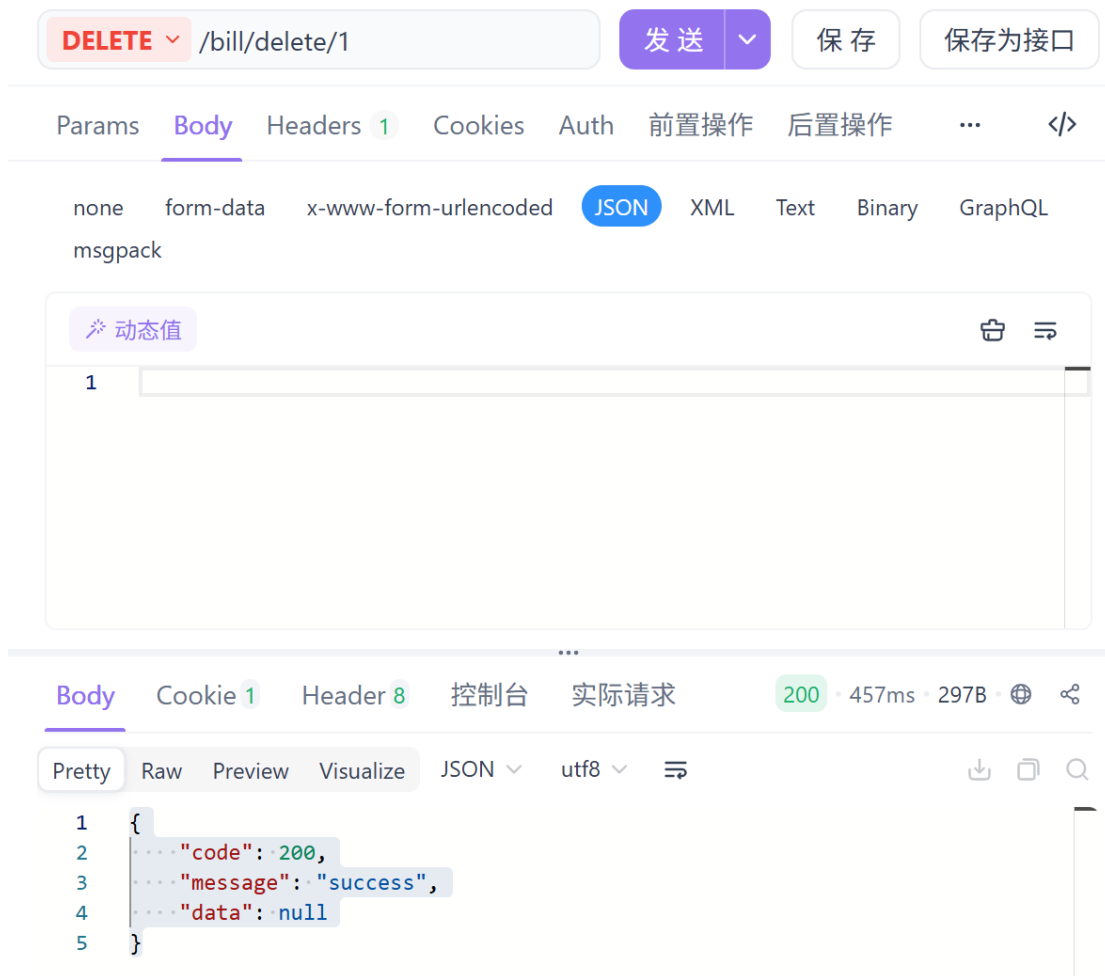

// 3.4 查询收支记录列表

@GetMapping("/list")

public Result list(@Valid BillQueryDTO dto) {

return billService.list(dto);

}

GET /bill/list?page=1&pageSize=10 发送 保存 保存为接口

Params 2 Body Headers 1 Cookies Auth 前置操作 后置操作 ... </>

Query 参数

参数名	参数值
page	= 1
pageSize	= 10

添加参数

Body Cookie 1 Header 8 控制台 实际请求 200 · 119ms · 337B · 分享

Pretty Raw Preview Visualize JSON utf8

```
1 {
2   "code": 200,
3   "message": "success",
4   "data": {
5     "total": 0,
6     "page": 1,
7     "pageSize": 10,
8     "list": []
9   }
10 }
```

// 3.5 获取收支记录详情

```
@GetMapping("/detail/{id}")
```

```
public Result detail(@PathVariable Long id) {
```

```
    return billService.detail(id);
```

```
}
```

GET /bill/detail/2 发送 保存 保存为接口

Params Body 1 Headers 1 Cookies Auth 前置操作 后置操作 ... </>

Headers 已隐藏 9 个

参数名	参数值
添加参数	

全局 Header 参数

参数名	参数值
Authorization	= 7ec43b98-4c87-4623-9985-6c86caf475f1 >

Body Cookie 1 Header 8 控制台 实际请求 200 · 83ms · 447B · 分享

Pretty Raw Preview Visualize JSON utf8

```
1 {
2   "code": 200,
3   "message": "success",
4   "data": {
5     "id": 2,
6     "type": "EXPENSE",
7     "categoryId": 1,
8     "categoryName": "餐饮",
9     "amount": 50.00,
10    "date": "2026-05-28",
11    "note": "角色B测试新增账单",
12    "visible": "PRIVATE"
13  }
```

// 3.6 修改记录可见范围


@PutMapping("/visible")

public Result updateVisible(@Valid @RequestBody BillVisibleDTO dto)

{

return billService.updateVisible(dto);

}

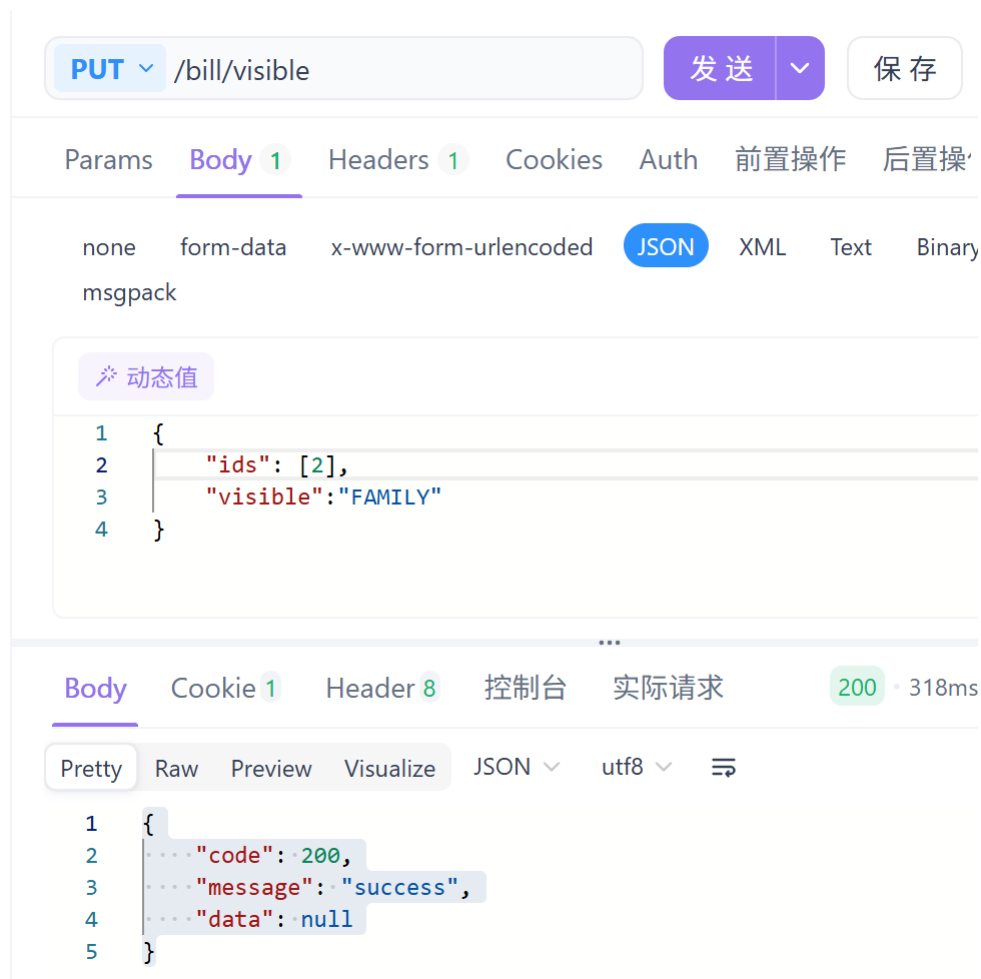

// 3.7 批量导入收支记录

```
@PostMapping("/import")
```

```
public Result importBills(@RequestParam("file") MultipartFile file,
```

```
                           @RequestParam("source") String
```

```
source) {
```

```
    return billService.importBills(file, source);
```

```
}
```

// 3.8 预览导入映射结果

```

@PostMapping("/import/preview")

public Result previewImport(@RequestParam("file") MultipartFile file,


                           @RequestParam("source") String

source) {

    return billService.previewImport(file, source);

}

```

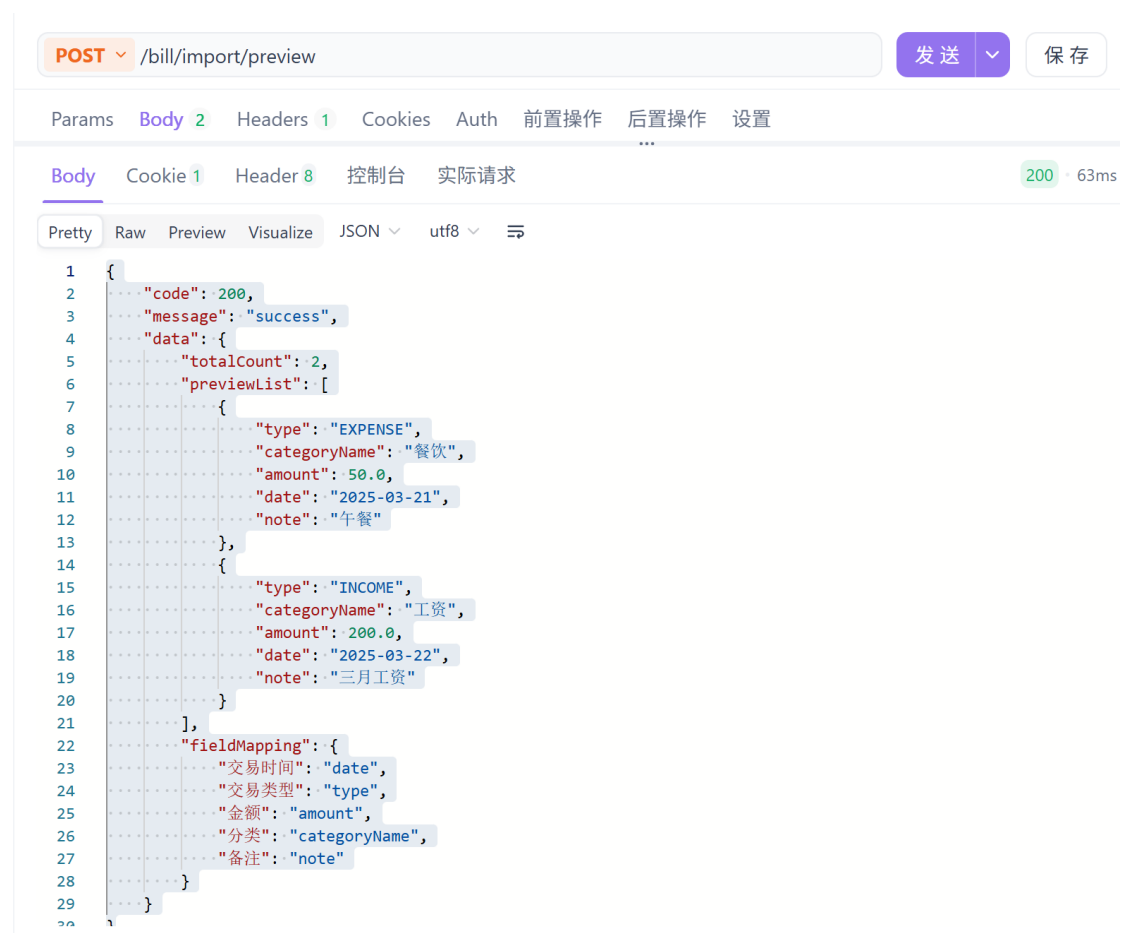

// 3.9 家庭管理员查询成员记录明细

```

@GetMapping("/family/list")

public Result familyList(@Valid BillQueryDTO dto,

```

@RequestParam(required = false) Integer

```
userId) {  
  
    return billService.familyList(dto, userId);  
  
}
```

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** /bill/family/list
- Buttons:** 发送 (Send), 保存 (Save)
- Tabs:** Params, Body, Headers, Cookies, Auth, 前置操作 (Pre-request), 后置操作 (Post-request)
- Active Tab:** Body
- Response Status:** 200, 320ms
- Response Format:** JSON, utf8
- Response Content (Pretty):**

```
1 {  
2   "code": 200,  
3   "message": "success",  
4   "data": {  
5     "total": 0,  
6     "page": 1,  
7     "pageSize": 20,  
8     "list": [  
9       {  
10        "id": 2,  
11        "type": "EXPENSE",  
12        "categoryId": 1,  
13        "categoryName": "餐饮",  
14        "amount": 50.00,  
15        "date": "2026-05-28",  
16        "note": "角色B测试新增账单",  
17        "visible": "FAMILY",  
18        "nickname": "新昵称",  
19        "userId": 4  
20      }  
21    ]  
22  }  
23 }
```