

Elektrona lādiņš (7)

Jānis Erdmanis (je11011)

An h1 header

Paragraphs are separated by a blank line.

2nd paragraph. *Italic*, **bold**, `monospace`. Itemized lists look like:

- this one
- that one
- the other one

Note that — not considering the asterisk — the actual text content starts at 4-columns in.

Block quotes are written like so.

They can span multiple paragraphs, if you like.

Use 3 dashes for an em-dash. Use 2 dashes for ranges (ex. “it’s all in chapters 12–14”). Three dots ... will be converted to an ellipsis.

Teorētiskais pamatojums

Viegli ir iekļauļamas arī matemātikas sakarības x^2 vai arī jaunā rindā:

$$x^2$$

An h2 header

Here’s a numbered list:

1. first item
2. second item
3. third item

Note again how the actual text starts at 4 columns in (4 characters from the left side). Here’s a code sample:

```
# Let me re-iterate ...  
for i in 1 .. 10 { do-something(i) }
```

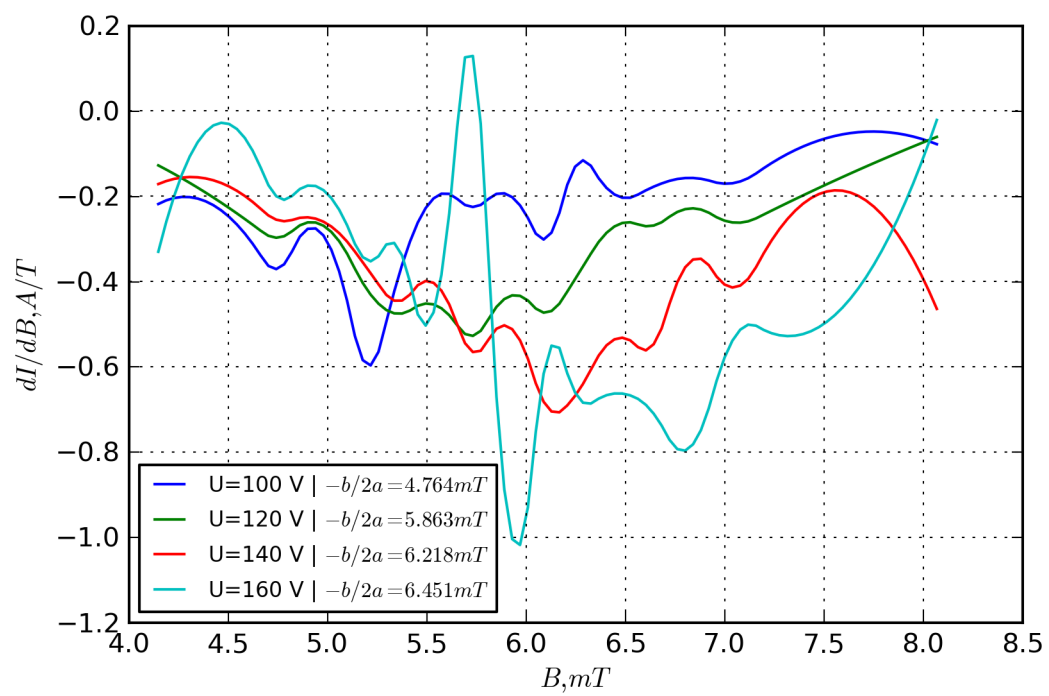


Figure 1: Voyage to the moon

Kā arī ir iekļaušanas latex komandas:

n^2 ame	givenname	matriculation	gender	grade
Maier	Hans	12345	m	1.0
Huber	Anna	23456	f	2.3
Weißbäck	Werner	34567	m	5.0