INFORMAL EXPERIMENT NOTES

Our graph-reading test

12 clean, synthetic Finnish-context images | 99 nodes | 129 edges | 240 printed text regions

How to read the scores

Every row uses the same 240 source items; extra OCR boxes add error events.
OCR checks printed text. Vision checks reconstructed nodes, labels, arrows, and strokes.

Approach matrix

The two tasks differ, so their percentages are not a direct ranking of graph accuracy.

Approach	Task	Events / 240	Exact figures	Node text	Edge text
RapidOCR PP-OCRv6 Finnish	OCR text	**17 (7.1%)**	7/12	0	2
PaddleOCR PP-OCRv5 Finnish	OCR text	**57 (23.8%)**	3/12	0	19
Older RapidOCR baseline	OCR text	**74 (30.8%)**	0/12	23	42
Blind Codex vision	Graph	**20 (8.3%)**	7/12	0	0
Blind Codex + RapidOCR	Graph	**12 (5.0%)**	8/12	0	0
Vision + deterministic OCR evidence	Graph	**20 (8.3%)**	7/12	0	0


What did the error events mean?

RapidOCR	2 edge-text misses or misreads; 15 unmatched text boxes
PaddleOCR	19 edge-text misses or misreads; 38 unmatched text boxes
Old OCR	9 title, 23 node-text, and 42 edge-text errors
Blind vision	18 node-shape errors; 1 wrong arrow; 1 wrong stroke
Blind vision + OCR	8 node-shape errors; 3 wrong arrows; 1 wrong stroke

The OCR-evidence union keeps the blind-vision graph unchanged, so those graph scores match by design.

Source diagram

Päivystyksen hoitoverkko | emergency-care network

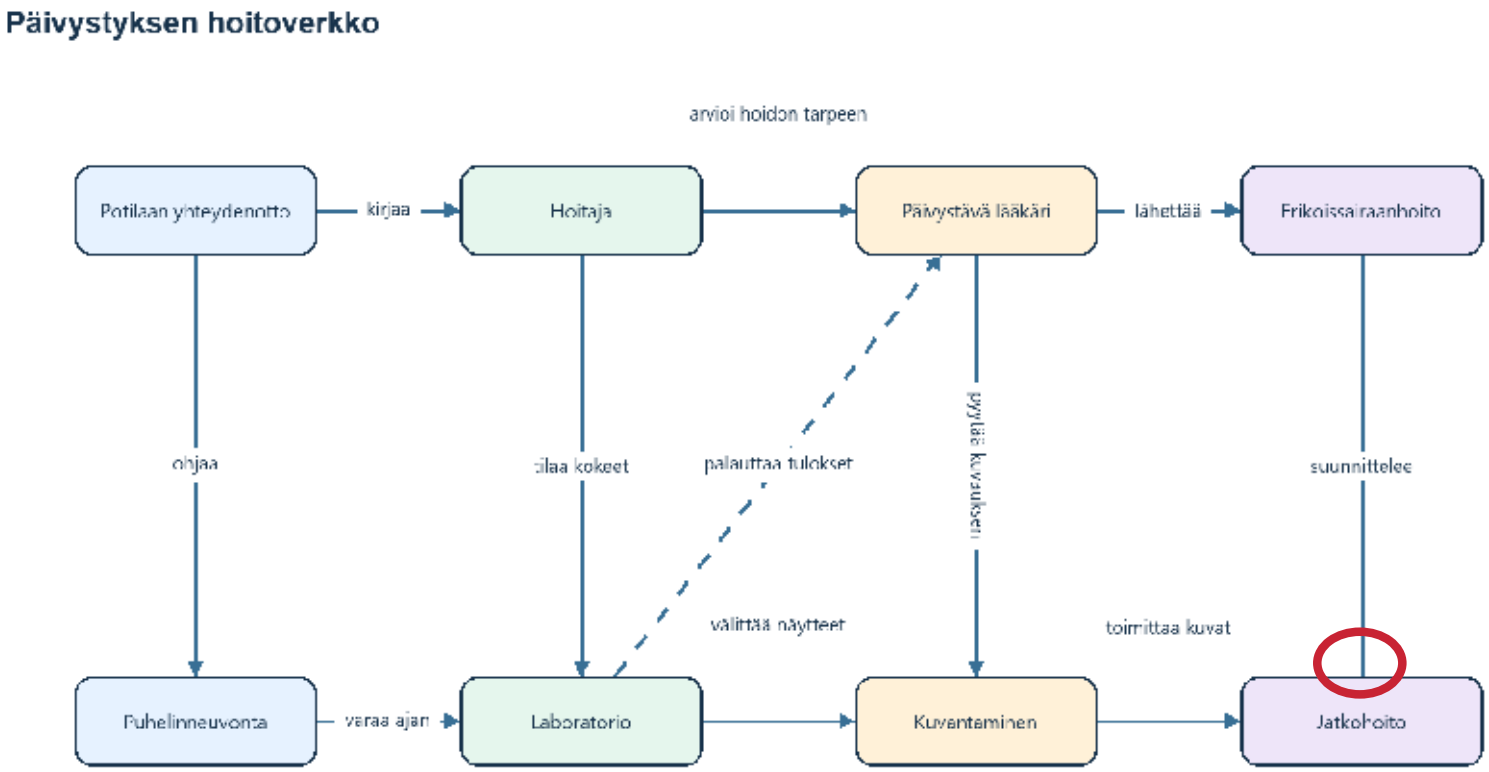


Reference: this link has no arrowhead.

Erikoissairaanhoito to Jatkohoito is printed as an arrowless link.

ONE DIAGRAM, TWO READINGS

Blind vision reconstruction

Päivystyksen hoitoverkko | emergency-care network

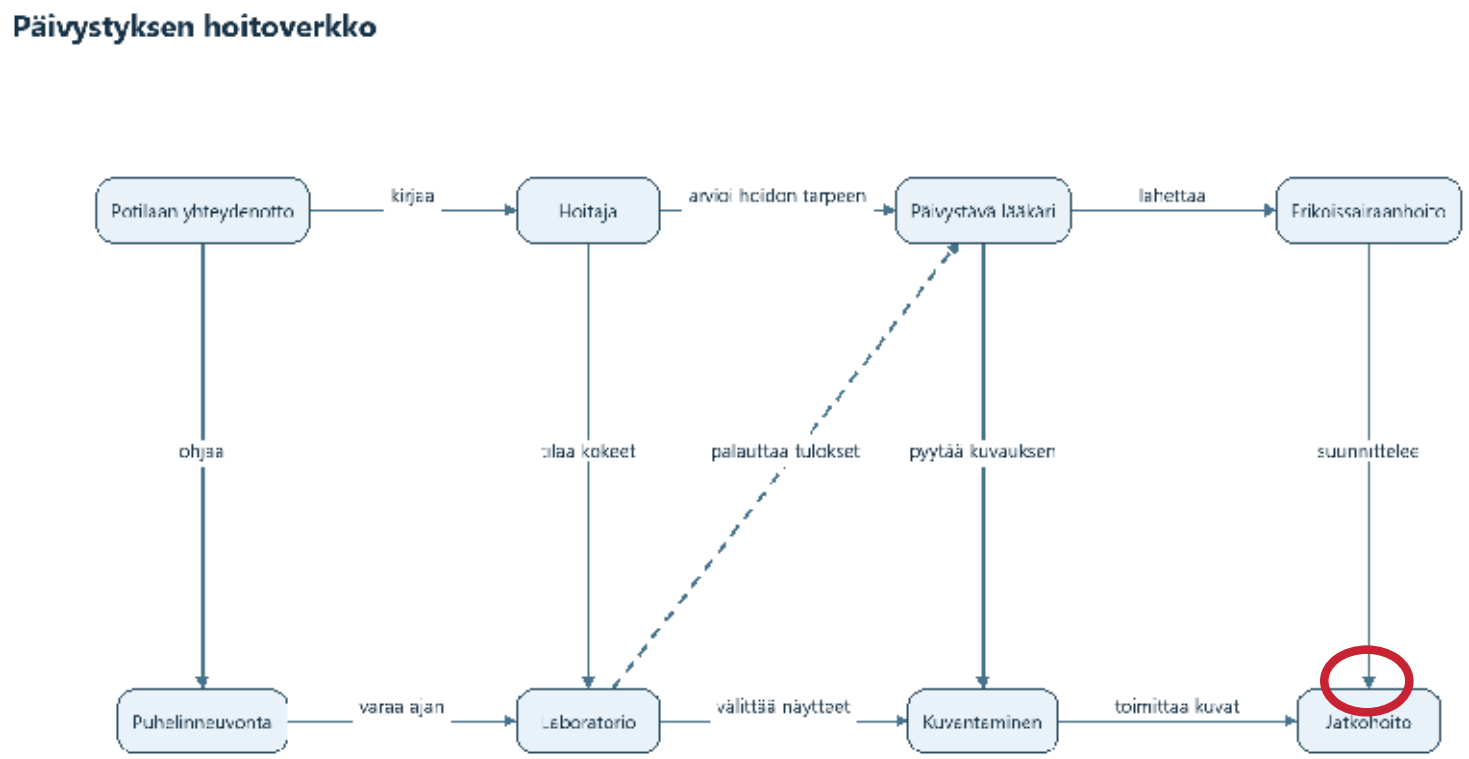

Error: the reconstruction adds an arrowhead.

The connection and label are correct; the extra arrow changes its direction.