INFORMAL EXPERIMENT NOTES

What happened in our 10-diagram test?

Clear synthetic Finnish-context figures | 83 nodes | 113 edges | 206 printed text regions

The short version

Blind vision got every scored detail right on only 4 of 10 diagrams.

OCR read text, not arrows or links. Adding OCR evidence did not change the saved vision graph.

Approach matrix

Each rate uses 206 source items. OCR rows score printed text; the vision row scores complete graph elements.

Approach	Scored	Errors / 206	Error-free	Key result
RapidOCR PP-OCRv6 Finnish	Text	**18 (8.7%)**	4 / 10	203/206 exact; 15 extra boxes
PaddleOCR PP-OCRv5 Finnish	Text	**59 (28.6%)**	0 / 10	187/206 exact; 40 extra boxes
Older RapidOCR baseline	Text	**61 (29.6%)**	0 / 10	145/206 exact; 0 extra boxes
Blind Codex vision	Graph	**26 (12.6%)**	4 / 10	101/113 edges fully correct

What caused the 26 blind-vision graph errors?

These five non-overlapping categories come from the item-level error ledger.


Problem	Count	What happened
Wrong node shape	10	The node label was right, but its visible shape was misclassified.
Missed connection	8	A link visible in the source was left out.
Extra connection	4	A link was reported where the source had none.
Wrong edge label	2	The printed relationship on a matched link was read incorrectly.
Wrong arrow direction	2	A matched link pointed the wrong way.

OCR errors: Rapid had 3 source-text misses or misreads + 15 unmatched boxes; Paddle 19 + 40; old Rapid 61 + 0.

This is a small synthetic test, not a research paper or an estimate for all diagrams. No matched link had the wrong stroke style.

ONE EXAMPLE


Example source figure

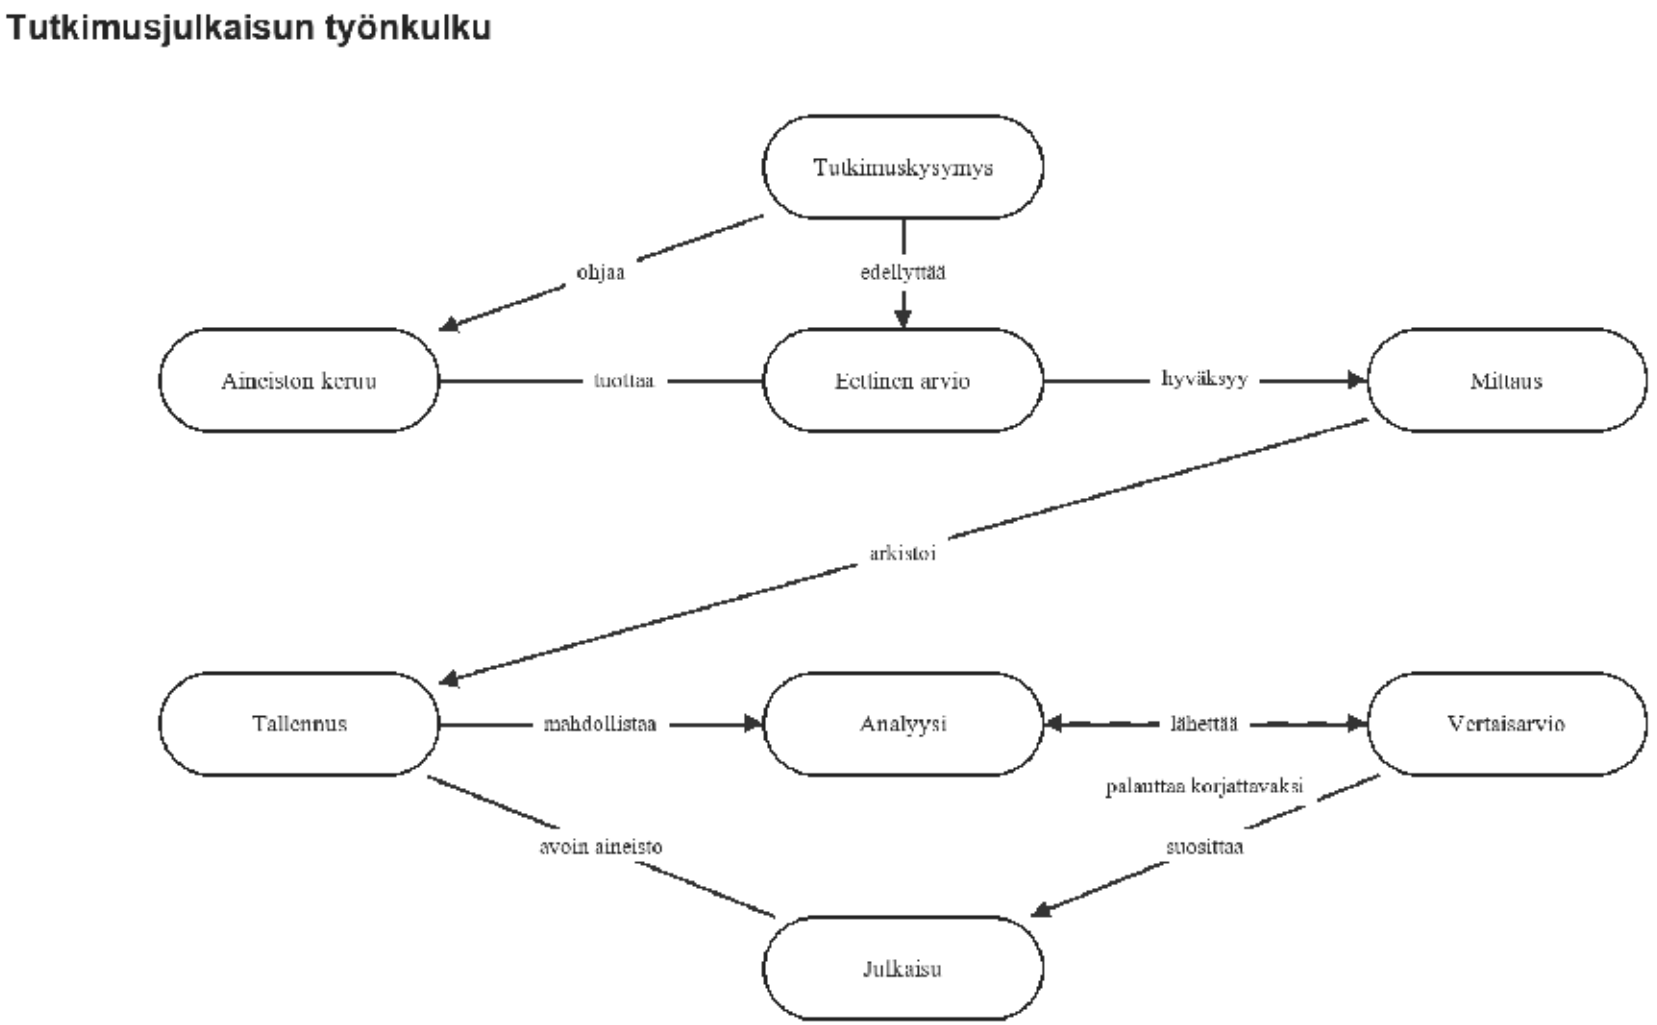

Source graph: 8 nodes and 10 edges, with pill-shaped nodes, arrowless and directed links.

ONE EXAMPLE

Blind vision reconstruction

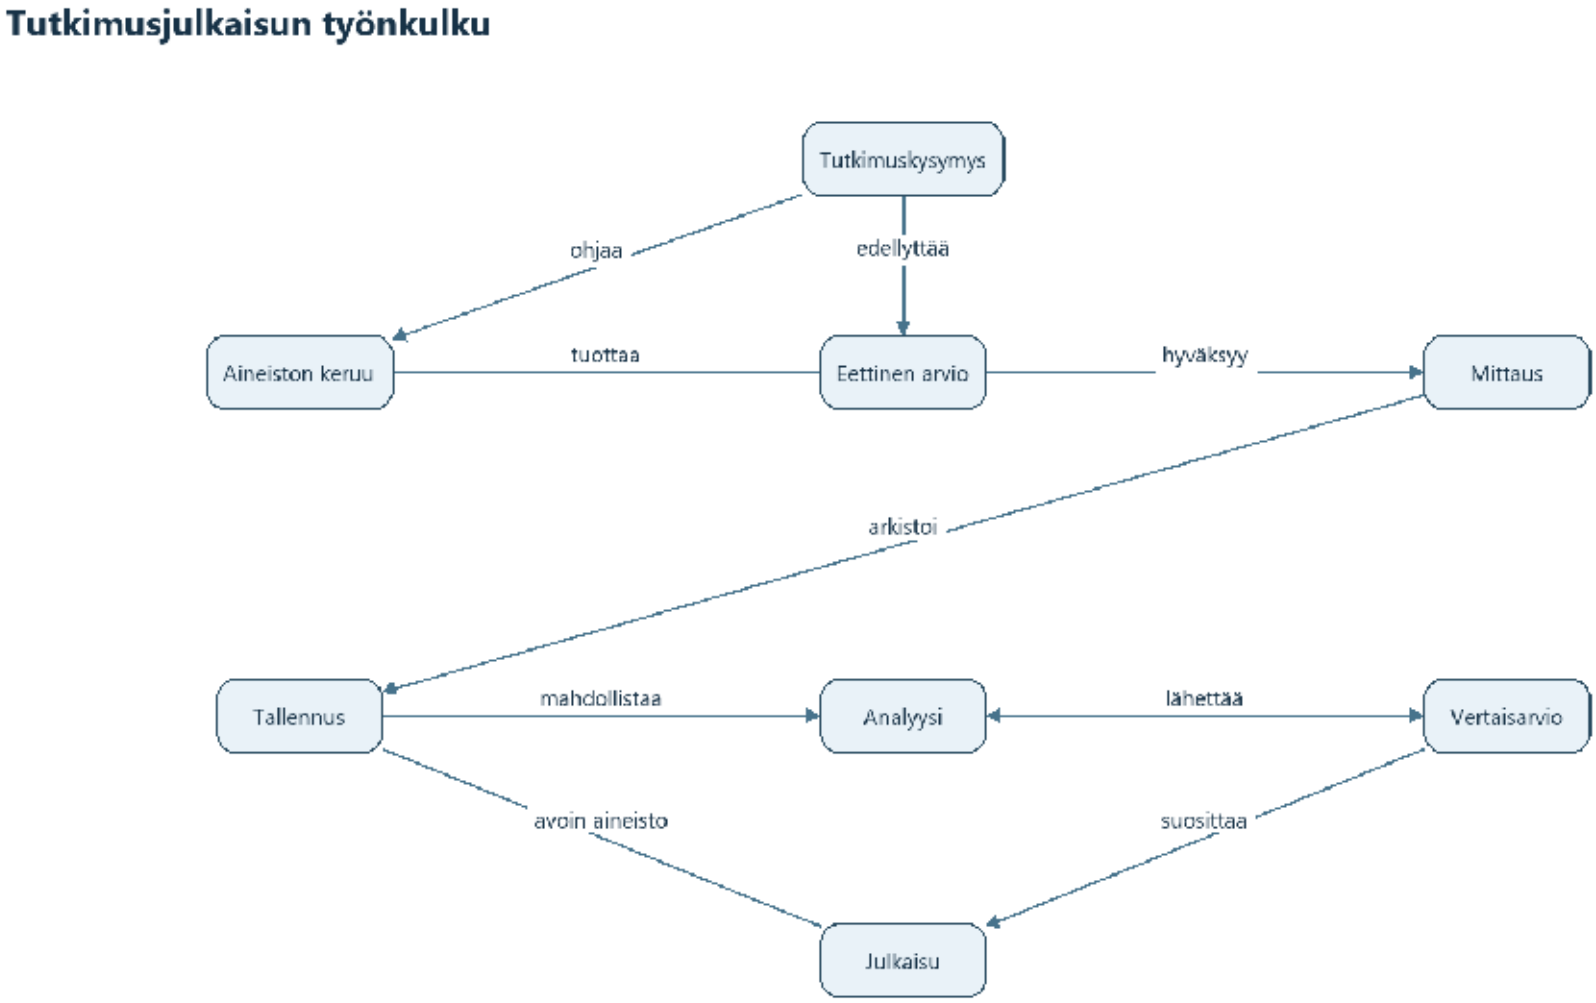

Blind prediction: 8 exact node labels, 8 wrong shapes, 2 missed connections, 1 extra, and 1 wrong arrow.