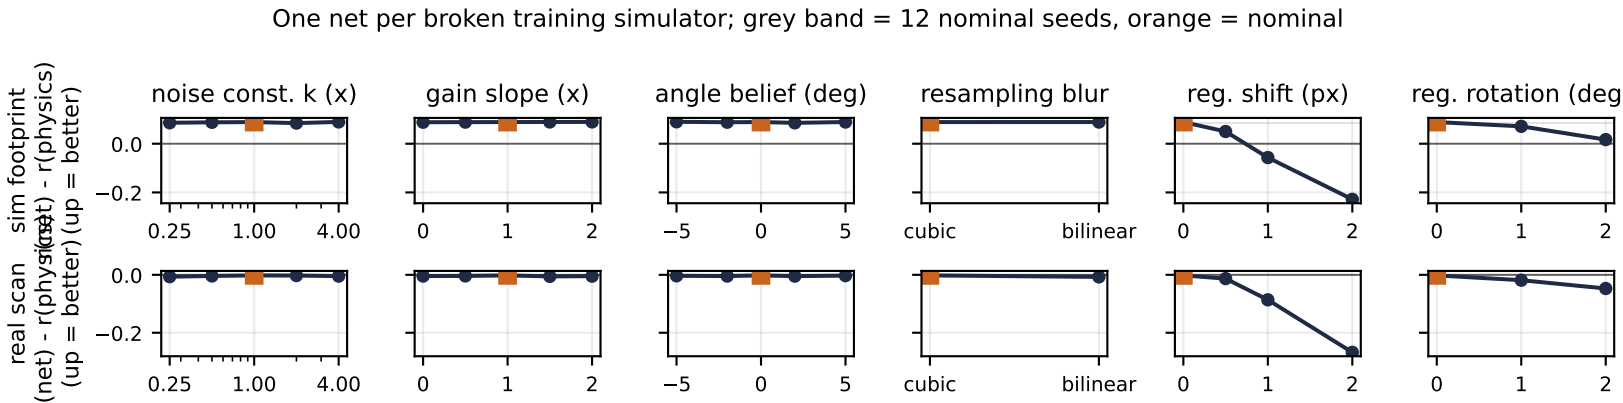

One net per broken training simulator; grey band = 12 nominal seeds, orange = nominal
noise const. k (x)
gain slope (x)
angle belief (deg)
resampling blur
reg. shift (px)
reg. rotation (deg)
sim footprint
r(net) - r(physics)
(up = better)
real scan
r(net) - r(physics)
(up = better)
0.0
−0.2
0.25
1.00
4.00
0
1
2
−5
0
5
cubic
bilinear