


CSE
635

(1)

9/14/17

1) Thread $T_2 = \text{new Thread}();$
Runnable \rightarrow overwrite $\text{run}();$
 $T_1.\text{run}();$

run {
- - -
- - -
}
 $T_1.\text{start}();$

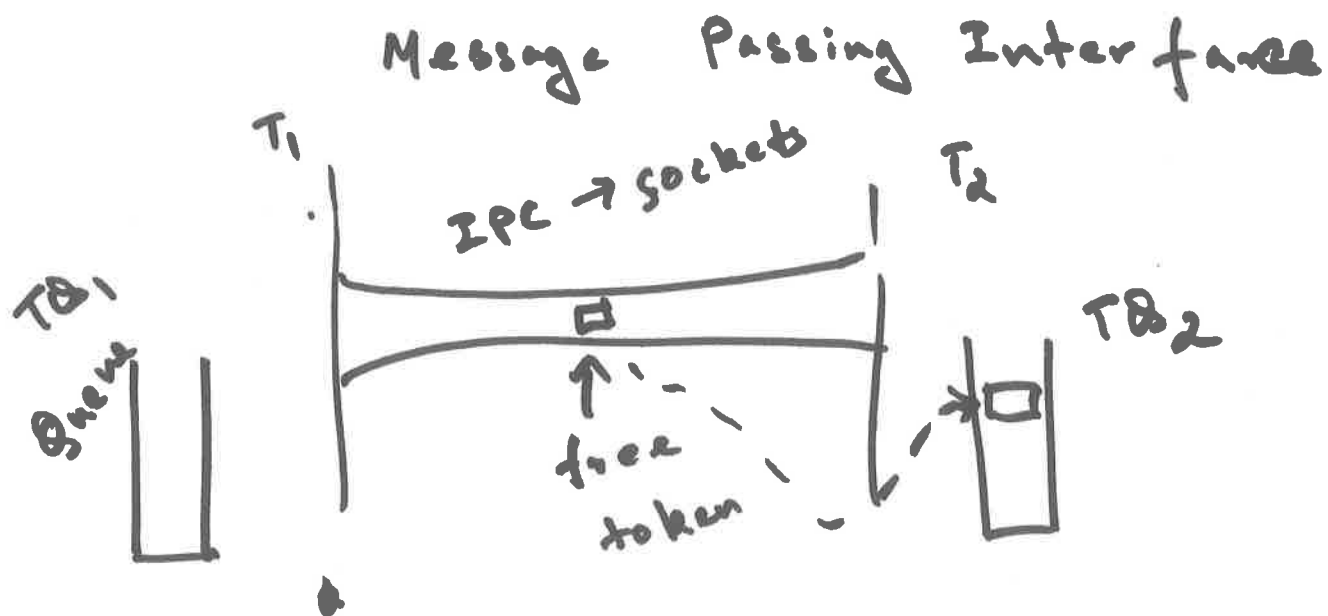

②

1> Take possession of token

2> Embed message in the token

↳ variable → int, string

↳ function request

3> Pushes the message into
TB₂