

Japanoma – MVP Handover Report

Decision-aid platform for Australian buyers in Northern Japan

Craefto · Built for Go&C Partners

2026-05-07

- 1 · Executive Summary
 - What “MVP” means in this handover
 - What’s deferred (not blocking handover)
 - How to read this document
- 2 · Architecture
 - 2.1 Tech stack at a glance
 - 2.2 System architecture
 - 2.3 Deployment topology
- 3 · Codebase Structure
- 4 · Data Model
 - 4.1 ERD overview
 - 4.2 Migration history
 - 4.3 Notable data conventions
- 5 · Authentication & Compliance
 - 5.1 Signup flow with policy capture
 - 5.2 Versioning and re-acknowledgment
 - 5.3 Privacy Policy structure
 - 5.4 Lead capture and consent
- 6 · Key User Journeys
 - 6.1 Decision-to-Living (D2L) journey
 - Phase advancement is monotonic forward by signal.
 - Manual override.
 - 6.2 Recommendation quiz
 - Scoring breakdown (out of 100, normalised from /98).
 - 6.3 Content Hub filtering
- 7 · Operations Runbook
 - 7.1 Deploy a code change
 - 7.2 Apply a Supabase migration

- 7.3 Bump a policy version
- 7.4 Rotate the Vercel preview-bypass key
- 7.5 Take the site live (lift the coming-soon gate)
- 7.6 Read deploy logs
- 7.7 View Supabase logs
- 8 · Environment Reference
 - 8.1 Database + Supabase
 - 8.2 Auth
 - 8.3 Sanity
 - 8.4 Observability + analytics
 - 8.5 Lead capture + email
 - 8.6 Pre-launch gate (handover deploy only)
- 9 · Feature Inventory
 - 9.1 Public surfaces
 - 9.2 Authenticated user surfaces
 - 9.3 Admin surfaces (gated by `app_metadata.is_admin`)
 - 9.4 Calculator tools
- 10 · Compliance Summary
- 11 · Pending Work & Tech Debt
 - 11.1 Blocking pre-launch
 - 11.2 Useful-but-not-blocking
 - 11.3 Known issues
 - 11.4 Roadmap suggestions
- 12 · Handover Checklist
- Appendix A · Diagrams (full set)
- Appendix B · Document set

1 · Executive Summary

Japanoma is a decision-aid platform that helps Australian ski-lovers decide whether — and where — to buy a home base in Northern Japan snow country. It provides transparent total-cost models, practical due diligence, and introductions to licensed local professionals.

Brand promise: *Own a Japan ski home base with clarity — not guesswork.*

Operator: Go&C Partners (Kaz Yasumura, Director · Shiun, CMO). **Builder:** Craefto (Obi, Technical Lead · Sara, Project Manager).

What “MVP” means in this handover

The MVP is **functionally complete**, **production-deployed**, and **gated behind a coming-soon page** until Kaz signs off. Specifically:

- All 24 user-facing routes are built and verified returning **HTTP 200** in production.
- 24 Postgres migrations applied to the live Supabase project.
- 459 tracked source files in the handover repository, build verified clean.
- Two production deployments running:
 - `japanoma.vercel.app` — original Craefto-account deploy, full site live.
 - `japanoma-japanoma-2058s-projects.vercel.app` — new Japanoma-account handover deploy, pre-launch with a coming-soon gate; reviewers bypass via `?preview=<key>` cookie.
- Compliance scaffolding present (Privacy + Terms 11-section ToC, append-only acknowledgment audit log), **flagged on-page as awaiting legal review** before public release.
- Resend transactional email wired up; notifications routed to `kaz@goandcpartners.com`, `craefto@gmail.com`, `admin@japanoma.com.au`.

What’s deferred (not blocking handover)

- **Legal counsel review** of `/privacy` and `/terms` wording. Page banner is visible until lifted.
- **Domain DNS** — `japanoma.com.au` apex/www records to be pointed at Vercel.
- **Resend domain verification** — DKIM, SPF, DMARC records on `japanoma.com.au` for `noreply@japanoma.com.au`.
- **Sentry / Plausible** — env keys unset; add when those services are provisioned.
- **Preview-scope env vars** — Vercel CLI 50.41.0 has a non-interactive preview-scope add bug; preview env vars can be added via the Vercel dashboard if branch previews are needed.

How to read this document

Sections 2–4 give a technical reviewer enough to inspect the system end-to-end. Sections 5–7 are operations-focused (deploy, env, day-2). Section 8 captures pending work + tech debt. Section 9 lists every visible feature. Appendix A is the diagram set.


2 · Architecture

2.1 Tech stack at a glance

Layer	Choice
Framework	Next.js 15 · App Router · React 19 · React Server Components
Language	TypeScript 5
UI	shadcn/ui + Tailwind CSS v4 + bespoke “Ma Space” components
Database	Supabase Postgres (Sydney ap-southeast-2)
ORM	Drizzle 0.3x
Auth	Supabase Auth (email + password, anonymous-first sessions)
CMS	Sanity (production dataset)
Forms	React Hook Form + Zod
Charts	Recharts
State	TanStack Query + Zustand (quiz answers) + nuqs
3D map	three.js + @react-three/fiber + drei
Email	Resend
Analytics	Plausible (cookieless)
Errors	Sentry
Hosting	Vercel

Architectural decisions are documented in `docs/adr/001-012` with rationale.

2.2 System architecture

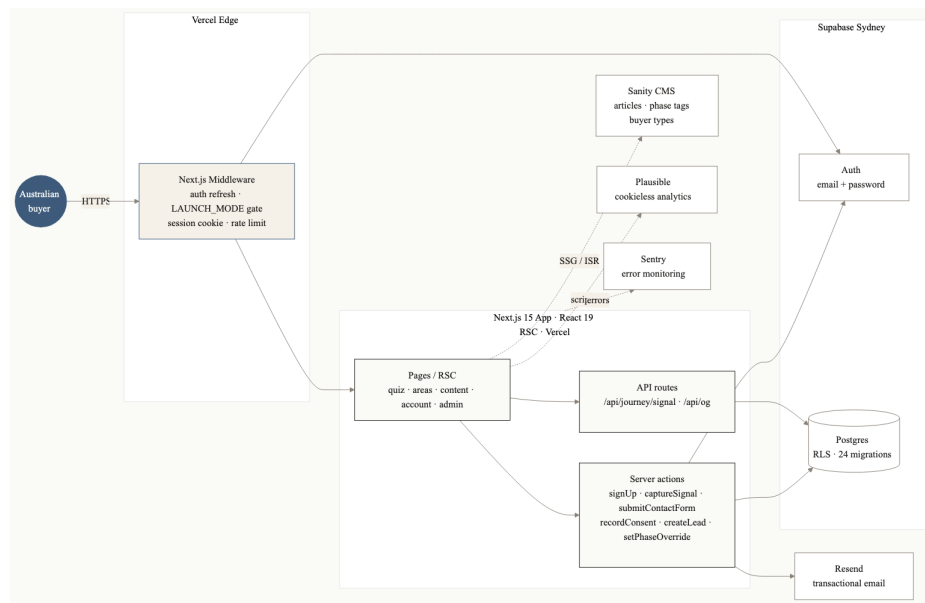

System architecture

The browser hits Vercel's edge, where Next.js middleware enforces three responsibilities in order:


1. **Pre-launch gate** — when `LAUNCH_MODE=coming_soon`, every public route 307-redirects to `/coming-soon` unless the visitor has the `jt_preview_unlock` cookie. Auth surfaces stay open.
2. **Auth refresh** — Supabase session cookie refreshed in-place via `updateSession`.
3. **Analytics session** — first-party `jt_session` UUID cookie set for anonymous event grouping.

Once past the gate, the request reaches a Next.js page (RSC by default). Server actions handle mutations (signup, quiz submit, lead capture, journey signal capture, contact form). API routes handle a small set of cross-component endpoints (`/api/journey/signal`, `/api/og`).

Outbound services are minimal:

- **Supabase** — auth and Postgres for all user data, journey state, leads, consent records, and the policy acknowledgment audit log.
- **Sanity** — editorial articles for the Content Hub (Kaz and Shiun edit there).
- **Resend** — transactional email for contact form + lead notifications.
- **Plausible** — page-view analytics, cookieless.
- **Sentry** — error monitoring (server + client + edge).

2.3 Deployment topology

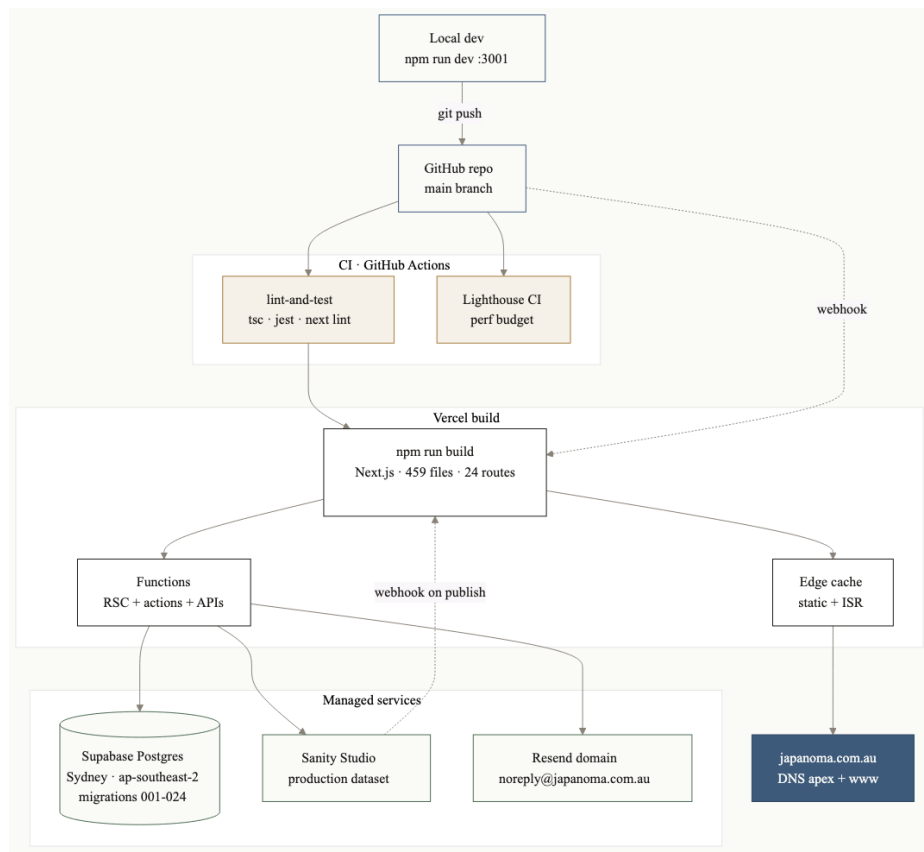

Deployment topology

Each git push to main triggers a Vercel build via webhook. CI (GitHub Actions) runs tsc --noEmit, jest, next lint, and Lighthouse CI in parallel. A successful build creates an immutable production deployment; the *.vercel.app alias is updated atomically. Custom domain japanoma.com.au (when configured) is mapped via Vercel's DNS records.

Sanity Studio is deployed separately (sanity deploy). When an editor publishes a document, a webhook triggers Vercel ISR revalidation for the affected routes (/content, /content/[slug], etc.), so editorial changes go live within seconds.

3 • Codebase Structure

src/	
app/	Next.js App Router routes
(auth)/	login · signup · password reset ·
verify email	
account/	authenticated user dashboard
admin/	Go&C internal admin (gated by

app_metadata.is_admin)	
areas/	area directory · 3D map · city detail
pages	
content/	editorial Content Hub (Sanity-backed)
quiz/	7-step recommendation quiz + results
contact/	contact form
coming-soon/	pre-launch brand page
privacy/ terms/	legal pages with sticky ToC
changelog/	user-facing release history (commit-
derived)	
api/	journey/signal · og · auth/confirm
components/	
japandi/	bespoke Ma Space design system
ui/	shadcn/ui primitives, themed
journey/	D2L journey UI (filters, nav, notes,
bookmarks)	
legal/	legal-page shell + sticky ToC
photography/	full-bleed image, ken-burns hero
quiz/	quiz step rendering, icons, gauge
layout/	header / footer / shells
brand/	LogoMark + LogoLockup
lib/	
db/	Drizzle schema + queries
supabase/	server / service / middleware clients
journey/	state machine, scoring, signal capture
quiz/	scoring algorithm + contact-context
extraction	
policies/	T&C / Privacy versioning +
acknowledgment log	
lead-capture/	consent records + leads
sanity/	client + GROQ queries + image builder
seo/	JSON-LD helpers
format/	currency / flight-time / origin
formatters	
data/	build-time data (e.g. area image
blurs)	
hooks/	shared React hooks
stores/	Zustand stores (quiz answers)
styles/	design tokens, motion utilities, Ma
spacing	
test-mocks/	Jest module shims for ESM-only deps
supabase/migrations/	24 sequential SQL migrations (apply in
order)	
sanity/schemas/	Sanity content type definitions

public/ fonts, OG art)	static assets (hero photography,
docs/ personas, user stories	ADRs, architecture, requirements,
e2e/	Playwright tests
scripts/	build / data scripts

The full design-system reference is **CLAUDE.md** at the repo root — the canonical developer guide. Every new dev should read it first.

4 • Data Model

4.1 ERD overview

Database ERD

Supabase's `auth.users` is the canonical identity. Domain tables fan out from there with `user_id` foreign keys, almost all governed by Row-Level Security policies that restrict reads to `auth.uid() = user_id`.

4.2 Migration history

24 sequential SQL files in supabase/migrations/:

#	File	What it adds
001	init_schema.sql	Initial taxonomy + content scaffolding
002	add_areas_to_personas.sql	Persona-area join

#	File	What it adds
003	auth_users.sql	Auth integration scaffolding
004	seed_taxonomy.sql	Initial prefecture + city + region seeding
005	cities_lat_lng.sql (early)	Lat/Lng on cities
006	quiz_responses.sql	Quiz response jsonb storage
007	events.sql	Anonymous event tracking
008	saves.sql	Saves table for content + areas
009	consent_text_versions.sql	Versioned consent text
010	consent_records.sql	Per-user consent capture
011	leads.sql	Lead pipeline
012	taxonomy_cra76_refresh.sql	Taxonomy update CRA-76
013	taxonomy_cra76_refresh_data.sql	Data for above
014	cities_hero_image_path.sql	Hero image paths on cities
015	cities_municipality_population.sql	Municipality URL + population

#	File	What it adds
016	taxonomy_cra76_25apr_data.sql	April taxonomy refresh
017	form_submissions.sql	Contact form + lead source storage
018	cities_lat_lng.sql	Lat/lng coordinates for the 3D map
019	fix_yamanouchi_spelling.sql	Typo fix
020	taxonomy_latest_sync.sql	Latest taxonomy sync
021	journey_tables.sql	D2L journey: state, signals, notes, bookmarks, og_cache
022	rate_limit.sql	Token-bucket rate limit table
023	policy_acknowledgments.sql	T&C / Privacy audit log (append-only)
024	remove_shimotakai_taxonomy.sql	Removed irregular district listing


To apply on a fresh Supabase project: run each file in order via the Supabase SQL Editor or `supabase db push`. Migration order is significant — later migrations reference earlier tables.

4.3 Notable data conventions

- **Anonymous-first sessions.** Quiz responses + saves can be created without an account. On signup, a server action migrates anonymous rows to the new `user_id` via a session-cookie match.
- **Consent records are append-only.** A “withdrawal” sets `withdrawn_at`, never deletes. Same for `policy_acknowledgments`.
- **Account deactivation is reversible.**
`auth.users.user_metadata.deactivated_at` is the soft-delete flag; on next signin the flag clears automatically.
- **RLS is the boundary.** Service-role writes are reserved for server actions that need to bypass RLS (e.g. signup-time policy log inserts). Public API never has service-role.

5 • Authentication & Compliance

5.1 Signup flow with policy capture

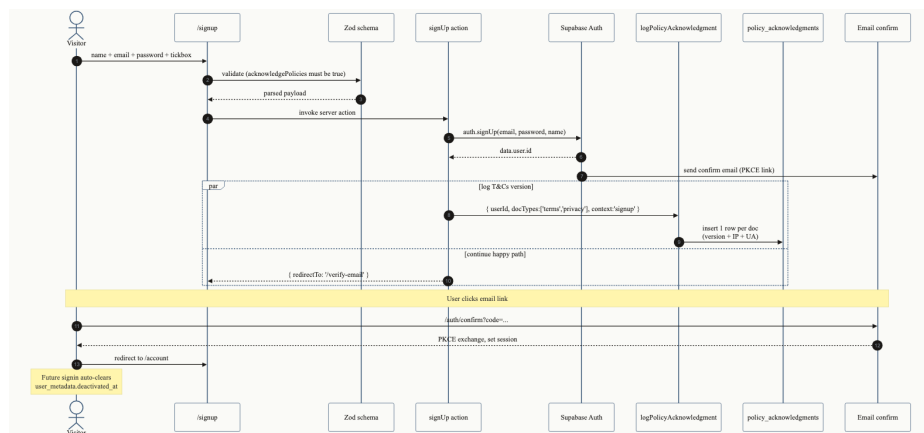

Auth and signup flow

The required tickbox on `/signup` enforces acknowledgment of both Terms & Conditions and Privacy Policy via Zod (`acknowledgePolicies: z.literal(true)`). On successful `auth.signUp`, a server-only helper writes one row per doc type into `policy_acknowledgments`:

```
user_id · doc_type ('terms'|'privacy') · version · ip_address ·  
user_agent · context ('signup'|'reacknowledgment') ·  
acknowledged_at
```

Rows are **never updated or deleted**. Account deletion sets `user_id = NULL` (anonymises) but the audit row survives indefinitely — that's the legal record of what version the user accepted, when, and from where.

5.2 Versioning and re-acknowledgment

Single source of truth: `src/lib/policies/versions.ts`.

```
export const TERMS_VERSION = '1.0';
export const TERMS_LAST_UPDATED = '2026-05-06';
export const PRIVACY_VERSION = '1.0';
export const PRIVACY_LAST_UPDATED = '2026-05-06';
```

When counsel finalises wording, the team:

1. Updates the version constant + `lastUpdated`.
2. Removes the on-page “Awaiting legal review” banner from `LegalShell`.
3. Deploys.

A version mismatch between a user's last `policy_acknowledgments` row and the live `TERMS_VERSION` / `PRIVACY_VERSION` surfaces in the `/account` sidebar in **kohaku amber** as “Stale”. Re-acknowledgment middleware that prompts on next signin is a planned follow-up phase.


5.3 Privacy Policy structure

The 11 sections per regulatory ToC structure:

1. Types of Personal Information We Collect and Why
2. How We Collect Your Personal Information
3. How We Use Your Personal Information
4. How We Disclose Your Personal Information
5. International Transfer of Personal Information
6. How We Secure Your Personal Information
7. How We Retain Your Personal Information
8. Your Choices and Rights
9. Other Important Information
10. Jurisdiction-Specific Notices (AU · JP · EU/UK · CA)
11. Contact Us

The page renders with a sticky desktop ToC, anchor links per section, and a version + last-updated header. The starter copy aligns with the **Privacy Act 1988 (AU)**, **APPI (JP)**, and **GDPR / UK GDPR** principles.

5.4 Lead capture and consent

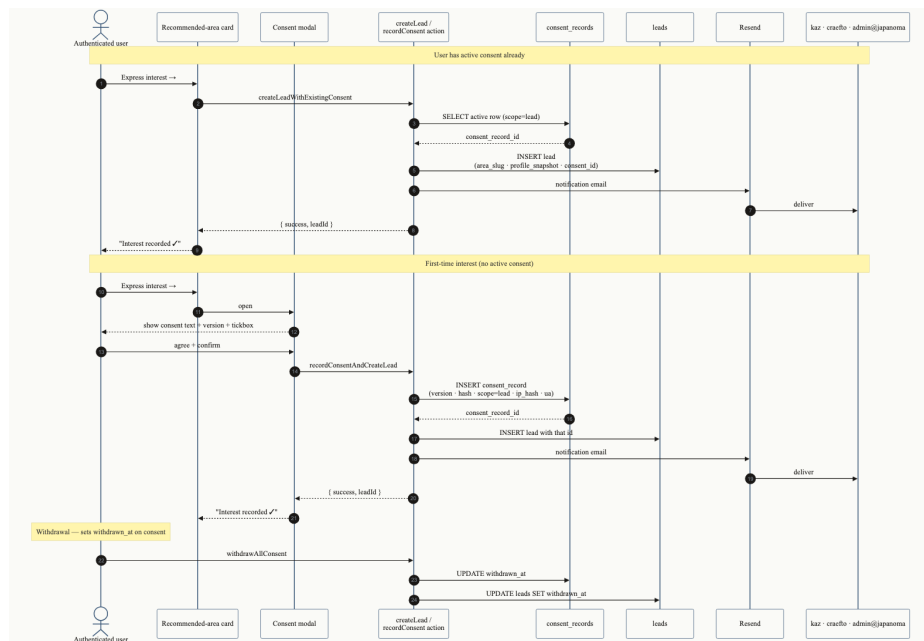

Lead capture flow


The Express-Interest button on each recommended-area card triggers one of two paths:

- **Existing active consent** → `createLeadWithExistingConsent` reads the latest active `consent_records` row, inserts a `leads` row, fires a `Resend` notification.
- **First-time interest** → `recordConsentAndCreateLead` opens a consent modal showing the current `consent_text_versions` row. On confirm, a `consent_records` row is inserted with the version, body hash, scope, IP hash (salted via `CONSENT_IP_HASH_SALT`), and UA. Then the lead is inserted referencing that consent record.

Withdrawal sets `withdrawn_at` on the consent row + cascades to all leads under it; the user sees confirmation. The append-only audit chain is preserved.

6 · Key User Journeys

6.1 Decision-to-Living (D2L) journey

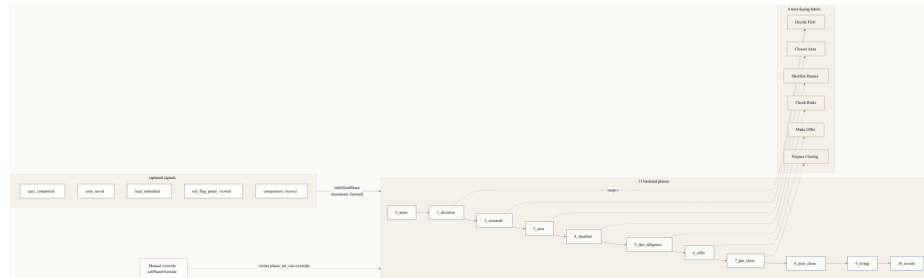

D2L user journey

The D2L model maps the buyer’s full decision lifecycle into **11 backend phases** (0_anon → 10_revisit). The visible UI collapses these to **6 user-facing labels** (Decide · Area · Shortlist · Risks · Offer · Closing) so the buyer doesn’t see internal granularity.

Phase advancement is monotonic forward by signal.

User actions emit signals through captureSignal:

Signal	Inferred phase advance
quiz_started	→ 1_decision
quiz_completed	→ 2_research
area_saved	→ 3_area
comparison_viewed	→ 4_shortlist
red_flag_panel_viewed	→ 5_due_diligence
lead_submitted	→ 6_offer

inferNextPhase(current, signal) is **pure and monotonic** — a signal can advance the phase but never regress it. This protects against accidental rollbacks (e.g. a user re-takes the quiz at phase 6 — they don’t get demoted to phase 2).

Manual override.

setPhase0override (server action, rate-limited via rate_limit table) lets a user pin their phase explicitly via the journey nav-map sheet. Sets phase_set_via='override' so analytics can distinguish inferred vs. self-reported state.

6.2 Recommendation quiz



Quiz flow


The 7-step quiz is the platform’s primary conversion surface. Each step uses a measured cascade entrance (title 0ms → subtitle 70ms → answer cards 140ms + 35ms each) for an editorial reveal cadence.

Scoring breakdown (out of 100, normalised from /98).

Dimension	Weight	Source
Purpose × region affinity	0–22	PURPOSE_AFFINITY lookup
Proximity × ski_season	0–22	carToSlopeMin weighted by SEASON_WEIGHT
Property type × region	0–13	TYPE_AFFINITY lookup, best of selection
Budget × content priority	0–13	scoreBudget
Priority tiebreaker	0–18	scorePriority
Family composition × municipal culture	0–10	FAMILY_AFFINITY lookup

Top 3 cities are persisted as a JSONB snapshot to quiz_responses.responses and rendered on /quiz/results, the /account recommended-areas grid, and pre-fill the /contact?source=quiz form.

6.3 Content Hub filtering

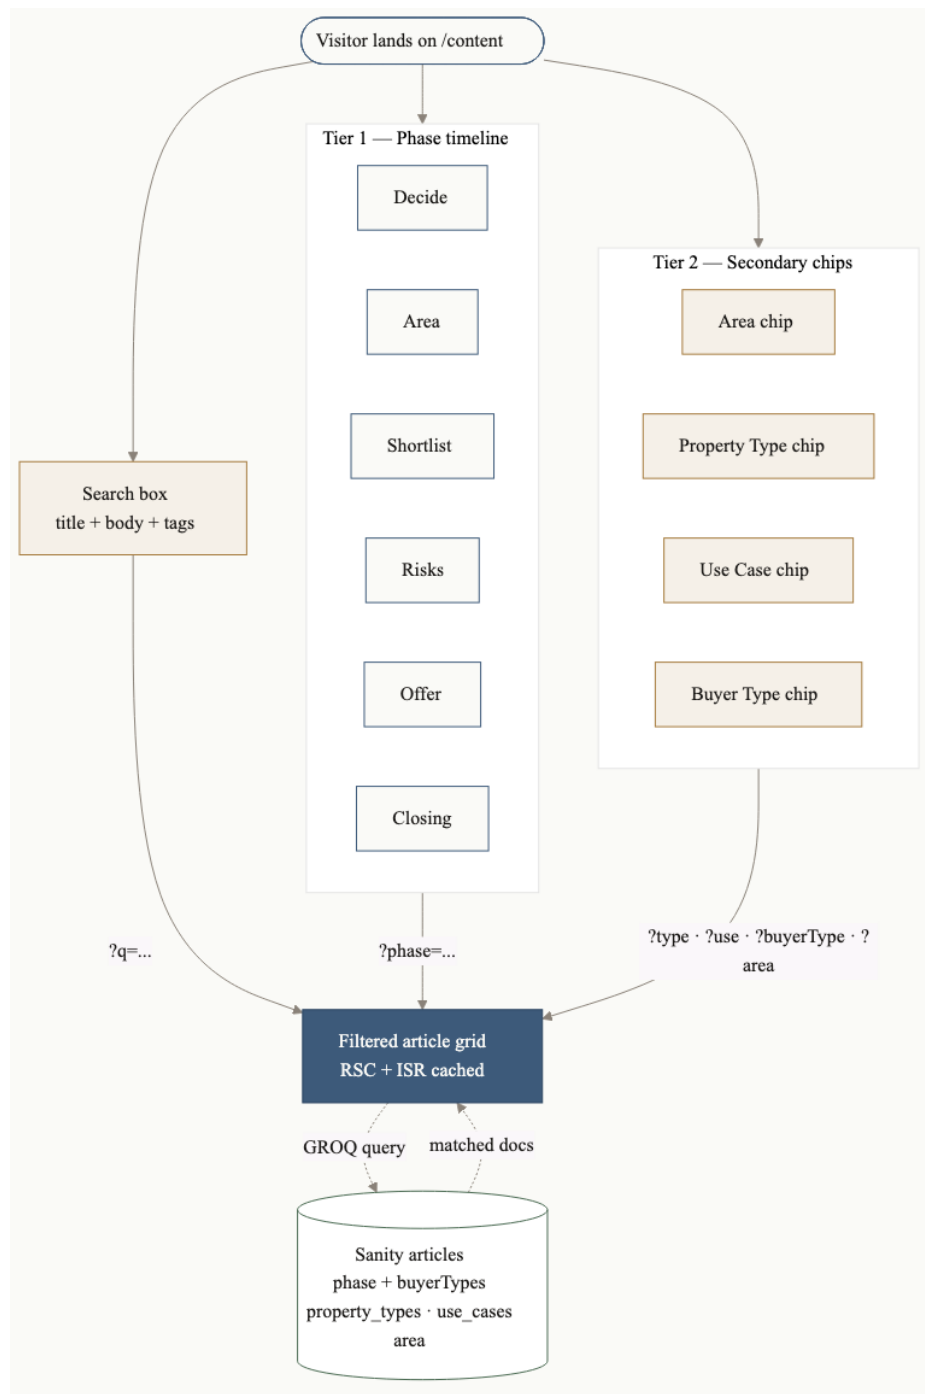

Content Hub filter

Two-tier filter UX:

- **Tier 1** — phase timeline with 6 numbered nodes connected by a hairline track. Inferred user phase highlighted with an indigo ring; active filter scaled-up with a soft glow. Click any node → `?phase=...` query param.
- **Tier 2** — secondary chips for Area, Property Type, Use Case, Buyer Type. Multi-select, additive.

Sanity-side, articles are tagged with `phaseTag[]` and `buyerTypeTag[]` document references. The GROQ query in `getFilteredArticles` filters on the URL params and returns the matched documents. Search is title + body + tag full-text.

7 • Operations Runbook

7.1 Deploy a code change

```
# Local check
npm run build           # Next.js + lint
npm test                # Jest
npm run e2e             # Playwright (when relevant)

# Ship
git checkout -b <branch>
# ... commit ...
gh pr create --base main --title "... " --body "... "
gh pr merge <num> --merge
# Vercel auto-deploys on merge to main.
```

7.2 Apply a Supabase migration

Place a new SQL file in `supabase/migrations/NNN_description.sql`. Apply via:

- **Dashboard** — Supabase SQL Editor (paste, run).
- **CLI** — `supabase db push` after `supabase link --project-ref <ref>`.
- **MCP** — `mcp__supabase__apply_migration` (Claude Code dev sessions).

Always re-generate types after schema changes:

```
# Supabase CLI:
supabase gen types typescript --project-id <ref> > src/lib/
supabase/database.types.ts
```

Or via MCP: `mcp__supabase__generate_typescript_types`.

7.3 Bump a policy version

```
// src/lib/policies/versions.ts
export const TERMS_VERSION = '1.1'; // was '1.0'
export const TERMS_LAST_UPDATED = '2026-06-15';
```

Then:

1. Remove the reviewNotice prop from <LegalShell> in the affected page (privacy or terms) once counsel has finalised wording.
2. Push and deploy.
3. Existing user acknowledgments are now “stale” — surfaced in /account sidebar. The re-acknowledgment middleware (planned) will gate next signin.

7.4 Rotate the Vercel preview-bypass key

```
cd ~/Desktop/japanoma-handover # only relevant for the handover
                                deploy
NEW_KEY=$(openssl rand -hex 16)
echo "$NEW_KEY" # copy this – it's the new bypass URL parameter
npx vercel env rm PREVIEW_KEY production --yes
npx vercel env rm PREVIEW_KEY development --yes
printf '%s' "$NEW_KEY" | npx vercel env add PREVIEW_KEY production
printf '%s' "$NEW_KEY" | npx vercel env add PREVIEW_KEY
                        development
npx vercel --prod --yes
```

Old jt_preview_unlock cookies remain valid until they expire (30 days) — to revoke immediately, the user clears their cookies or you change cookie name in src/middleware.ts.

7.5 Take the site live (lift the coming-soon gate)

Two options on the handover Vercel deploy:

- **Remove the env var** entirely (recommended): `npx vercel env rm LAUNCH_MODE production` then redeploy.
- **Set to a non-coming-soon value**: `printf 'live' | npx vercel env add LAUNCH_MODE production`.

Either takes effect on the next request — no rebuild needed (the env is read at runtime in middleware).

7.6 Read deploy logs

Specific deploy by URL slug or ID

```
npx vercel logs <deploy-url>
```

All recent deploys (status + duration)

```
npx vercel ls
```

7.7 View Supabase logs

mcp__supabase__get_logs with one of:

api · postgres · edge-function · auth · storage · realtime. Or via Supabase Dashboard → Logs.

8 · Environment Reference

Required env vars, copied from `.env.example`. **Never commit `.env.local`** — `.gitignore` blocks it; `git add -A` defences also block accidental binary-doc commits.

8.1 Database + Supabase

Var	Required	Where	Description
DATABASE_URL	yes	server	Supabase pooler URL for Drizzle queries
NEXT_PUBLIC_SUPABASE_URL	yes	client + server	<code>https://<ref>.supabase.co</code>
NEXT_PUBLIC_SUPABASE_ANON_KEY	yes	client + server	Public anon key
SUPABASE_SERVICE_ROLE_KEY	yes	server only	Service-role key — bypasses RLS; production scope only

8.2 Auth

Var	Required	Description
AUTH_SECRET	yes	32-byte hex; rotate per environment
AUTH_URL	yes	Public site URL (used in PKCE redirect targets)
AUTH_UI_ENABLED	yes	'true' to expose /login, /signup, etc. Otherwise routes 404.

8.3 Sanity

Var	Required	Description
NEXT_PUBLIC_SANITY_PROJECT_ID	yes	Sanity project ID
NEXT_PUBLIC_SANITY_DATASET	yes	Usually production
SANITY_WEBHOOK_SECRET	yes	Secret used to verify Sanity → Vercel ISR webhook

8.4 Observability + analytics

Var	Required	Description
NEXT_PUBLIC_PLAUSIBLE_DOMAIN	optional	Plausible domain; omit to skip analytics
NEXT_PUBLIC_SENTRY_DSN	optional	Sentry DSN; omit to skip error monitoring
NEXT_PUBLIC_SITE_URL	yes	Canonical site URL for OG tags + sitemap

8.5 Lead capture + email

Var	Required	Description
CONSENT_IP_HASH_SALT	yes	64-char hex. Lifetime-stable — rotating breaks IP correlation across consent records
RESEND_API_KEY	optional	Resend API key. If unset, sends silently no-op (dev-safe)

Var	Required	Description
EMAIL_FROM	yes if Resend	Japanoma <noreply@japanoma.com.au> style. Sending domain must be verified in Resend
EMAIL_NOTIFICATIONS_TO	yes if Resend	Comma-separated internal recipients

8.6 Pre-launch gate (handover deploy only)

Var	Required	Description
LAUNCH_MODE	optional	coming_soon redirects all public routes to / coming-soon. Anything else (or unset) = live
PREVIEW_KEY	required if gate on	Random 32-char hex. ?preview=<KEY> sets a 30-day cookie that bypasses the gate

9 • Feature Inventory

9.1 Public surfaces

Route	What it does
/	Editorial hero, value prop, three featured calculators
/quiz	7-step recommendation quiz with cascade entrance + scoring
/quiz/results	Top-3 area cards with AVIF imagery + AUD prices + flight time
/areas	Searchable directory + 3D Japan map view (toggleable)
/areas/[prefecture]/[city]	City detail page with hero, stats, JA copy chip + outbound search links
/content	Editorial Content Hub with phase timeline + secondary filters
/content/[slug]	Article reader with phase tag + buyer-type chips
/contact	Contact form with editorial Field component, Resend integration

Route	What it does
/privacy · /terms	Compliance pages with sticky ToC; awaiting legal review banner
/changelog	Commit-derived release history
/about	Operator + brand story
/coming-soon	Pre-launch brand page (only visible behind LAUNCH_MODE gate)

9.2 Authenticated user surfaces

Route	What it does
/account	Concierge sidebar + recommended areas grid + saved items + journey notes + bookmarks + export
/login	Email + password sign in with auto-reactivation
/signup	Account creation with required T&C / Privacy tickbox
/verify-email	Email verification holding screen
/forgot-password · /reset-password	Password recovery flow

9.3 Admin surfaces (gated by `app_metadata.is_admin`)

Route	What it does
/admin	Hub for internal Go&C tools
/admin/leads	Lead pipeline with CSV export
/admin/quiz-stats	Quiz response analytics

9.4 Calculator tools

The home page features three flagship calculators:

- **Total Cost of Ownership** — annual upkeep (taxes, management, snow load insurance, utilities) layered onto purchase price.

- **AUD**  **JPY** — converter with real-time rate (manually maintained: JPY_AUD_RATE constant in src/lib/quiz/questions.ts).
- **Flight Time** — Sydney/Melbourne/Brisbane/Perth/Adelaide → nearest Japan airport.

10 • Compliance Summary

Requirement	State
Privacy Policy structure (11 sections)	✓ Built. Awaiting legal counsel review of wording.
Terms & Conditions	✓ Built (12 sections). Awaiting legal counsel review of wording.
Required signup acknowledgment with audit log	✓ Built. policy_acknowledgments append-only, retained indefinitely.
Cookieless analytics	✓ Plausible (when key is set).
Anonymous-first sessions	✓ Quiz, browse, save — no account required.
Consent-gated lead capture	✓ consent_records versioned, IP-hashed via CONSENT_IP_HASH_SALT, withdrawable.
Right to access / correct / delete data	✓ /account page; deactivation reversible; account deletion in roadmap.
Australian Privacy Act 1988	Aligned (subject to counsel sign-off).
Japan APPI	Aligned (subject to counsel sign-off).
EU GDPR / UK GDPR	Aligned (subject to counsel sign-off).
California CCPA / CPRA	“Do not sell” — we don’t.
WCAG 2.1 AA	In progress. inert attribute on closed mobile menu, focus trap on modals, aria-live announcements on copy chips.

11 · Pending Work & Tech Debt

11.1 Blocking pre-launch

- **Legal counsel review** of /privacy and /terms wording. Lift the on-page banner once finalised.
- **DNS** for japanoma.com.au apex + www to be pointed at Vercel.
- **Resend domain verification** for noreply@japanoma.com.au (DKIM, SPF, DMARC).
- **Sanity content backfill** — currently 4/11 articles auto-tagged at high confidence; remaining 7 need editor pass.

11.2 Useful-but-not-blocking

- **Re-acknowledgment middleware** — when a user's last `policy_acknowledgments.version` differs from the current `TERMS_VERSION/PRIVACY_VERSION`, gate the next signin to a re-accept screen.
- **Sentry + Plausible env keys** to be set when those services are provisioned.
- **Preview-scope env vars** — Vercel CLI 50.41.0 has a non-interactive preview-scope add bug. Add via dashboard if branch previews are needed.
- **Custom domain for handover deploy** — currently a *.vercel.app URL. When japanoma.com.au DNS is configured, point to whichever deploy is the production one and update `AUTH_URL` + `NEXT_PUBLIC_SITE_URL`.

11.3 Known issues

- **Vercel CLI --force flag** doesn't always work for preview-scope env adds (CLI 50.41.0 bug). Workaround: `vercel env rm + add`. Documented in deploy runbook.
- **THREE.js deprecation warnings** in console (`THREE.Clock` → `THREE.Timer`, `PCFSoftShadowMap` → `PCFShadowMap`). Third-party from `@react-three/fiber + drei`. Resolved by a coordinated package upgrade — separate session.
- **Webpack .next cache occasionally corrupts** during long dev sessions. `rm -rf .next` and restart fixes. Future: switch dev to

Turbopack (next dev --turbo) which bypasses the failing PackFileCacheStrategy.

- **2 pre-existing TypeScript test errors** in actions.test.ts files — non-blocking, slated for cleanup.

11.4 Roadmap suggestions

- **Browser-side PDF download** of quiz results + journey export. Currently MD-only.
- **Email digest** — weekly summary to interested users showing new content matched to their phase.
- **Sanity** → **Slack integration** for new article notifications.
- **JP-locale** version using the existing Shippori Mincho B1 + Noto Sans JP fonts. Sanity dataset already supports language field.

12 • Handover Checklist

For the receiving team:

☐

Receive GitHub repo invite (push access to Japanoma-com/japanoMa and/or ObiBat/Japa-Tak).

☐

Receive Vercel project access — japanoma-2058 scope or transfer to a new team.

☐

Receive Supabase project access — currently project ref dfbyywvogeax rxsrhahp.

☐

Receive Sanity Studio access — currently project ID ljeqozrv, dataset production.

☐

Receive Resend account access (or be added to the team).

☐

Optional: provision Sentry, Plausible, set env vars.

☐

Read CLAUDE.md (developer guide).

☐

Read DEPLOYMENT.md (step-by-step setup from scratch).

☐

Read CHANGELOG.md (release history).

- ☐ Walk through /quiz end-to-end on the live site.
- ☐ Trigger a contact-form submission and confirm Resend email arrives.
- ☐ Review the 8 diagrams in docs/handover/diagrams/ (the source of this report).
- ☐ Schedule legal-counsel review of /privacy and /terms.
- ☐ Configure japanoma.com.au DNS.
- ☐ Verify Resend sending domain (DKIM, SPF, DMARC).
- ☐ Lift the LAUNCH_MODE=coming_soon env var when ready to go public.

Appendix A · Diagrams (full set)

The 8 architecture diagrams in this report, listed with source file paths. All are in Mermaid (text source) → rendered to PNG (1600w, embed-ready) and SVG (crisp print + Figma-importable).

#	Title	Source
1	System architecture	diagrams/01-system-architecture.mmd
2	Deployment topology	diagrams/02-deployment-topology.mmd
3	Database ERD	diagrams/03-database-erd.mmd
4	Auth and signup flow	diagrams/04-auth-and-signup.mmd
5	D2L user journey	diagrams/05-d2l-journey.mmd
6	Lead capture and consent flow	diagrams/06-lead-capture.mmd
7	Content Hub filter	diagrams/07-content-filter.mmd
8	Quiz flow	diagrams/08-quiz-flow.mmd

To re-render after editing a source:

```
mmdc -i diagrams/<file>.mmd -o diagrams/<file>.png -b "#FAFAF7" -w 1600
mmdc -i diagrams/<file>.mmd -o diagrams/<file>.svg -b "#FAFAF7"
```

Appendix B · Document set

This handover package includes:

File	Format	Purpose
Japanoma- Handover- Report.md	Markdown	Master text source — what you're reading
Japanoma- Handover- Report.docx	Word	Pandoc render of the master, with embedded PNG diagrams
Japanoma- Handover- Report.pdf	PDF	Pandoc render of the master, with embedded PNG diagrams
Japanoma- Handover- Deck.pptx	PowerPoint	Marp executive slide deck — exec-summary cut for stakeholder review
Japanoma- Handover-Deck.pdf	PDF	Same deck as PDF
diagrams/*.mmd	Mermaid	Text source for all 8 diagrams
diagrams/*.png / *.svg	Image	Rendered diagrams

End of report. For questions, contact Craefto · obibatbileg@gmail.com.