


SIDE PROJECT · SEPTEMBER 2026

flysdown

Live aircraft and ships on one map,
with a detection engine that warns
before something enters restricted
airspace.

WHAT YOU ARE LOOKING AT

39 seconds from prohibited airspace

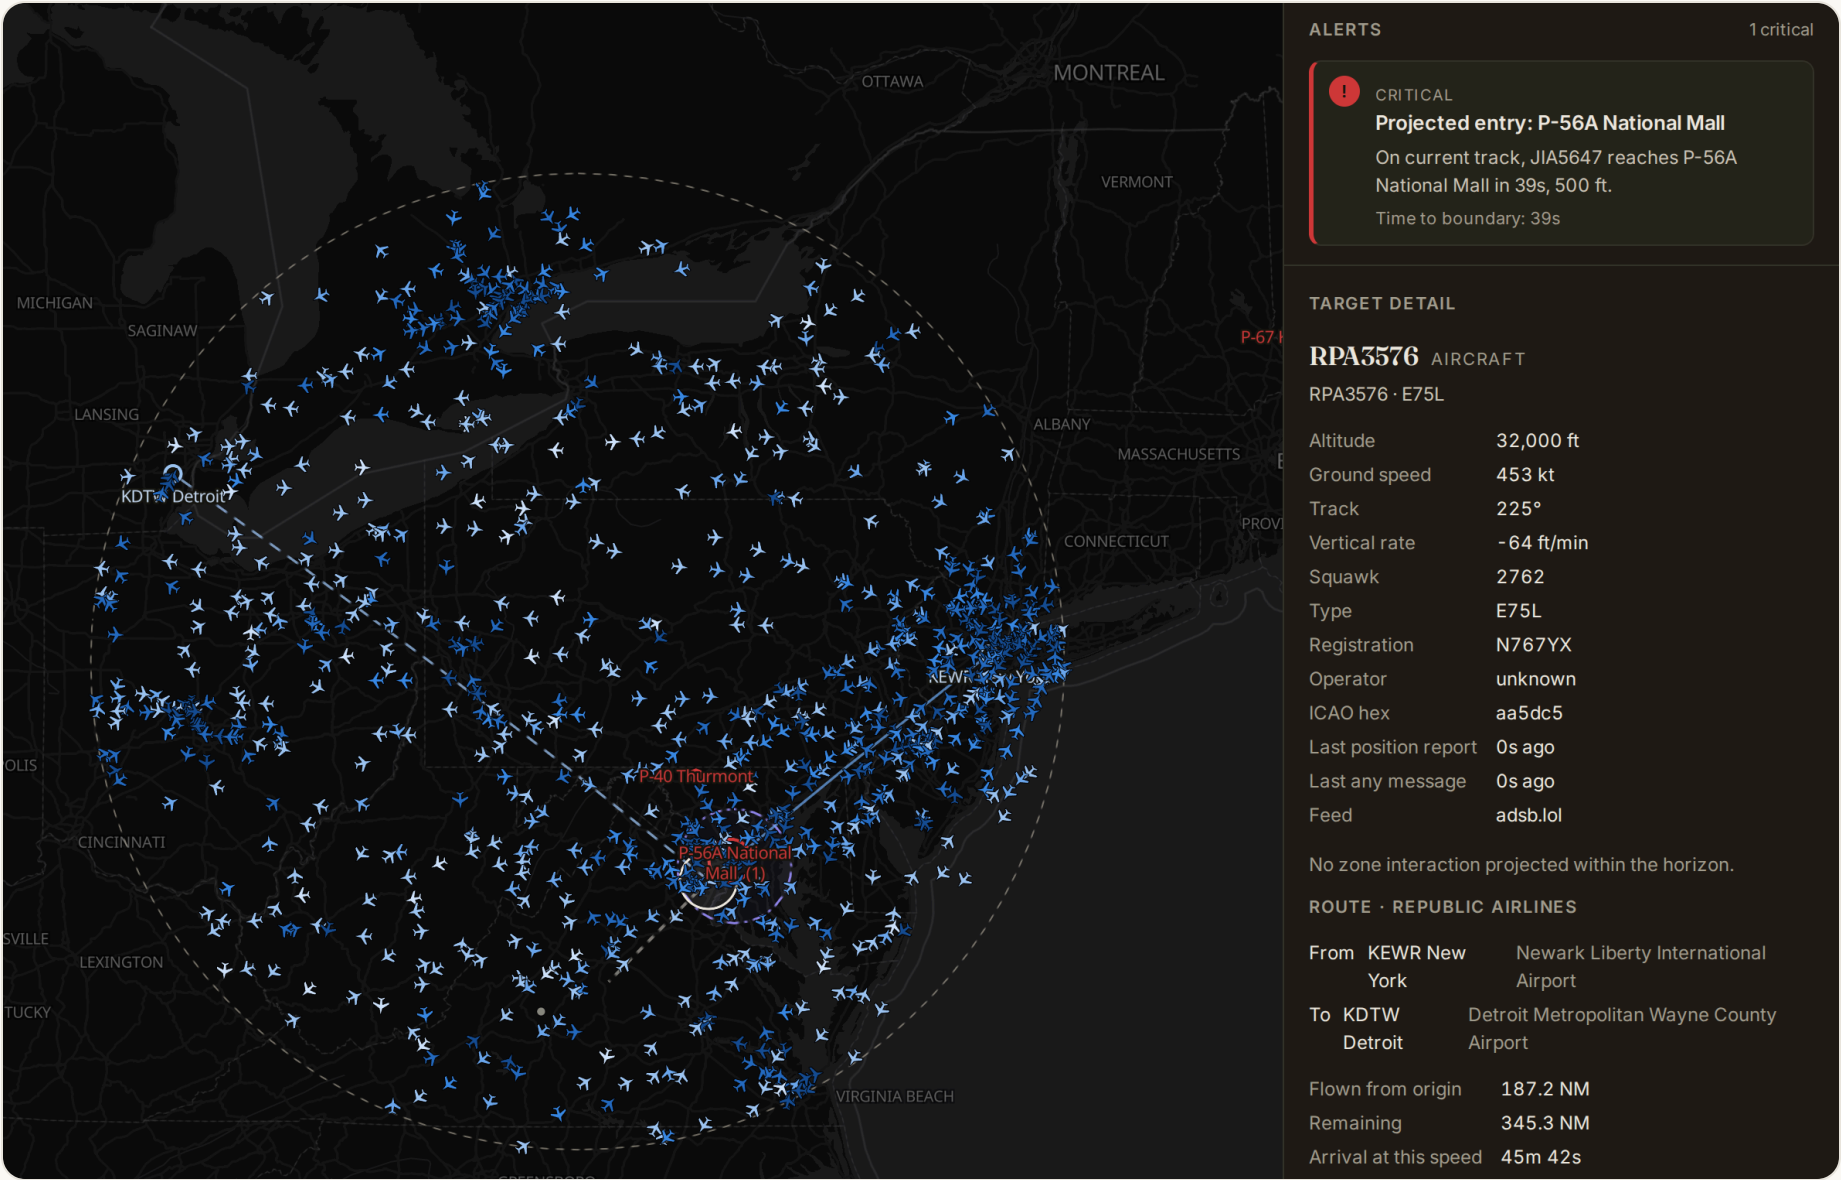

A live warning over the National Mall, and the selected regional jet drawn back to Newark where it took off, with the distance flown, the distance remaining and an arrival time at its current speed.

WHAT IT DOES

Four questions, answered live

- Is anything inside restricted airspace right now, and at what altitude?
- If nothing changes, what enters a zone next, and how long have we got?
- Are two ships converging on each other, and how close will they pass?
- Where did this flight come from, and where is it going?

THE PROBLEM NOBODY WARNS YOU ABOUT

Serverless has no IP address of its own

1 in 8

polls succeeded from the edge before the fix

Community ADS-B feeds rate-limit by IP, and a Cloudflare Worker egresses from addresses shared with every other customer on the platform. Measured from production: adsb.lol returned 429 on most attempts, adsb.fi served a bot challenge every time, and OpenSky did not answer at all. None of them send CORS headers, so the browser cannot call them either. Changing source does not fix it. The address is the problem.

THE FIX

Move the fetch, not the source

2 to 9 s

age of live aircraft data in production, about 490 targets

A small poller runs where the IP is ordinary. It asks the site which map areas people are actually looking at, fetches those, and pushes snapshots into Cloudflare D1, which the edge reads first. Demand driven, so it follows the map instead of polling a fixed list of cities.

```
browser -> /api/aircraft -> D1 snapshot (fresh) <- relay, every 8 s
|
+--> aggregators directly (usually refused)
+--> last known good, labeled stale with its age
```

DETECTION, PART ONE


Projected airspace entry

Every target is dead-reckoned forward and checked against each zone in three dimensions, so a jet at 35,000 ft over a surface-to-18,000 ft prohibited area is correctly not an incursion, while one descending into the band is caught. The step size is tied to each zone's own radius, because a fixed 15 second step at 500 knots walks straight over a one mile circle, and the crossing time is then refined by bisection.

N9287Y reaches P-40 Thurmont in 56s, 5000 ft

a real alert, over Camp David

Two ships, one relative track

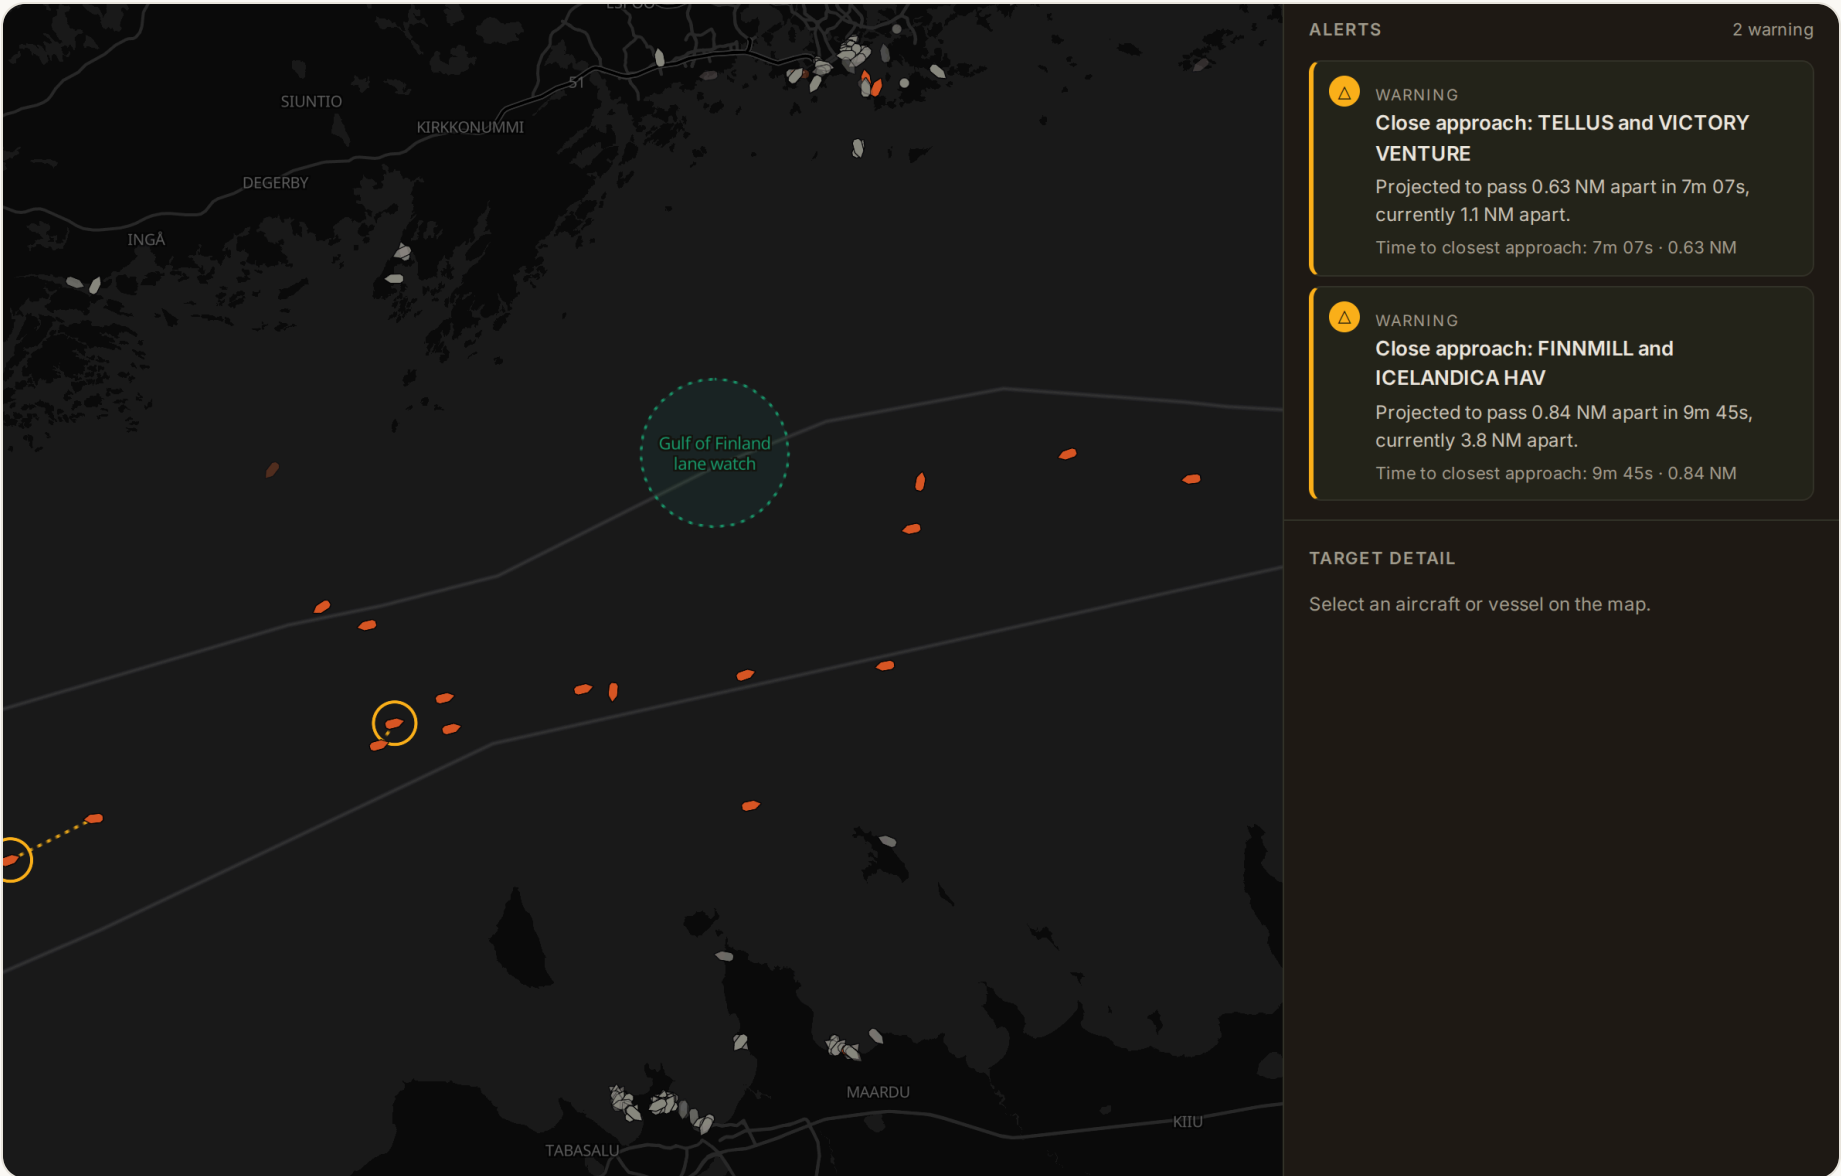

Closest Point of Approach by relative motion, the same alarm model an ARPA radar uses: a preset CPA limit and a warning time. Moored and anchored ships are excluded, or a harbor would drown the feed with pairs lying a cable apart at zero knots.

GETTING THE BORING PARTS RIGHT

Real airspace, and honest staleness

- Zone geometry is the FAA's own published Special Use Airspace, not hand-drawn. Their one-mile circles ship as 6,285-point polygons; simplification takes that to 17 with no visible difference.
- Transiting the DC Special Flight Rules Area with a clearance is routine, so it is advisory: drawn and reported, never alerted. That change took one view from 55 alerts to 3 real ones.
- When every upstream refuses, the map shows the last good picture labeled with its age. A dashboard that quietly shows five minute old positions as current is worse than one showing nothing.

BY THE NUMBERS

What it took

5,780

lines, no framework, no build step

16

restricted zones from FAA data

\$0

hosting: Cloudflare free tier

26

unit tests, plus a real-browser smoke test

4

live data sources, none needing a key

9

page write-up of how it all works

HAVE A LOOK

flysdown.jaronwilson.dev

ADS-B from adsb.fi and adsb.lol, AIS from Fintraffic Digitraffic, airspace from the FAA, routes from adsbdb, basemap from OpenFreeMap. Built on Cloudflare Pages with MapLibre GL JS.