

Project-1

Instances | EC2 | ap-south-1

EC2 Instance Connect | ap-south-1

ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#instances:

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

Muhammed Jaseem KP

Dashboard

EC2 Global View

Events

▼ Instances

Instances

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

▼ Images

AMIs

AMI Catalog

Instances (3) Info

Last updated less than a minute ago

Connect

Instance state

Actions

Launch instances

Find Instance by attribute or tag (case-sensitive)

Running

< 1 >

☐	Name	Instance ID	Instance state	Instance type	Status check	Alarm status
☐	Ansible-M	i-01a7f2eaf3de73b00	Running	t2.medium	Initializing	View alarms +
☐	Ansible-Test	i-0403d186609c338d4	Running	t2.micro	Initializing	View alarms +
☐	Ansible-Prod	i-0f7c8427f2d4e3f4d	Running	t2.micro	Initializing	View alarms +

Select an instance

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

Instances | EC2 | ap-south-1

EC2 Instance Connect | ap-south-1

Installing Ansible on specific op

ap-south-1.console.aws.amazon.com/ec2-instance-connect/ssh/home?region=ap-south-1&connType=standard&instanceId=i-01a7f2eaf3de73b00&osUser=ub...

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

Muhammed Jaseem KP

ubuntu@ip-172-31-14-163:~\$ history

1 clear

2 clear

3 sudo apt update

4 sudo apt install software-properties-common

5 sudo add-apt-repository --yes --update ppa:ansible/ansible

6 sudo apt install ansible

7 clear

8 history

ubuntu@ip-172-31-14-163:~\$

i-01a7f2eaf3de73b00 (Ansible-M)

PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

```
ubuntu@ip-172-31-8-127:~$ cd .ssh
ubuntu@ip-172-31-8-127:~/.ssh$ sudo nano authorized_keys
ubuntu@ip-172-31-8-127:~/.ssh$ history
 1 clear
 2 cd .ssh
 3 sudo nano authorized_keys
 4 history
ubuntu@ip-172-31-8-127:~/.ssh$
```

i-0f7c8427f2d4e3f4d (Ansible-Prod)

PublicIPs: 13.233.43.159 PrivateIPs: 172.31.8.127

```
ubuntu@ip-172-31-1-15:~$ cd .ssh
ubuntu@ip-172-31-1-15:~/.ssh$ sudo nano authorized_keys
ubuntu@ip-172-31-1-15:~/.ssh$ history
 1 clear
 2 cd .ssh
 3 sudo nano authorized_keys
 4 history
ubuntu@ip-172-31-1-15:~/.ssh$
```

i-0403d186609c338d4 (Ansible-Test)

PublicIPs: 3.108.51.1 PrivateIPs: 172.31.1.15

```
The key fingerprint is:
SHA256:6namRMUQ8d+nwkpSonm0pkzWsEbDKSxtFUb59SE6VwY ubuntu@ip-172-31-14-163
The key's randomart image is:
+---[RSA 3072]-----+
|.+.+oE.|
|...+o+|
|..o+=.|
|o o+. ....|
|. = * +oS . . .|
|o o X = . . o|
| B O . o .|
| = *.oo. .|
| o.o+.|
+---[SHA256]-----+
ubuntu@ip-172-31-14-163:~$ cat /home/ubuntu/.ssh/id_rsa.pub
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGDY55GSgMaY0a1oRzeI3e31Te/MyuxPU+tvxFmBKCyR8g48LmkP2C/27CiCWdx3wyhMgKdbesqppVvq586/3Gdt+Na53kdmvI2RjWA6
6Bp9dQkr1FFyJjsKP1UCGDY57cMwceLNgrFsQLSCJoeSKYCuLJY0VdRacdE1P7K161zPFdydEgg9MATjNnnk60/y5HUmMVTQXmccwRJBmVmrzEaULkzRXUK/usqI9e5azlFRoFyaxUzR
qYrOKjYdgRwRtvVJtCu4sGO/1HYQciPhpty/AY2do9P1/uzmF92y+MqkY29617cZRvIgrNNWYI8aHs4F5hwp5J4x+id59YevZuxRkm2AxT7GvQdndZz4F0Jn4dt.copC4hHymiKrlLz3Xs
Ms+ZJkw/rLVOrxQfKvh1Zt8asWzzrCU13zAa8sVM2Tbp7J7jNc68+Z+7Q8DdxgVSn6G0zcg0Ayama155xfalsIDJCY+uftrHwxAlBilqyAlwzWsGhruoMVRKOMPfWljwSc= ubuntu@
ip-172-31-14-163
ubuntu@ip-172-31-14-163:~$
```

i-01a72eaf3de73b00 (Ansible-M)

PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

```
GNU nano 6.2 hosts *
[slaves]
172.31.1.15
172.31.0.127

# This is the default ansible 'hosts' file.
#
# It should live in /etc/ansible/hosts
#
# - Comments begin with the '#' character
# - Blank lines are ignored
# - Groups of hosts are delimited by [header] elements
# - You can enter hostnames or ip addresses
# - A hostname/ip can be a member of multiple groups

^G Help      ^O Write Out  ^W Where Is   ^R Cut        ^T Execute    ^C Location   ^U Undo       ^_ Set Mark   ^] To Bracket
^X Exit      ^R Read File  ^\ Replace    ^U Paste      ^J Justify    ^_ Go To Line  ^- Redo       ^- Copy      ^_ Where Was
```

i-01a72eaf3de73b00 (Ansible-M)

PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

```
ubuntu@ip-172-31-14-163:/etc/ansible$ ansible -m ping all
[WARNING]: Platform linux on host 172.31.1.15 is using the discovered Python interpreter at /usr/bin/python3.10, but future installation of
another Python interpreter could change the meaning of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
172.31.1.15 | SUCCESS => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3.10"
  },
  "changed": false,
  "ping": "pong"
}
[WARNING]: Platform linux on host 172.31.8.127 is using the discovered Python interpreter at /usr/bin/python3.10, but future installation
of another Python interpreter could change the meaning of that path. See https://docs.ansible.com/ansible-
core/2.17/reference_appendices/interpreter_discovery.html for more information.
172.31.8.127 | SUCCESS => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3.10"
  },
  "changed": false,
  "ping": "pong"
}
```

i-01a7f2eaf3de73b00 (Ansible-M)

PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

```
ubuntu@ip-172-31-14-163:/etc/ansible$ sudo nano play.yaml
ubuntu@ip-172-31-14-163:/etc/ansible$ sudo nano master.sh
ubuntu@ip-172-31-14-163:/etc/ansible$ sudo nano slave.sh
ubuntu@ip-172-31-14-163:/etc/ansible$ cat master.sh
#!/bin/bash
sudo apt update
sudo apt install openjdk-17-jre -y
sudo wget -O /usr/share/keyrings/jenkins-keyring.asc \
  https://pkg.jenkins.io/debian/jenkins.io-2023.key
echo deb [signed-by=/usr/share/keyrings/jenkins-keyring.asc] \
  https://pkg.jenkins.io/debian binary/ | sudo tee \
  /etc/apt/sources.list.d/jenkins.list > /dev/null
sudo apt-get update
sudo apt-get install jenkins -y
ubuntu@ip-172-31-14-163:/etc/ansible$
```

i-01a7f2eaf3de73b00 (Ansible-M)

PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

```
ubuntu@ip-172-31-14-163:/etc/ansible$ cat slave.sh
#!/bin/bash
sudo apt update
sudo apt install openjdk-17-jre -y
sudo apt install docker.io -y
ubuntu@ip-172-31-14-163:/etc/ansible$
```

i-01a7f2eaf3de73b00 (Ansible-M)
PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

```
ubuntu@ip-172-31-14-163:/etc/ansible$ cat slave.sh
#!/bin/bash
sudo apt update
sudo apt install openjdk-17-jre -y
sudo apt install docker.io -y
ubuntu@ip-172-31-14-163:/etc/ansible$ cat play.yaml
- name: task for master
  hosts: localhost
  become: true
  tasks:
    - name: executing script master
      script: master.sh
- name: task for slave
  hosts: slaves
  become: true
  tasks:
    - name: executing script slaves
      script: slave.sh
ubuntu@ip-172-31-14-163:/etc/ansible$
```

i-01a7f2eaf3de73b00 (Ansible-M)
PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

i-01a7f2eaf3de73b00 (Ansible-M)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Instances | EC2 | ap-south-1 x EC2 Instance Connect | x EC2 Instance Connect | x EC2 Instance Connect | x Installing Ansible on spe x + -

ap-south-1.console.aws.amazon.com/ec2-instance-connect/ssh/home?region=ap-south-1&connType=standard&instanceId=i-01a72eaf3de73b008&osUser=ub... ☆ M

aws Search [Alt+S] Asia Pacific (Mumbai) Muhammed Jaseem KP

i-01a7f2eaf3de73b00 (Ansible-M)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Instances | EC2 | ap-sou...

EC2 Instance Connect |

EC2 Instance Connect |

EC2 Instance Connect |

Installing Ansible on spe...

—

↶

↷

↻

🔍 ap-south-1.console.aws.amazon.com/ec2-instance-connect/ssh/home?region=ap-south-1&connType=standard&instanceId=i-01a7f2eaf3de73b00&osUser=ub...

☆

M

⋮

aws

Search

[Alt+S]

📧

🔔

🔗

⚙️

Asia Pacific (Mumbai)

Muhammed Jaseem KP

🔍

ubuntu@ip-172-31-14-163:/etc/ansible\$ ansible-playbook play.yaml

PLAY [task for master] *****

TASK [Gathering Facts] *****

ok: [localhost]

TASK [executing script master] *****

changed: [localhost]

PLAY [task for slave] *****

TASK [Gathering Facts] *****

[WARNING]: Platform linux on host 172.31.8.127 is using the discovered Python interpreter at /usr/bin/python3.10, but future installation of another Python interpreter could change the meaning of that path. See https://docs.ansible.com/ansible-core/2.17/reference_appendices/interpreter_discovery.html for more information.

ok: [172.31.8.127]

[WARNING]: Platform linux on host 172.31.1.15 is using the discovered Python interpreter at /usr/bin/python3.10, but future installation of another Python interpreter could change the meaning of that path. See https://docs.ansible.com/ansible-core/2.17/reference_appendices/interpreter_discovery.html for more information.

ok: [172.31.1.15]

i-01a7f2eaf3de73b00 (Ansible-M)

PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Instances | EC2 | ap-sou...

EC2 Instance Connect |

EC2 Instance Connect |

EC2 Instance Connect |

Installing Ansible on spe...

—

↶

↷

↻

🔍 ap-south-1.console.aws.amazon.com/ec2-instance-connect/ssh/home?region=ap-south-1&connType=standard&instanceId=i-01a7f2eaf3de73b00&osUser=ub...

☆

M

⋮

aws

Search

[Alt+S]

📧

🔔

🔗

⚙️

Asia Pacific (Mumbai)

Muhammed Jaseem KP

🔍

TASK [Gathering Facts] *****

[WARNING]: Platform linux on host 172.31.8.127 is using the discovered Python interpreter at /usr/bin/python3.10, but future installation of another Python interpreter could change the meaning of that path. See https://docs.ansible.com/ansible-core/2.17/reference_appendices/interpreter_discovery.html for more information.

ok: [172.31.8.127]

[WARNING]: Platform linux on host 172.31.1.15 is using the discovered Python interpreter at /usr/bin/python3.10, but future installation of another Python interpreter could change the meaning of that path. See https://docs.ansible.com/ansible-core/2.17/reference_appendices/interpreter_discovery.html for more information.

ok: [172.31.1.15]

TASK [executing script slaves] *****

changed: [172.31.1.15]

changed: [172.31.8.127]

PLAY RECAP *****

172.31.1.15 : ok=2 changed=1 unreachable=0 failed=0 skipped=0 rescued=0 ignored=0

172.31.8.127 : ok=2 changed=1 unreachable=0 failed=0 skipped=0 rescued=0 ignored=0

localhost : ok=2 changed=1 unreachable=0 failed=0 skipped=0 rescued=0 ignored=0

i-01a7f2eaf3de73b00 (Ansible-M)

PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Instances | EC2 | ap-south-1

EC2 Instance Connect |

EC2 Instance Connect |

EC2 Instance Connect |

Installing Ansible on spe

Asia Pacific (Mumbai)

Muhammed Jaseem KP

ap-south-1.console.aws.amazon.com/ec2-instance-connect/ssh/home?region=ap-south-1&connType=standard&instanceId=i-01a72eaf3de73b00&osUser=ub...

Search [Alt+S]

ubuntu@ip-172-31-14-163:/etc/ansible\$ java --version
openjdk 17.0.13 2024-10-15
OpenJDK Runtime Environment (build 17.0.13+11-Ubuntu-2ubuntu122.04)
OpenJDK 64-Bit Server VM (build 17.0.13+11-Ubuntu-2ubuntu122.04, mixed mode, sharing)
ubuntu@ip-172-31-14-163:/etc/ansible\$ sudo systemctl status jenkins
● jenkins.service - Jenkins Continuous Integration Server
 Loaded: loaded (/lib/systemd/system/jenkins.service; enabled; vendor preset: enabled)
 Active: active (running) since Thu 2025-01-09 10:21:04 UTC; 2min 31s ago
 Main PID: 7279 (java)
 Tasks: 45 (limit: 4630)
 Memory: 543.8M
 CPU: 16.585s
 CGroup: /system.slice/jenkins.service
 └─7279 /usr/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=/var/cache/jenkins/war --httpPort=8080

Jan 09 10:20:59 ip-172-31-14-163 jenkins[7279]: 17281c7138fb4476ad7785c994f2e3a7
Jan 09 10:20:59 ip-172-31-14-163 jenkins[7279]: This may also be found at: /var/lib/jenkins/secrets/initialAdminPassword
Jan 09 10:20:59 ip-172-31-14-163 jenkins[7279]: *****
Jan 09 10:20:59 ip-172-31-14-163 jenkins[7279]: *****
Jan 09 10:20:59 ip-172-31-14-163 jenkins[7279]: *****
Jan 09 10:21:04 ip-172-31-14-163 jenkins[7279]: 2025-01-09 10:21:04.728+0000 [id=32] INFO jenkins.InitReactorRunner\$1#onAttai

i-01a7f2eaf3de73b00 (Ansible-M)

PublicIPs: 15.206.88.144 PrivateIPs: 172.31.14.163

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Instances | EC2 | ap-south-1

EC2 Instance Connect |

EC2 Instance Connect |

EC2 Instance Connect |

Installing Ansible on spe

Asia Pacific (Mumbai)

Muhammed Jaseem KP

ap-south-1.console.aws.amazon.com/ec2-instance-connect/ssh/home?region=ap-south-1&connType=standard&instanceId=i-0403d186609c338d4&osUser=u...

Search [Alt+S]

ubuntu@ip-172-31-1-15:~\$ java --version
openjdk 17.0.13 2024-10-15
OpenJDK Runtime Environment (build 17.0.13+11-Ubuntu-2ubuntu122.04)
OpenJDK 64-Bit Server VM (build 17.0.13+11-Ubuntu-2ubuntu122.04, mixed mode, sharing)
ubuntu@ip-172-31-1-15:~\$ docker -v
Docker version 24.0.7, build 24.0.7-0ubuntu2~22.04.1
ubuntu@ip-172-31-1-15:~\$

i-0403d186609c338d4 (Ansible-Test)

PublicIPs: 3.108.51.1 PrivateIPs: 172.31.1.15

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences


```
ubuntu@ip-172-31-8-127:~$ java --version | docker -v
Docker version 24.0.7, build 24.0.7-0ubuntu2~22.04.1
ubuntu@ip-172-31-8-127:~$ java --version ; docker -v
openjdk 17.0.13 2024-10-15
OpenJDK Runtime Environment (build 17.0.13+11-Ubuntu-2ubuntu122.04)
OpenJDK 64-Bit Server VM (build 17.0.13+11-Ubuntu-2ubuntu122.04, mixed mode, sharing)
Docker version 24.0.7, build 24.0.7-0ubuntu2~22.04.1
ubuntu@ip-172-31-8-127:~$
```

i-0f7c8427f2d4e3f4d (Ansible-Prod)

PublicIPs: 13.233.43.159 PrivateIPs: 172.31.8.127

CloudShellFeedback

© 2025, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences

Instances | EC2 | ap-southeast-1 | EC2 Instance Connect | EC2 Instance Connect | EC2 Instance Connect | Sign in (Jenkins)

Not secure15.206.88.144:8080/login?from=%2F

Getting Started

Unlock Jenkins

To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:

```
/var/lib/jenkins/secrets/initialAdminPassword
```

Please copy the password from either location and paste it below.

Administrator password

Continue

Getting Started

Getting Started

✓ Folders	Formatter			Folders
Timestampers	Workspace Cleanup	Ant	Gradle	OWASP Markup Formatter
Pipeline	GitHub Branch Source	Pipeline: GitHub Groovy Libraries	Pipeline Graph View	** ASM API
Git	SSH Build Agents	Matrix Authorization Strategy	PAM Authentication	** JSON Path API
LDAP	Email Extension	Mailer	Dark Theme	** Struts
				** Pipeline: Step API
				** Token Macro
				Build Timeout
				** bouncycastle API
				** Credentials
				** - required dependency

Jenkins 2.492

Getting Started

Instance Configuration

Jenkins URL:

http://15.206.88.144:8080/

The Jenkins URL is used to provide the root URL for absolute links to various Jenkins resources. That means this value is required for proper operation of many Jenkins features including email notifications, PR status updates, and the `BUILD_URL` environment variable provided to build steps.

The proposed default value shown is **not saved yet** and is generated from the current request, if possible. The best practice is to set this value to the URL that users are expected to use. This will avoid confusion when sharing or viewing links.

Jenkins 2.492

Not now

Save and Finish

Instances | EC2 | ap-sou... x EC2 Instance Connect | x EC2 Instance Connect | x EC2 Instance Connect | x Dashboard [Jenkins] x

← → ↻ Not secure 15.206.88.144:8080 ☆ M

 **Jenkins**

🔍 🛡️ 1 👤 Muhammed Jaseem KP 🚪 log out

Dashboard >

+ New Item

📁 Build History

⚙️ Manage Jenkins

📌 My Views

Build Queue

No builds in the queue.

Build Executor Status

0/2

Welcome to Jenkins!

This page is where your Jenkins jobs will be displayed. To get started, you can set up distributed builds or start building a software project.

Start building your software project

Create a job +

Set up a distributed build

Set up an agent 🖥️

Configure a cloud ☁️

Learn more about distributed builds ?

Dashboard > Manage Jenkins > Nodes > New node

New node

Node name

Slave-1

Type

☒ Permanent Agent

Adds a plain, permanent agent to Jenkins. This is called "permanent" because Jenkins doesn't provide higher level of integration with these agents, such as dynamic provisioning. Select this type if no other agent types apply — for example such as when you are adding a physical computer, virtual machines managed outside Jenkins, etc.

Create

REST API Jenkins 2.492

Jenkins

Dashboard > Manage Jenkins > Nodes

Nodes

Build Queue

Build Executor Status

S	Name	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time
	Built-In Node	Linux (amd64)	In sync	4.39 GiB	0 B	4.39 GiB	0ms
	Slave-1	Linux (amd64)	In sync	5.02 GiB	0 B	5.02 GiB	37ms
	Slave-2	Linux (amd64)	In sync	5.02 GiB	0 B	5.02 GiB	64ms
Data obtained		0.89 sec	0.87 sec	0.82 sec	0.81 sec	0.83 sec	0.84 sec

Icon: S M L

Legend

github.com/jasaseemkp/website

jasaseemkp / website

Code Pull requests Actions Projects Wiki Security Insights Settings

website Public

forked from hshar/website

master 1 Branch 0 Tags

This branch is up to date with hshar/website:master.

Contribute Sync fork

Ubuntu modified 883b439 - 6 years ago 2 Commits

images final 6 years ago

index.html modified 6 years ago

README

About

No description, website, or topics provided.

Activity

0 stars

0 watching

0 forks

Releases

No releases published

Create a new release

Start Course | Intellipaat x Project 1 Share - Google Docs x labs/ansible/ansible-roles at m... x New File at / - jasaseemkp/web... x

github.com/jasaseemkp/website/new/master

jasaseemkp / website

Code Pull requests Actions Projects Wiki Security Insights Settings

website / Dockerfile in master

Cancel changes Commit changes...

Edit Preview Code 55% faster with GitHub Copilot

Spaces 2 No wrap

```
1 FROM ubuntu
2 RUN apt update
3 RUN apt install apache2 -y
4 ADD . /var/www/html/
5 ENTRYPOINT apache2ctl -D FOREGROUND
6 |
```

Use Control + Shift + ⌘ to toggle the tab key moving focus. Alternatively, use esc then tab to move to the next interactive element on the page.

Start Course | Intellipaat x Project 1 Share - Google Docs x labs/ansible/ansible-roles at m... x Branches - jasaseemkp/website x

github.com/jasaseemkp/website/branches?branch_event=branch%2520%27Develop%27%2520was%2520created

Branches

New branch

Overview Yours Active Stale All

Q Search branches...

Default

Branch	Updated	Check status	Behind Ahead	Pull request
master	now		Default	

Your branches

Branch	Updated	Check status	Behind Ahead	Pull request
Develop	now		0 0	

Active branches

Branch	Updated	Check status	Behind Ahead	Pull request
Develop	now		0 0	

Dashboard > All > New Item

New Item

Enter an item name

Job-1-Build

Select an item type



Freestyle project

Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.



Pipeline

Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.



Multi-configuration project

Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.



Folder

OK

Dashboard > Job-1-Build > Configuration

Configure

General

Source Code Management

Triggers

Environment

Build Steps

Post-build Actions

☐ Discard old builds ?

☐ GitHub project

☐ This project is parameterized ?

☐ Throttle builds ?

☐ Execute concurrent builds if necessary ?

☒ Restrict where this project can be run ?

Label Expression ?



Slave-1



Label Slave-1 matches 1 node. Permissions or other restrictions provided by plugins may further reduce that list.

Advanced ▾

Save

Apply

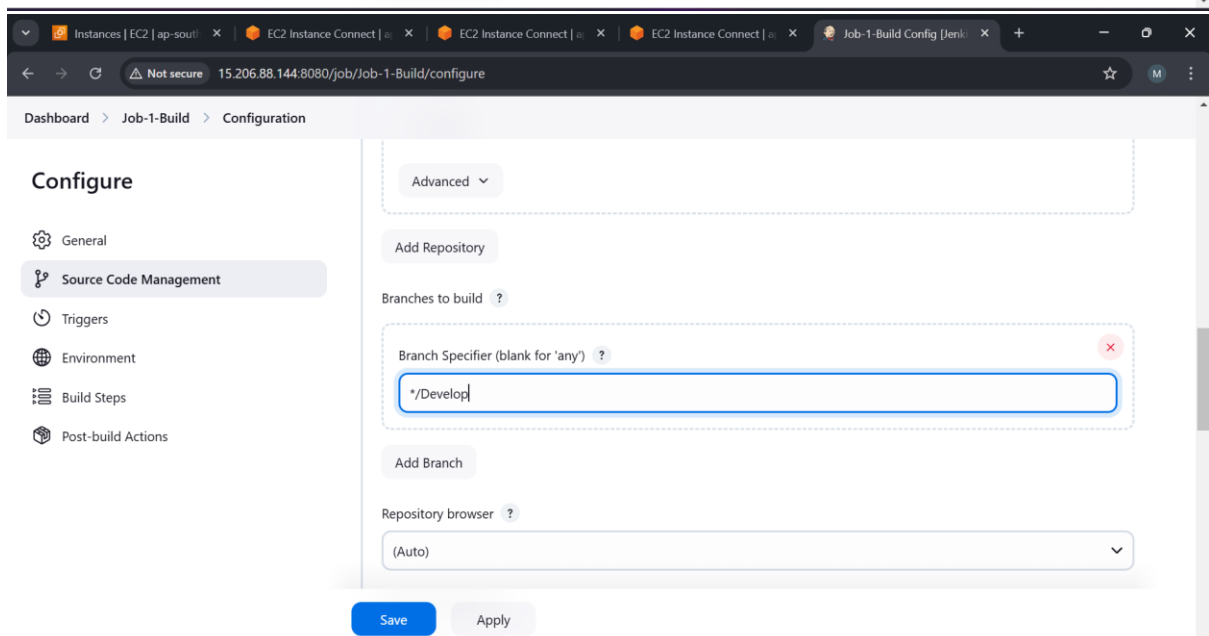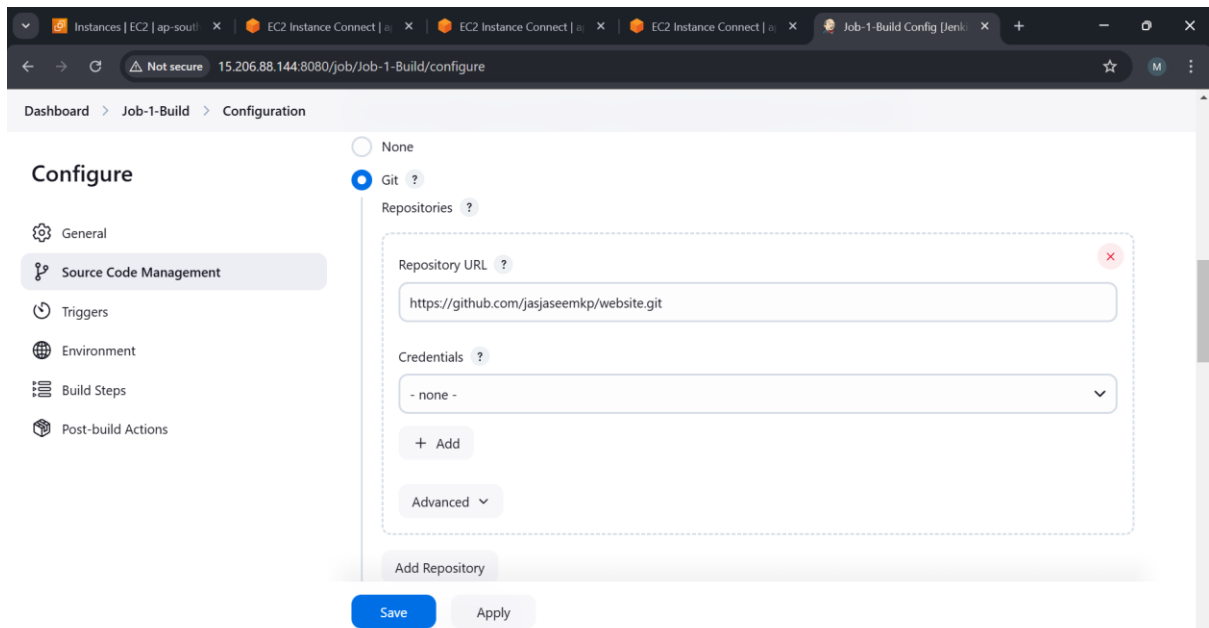

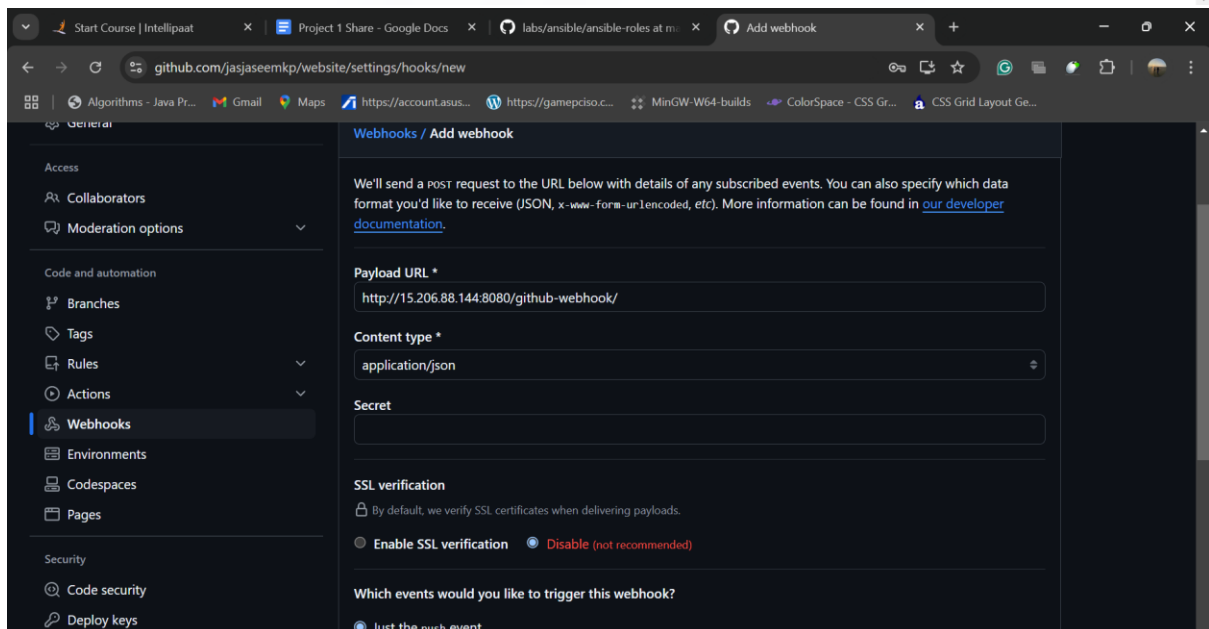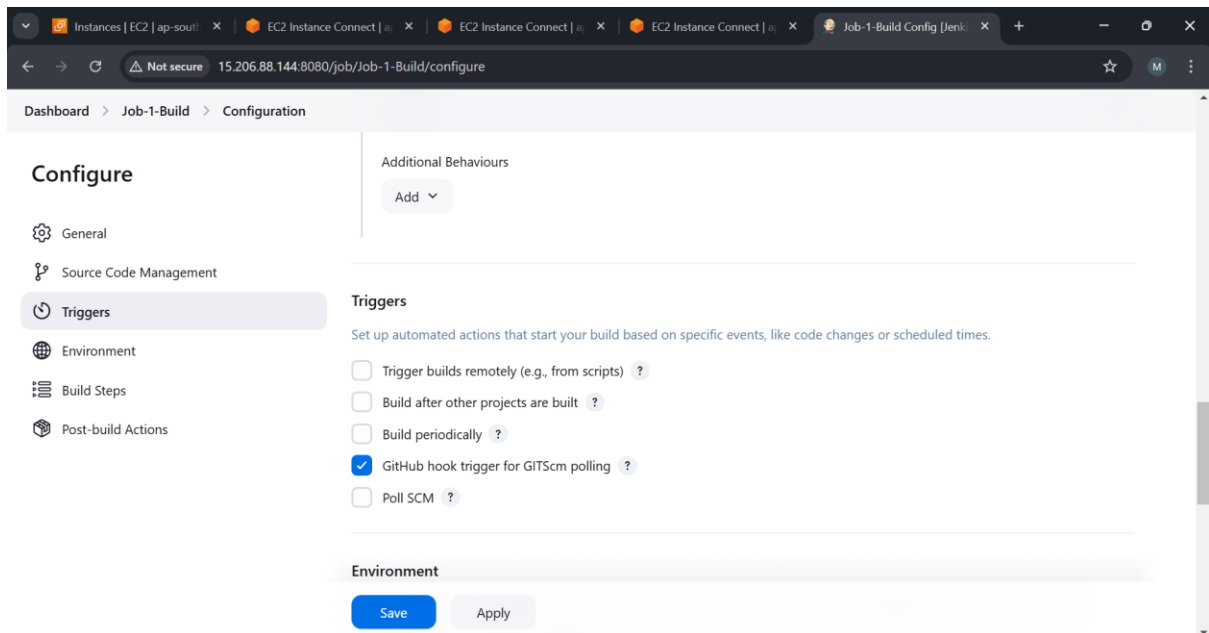

Start Course | Intellipaat

Project 1 Share - Google Docs

labs/ansible/ansible-roles at m

Webhooks · Settings · jasaseem

github.com/jasaseemkp/website/settings/hooks

jasaseemkp / website

Type to search

CodePull requestsActionsProjectsWikiSecurityInsightsSettings

Okay, that hook was successfully created. We sent a ping payload to test it out! Read more about it at <https://docs.github.com/webhooks/#ping-event>.

General

Access

Collaborators

Moderation options

Code and automation

Branches

Tags

Rules

Actions

Webhooks

Webhooks

Add webhook

Webhooks allow external services to be notified when certain events happen. When the specified events happen, we'll send a POST request to each of the URLs you provide. Learn more in our [Webhooks Guide](#).

• <http://15.206.88.144:8080/github-w...> (push)

EditDelete

This hook has never been triggered.

Instances | EC2 | ap-southeast-1

EC2 Instance Connect | us-east-1

EC2 Instance Connect | us-east-1

EC2 Instance Connect | us-east-1

Job-1-Build [Jenkins]

15.206.88.144:8080/job/Job-1-Build/

Jenkins

Muhammed Jaseem KP

log out

Dashboard > Job-1-Build >

Status

Changes

Workspace

Build Now

Configure

Delete Project

GitHub Hook Log

Rename

Job-1-Build

Add description

Permalinks

Builds

Build scheduled

Jenkins

Dashboard > Job-1-Build > #1

Status #1 (Jan 9, 2025, 10:41:37 AM) Add description Keep this build forever

Changes

Console Output

Edit Build Information

Delete build '#1'

Timings

Git Build Data

Started by user [Muhammed Jaseem KP](#)

This run spent:

- 32 ms waiting;
- 7.9 sec build duration;
- 8 sec total from scheduled to completion.

Revision: [ec85adce5a30b3b032bc61dce2195c41f70ee2a5](#)

Repository: <https://github.com/jasjaseemkp/website.git>

- refs/remotes/origin/Develop

No changes.

ap-south-1.console.aws.amazon.com/ec2-instance-connect/ssh/home?region=ap-south-1&connType=standard&instanceId=i-0403d186609c338d4&osUser=u...

```
ubuntu@ip-172-31-1-15:~$ ls
jenkins
ubuntu@ip-172-31-1-15:~$ cd jenkins/
ubuntu@ip-172-31-1-15:~/jenkins$ ls
remoting  remoting.jar  workspace
ubuntu@ip-172-31-1-15:~/jenkins$ cd workspace/
ubuntu@ip-172-31-1-15:~/jenkins/workspace$ ls
Job-1-Build
ubuntu@ip-172-31-1-15:~/jenkins/workspace$ cd Job-1-Build/
ubuntu@ip-172-31-1-15:~/jenkins/workspace/Job-1-Build$ ls
Dockerfile  images  index.html
ubuntu@ip-172-31-1-15:~/jenkins/workspace/Job-1-Build$
```

i-0403d186609c338d4 (Ansible-Test)

PublicIPs: 3.108.51.1 PrivateIPs: 172.31.1.15

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Instances | EC2 | ap-sou... x EC2 Instance Connect | x EC2 Instance Connect | x EC2 Instance Connect | x Job-1-Build Config [Jenk... x

15.206.88.144:8080/job/Job-1-Build/configure

Dashboard > Job-1-Build > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps**
- Post-build Actions

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Execute shell ?

Command

[See the list of available environment variables](#)

```
sudo docker build /home/ubuntu/jenkins/workspace/Job-1-Build/ -t imagejob1
sudo docker run -itd -p 85:80 --name c1 imagejob1
```

Advanced ▾

Add build step ▾

Save Apply

Instances | EC2 | ap-sou... x EC2 Instance Connect | x EC2 Instance Connect | x EC2 Instance Connect | x Job-1-Build Config [Jenk... x

15.206.88.144:8080/job/Job-1-Build/configure

Dashboard > Job-1-Build > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps**
- Post-build Actions

Command

[See the list of available environment variables](#)

```
sudo docker build /home/ubuntu/jenkins/workspace/Job-1-Build/ -t imagejob1
sudo docker run -itd -p 85:80 --name c1 imagejob1
```

Advanced ▾

Add build step ▾

Post-build Actions

Define what happens after a build completes, like sending notifications, archiving artifacts, or triggering other jobs.

Save Apply

Instances | EC2 | ap-sou...

EC2 Instance Connect | ...

EC2 Instance Connect | ...

EC2 Instance Connect | ...

Job-1-Build #3 [Jenkins]

15.206.88.144:8080/job/Job-1-Build/3/

Dashboard > Job-1-Build > #3

Status

Changes

Console Output

Edit Build Information

Delete build '#3'

Timings

Git Build Data

Previous Build

#3 (Jan 9, 2025, 10:48:13 AM)

Add description

Keep this build forever

Started by user [Muhammed Jaseem KP](#)

Started 4 sec ago
Took 1.6 sec on [Slave-1](#)

This run spent:

- 2 ms waiting;
- 1.6 sec build duration;
- 1.6 sec total from scheduled to completion.

git

Revision: [ec85adce5a30b3b032bc61dce2195c41f70ee2a5](#)

Repository: <https://github.com/jasjaseemkp/website.git>

- refs/remotes/origin/Develop

</>

No changes.

REST APIJenkins 2.492

Instances | EC2 | ap-sou...

EC2 Instance Conn...

EC2 Instance Conn...

EC2 Instance Conn...

Job-1-Build #3 [Jenkins]

IntelliPaat

3.108.51.1.85

IntelliPaat

Hello world!

The image shows the GitHub logo, which is a black cat-like creature with large eyes and a small body, standing on a blue circular base. Below the logo, the word "GitHuh" is written in a large, bold, black font. The background is white.

Instances | EC2 | Job-2-Test Config | Intellipaat

Not secure 15.206.88.144:8080/job/Job-2-Test/configure

Dashboard > Job-2-Test > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

☐ Execute concurrent builds if necessary ?

☒ Restrict where this project can be run ?

Label Expression ?

Slave-1

Label Slave-1 matches 1 node. Permissions or other restrictions provided by plugins may further reduce that list.

Advanced ▾

Source Code Management

Connect and manage your code repository to automatically pull the latest code for your builds.

☐ None

☒ Git ?

Repositories ?

Save Apply

Instances | EC2 | Job-2-Test Config | Intellipaat

Not secure 15.206.88.144:8080/job/Job-2-Test/configure

Dashboard > Job-2-Test > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

☐ None

☒ Git ?

Repositories ?

Repository URL ?

https://github.com/jasaseemkp/website.git

Credentials ?

- none - ▾

+ Add

Advanced ▾

Add Repository

Save Apply

Instances | EC2 | x EC2 Instance Conn x EC2 Instance Conn x EC2 Instance Conn x Job-2-Test Config x Intellipaat x + -

Not secure 15.206.88.144:8080/job/Job-2-Test/configure

Dashboard > Job-2-Test > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

new repository

Branches to build ?

Branch Specifier (blank for 'any') ?

*/master

Add Branch

Repository browser ?

(Auto)

Additional Behaviours

Add

Save Apply

Instances | EC2 | x EC2 Instance Conn x EC2 Instance Conn x EC2 Instance Conn x Job-2-Test [Jenkins] x Intellipaat x + -

Not secure 15.206.88.144:8080/job/Job-2-Test/

Jenkins

Muhammed Jaseem KP log out

Dashboard > Job-2-Test >

Job-2-Test

Add description

Permalinks

- Status
- Changes
- Workspace
- Build Now
- Configure
- Delete Project
- GitHub Hook Log
- Rename

Builds

Instances | EC2 | Job-2-Test Config | IntelliPaat

15.206.88.144:8080/job/Job-2-Test/configure

Dashboard > Job-2-Test > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

☐ Execute concurrent builds if necessary ?

☒ Restrict where this project can be run ?

Label Expression ?

Slave-1

Label Slave-1 matches 1 node. Permissions or other restrictions provided by plugins may further reduce that list.

Advanced ▾

Source Code Management

Connect and manage your code repository to automatically pull the latest code for your builds.

☐ None

☒ Git ?

Repositories ?

Save Apply

Instances | EC2 | Job-2-Test Config | IntelliPaat

15.206.88.144:8080/job/Job-2-Test/configure

Dashboard > Job-2-Test > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

Repository URL ?

https://github.com/jasaseemkp/website.git

Credentials ?

- none - ▾

+ Add

Advanced ▾

Add Repository

Branches to build ?

Save Apply

Instances | EC2 | Job-2-Test Config | Intellipaat

Not secure 15.206.88.144:8080/job/Job-2-Test/configure

Dashboard > Job-2-Test > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

Branches to build ?

Branch Specifier (blank for 'any') ?

*/master

Branch Specifier (blank for 'any') ?

*/Develop

Add Branch

Repository browser ?

(Auto)

Save Apply

Instances | EC2 | Job-2-Test Config | Intellipaat

Not secure 15.206.88.144:8080/job/Job-2-Test/configure

Dashboard > Job-2-Test > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

Triggers

Set up automated actions that start your build based on specific events, like code changes or scheduled times.

- ☐ Trigger builds remotely (e.g., from scripts) ?
- ☐ Build after other projects are built ?
- ☐ Build periodically ?
- ☒ GitHub hook trigger for GITScm polling ?
- ☐ Poll SCM ?

Environment

Configure settings and variables that define the context in which your build runs, like credentials, paths, and global parameters.

- ☐ Delete workspace before build starts
- ☐ Use secret text(s) or file(s) ?
- ☐ Add timestamps to the Console Output

Save Apply

Instances | EC2 | Job-2-Test Config | Intellipaat

15.206.88.144:8080/job/Job-2-Test/configure

Dashboard > Job-2-Test > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps**
- Post-build Actions

Build Steps

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Execute shell ?

Command

[See the list of available environment variables](#)

```
sudo docker build /home/ubuntu/jenkins/workspace/Job1/ -t imagejob1
sudo docker run -itd -p 85:80 --name c1 imagejob1
```

Advanced ▾

Save Apply

Instances | EC2 | Job-2-Test Config | Intellipaat

15.206.88.144:8080/job/Job-2-Test/configure

Dashboard > Job-2-Test > Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps**
- Post-build Actions

Build Steps

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Execute shell ?

Command

[See the list of available environment variables](#)

```
sudo docker build /home/ubuntu/jenkins/workspace/Job1/ -t imagejob1
sudo docker run -itd -p 86:80 --name c1 imagejob1
```

Advanced ▾

Add build step ▾

Save Apply

Start Course | Intellipaat x Project 1 Share - Google Docs x labs/ansible/ansible-roles at m... x Editing website/index.html at m... x

github.com/jasaseemkp/website/edit/master/index.html

jasaseemkp / website

Code Pull requests Actions Projects Wiki Security Insights Settings

Files

master +

Go to file t

images

Dockerfile

index.html

website / index.html in master

Cancel changes Commit changes...

Edit Preview Code 55% faster with GitHub Copilot

Spaces 2 No wrap

```
1 <html>
2 <head>
3 <title> Intellipaat Software Soln Pvt </title>
4 </head>
5 <body style = "background-image:url('images/github3.jpg'); background-size: 100%">
6 <h2 ALIGN=CENTER>Hello world!</h2>
7 </body>
8 </html>
9
```

Use Control + Shift + m to toggle the tab key moving focus. Alternatively, use esc then tab to move to the next interactive element on the page.

Instances | EC2 | a... x EC2 Instance Conn... x EC2 Instance Conn... x EC2 Instance Conn... x Dashboard (Jenkin... x Intellipaat x

Not secure 15.206.88.144:8080

Dashboard

Build History

Project Relationship

Check File Fingerprint

Manage Jenkins

My Views

Build Queue (2)

Job-2-Test

Job-3-Prod

Build Executor Status

Built-In Node 0/2

Slave-1 0/1

Slave-2 0/1

S	W	Name ↓	Last Success	Last Failure	Last Duration
✓	☀	Job-1-Build	12 min #3	15 min #2	1.6 sec
...	☀	Job-2-Test	N/A	N/A	N/A
...	☀	Job-3-Prod	N/A	N/A	N/A

Icon: S M L

Dashboard >

Build History

Project Relationship

Check File Fingerprint

Manage Jenkins

My Views

Build Queue

No builds in the queue.

Build Executor Status

Built-in Node

0/2

Slave-1

0/1

Slave-2

1/1

Job-3-Prod

#1

S

W

Name ↓

Last Success

Last Failure

Last Duration

✓

☁

Job-1-Build

12 min #3

15 min #2

1.6 sec

▶

⋮

☀

Job-2-Test

N/A

N/A

N/A

▶

⋮

☀

Job-3-Prod

N/A

N/A

N/A

▶

Icon:

S

M

L

ooo

Dashboard > Job-2-Test > Configuration

Configure

General

Source Code Management

Triggers

Environment

Build Steps

Post-build Actions

See the list of available environment variables

```
sudo docker build /home/ubuntu/jenkins/workspace/Job1/ -t imagejob2
sudo docker run -itd -p 85:80 --name c2 imagejob2
```

Advanced ▾

Add build step ▾

Post-build Actions

Define what happens after a build completes, like sending notifications, archiving artifacts, or triggering other jobs.

Save

Apply

Dashboard > Job-3-Prod > Configuration

☐ With Ant ?

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps**
- Post-build Actions

Build Steps

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Execute shell ?

Command

[See the list of available environment variables](#)

```
sudo docker build /home/ubuntu/jenkins/workspace/Job-3-Prod/ -t imagejob3
sudo docker run -itd -p 85:80 --name c1 imagejob3
```

Advanced ▾

Save Apply

ap-south-1.console.aws.amazon.com/ec2-instance-connect/ssh/home?region=ap-south-1&connType=standard&instanceId=i-0f7c8427f2d4e3f4d&osUser=ub...

aws Search [Alt+S] Asia Pacific (Mumbai) Muhammed Jaseem KP


```
ubuntu@ip-172-31-8-127:~$ sudo su -
root@ip-172-31-8-127:~# docker ps
CONTAINER ID   IMAGE      COMMAND                  CREATED    STATUS    PORTS                               NAMES
01698a241754   c3bc7122f149  "/bin/sh -c 'apachec..." About a minute ago    Up About a minute    0.0.0.0:85->80/tcp, :::85->80/tcp    c1
root@ip-172-31-8-127:~# docker
```

i-0f7c8427f2d4e3f4d (Ansible-Prod)

PublicIPs: [13.233.43.159](#) PrivateIPs: 172.31.8.127

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences



Hello world!



GitHuh