



2400032492 - Gummalla Jashnavi

Assigned Entity: Client


Swagger-UI: <http://localhost:2000/swagger-ui/index.html#/>

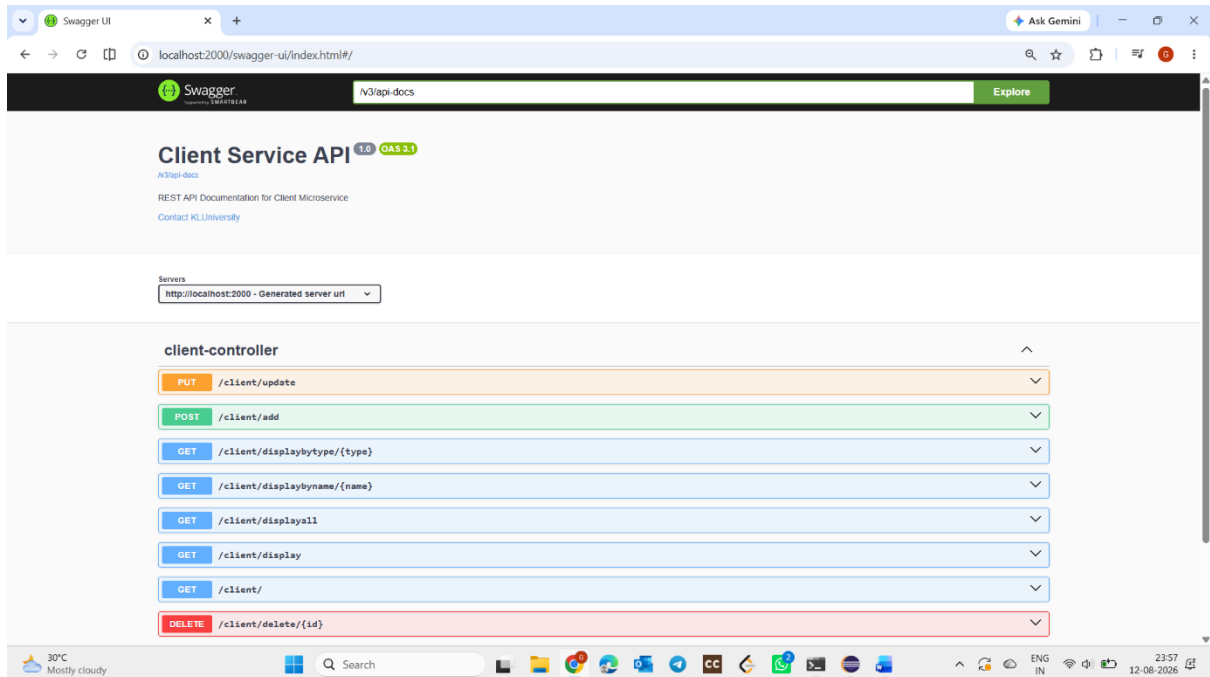

Client: <http://localhost:2000/client/>

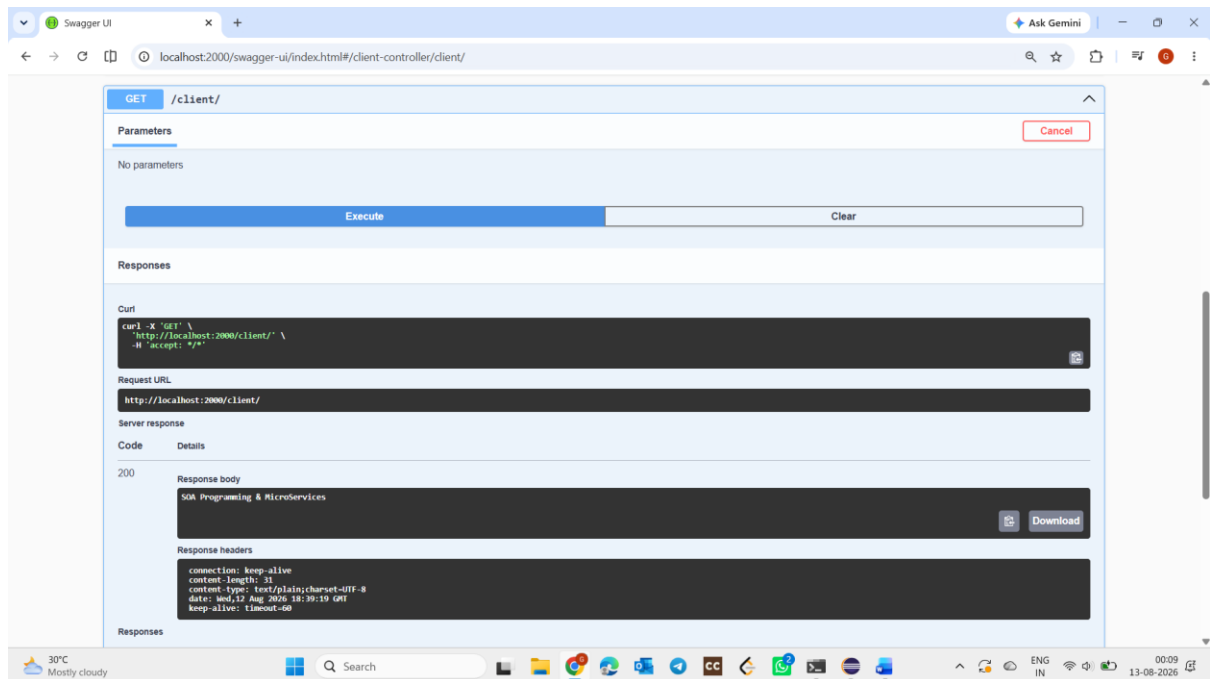

addClient: <http://localhost:2000/swagger-ui/index.html#/client-controller/addClient>

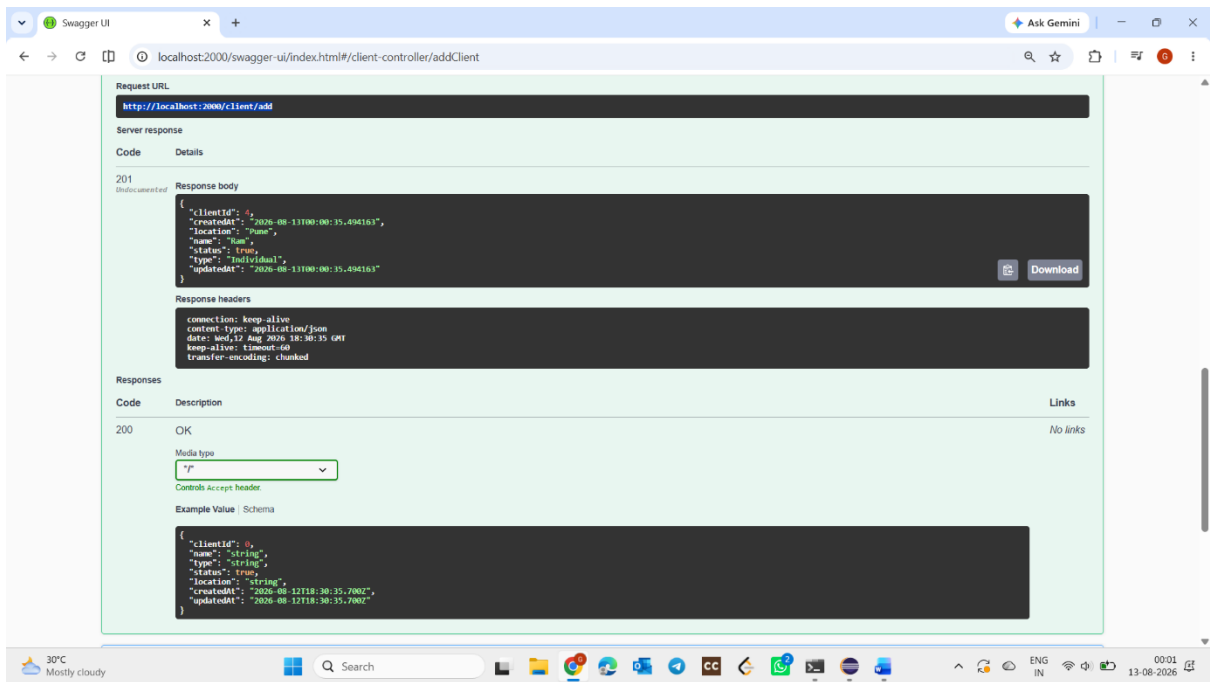

The screenshot shows the Swagger UI for the `addClient` endpoint. The request URL is `http://localhost:2000/client/add`. The server response is a 201 status code. The response body is a JSON object representing a client:

```
{  "clientId": 1,  "createdAt": "2026-08-13T00:00:35.494161",  "location": "Pune",  "name": "Ravi",  "status": true,  "type": "Individual",  "updatedAt": "2026-08-13T00:00:35.494161"}
```


The response headers are:

```
connection: keep-alive
content-type: application/json
date: Wed, 12 Aug 2026 18:20:35 GMT
keep-alive: timeout=60
transfer-encoding: chunked
```

Below the response, there is a table of responses with a 200 status code and an 'OK' description. A media type dropdown is set to 'JSON'. An example value is provided:

```
{  "clientId": 0,  "name": "string",  "type": "string",  "status": true,  "location": "string",  "createdAt": "2026-08-12T18:30:35.700Z",  "updatedAt": "2026-08-12T18:30:35.700Z"}
```

displayAllClients: <http://localhost:2000/client/displayall>

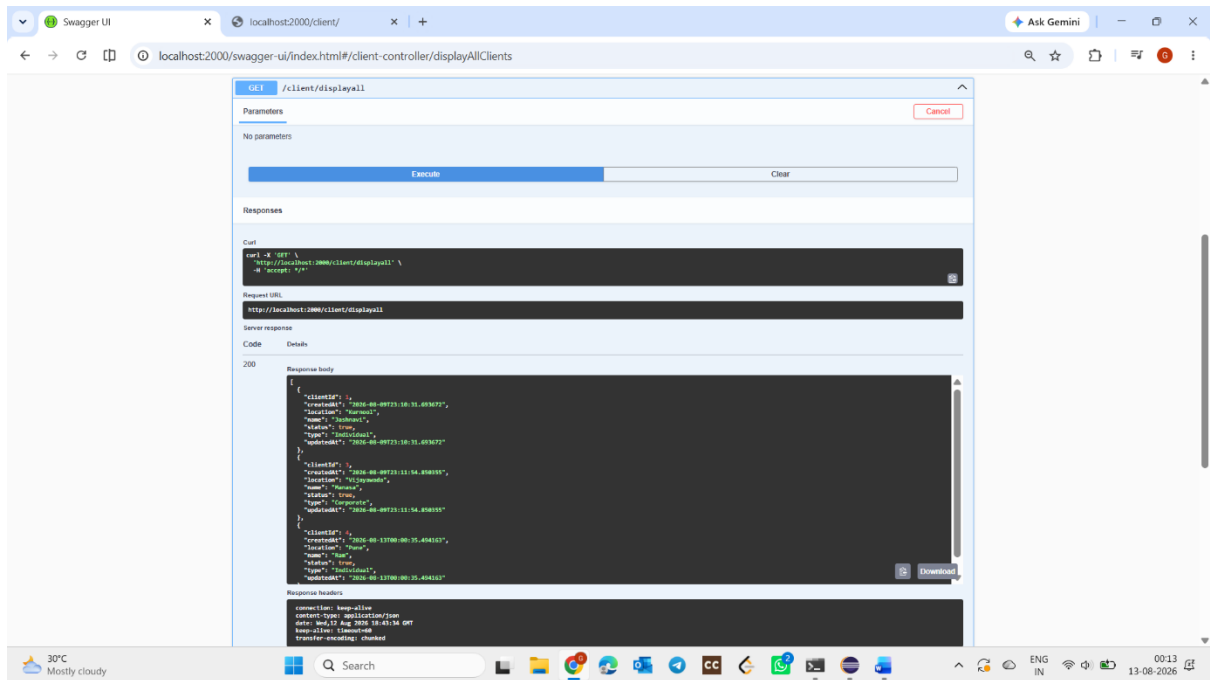


The screenshot shows the Swagger UI for the `displayAllClients` endpoint. The request URL is `http://localhost:2000/client/displayall`. The server response is a 200 status code. The response body is a JSON array of client objects:

```
[  {    "clientId": 1,    "createdAt": "2026-08-09T23:18:31.693077",    "location": "Mumbai",    "name": "Sachin",    "status": true,    "type": "Individual",    "updatedAt": "2026-08-09T23:18:31.693077"  },  {    "clientId": 2,    "createdAt": "2026-08-09T23:11:54.858185",    "location": "Hyderabad",    "name": "Ramesh",    "status": true,    "type": "Corporate",    "updatedAt": "2026-08-09T23:11:54.858185"  },  {    "clientId": 3,    "createdAt": "2026-08-13T00:00:35.494161",    "location": "Pune",    "name": "Ravi",    "status": true,    "type": "Individual",    "updatedAt": "2026-08-13T00:00:35.494161"  }]
```

The response headers are:

```
connection: keep-alive
content-type: application/json
date: Wed, 12 Aug 2026 18:41:34 GMT
keep-alive: timeout=60
transfer-encoding: chunked
```

displayClientById: <http://localhost:2000/client/display?id=1>

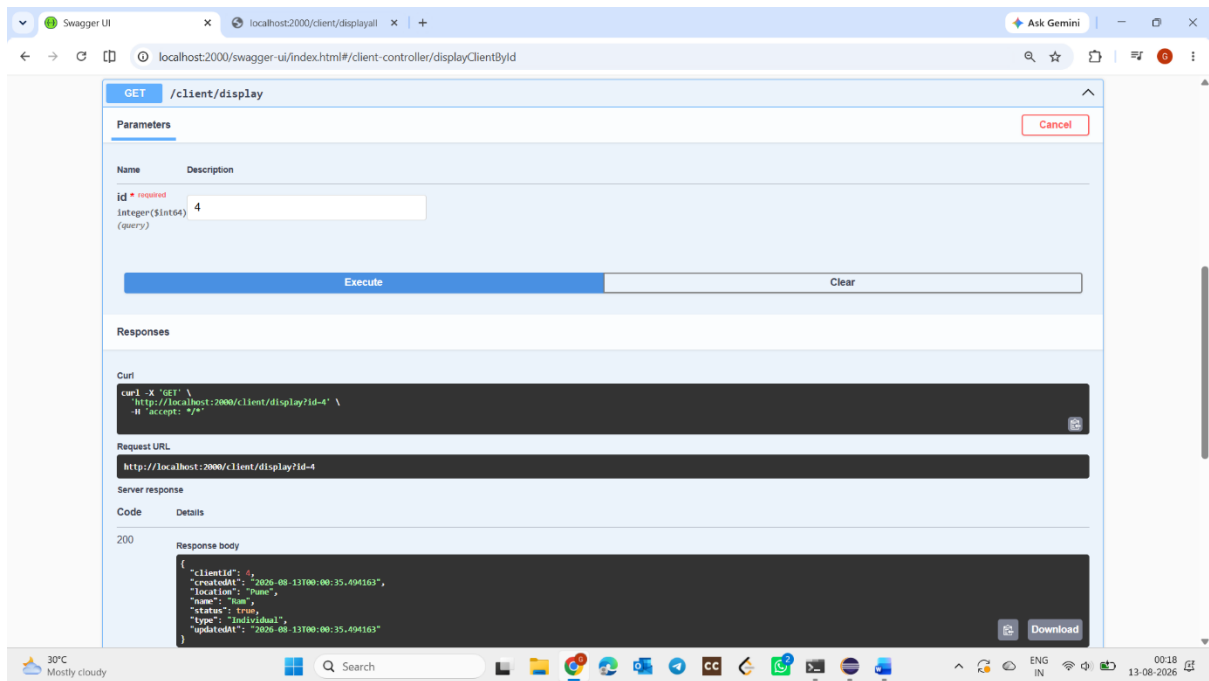

The screenshot shows the Swagger UI for the GET /client/display endpoint. The 'id' parameter is set to 4. The response body is a JSON object representing a client.

GET /client/display

Parameters

Name	Description
id * required	Integer (int64) (query)

Execute **Clear**


Responses

200

Response body

```
{
  "clientId": 4,
  "createdAt": "2026-08-13T00:00:35.494163",
  "location": "Pune",
  "name": "Ravi",
  "status": true,
  "type": "Individual",
  "updatedAt": "2026-08-13T00:00:35.494163"
}
```

displayClientsByType: <http://localhost:2000/client/displaybytype/Individual>

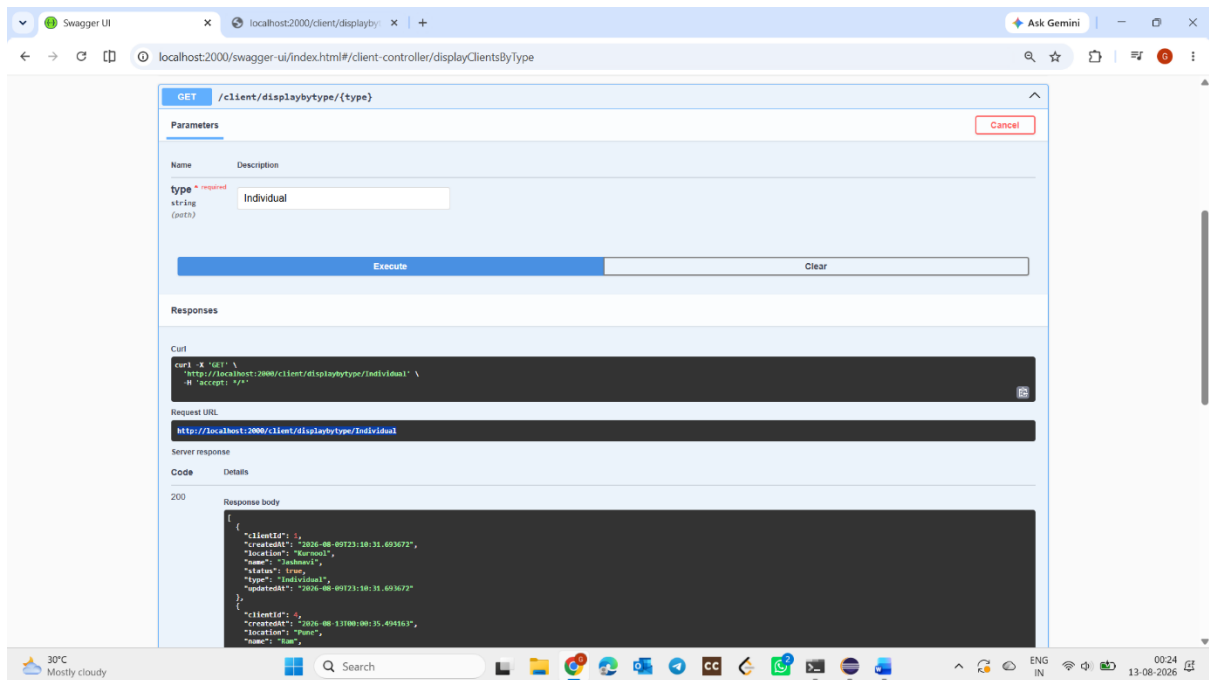

The screenshot shows the Swagger UI for the GET /client/displaybytype/{type} endpoint. The 'type' parameter is set to Individual. The response body is a JSON array of client objects.

GET /client/displaybytype/{type}

Parameters

Name	Description
type * required	string (path)

Execute **Clear**


Responses

200

Response body

```
[
  {
    "clientId": 1,
    "createdAt": "2026-08-09T23:18:31.693672",
    "location": "Mumbai",
    "name": "Jashwanth",
    "status": true,
    "type": "Individual",
    "updatedAt": "2026-08-09T23:18:31.693672"
  },
  {
    "clientId": 2,
    "createdAt": "2026-08-13T00:00:35.494163",
    "location": "Pune",
    "name": "Ravi",
    "status": true,
    "type": "Individual",
    "updatedAt": "2026-08-13T00:00:35.494163"
  }
]
```

displayClientsByName: <http://localhost:2000/client/displaybyname/Ram>

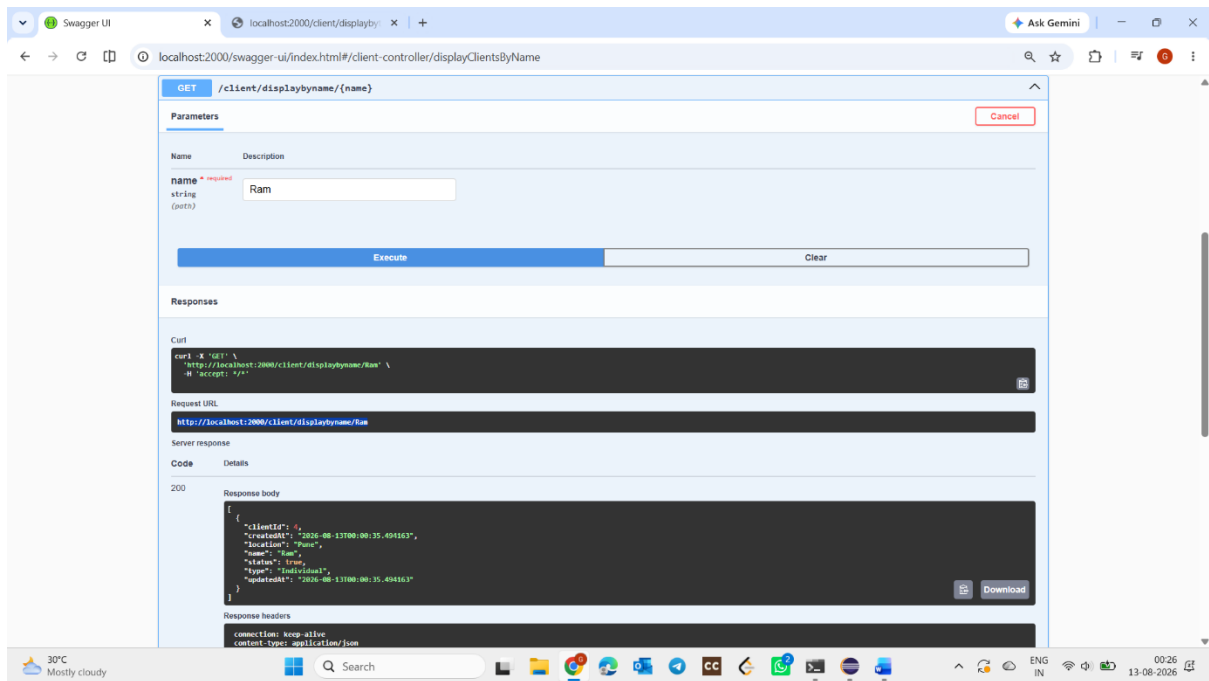


The screenshot shows the Swagger UI for the endpoint `GET /client/displaybyname/{name}`. The **Parameters** section shows a required string parameter `name` with the value `Ram`. The **Execute** button is highlighted. The **Responses** section shows a `200` response with a JSON body:

```
{
  "clientId": 1,
  "createdAt": "2026-08-13T08:00:35.494163",
  "location": "Pune",
  "name": "Ram",
  "status": true,
  "type": "Individual",
  "updatedAt": "2026-08-13T08:00:35.494163"
}
```

The response headers are `connection: keep-alive` and `content-type: application/json`. The bottom status bar shows `30°C Mostly cloudy` and the time `00:26 13-08-2026`.

deleteClientById: <http://localhost:2000/client/delete/3>

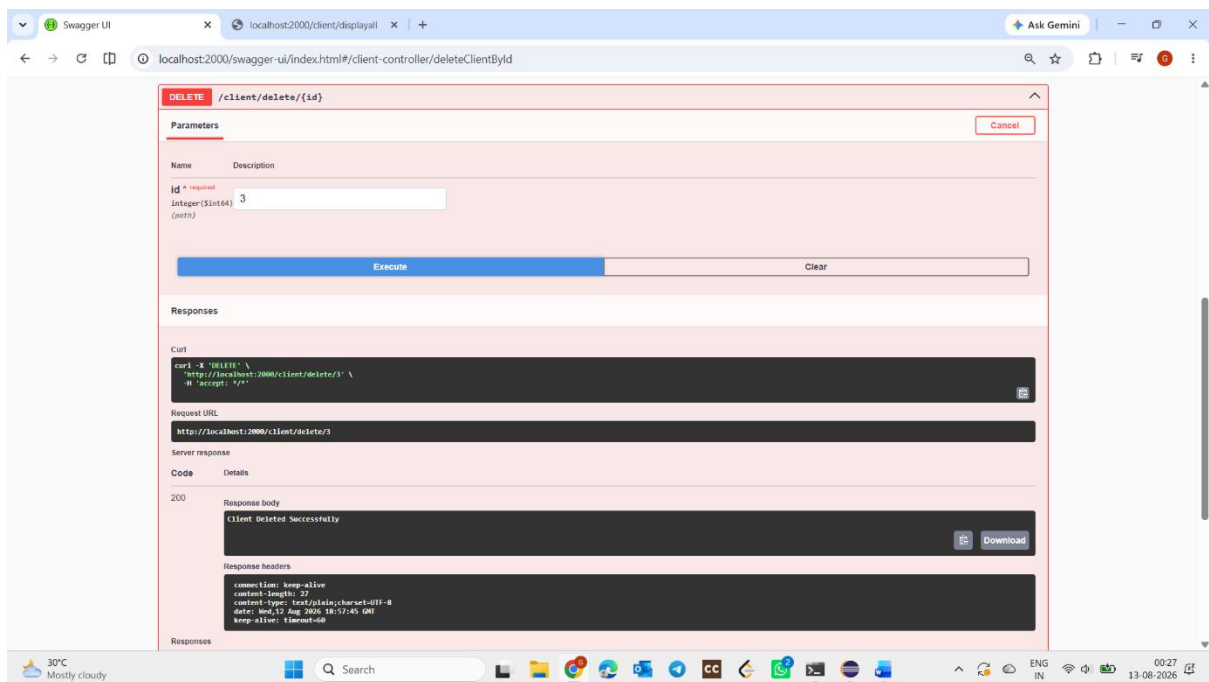

The screenshot shows the Swagger UI for the endpoint `DELETE /client/delete/{id}`. The **Parameters** section shows a required integer parameter `id` with the value `3`. The **Execute** button is highlighted. The **Responses** section shows a `200` response with a plain text body: `Client Deleted Successfully`. The response headers are `connection: keep-alive`, `content-length: 22`, `content-type: text/plain; charset=utf-8`, `date: Mon, 13 Aug 2026 18:17:45 GMT`, and `keep-alive: timeout=60`. The bottom status bar shows `30°C Mostly cloudy` and the time `00:27 13-08-2026`.

updateClient: <http://localhost:2000/client/update>

The image shows the Swagger UI interface in a web browser. The URL bar indicates the endpoint is `localhost:2000/swagger-ui/index.html#/client-controller/updateClient`. The interface displays a REST client request and its corresponding response.

Request:

```
{  "clientId": 4,  "name": "Ram",  "type": "Individual",  "status": "Active",  "location": "Chennai"}
```

Request URL: `http://localhost:2000/client/update`

Response:

```
{  "clientId": 4,  "created_at": "2026-08-13T00:00:35.494163",  "location": "Chennai",  "name": "Ram",  "status": "Active",  "type": "Individual",  "updated_at": "2026-08-13T00:32:22.276899"}
```

Database:

The image shows the MySQL Command Line Client interface. The user has executed several SQL commands to interact with the `soataskdb` database.

Commands and Results:

```
mysql> use soataskdb;
Database changed
mysql> show tables;
+-----+
| Tables_in_soataskdb |
+-----+
| client_table         |
+-----+
1 row in set (0.00 sec)

mysql> desc client_table;
+-----+
| Field      | Type          | Null | Key | Default | Extra           |
+-----+
| cid        | bigint(6)     | NO   | PRI | NULL    | auto_increment |
| created_at | datetime(6)   | NO   |     | NULL    |                 |
| location   | varchar(255)  | NO   |     | NULL    |                 |
| cname      | varchar(100)  | NO   |     | NULL    |                 |
| status     | bit(1)        | NO   |     | NULL    |                 |
| type       | varchar(100)  | NO   |     | NULL    |                 |
| updated_at | datetime(6)   | NO   |     | NULL    |                 |
+-----+
7 rows in set (0.01 sec)

mysql> select * from client_table;
+-----+
| cid | created_at                | location    | cname    | status | type       | updated_at                |
+-----+
| 1   | 2026-08-09 23:10:31.693672 | Murnool    | Jashnavi | 0x01   | Individual | 2026-08-09 23:10:31.693672 |
| 3   | 2026-08-09 23:11:54.850355 | Vijayawada | Manasa   | 0x01   | Corporate  | 2026-08-09 23:11:54.850355 |
+-----+
2 rows in set (0.00 sec)

mysql> select * from client_table;
+-----+
| cid | created_at                | location    | cname    | status | type       | updated_at                |
+-----+
| 1   | 2026-08-09 23:10:31.693672 | Murnool    | Jashnavi | 0x01   | Individual | 2026-08-09 23:10:31.693672 |
| 4   | 2026-08-13 00:00:35.494163 | Chennai    | Ram      | 0x00   | Individaul | 2026-08-13 00:32:22.276899 |
+-----+
2 rows in set (0.00 sec)
```