KOLEJ MATRIKULASI LABUAN
LABUAN MATRICULATION COLLEGE

TOPIC 1

INTRODUCTION TO PROGRAMMING



COMPUTER SCIENCE II | SC025

Learning Outcomes

At the end of the lesson, students should be able to:

a) **Define** programming language, programming paradigm and language translators.

b) **Differentiate** paradigms of programming language: procedural, object oriented and logic.

c) **Define** types of language translators: compiler, interpreter and assembler.

Introduction

Definition:
Computer Program - Set of instructions written in a programming language that directs a computer to perform specific tasks.

How do we make a **computer program**?
We use programming languages to write computer programs.

Why do we need **programming languages**?
Programming languages are designed for computers to be able to understand and execute its instructions.

Programming Languages


Definition:

Programming language is a set of words, abbreviation, and symbols that enables a programmer to give instructions to a computer.

Examples: Java, C, C++, JavaScript, Python, HTML, etc...

Different programming languages have different rules, syntax and functions.

Types of Programming Language

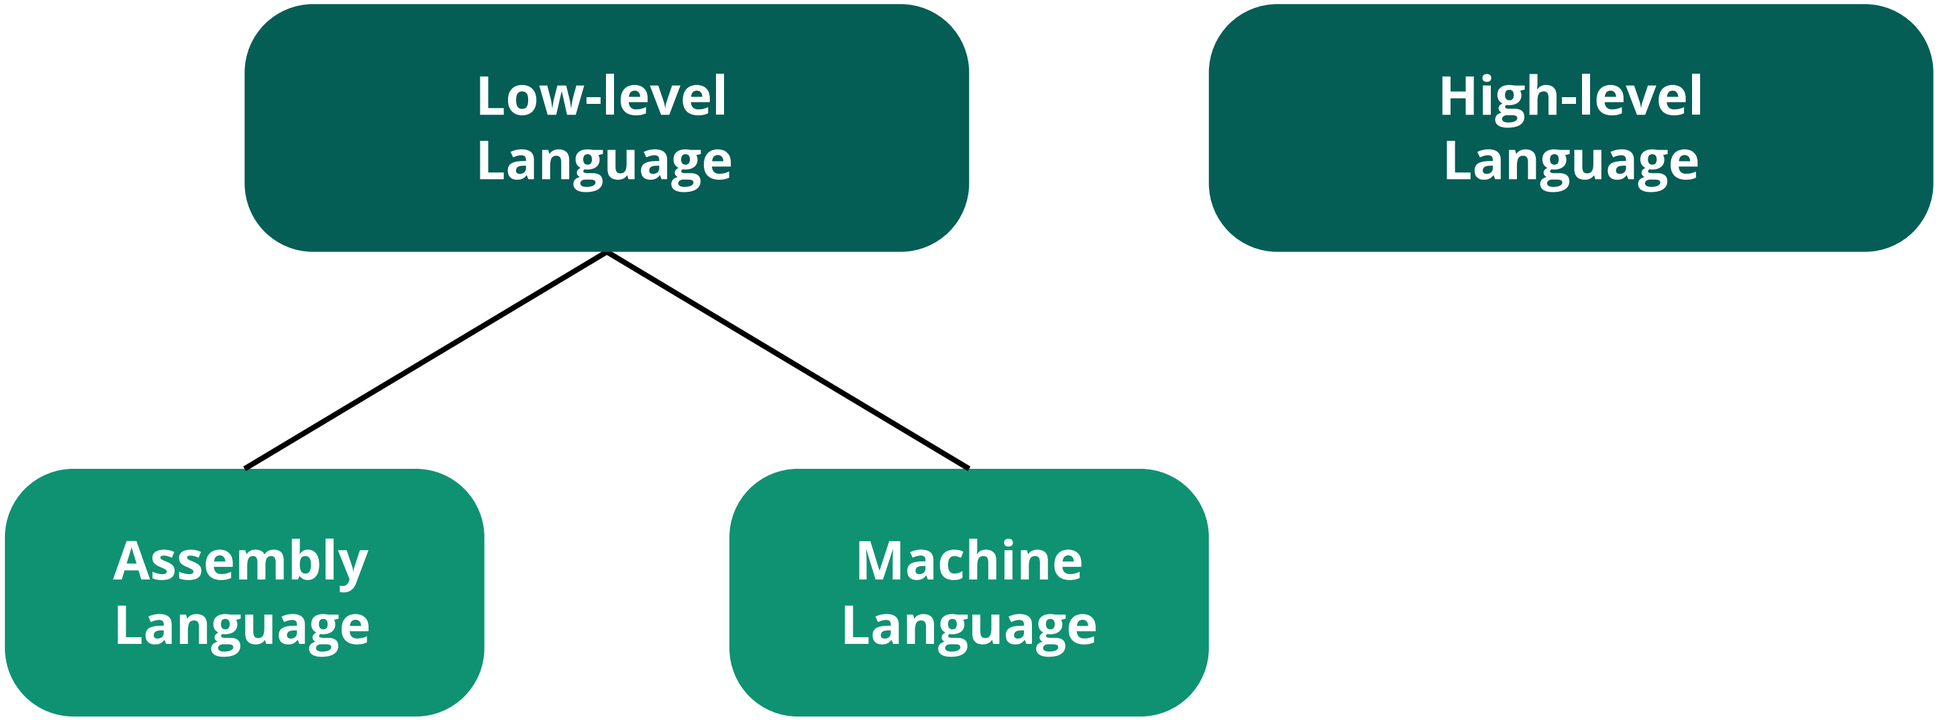

Low-level programming languages

- A type of programming language that contains basic computer instructions that the **computer can understand and execute**.
- Communicates **directly with hardware**.
- Mostly used in **operating systems or programs** that **require direct hardware access**.
- Creates efficient and optimized programs through accessing hardware components directly.
- Examples of low-level programming languages:
  - Machine language
  - Assembly language


Machine Language

- Set of instructions and data in the form of binary numbers: “0” or “1”
- **Hard for humans** to understand.
- **Easy for computers** to understand.
- **First-generation programming language**.
- **Machine dependent**. Program on one computer will not work on another computer.



Assembly Language

- Contains basic English commands or abbreviations.
- **Easier for humans** to understand compared to machine language.
- Needs to be **translated into machine language** before it is run by the computer.
- **Second-generation programming language**.

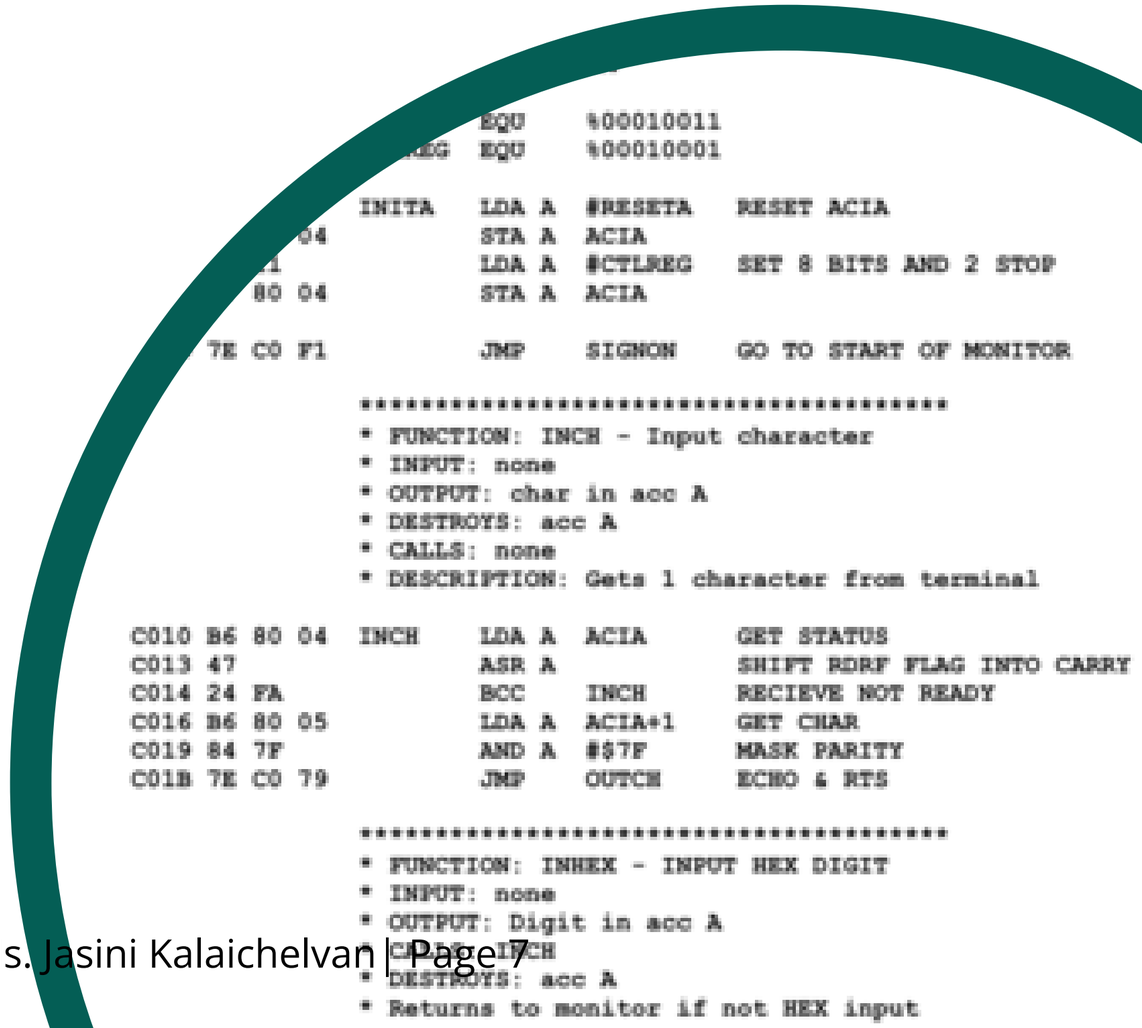

```
                        EQU     %00010011
                   EG   EQU     %00010001

                   INITA   LDA A  #RESETA   RESET ACIA
                     04            STA A  ACIA
                     11            LDA A  #CTLREG   SET 8 BITS AND 2 STOP
                      80 04        STA A  ACIA

                    7E C0 F1        JMP    SIGNON    GO TO START OF MONITOR

                                ****************************************
                                * FUNCTION: INCH - Input character
                                * INPUT: none
                                * OUTPUT: char in acc A
                                * DESTROYS: acc A
                                * CALLS: none
                                * DESCRIPTION: Gets 1 character from terminal

C010 B6 80 04                   INCH    LDA A  ACIA      GET STATUS
C013 47                                 ASR A            SHIFT RDRF FLAG INTO CARRY
C014 24 FA                              BCC    INCH      RECIEVE NOT READY
C016 B6 80 05                           LDA A  ACIA+1    GET CHAR
C019 84 7F                              AND A  #$7F      MASK PARITY
C01B 7E C0 79                           JMP    OUTCH     ECHO & RTS


                                ****************************************
                                * FUNCTION: INHEX - INPUT HEX DIGIT
                                * INPUT: none
                                * OUTPUT: Digit in acc A
                                * CALLS: INCH
                                * DESTROYS: acc A
                                * Returns to monitor if not HEX input
```

Comparison between Machine and Assembly language

	Machine Language	Assembly Language
Complexity to humans	Cannot be easily understood by humans	May be understood by humans
Complexity to computers	Computers can **directly execute**. Does not need to be translated.	Needs to be **translated using an assembler.**
Characteristic	Made up of 0s and 1s (binary)	English-like abbreviations and commands

High-level programming languages

- These languages use English-like words that are **closer to human language**.
- **Easy to read, write, and maintain**. **Programmer-friendly**.
- **Portable** as these languages can run on different computers.
- **Needs to be translated** into **machine code** before it is executable by the computer.

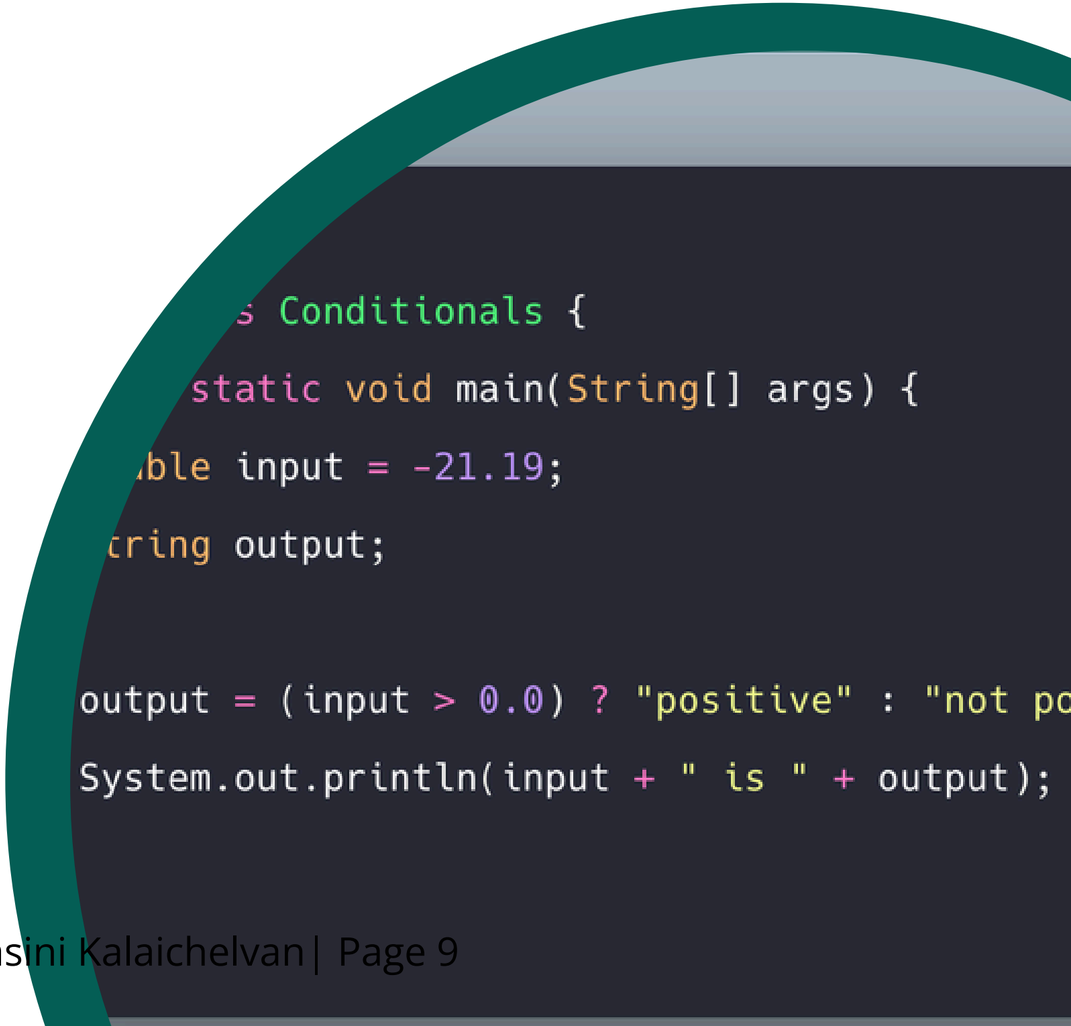

Comparison between High and Low-level Languages

Low-level Language	High-level Language
Machine-friendly language; Harder to be understood and learnt by humans	**Programmer-friendly language**; Easily understood and learnt by humans
Non-portable; **Machine dependent**	Portable; **Machine independent**
Consists of **binary digits** or **English-like abbreviations**	Consists of **English-like words**
Communicate directly with hardware to create **more efficient** programs	**Less efficient** as cannot directly communicate with hardware.

Programming Paradigm

Definition:

Programming paradigm is an approach to solving problems using programming language.

The different styles by which a computer language looks at the problem to be solved.

There are three (3) main types of programming paradigms:

- **Procedural Programming**
- **Object-oriented Programming**
- **Logic Programming**

Procedural Programming

- **Procedural programming** is a **structured approach** to software development where programs are **organized into procedures or functions** to perform computations.
- A **procedure** is a **series of instructions** to be carried out by the computer **step-by-step**.
- **Top-down approach; Linear**.
- Examples: **Fortran, COBOL, BASIC, C, Pascal.**

Object-oriented Programming

- **Object-oriented programming (OOP)** revolves around the concept of **objects**, which are instances of **classes**.
- An **object** in an item that can contain both **data** and **procedures** that read and manipulate that data.
- **Bottom-up approach**
- OOP allows programmers to **reuse and modify existing objects**.
- Examples: **Java, C++, JavaScript, C#, Python.**

Logic Programming

- **Logic programming** revolves around **program statements** that express **facts and rules** about a problem within a **system of formal logic**.
- **Rules** are written in logical clauses, “X is true if Y and Z are true”
- **Facts** are expressed without a body, “X is true”.
- Largely used in Artificial Intelligence (AI) models.
- Examples: **Prolog, ASP, Datalog.**

Comparison of Programming Paradigms


Procedural	Object-oriented	Logic
Top-down approach	Bottom-up approach	No explicit algorithm
Focuses on procedures and data	**Focuses on objects and methods**	**Focuses on facts and rules within a system of formal logic**
Fortran, COBOL, BASIC, C, Pascal	Java, C++, JavaScript, C#, Python	Prolog, ASP, Datalog

Language Translator

Definition:

A translator is a computer program that translates programming source code into machine language (machine code).

There are three (3) types of language translators: **assembler**, **comipler**, and **interpreter**.

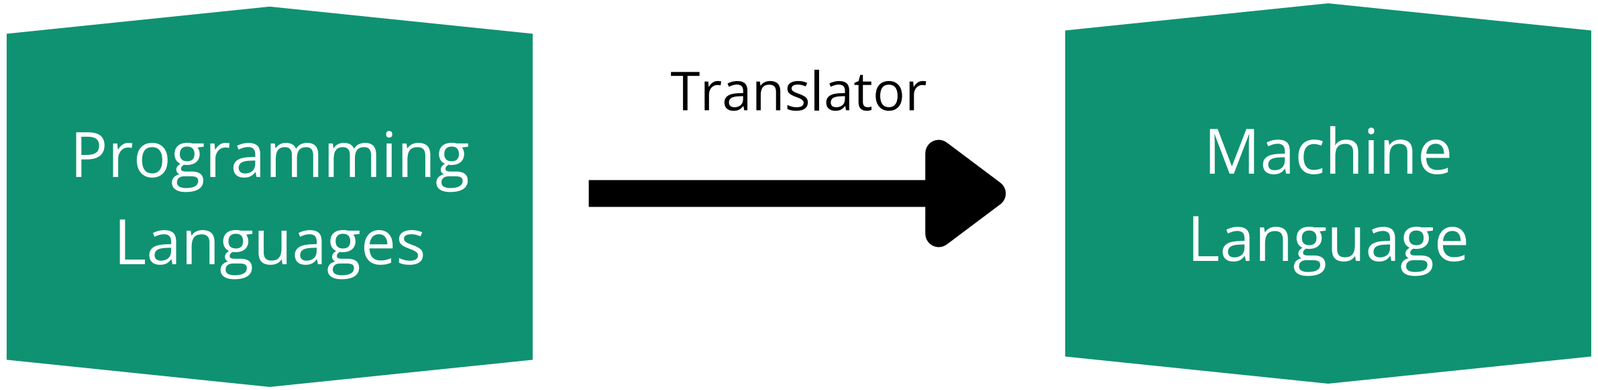

Assembler

- **Assembler converts** programs written in **assembly language** into **machine code**.

```
0         LDR R0, 150
1         LDR R1, 151
2         ADD R2, R1, R0
3         CMP R2, #10
4         BLT end
5         MOV R2, #10
  end:
6         STR R2, 152
7         HALT
```

Assembly language

Assembler



Machine code

Assembler

- Recap: **Assembly language** is a low-level programming language that uses English-like abbreviations to represent instructions / code.
- The **assembler** converts **assembly language** source program into **machine language** to create an executable program called **object code**.
- However, **assemblers** are **processor-dependent** and each kind of computer may be programmed in its own assembly language.

Compiler

- **Compiler converts** entire **high-level source code** (programming languages) into **machine language**.

```
<! DOCTYPE  html>
<html>

<head>
  <title>Page Title</title>
</head>
<body>
  <h2>Heading Content</h2>
  <p>Heading Content</p>
</body>

</html>
```

High-level programming language

Compiler




Machine code

Compiler

- Recap: High-level programming languages uses English-like words to represent instructions / code.
- A **compiler** converts **high-level source code** into an **executable file** containing **machine code** (object code).
- The **executable file** (program) can be **run independently** of the source code.
- **Error reports** are generated **after** the **entire program is compiled**, offering a comprehensive overview of potential issues.

Interpreter

- An **interpreter** translates **high-level source code** into **machine code** **and** **executes** it.
- This **does not produce** an **executable file**.
- Each line of source code is read then converted into machine language, then executed. Any **error** is **immediately detected** and shown.

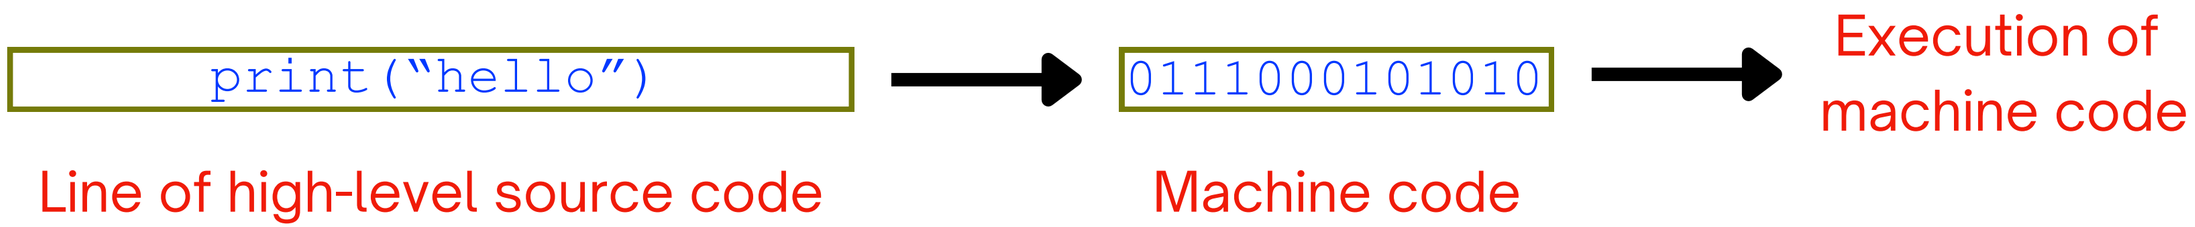

Execution Times

- Compiled programs generally run faster because translation is done before hand and the executable file can be directly executed by the machine.
- Interpreted programs are slower as the interpreter translates and executes line-by-line producing overhead during execution.

Comparison of Language Translators

	Assembler	Compiler	Interpreter
Description	Translates program written in assembly language into machine language	Translates ENTIRE program written in high-level programming language into machine language	Translates program written in high-level programming language into machine language AND executes it line-by-line
Executable file	Creates executable file	Creates executable file	Does NOT create executable file
Example of programming languages that use the translator	Assembly language	Java, C++, C	Python, JavaScript, Ruby

FAQs

1. Definition of program, programming language, and programming paradigm.
2. Differences / comparison between low-level and high-level programming language.
3. Identify type of programming language.
4. Advantages and disadvantages of low-level programming language.
5. Differences / comparison between machine and assembly language.
6. Advantages and disadvantages of high-level programming language.
7. Comparison between procedural, object-oriented, and logic paradigm.
8. Explain the types of programming paradigms.
9. Differences between compiler, interpreter, and assembler.
10. Match the type of programming language with its translator.
11. Describe the function of compiler, interpreter, or assembler.