Dt. ______ Pg. 1 ______ B+

Q→ why Binary (0, 1 only)
Q→ Interpreter, Compiler Diff – 3   Q Q eg
Q→ Low level, high-level diff   Q Q eg
Q→ 4 rules of Identifiers – 1   Q Other name
Q→ 8 bits meaning   Q __ to __
Q→ Diff b/w char section = 'A' and char section = 65
Q→ ASCII value of (i) A   (ii) a   Q (iii) 0
Q→ Int – 2 integer
Q→ 2 to 2   Q Decimal
Q→ which correct or which not   a=10, 10=a, a=b=c=10
Q→ which Arithmetic not used in float
Q→ % cin>> a,b; or cin>>(a)(b); correct
Q→ int a=11, b=3; float c; c=a/b; output
Q→ what to do to get correct output
Q→ 2 types of cast   Q Q egs of both
Q→ int a = 10; float b=20; b=a; a=b; output
Q→ Swap 2 variables, with + without 3rd
Q→ Enter seconds, convert to hours and minutes
Q→ Enter 3 digit # and display digits separately
Q→ 2 steps in basic structure
Q→ Meaning of iostream   Q why required
Q→ Diff in iostream, iostream.h
Q→ Code blocks before main Q return __   Q Meaning
Q→ iostream (Photo)   Q 2 classes   Q 2 objects
Q→ 2 operators for 2 objects   Q Photo
Q Relational ✓   Q logical   Q Q bitwise – 8
Q→ 2 imp rules
Q→ Predict output (i) int a=5, b=6, (ii) int a=5, b=6;

```
i) int a=5, b=5,     if (!(a>b))      if (a>b)
   if (a>b)              a++;             a++;
     a++;                b++;             b++;
     b++;            cout<<a<<b;     
   cout<<a<<b;                       cout<<a<<b;
```

Scanned with CamScanner

Dt.________
Pg.________ B+

Q-) Dangling else ✓ Q) Ladder if syntax

Q-) enter two time formats and add them in 12 hour format

Q-) 2 notes for switch (pg-10)

Q-) Suppose today is monday, which day will occur after n days

PS-) Q-) 3 requirements of loops

Q-) Do-while

Q-) Infinite while

Q-) while (0) or while (-1)

Q-) for is ____ loop

Q-) 2 alters for for loop

Q-) for ~~#~~ for multiple operations

Q-) when terminate

Q-) Display 30 29 27 24 20 15 9 2

Q-) Check if # is prime

Q-) Count digits in a #

Q-) Reverse a #

Q-) Check if a # is pallindrone

Q-) 
```
int a=15;
cout<<a;
cout<<++a;
cout<<a;
cout<<a++;
cout<<a;
cout<<a++;
cout<<++a;
cout<<a;
```

Q-)
```
int a=1, b=1;
a= a++ + ++b;
b= b++ + ++a;
cout<< a<<b;
```

Q-) int a=1;

(i) `cout<<++a<<++a<<++a;`

(ii) `cout<<++a<<a++<<++a;`

Q-) `cout<<++a<<a++<<++a<<a<<++a<<a++<<++a`

→ B+

Q→ int a=1, b;
b=a++ + ++a + a+ ++a + a++;
cout << a << b;

Q→ 2 jump statements

Q→ Enter values till 0 is entered and display count of even, odd, prime values

Q→ Meaning of for loop

Q→ Diff in int ch='A'; and char ch='A';

Q→ Prog for (i)

```
A
B B
.
.
Z Z -- Z
```

Q (ii)

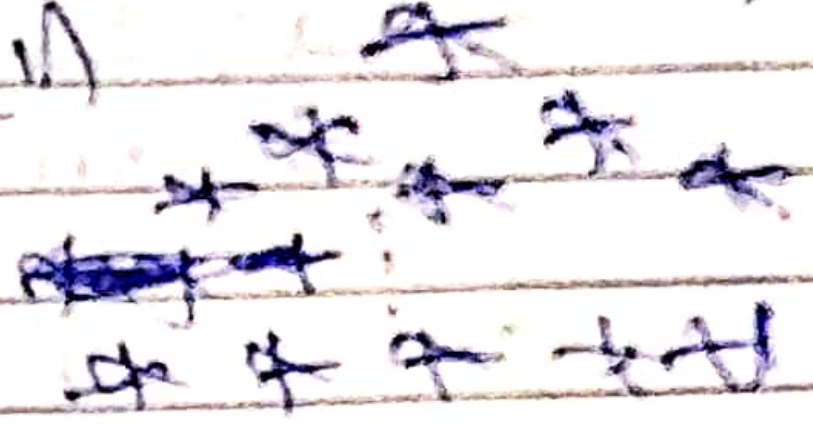

(v)

|   |   |   |
|---|---|---|
| 1 | 2 | 3 |
| 4 | 5 | 6 |
| 7 | 8 | 9 |

(iii)

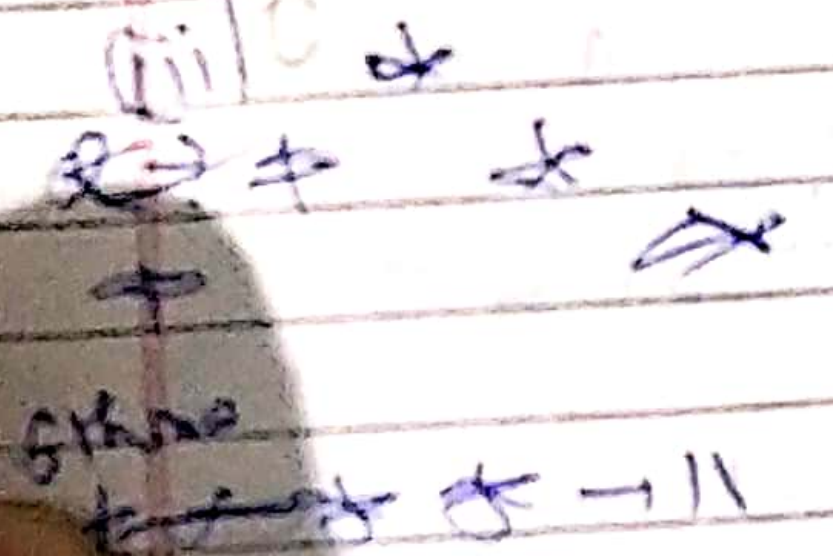

Q (iv)

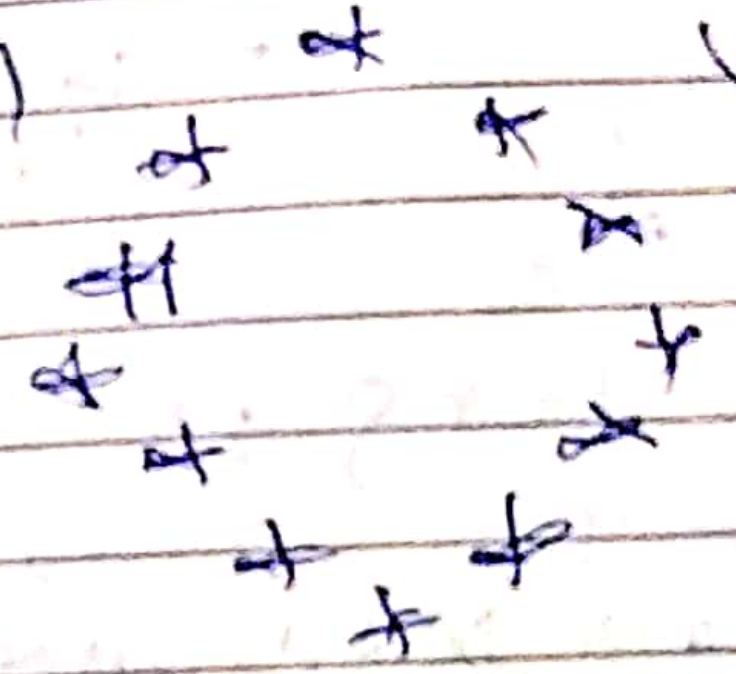

Q→ Enter a range and display all palindrome # number

Q→ fn defn    Q Declaration syntax    Q Declaration defn

Q→ 3 parts    Q Purpose    Q Call

Q→ Defn    Q Eg

Q→ fn call    Q Eg    Q [illegible]    Q Photo

Q→ Type 1 N m

Q→ Eg    Q Eg of Hello 3, Hello 1, Hello2

Q→ 2nd type of fn

Q→ Create a fn accepting 2 values & display

Q→ Try writing ——    Q explain fn before & after

Q→ Enter a value and display either star pattern, number pattern or table

1-5 (NO)
6-10 (+)
>10 table

Scanned with CamScanner

Q 1st imp note  Q 2nd  Q 3rd  Q 4th
Q→ 3rd type of fn  Q Diag
Q→ Create a fn accepting 2 values & returns sum
Q→ Find sum of series

$S = x + \frac{x^2}{2!} + \frac{x^3}{3!} + \dots + \frac{x^n}{n!}$

Q→ How to call a function in another prog
✓ Q→ When to write include later ~~&~~ in main()
Q→ Eg of factorial  Q Syntax
Q→ which location  Q when
✓ Q→ Default argument functions
✓ Q→ 2 ways to call them
Q→ int a=10  Q Pointer defn
cout<<a  Q→ ~~as~~ is *p=&a correct
cout<<&a  Q is int*p=&a correct
cout<<*&a  Q→ Swap 2# using *
Q→ Swap using pointers
Q→ Recursion — Q→ Factorial using recursion
Q→ Fibonacci series using recursion —
Q→ fn overloading  Q eg
Q→ Name 4th type of fn
Q→ Defn array
Q→ Declaration of
Q→ 2 meaning of homogeneous
Q→ Defining array  Q→ 2 names of 2nd thing
Q→ 2 imp things (array)
Q→ Initialization — 2 methods
Q→ 2-D array
Q→ How to display array in prog
Q→ Enter 6 values in array and display it

S B+

Q-1 find largest of 5 values in array
10 Q-1 what is bubble sort
Q-1 Prog for ascending & descending
10 Q-1 what is selection sort
10 Q-1 Prog for ascending & Desc
Q-1 Reverse an array
Q-1 What is armstrong #
Q-1 Display 2nd largest from n values
Q-1 Delete duplicate elements from array
Q-1 Display count of each element in array
Q-1 Enter a range and display armstrong numbers in that range
Q-1 Create an array containing first n prime values
Q-1 Enter n values and display sum
Q-1 Procedure for bubble sort
Q-1 Dynamic memory Allocation
Q- new and delete operator
Q-1 full program
Q- Selection Sort procedure
Q-1 Reverse the array
Q- prog for second largest.
-1 prog to delete duplicate
Q-1 ———— count
Q-1 Store first n prime values
Q- Input values 1 to 31 then 1 to 12
eg (1 to 31) → user entered '4'
(1 to 12) —1 ———→ 6'

1 | 2 | 3 | 5 | 7 | 11 | 13 | 17 | 19 | 23 | ... → Array of first n prime
↓ 4 ↓ 6
7+13=20

Now enter user's lucky #
Suppose it is 2
Won lottery

B+

Q → which correct (i) int a[][3] = {1, 2, — 9},
(ii) int a[][] = {1, 2 — — 9} — (iii) int a[3][] = {. — }

Q → int a[5] = {2} output

Q → int a[5]; a[0] = 2; output

Q → Arrays and pointers

Q → predict output

```
int a[] = {10, 20, 30, 40, 50};
int *p;
    p = &a[2];
      p--;
for(int i = 1; i <= 5; i++)
{
    if ( i % 2 == 0)
      *p = *p + 1
      else
      *p = *p - 2
      p++;
}
    p--;
for(int i = 1; i <= 6; i++)
{
    cout << *p;
      p--;
}
```

Q → Arrays and functions - passing individual values

Q → ——— full array

Q → Rule for above Q

Q → 2 ways to do

Q → 2 sub methods

Q → Yes — not

Q → 2 d array

Q → Declaration

Q → Always ——

Q → which values to be provided in

Q → a[3][4]

a[ ][4] → which correct lines declaration

B+

Q→ 2 ways of initialization

Q→ int a[ ][3] = {1, 2, 3, ——— 9};
int a[3][ ] = {1, 2, ——— 9};
int a[ ][ ] = {1, 2, ——— 9};

Q→ Enter a matrix and display it

Q→ Enter a dynamic matrix

Q→ Sum 2 matrices Q→ Multiply 2 matrices

Q→ int a[ ][3] = {1, 2, 3, 4, 5, 6, 7, 8, 9};
cout << a; ; cout << a[0];
cout << a[1] ; cout << a[1][2];

Q→ Pass 2-d array to function ~~Q~~ method 1 Q2 Q3

Q→ Pass to 1-d array in prime in array = 2 ways

Q→ modifications in enchey pg-54.

Q→ How to display Name with space

Q→ Write program

Q→ Hexadecimal show

Q→ 2-d strings

Q→ Prog

Q→ max character how declared

Q→ Initialization

Q→ char a[3][10] = {"Hello", "Bye", "Welcome"};
cout << a[2][1]; // ?
cout << a[2] ; // ?
cout a;

Q→ How to input values

Q→ 3-4 methods of passing 2-d strings to function

Q→ Input n strings and display alphabetically

Q→ Input 5 strings of 10 characters and create password of 10 digits by choosing 2 from each 5 but no duplicate element

Scanned with CamScanner

B+

Read C++ [illegible]

Q→ OOPs → Expand,
Q→ 3 concepts
Q→ 1st eg. Q 2nd Q Q 3rd
Q→ First operator,
Q→ Write prog to explain its 3-4 usage
Q→ Classes defn Q→ 2 members of class
Q→ What is object - defn
Q→ when memory allocated Q→ How object access class members
pg=57 Q→ Eg → daily life
Q→ Syntax of class Q Syntax of object
Q→ eg1 of class general (Passing Values in main class)
Q→ eg 2 of class — ( ——— )
Q→ Imp eg 3 of class having marks of student and name
Q→ eg 4 same as eg 3 define functions outside syntax
Q→ Meaning of inline
Q→ ——— not inline
Q→ when inline Q when not
Q→ Create a prog to add 2 complex # using object as parameter
Q→ Use array of object to enter marks of 6
Q→ ——— to enter marks of n students and display highest marks, name of st with highest marks and arrange marks alphabet
Q→ Can we make object outside main
Q→ What is friend function
Q→ Add ~~friend~~ for complex # using friend
Q→ Eg. of Account NO to explain static mem
Q→ Syntax of static member
Q→ Constructors 1 Q 2 Q3 Q4 Q5
Q→ Give output of
Clas Abc
{ Public:
Abc() { cout<<"Hello"<<endl; } }

Scanned with CamScanner

int main() {Abc ob1; cout<<"main"; Abc ob2, ob3;}

Q→ eg to show default constructor
Q→ Enter values in default con
Q→ eg of parameterized constructor
Q→ Copy constructor → syntax
Q→ eg to show (use ~~[illegible]~~ also)
Q→ Copy constructor to add complex #
Q→ friend fn + copy constr
Q→ Destructor → defn    Q → Always
Q→ Syntax    Q Name of symbol    Q when invoked
Q→ # of destructor    Q ~~class Abc~~

```
{static int a;                int Abc::a
 public:                      int main()
 Abc()                        { Abc ob1;
 {a++;                         {Abc ob2;
  cout<<a;                      {Abc ob3;
 }                             } Abc ob4, ob5; }
 ~Abc()                          Abc ob6; }
 {a--;                        }
  cout<<a;
 }};
```

Pg-68 Q→ Clear defn of destructor
Q→ operator overloading syntax
Q→ where to use syntax Q Q why
Q→ General rule for Unary-2 Q Q Binary-2
Q→ Negative of object using member Q Q friend Q only
Q→ Add complex # Q Q
Q→ Compare string length using operator overl
Q→ using
Q→ Diff b/w string string length

Scanned with CamScanner

Q→ Clarify iostream ... done in begining

Q→ Overloading insertion, extraction (can it be using member fn)

Q→ why / why not

Q→ Give eg

15-7 Q→ Expand conio.h    Q 3 functions in it

Q→ eg of conio    Q Explain 2nd

Q→ Explain [illegible] — Q fun to enter 4 digit no.

Q→ where clrscr    Q where else    Q Syntax else

Q→ which lib used    Q iomanip expand

Q→ where last digit in setw

Q→ Output of

```
int a=3142;
 cout<<a;
 cout<<setw(8)<<a;
 cout<<setw(2)<<a;
float a=31.42;
 cout<<a; Q full concept behind.
 cout<<setprecision(4) <<a; Q full conc
cout <<  ————(6) <<— Q
cout<<fixed<<setprecision(2)<<a; Q —
 cout<<fixed<<a; Q full
 cout<<f— <<setprecision(8) <<a; Q Full
```

Q 3rd function except precision & w

Q→ Syntax and eg

Q→ Macros    Q # meaning    Q Meaning of Preprocessor

Q→ using macros find area

Q→ Can we define fn in macro Q eg. Q Limitation Q Adv.

Q→ Data type

Q→ Expand #ifdef & #ifndef

Q→ Explain    Q

Q Diff b/w macros & function

Q→ Input 2 dates and count # of days b/w them

Q→ Project ATM System

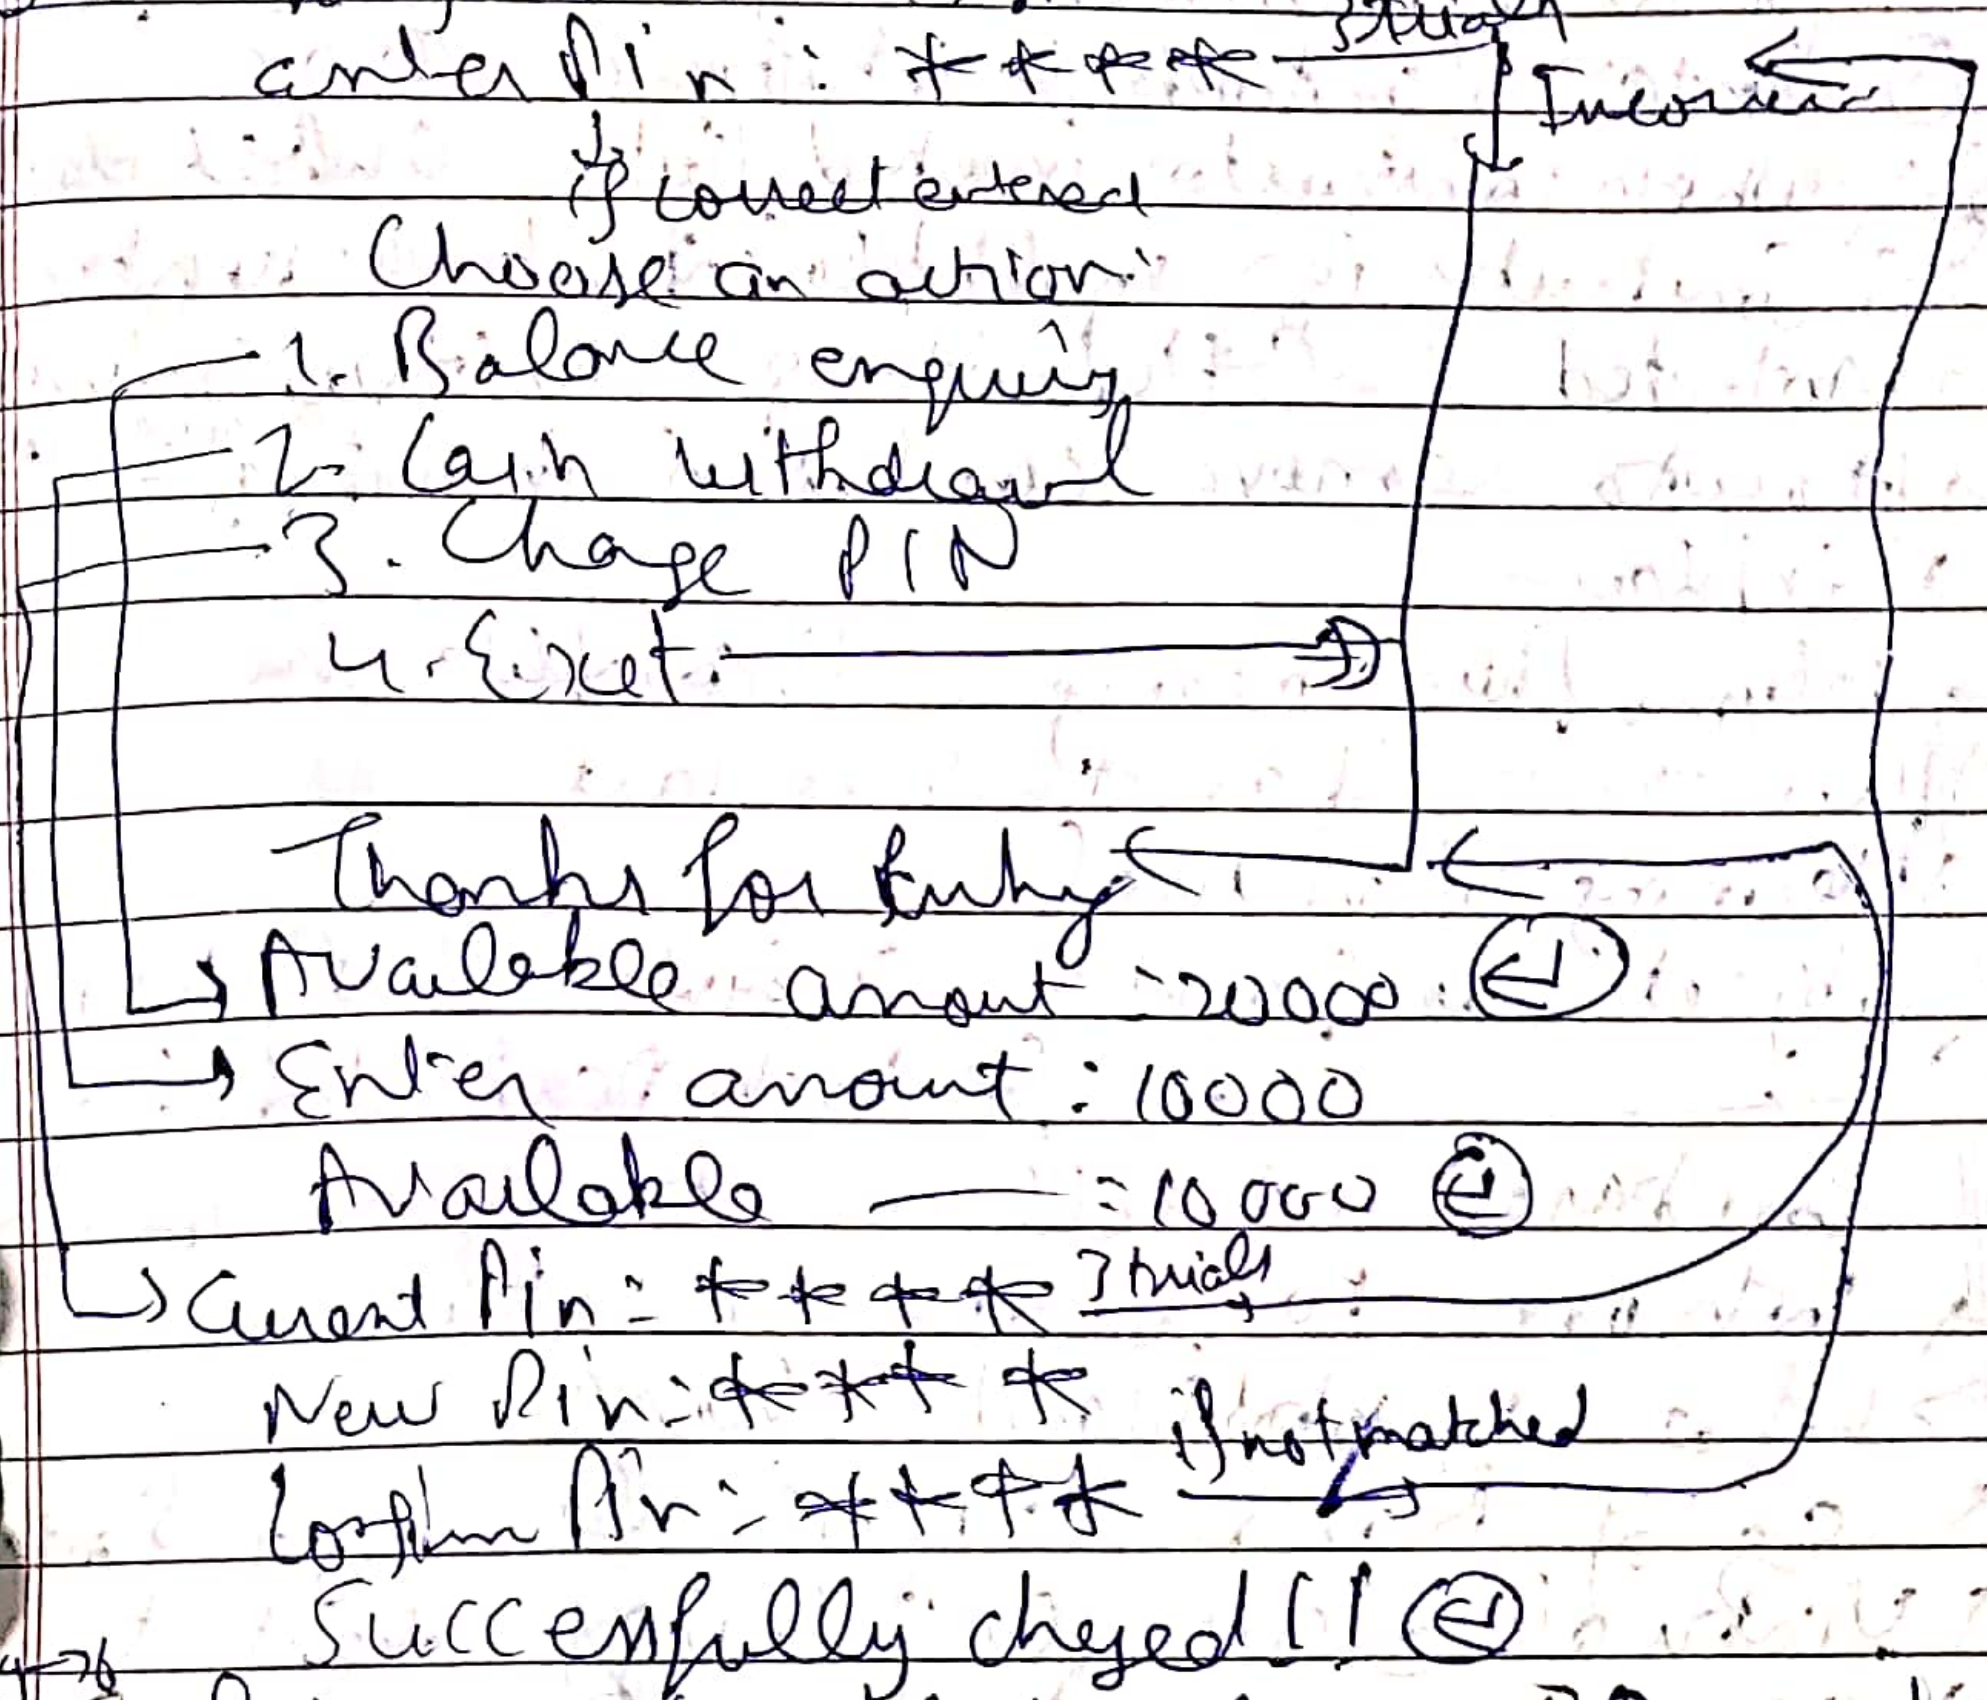

enter Pin : ****

Choose an action

1. Balance enquiry
2. Cash withdrawl
3. Change PIN
4. Exit

Thanks for using

Available amount : 20000

Enter amount : 10000

Available : 10000

Current Pin : ****

New Pin : ****

Confirm Pin : ****

Successfully changed !!

Q→ What are template classes Q Q workison

Q→ Template to add 2 #

Q→ Template in classes & objects → syntax Q eg

Q→ Two arg Q Q

Q→ Exception handling name 3 things

Q→ Explain try block Q Q throw it Q catch block

Q→ In other lang Q Thr low

Q→ eg Q why catch immediately after try

Q where block necessary Q Q where not

Q→ If more throws then how catch Q eg of atleast 3 catch

Q→ global catch Q eg Q Q Make global using template class

Q→ If we have to catch int separately & all other globally what to do

Q→ What to comt

Be Positive...

Dt. ____ B+
Pg. ____

Q→ Meaning of inheritance Q Manner of Base Cl. Q 9 of dgn eg
Q→ Syntax of inheritance Q Types – 5 Q Explain 5 Ty
Pg-81 Q Syntax of constructor in inheritance Q e.g
Q→ Which constructor invoked first ✓ Q which destructor
Q→ Constructor in multiple inheritance: syntax Q eg
Q→ Protected Q Hybrid-eg Q How confusion in hybrid
Q→ How to remove confusion in hybrid
Q→ Explain
Pg-82 Q→ Polymorphism - meaning Q Compile Time - 3 names Q 2 parts
Q→ Run time - 2 names Q One Part
Q→ Meaning of virtual
Q→ Object as pointer Q Syntax Q Program
Q→ ———— for both Derived & Base class
Q→ Compare and tell how to remove confusion
Q→ Whom to make virtual
Q→ What is abstract class
Q→ eg of Bank 10 Digit Q Prog + Syntax
Q→ Virtual class Q 2 things about it
Q→ Can we create its object Q Do it have private
Q→ What is this pointer
Q→ When this used Q when ~~it~~ compiler confuses
Q→ Simple prog
Q→ Create prog using this ptr and constructor to compare stringlength of 2 prog
Pg-86
Q→ 3 types to create dynamic memory as in C
Q→ 3 syntaxes Q Diff Q 3 tasks in file handling
Q→ * — Q fstream - expand
Q→ 2 classes Q Objects Q 8 function
Q→ function of get() Q put()
Q→ getline() Q open() Q syntax
Q→ Mode - 6 types Q tellg/tellp
Q→ seekg/seekp Q read write

Be Positive...

B+

Q→ What happen if we not ~~use~~ close

Q→ Diff b/w object of ofstream & ifstream

Q→ When overwrites ○ Q When not file

Q→ Prog using get() and write a ~~program~~ file on screen

Q→ Diff in member fn and constructor

Q→ Give usage of get & put using fn

Q→ Can we create object of fstream

Q→ Mode ○ Q Read() Write() explain

Q→ How to convert .23 to binary

Q→ Int a = 512 in bytes

Q→ Syntax and usage of write

Q→ What is g and p