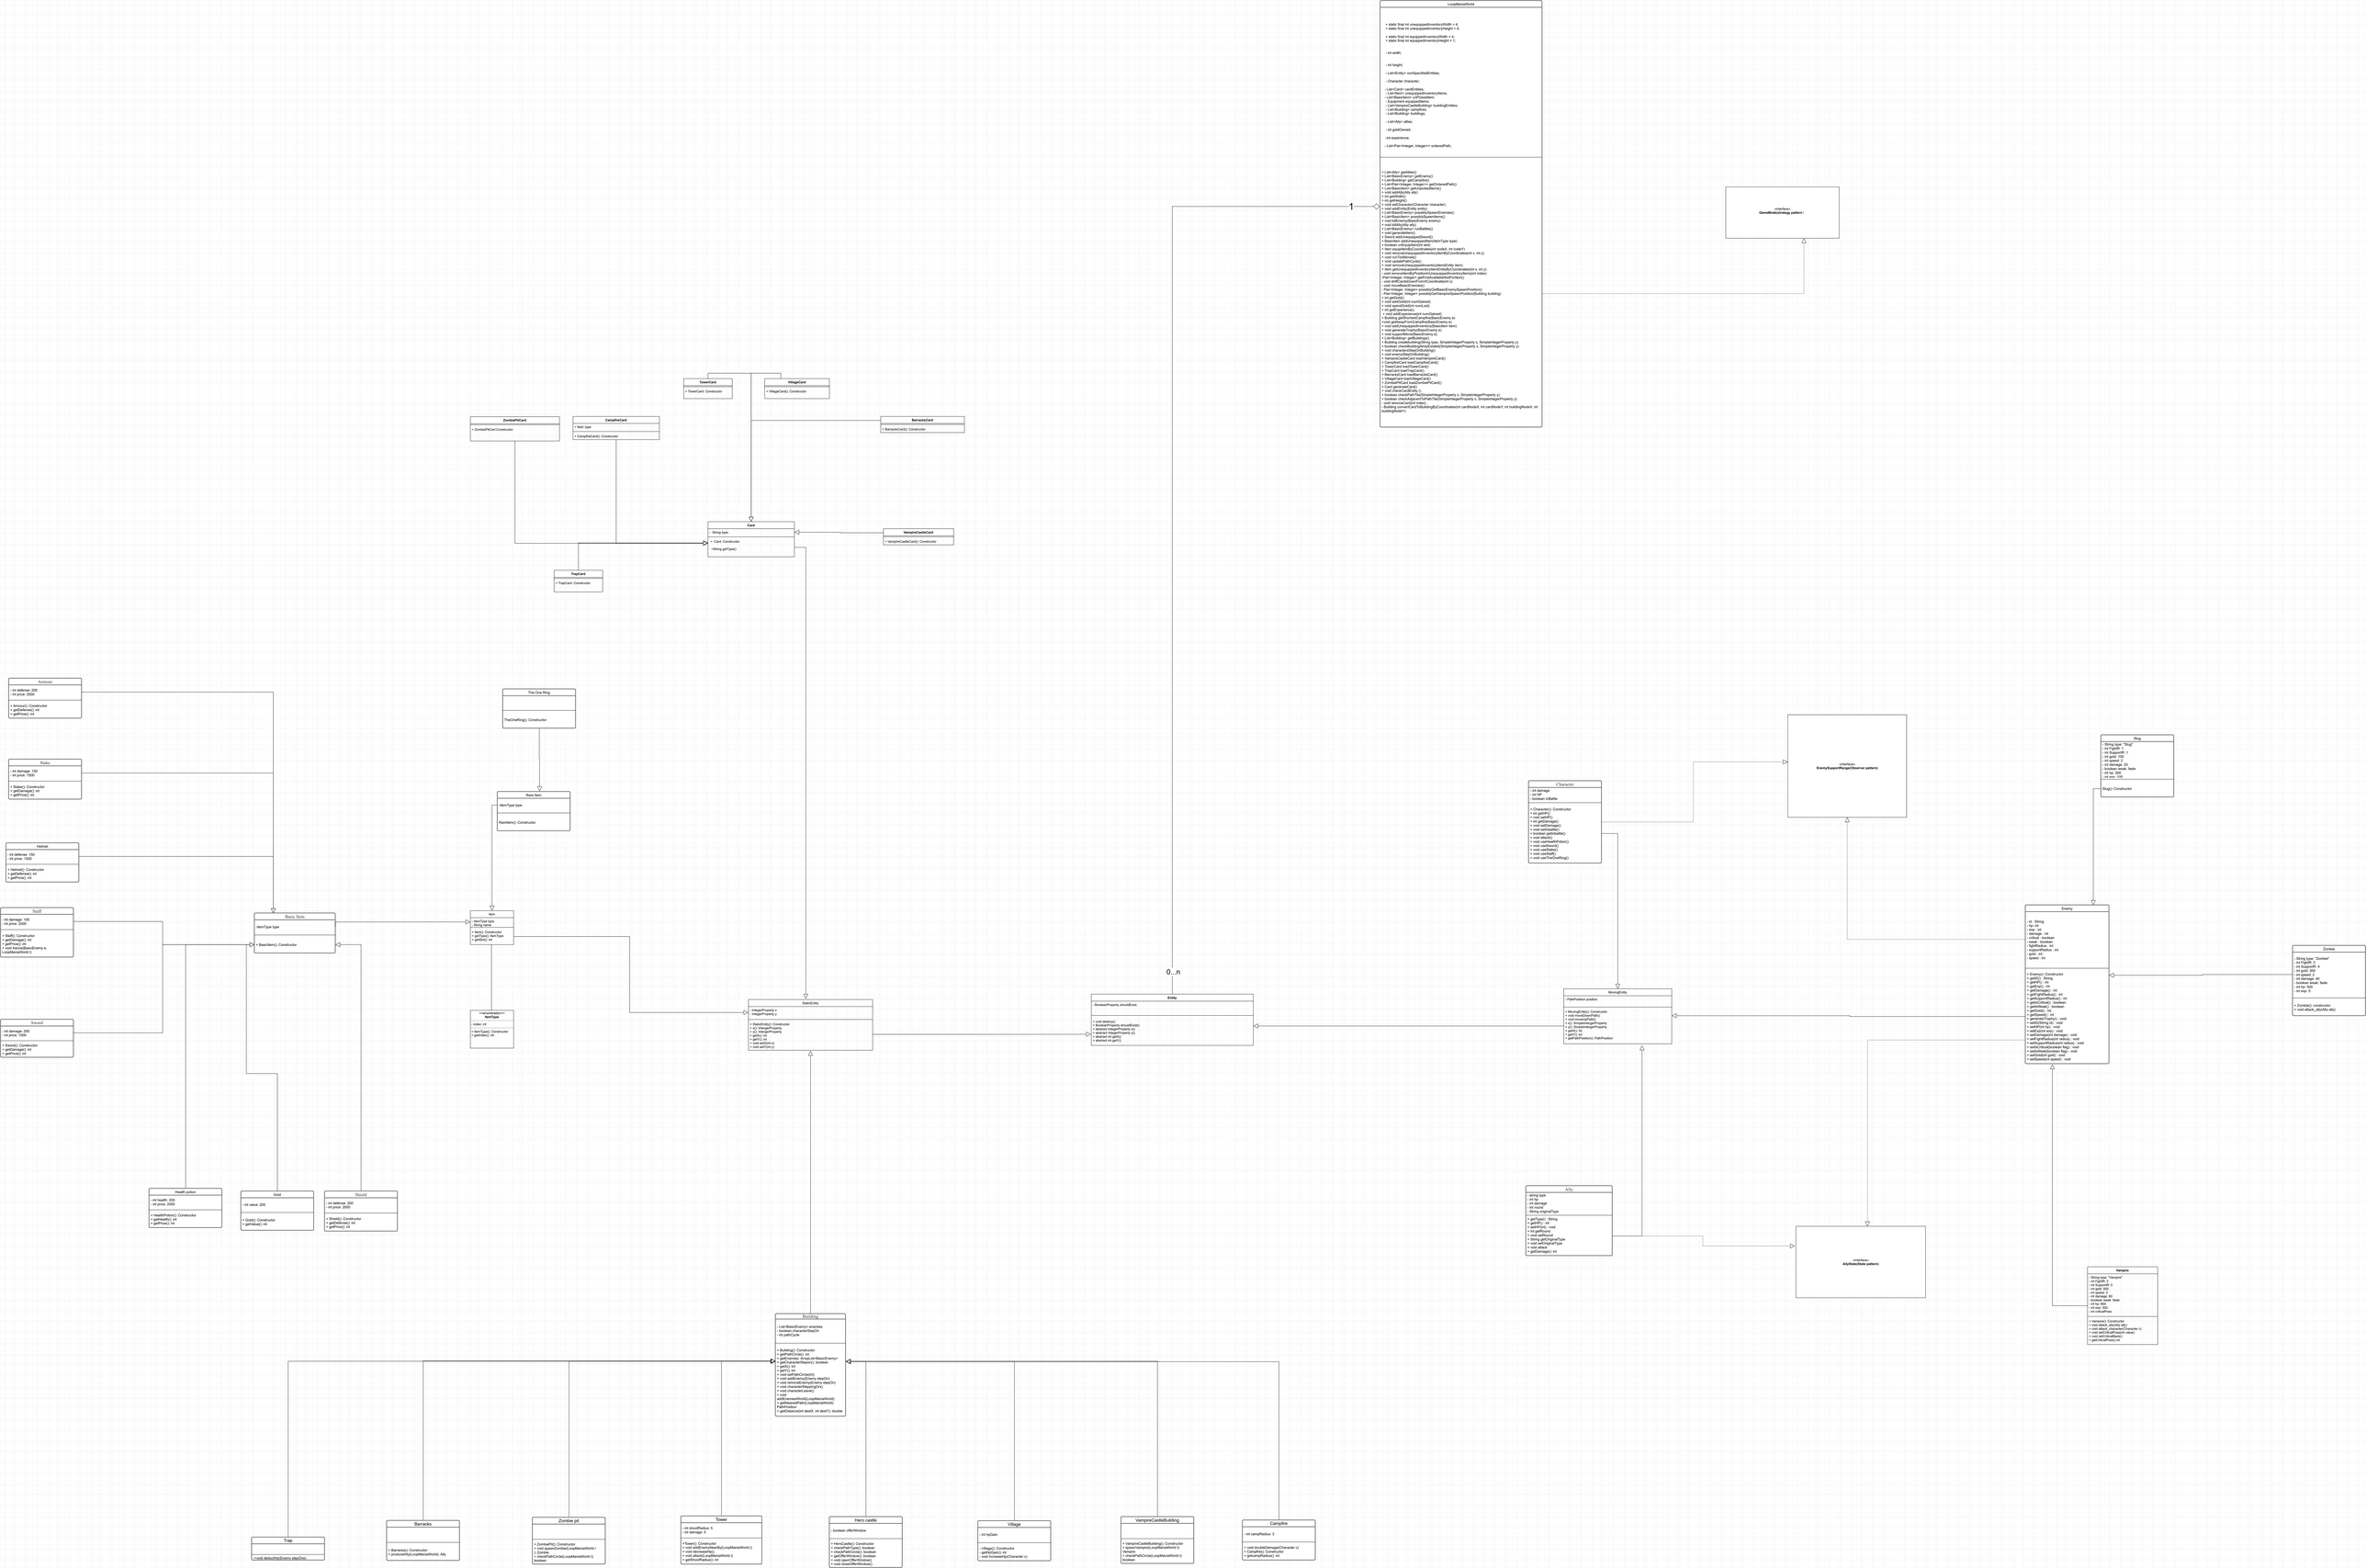
LoopManiaWorld
+ static final int unequippedInventoryWidth = 8;
+ static final int unequippedInventoryHeight = 4;
+ static final int equippedInventoryWidth = 4;
+ static final int equippedInventoryHeight = 1;
- int width;
- int height;
- List<Entity> nonSpecifiedEntities;
- Character character;
- List<Card> cardEntities;
- List<Item> unequippedInventoryItems;
- List<Item> equippedInventory;
- Equipment equipped;
- List<VampireCastleBuilding> buildingEntities;
- List<Building> buildings;
- List<Building> buildings;
- List<Ally> allies;
- int goldOwned;
- int experience;
- List<Pair<Integer, Integer>> orderedPath;
+ List<Ally> getAllies();
+ List<BasicEnemy> getEnemy();
+ List<Building> getCampfire();
+ List<Pair<Integer, Integer>> getOrderedPath();
+ List<BasicItem> getUnequipped();
+ int getExperience();
+ int getGold();
+ int getWidth();
+ void setCharacter(Character character)
+ void addEntity(Entity entity)
+ void addEnemy(BasicEnemy pSpawnEnemies)
+ List<BasicItem> possibleSpawnItems();
+ void killEnemy(BasicEnemy enemy);
+ void addGold(int i);
+ List<BasicEnemy> ~()~Allies();
+ void generateItem();
+ void addUnequippedItem(Item);
+ BasicItem addUnequippedItem(Item Type type);
+ boolean unEquipItem(int id);
+ void swapInventoryItemsOrder(int nodeX, int nodeY);
+ void removeUnequippedInventoryItemByCoordinates(int x, int y);
+ void addExperience(int i);
+ void updatePath();List<
+ void removeUnequippedInventoryItem(Entity item);
+ Item getUnequippedInventoryItemEntityAt(ArrayInstance2d a, int y);
+ void removeItemByPosition(LinkedUnequippedInventoryItem(int index);
+ void addEnemy(BasicEnemy pSpawnEnemies, int x, int y);
- void shiftCardsOverFromXCoordinate(int x);
- void moveBasicEnemies();
- Pair<Integer, Integer> possibleSpawnEnemyLocation();
- Pair<Integer, Integer> possibleSpawnprojectileSpawnPosition(Building building);
+ int getGold();
+ void setGoldGain(int numGained);
+ void setexpGain(int numLost);
+ int getExperience();
+ void setExperienceGain(int numGained);
+ Building getClosestCampfire(BasicEnemy e);
+ void getNearFromCampfire(BasicEnemy e);
+ void addUnequippedInventoryItem(Item item);
+ void generateTrophy(BasicEnemy e);
+ void setExperience(int i);
+ List<Building> getBuildings();
+ boolean checkIfBuildingAt(SimpleIntegerProperty x, SimpleIntegerProperty y);
+ boolean checkBuildingAt(LinkedSimpleIntegerProperty x, SimpleIntegerProperty y);
+ void characterStepOnBuilding();
+ void characterLeaveBuilding();
+ VampireCastleCard loadVampireCard();
+ CampfireCard loadCampfireCard();
+ ZombiePitCard loadZombiePitCard();
+ TrapCard loadTrapCard();
+ BarracksCard loadBarracksCard();
+ TowerCard loadTowerCard();
+ ZombiePitCard loadZombiePitCard();
+ Card generateCard();
+ void addCard(Card c);
+ boolean checkPathTileOf(SimpleIntegerProperty x, SimpleIntegerProperty y);
+ boolean checkAdjacentPathTileOf(SimpleIntegerProperty x, SimpleIntegerProperty y);
+ void addBuilding(Building building);
- Building convertCardToBuildingAt(CoordinatesInt cardNodeX, int cardNodeY, int buildingNodeX, int buildingNodeY);
TowerCard
+ TowerCard: Constructor
VillageCard
+ VillageCard(): Constructor
ZombiePitCard
+ ZombiePitCard:Constructor
CampfireCard
+ field: type
+ (CampfireCard): Constructor
BarracksCard
+ BarracksCard(): Constructor
Card
- String type;
+ Card: Constructor
+String getType();
VampireCastleCard
+ VampireCastleCard(): Constructor
TrapCard
+ TrapCard: Constructor
Armour
+ int defense: 200
+ int price: 2000
+ Armour(): Constructor
+ getDefense(): int
+ getPrice(): int
Sword
+ int damage: 150
+ int price: 1000
+ Sword(): Constructor
+ getDamage(): int
+ getPrice(): int
The One Ring
TheOneRing(): Constructor
Rare Item
-ItemType type
Rare(Item): Constructor
Helmet
+ int defense: 150
+ int price: 1000
+ Helmet(): Constructor
+ getDefense(): int
+ getPrice(): int
Stuff
+ int damage: 150
+int price: 2000
+ Stuff(): Constructor
+ getDamage(): int
+ getPrice(): int
+ void transitionBasicEnemy a, LoopManiaWorld l)
Basic Item
-ItemType type
+ BasicItem(): Constructor
Item
-ItemType type
-String name
+ Item(): Constructor
+ getItemType(): ItemType
+ getName(): str
<<enumeration>>
ItemType
- index: int
+ ItemType(): Constructor
+ getIndex(): int
Sword
+ int damage: 200
+int price: 1000
+ Sword(): Constructor
+ getDamage(): int
+ getPrice(): int
Health potion
+ int health: 200
+int price: 2000
+ HealthPotion(): Constructor
+ getHealth(): int
+ getPrice(): int
Gold
- int value: 200
+ Gold(): Constructor
+ getValue(): int
Shield
+ int defense: 200
+int price: 2000
+ Shield(): Constructor
+ getDefense(): int
+ getPrice(): int
StaticEntity
+ ImageProperty x
+ ImageProperty y
+ StaticEntity(): Constructor
+ abstract int getX();
+ x(): ImageProperty
+ getX(): int
+ abstract void setX(int x);
+ void setX(int x)
+ void setY(int y)
0...n
Entity
- BooleanProperty shouldExist;
+ void destroy()
+ BooleanProperty shouldExist()
+ void setShouldExist(boolean b)
+ abstract ImageProperty x()
+ abstract int getX()
+ abstract int getY()
MovingEntity
- PathPosition position;
+ MovingEntity(): Constructor
+ void setPosition(int i, int j)
+ void moveUpPath()
+ x(): SimpleIntegerProperty
+ y(): SimpleIntegerProperty
+ getX(): int
+ getY(): int
+ getPosition(int i): PathPosition
Character
+int damage
+int hp
- boolean inBattle
+ Character(): Constructor
+ int getHP()
+ void setHP()
+ void setHealth()
+ void setDamage()
+ void setInBattle()
+ void setCoordinates()
+ void attack()
+ void useHealthPotion()
+ void useArmour()
+ void useSwords()
+ void useShield()
+ void useTheOneRing()

Character
+int damage
+int hp
- boolean inBattle
+ Character(): Constructor
+ int getHP()
+ void setHP()
+ void setHealth()
+ void setDamage()
+ void setInBattle()
+ void setCoordinates()
+ void attack()
+ void useHealthPotion()
+ void useArmour()
+ void useSwords()
+ void useShield()
+ void useTheOneRing()
Ally
- string type
- int hp
- int damage
- int speed
- String originalType
+ getType(): String
+ getHP(): int
+ setHP(int hp)
+ int getBound
+ int getSpeed
+ String getOriginalType
+ void setOriginalType
+ void setHP()
+ getDamage(): int