



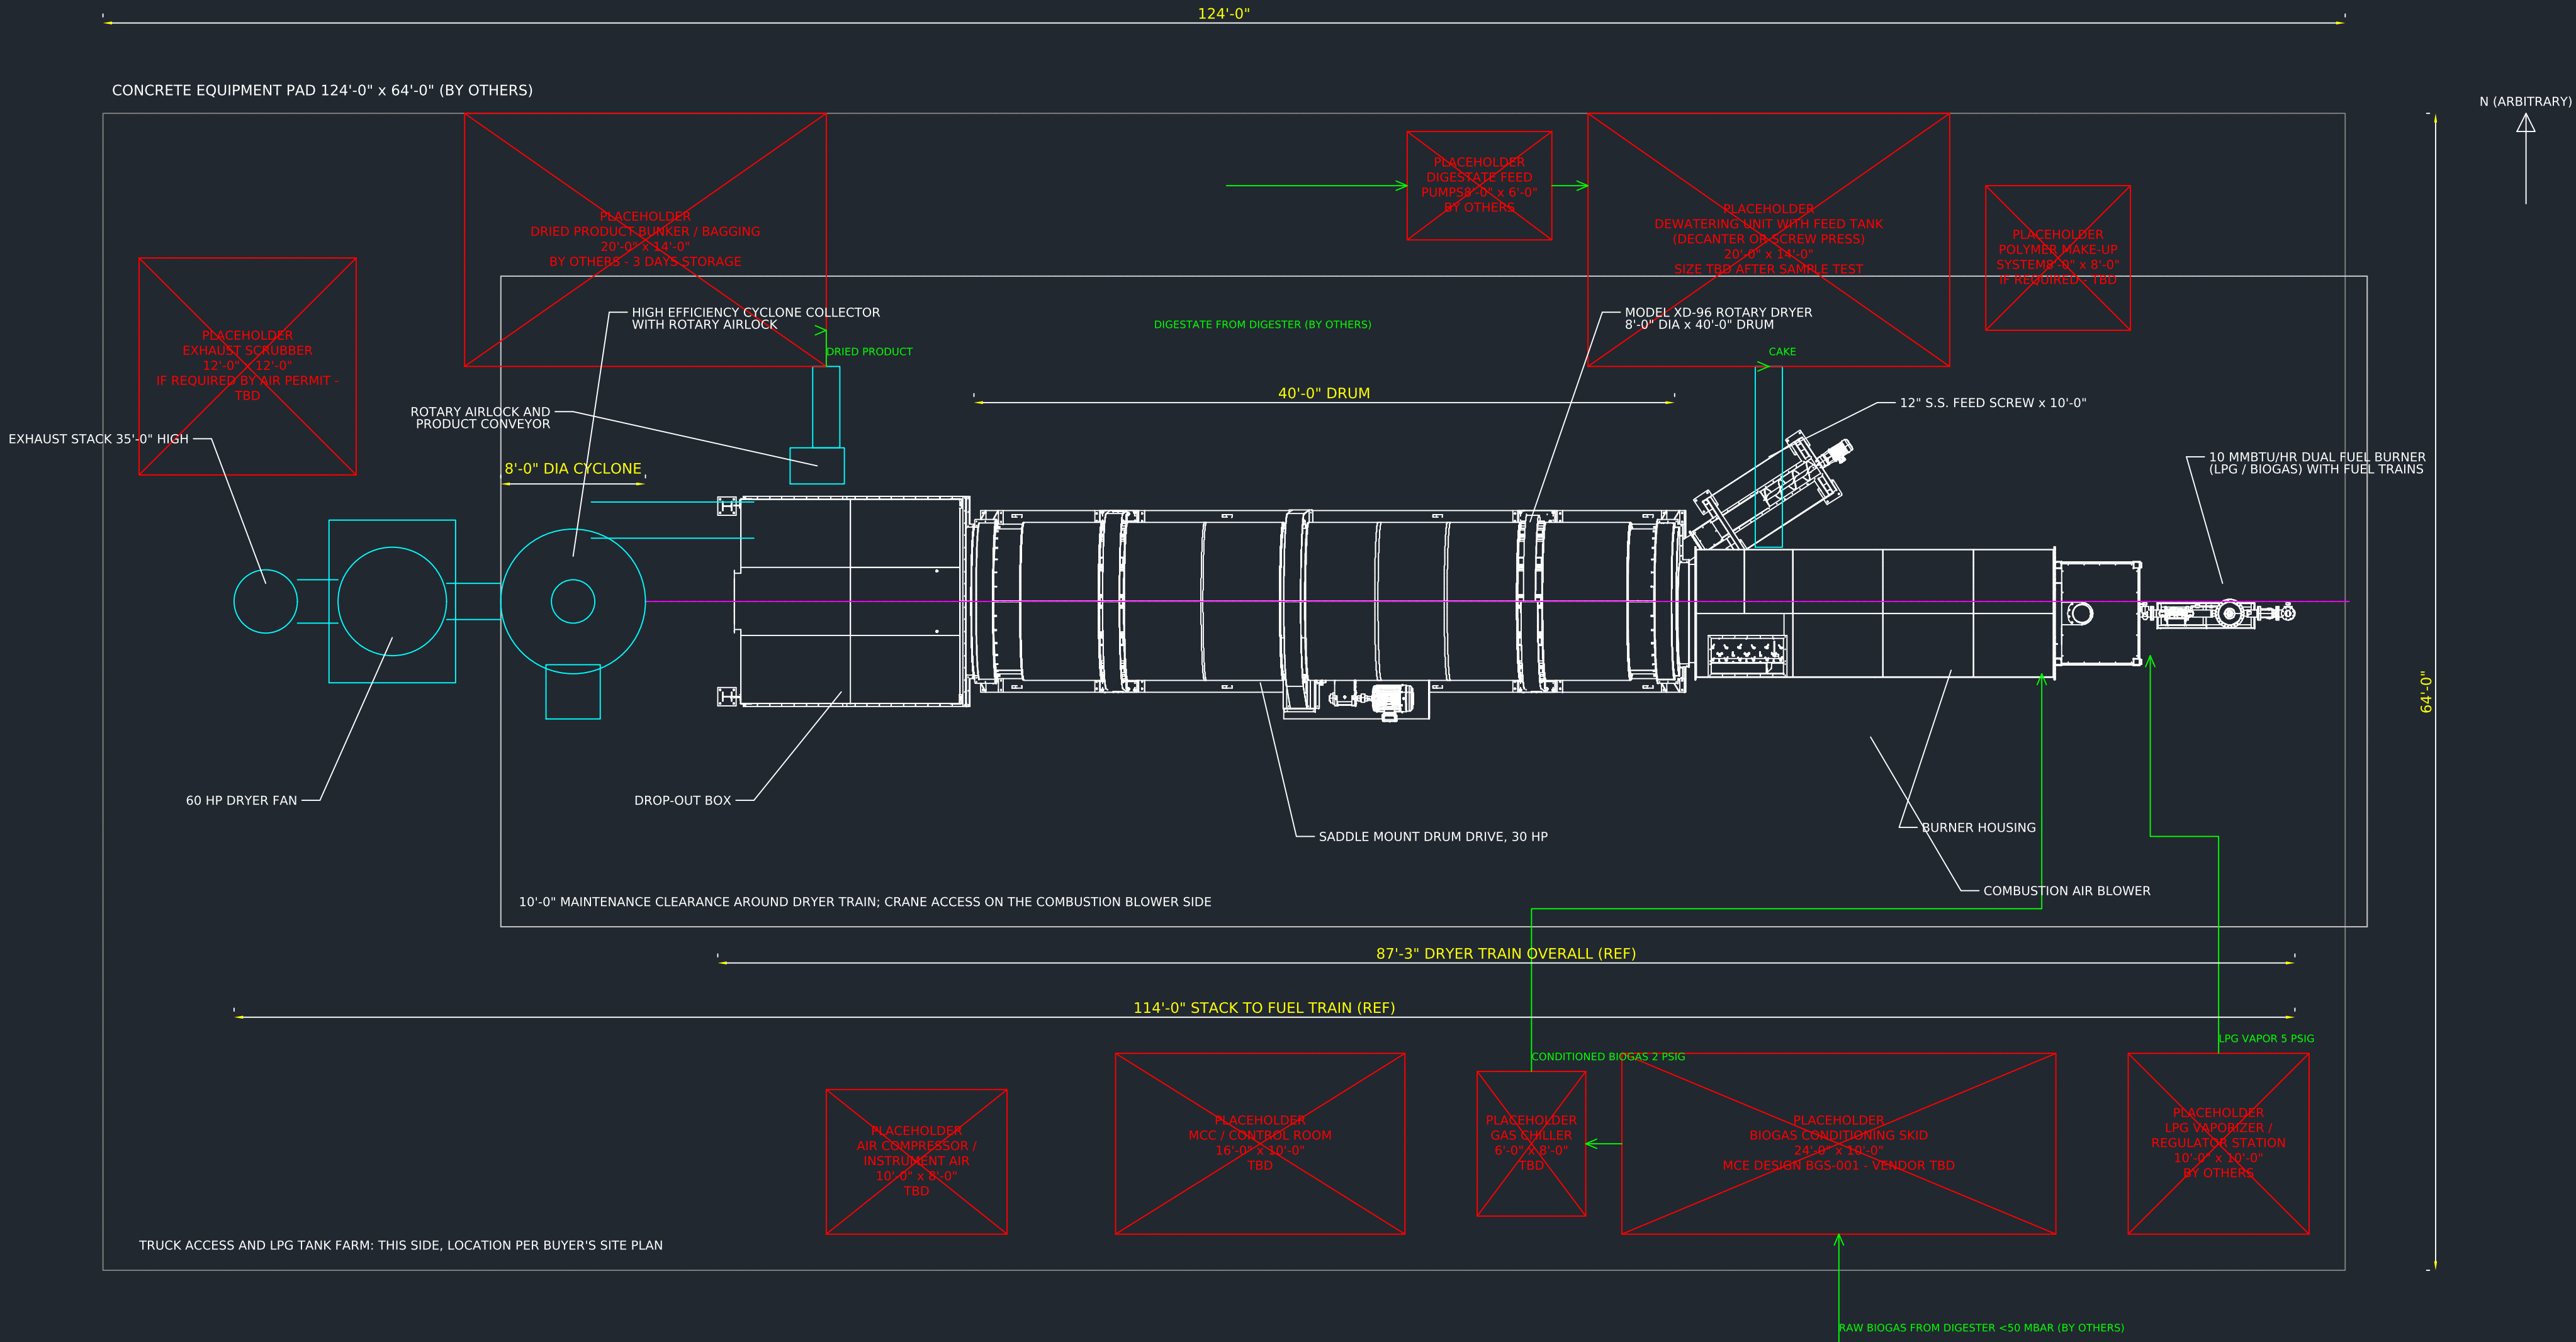


PLAN VIEW - PROPOSED LAYOUT

MODEL XD-96 DRYER SYSTEM - DIMENSIONS IN INCHES, MODEL 1:1

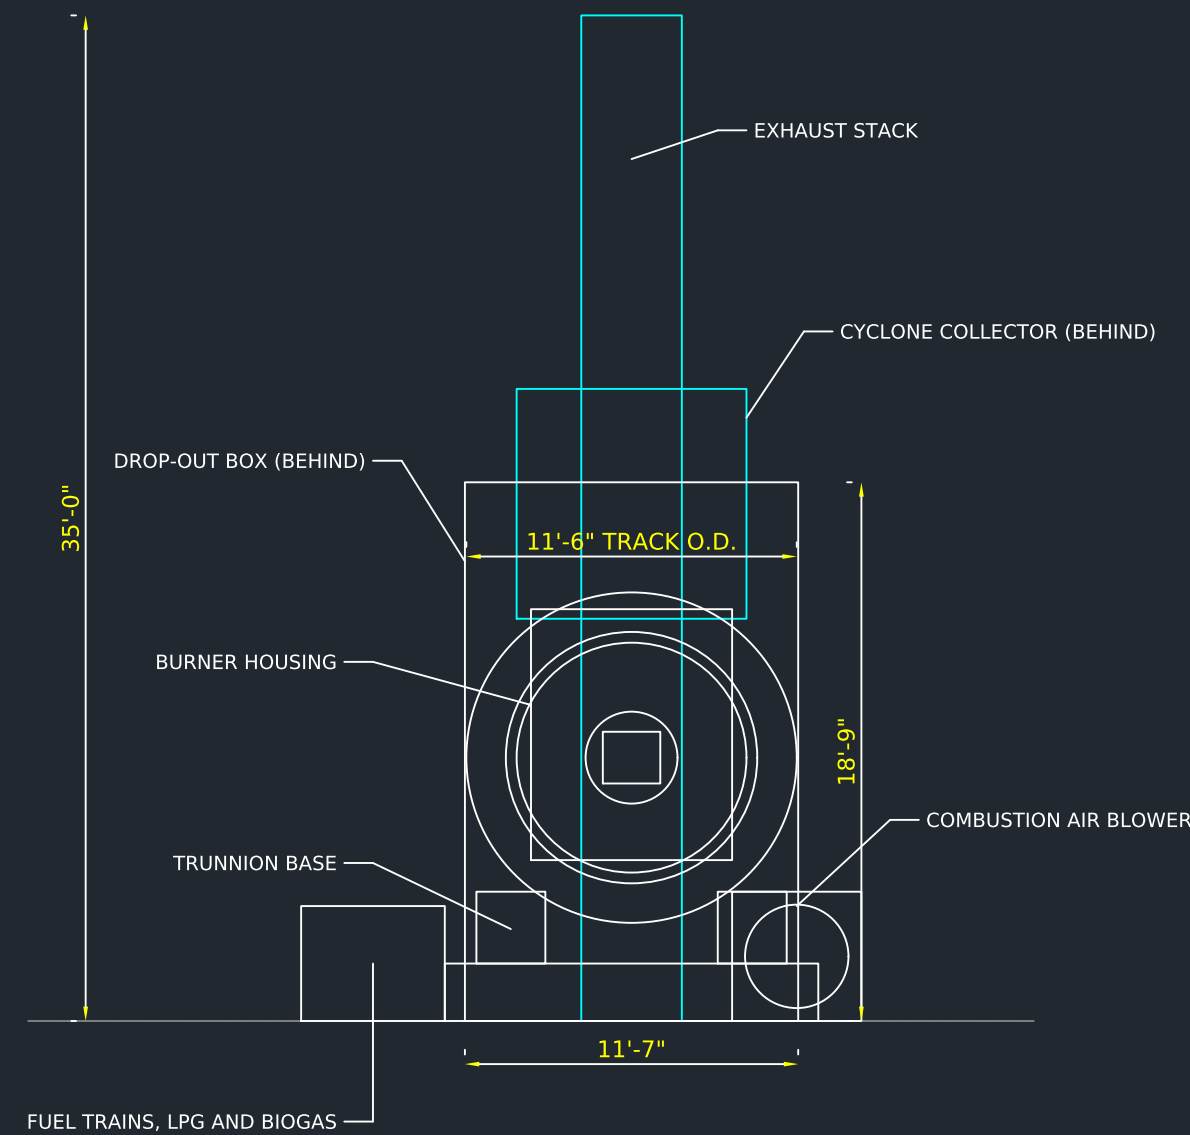

END VIEW

MODEL XD-96 DRYER SYSTEM - FROM THE BURNER END

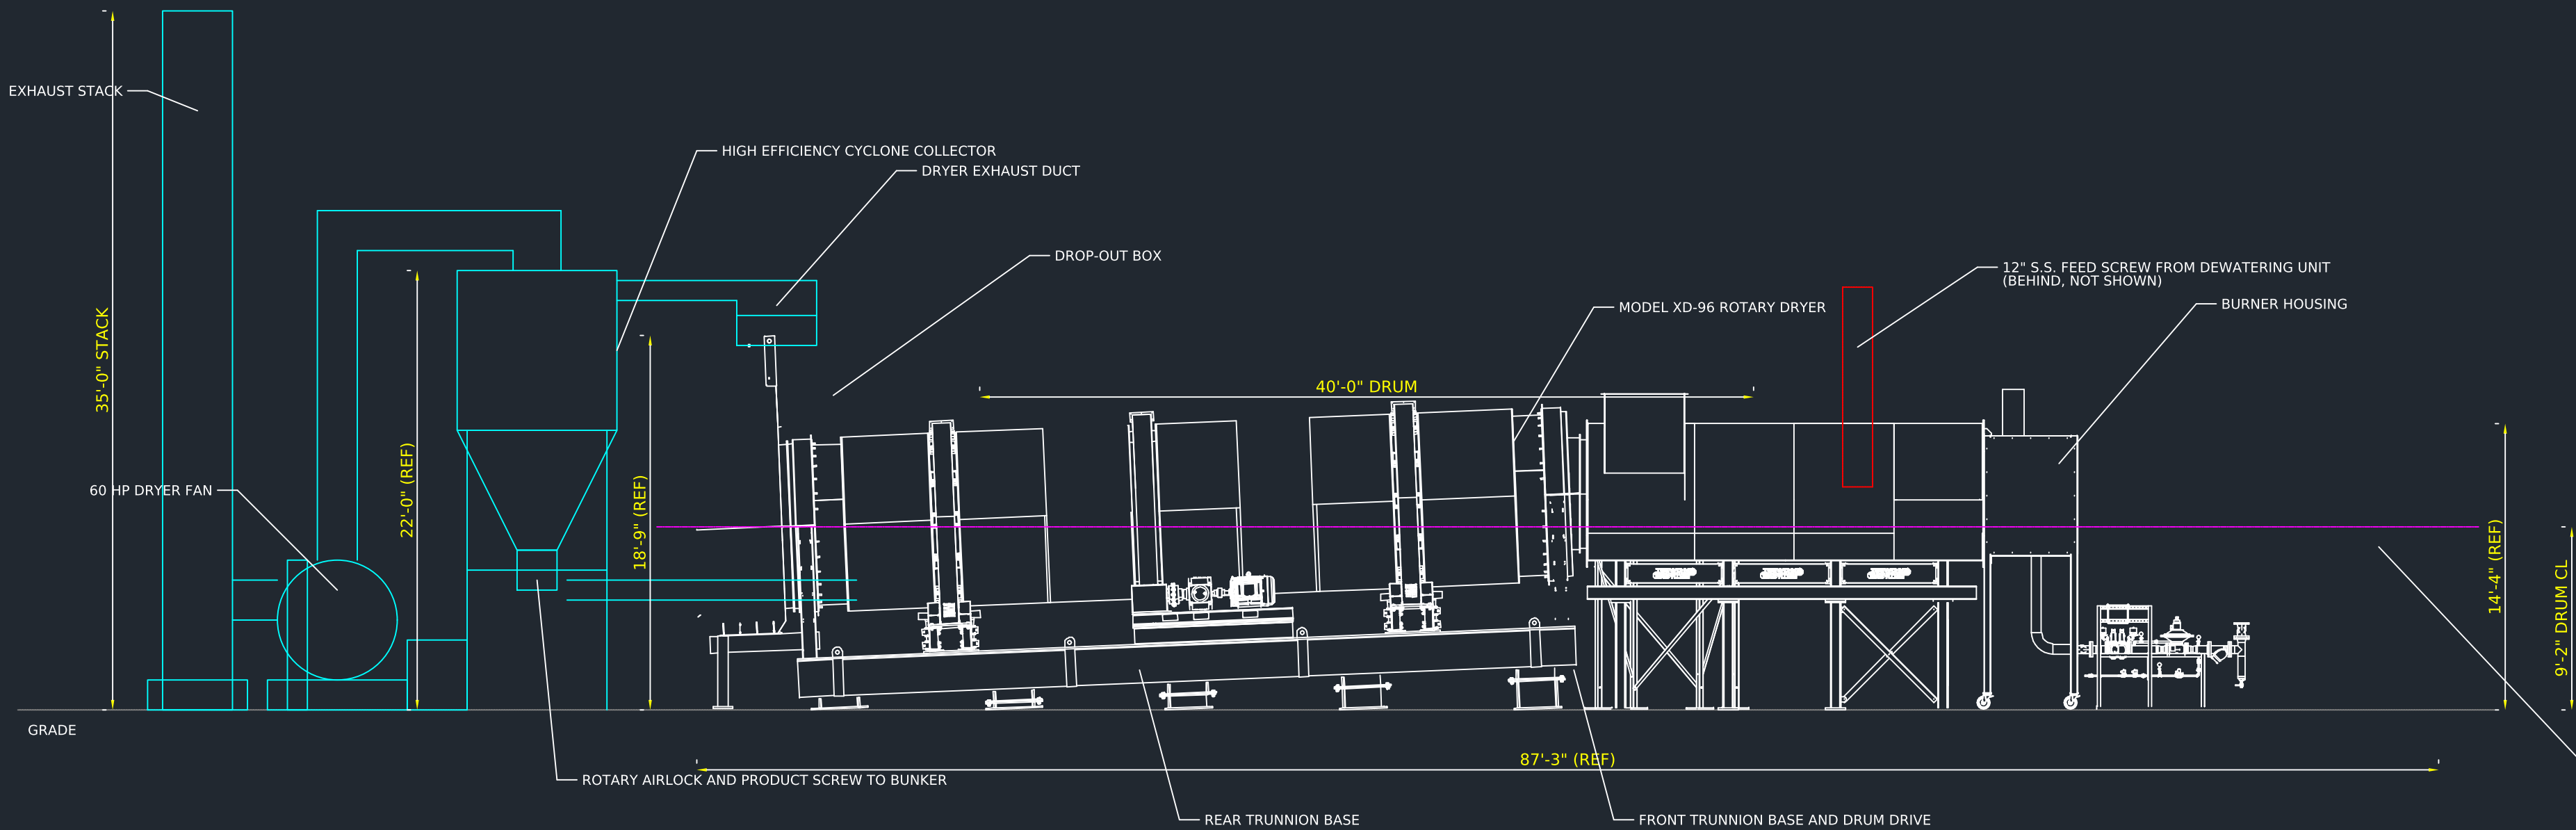

ELEVATION VIEW

MODEL XD-96 DRYER SYSTEM

MIDWEST CUSTOM ENGINEERING, INC. - STUART, FL - USEMCE.COM		
MCE PROPOSED PLANT LAYOUT - PLAN, ELEVATION AND END VIEW		
LETEK DCG / BACHOCO - MODEL XD-96 8'-0" x 40'-0" ROTARY DRYER SYSTEM MERIDA, YUCATAN - PRELIMINARY, FOR SITE PLANNING ONLY PROPRIETARY AND CONFIDENTIAL - PROPERTY OF MIDWEST CUSTOM ENGINEERING, INC. - COPYRIGHT 2026		
DRAWN: MCE DATE: 9/18/2026	UNITS: INCHES SCALE: 1:1 MODEL	DRAWING NO.
DUAL FUEL BURNER AND FUEL TRAINS		SD-26-02 REV P1

GENERAL NOTES

- PRELIMINARY ARRANGEMENT FOR SITE PLANNING. DRYER TRAIN LINE WORK (LAYER DRYER-TRAIN) IS FROM THE MCE 8x40 DRYER GENERAL ARRANGEMENT AND IS TO SCALE.
- ITEMS ON LAYER PLACEHOLDER ARE NOT YET DEFINED. THE DASHED, CROSSED RECTANGLES RESERVE SPACE AT THE SIZE SHOWN AND WILL BE REPLACED BY VENDOR BLOCKS WHEN SELECTED.
- CYCLONE, FAN, STACK, DUCTING, AIRLOCKS AND SCREWS (LAYER EQUIPMENT) ARE SIZED SCHEMATICALLY AND WILL BE DETAILED IN FINAL ENGINEERING.
- BASIS: 140 MT/DAY DIGESTATE AT 8% TS, DEWATERED TO 2-3.5% TS, DRIED TO 15% MOISTURE, 10 MMBTU/HR DUAL-FUEL BURNER, BIOGAS PRIMARY, LPG STAND-BY.
- WEIGHTS FOR FOUNDATION DESIGN: DRUM AND SKID 79,900 LB EMPTY + 19,300 LB MATERIAL RUNNING; BURNER ASSEMBLY 16,000 LB; DROP-OUT BOX 9,300 LB.
- UTILITIES: 480V/3/60 (OR 440V/60), +160 HP CONNECTED. BIOGAS +50 MBAR TO SKID, 2 PSIG TO BURNER; LPG VAPOR 5 PSIG (BY OTHERS); INSTRUMENT AIR 5 SCFM AT 90 PSIG.
- PAD 124'-0" x 64'-0", ROOF OVER DRYER TRAIN, DEWATERING AND SKID RECOMMENDED. LPG TANKS MIN. 50'-0" FROM THE DRYER. EQUIPMENT CAN BE ROTATED TO SUIT THE SITE.
- LAYERS: PAD, CLEARANCE, DRYER-TRAIN, EQUIPMENT, PLACEHOLDER, PLACEHOLDER-TEXT, FLOW, DIMENSIONS, TEXT, CENTERLINE, TITLE, NOTES.