


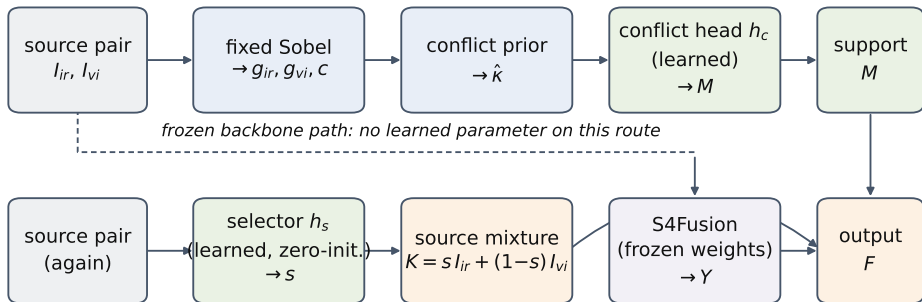

conflict prior  $\kappa = \min(g_{ir}, g_{vi}) \frac{1-C}{2}$ ,  $\hat{\kappa}$  = per-image max-normalised  $\kappa$

selector  $s = \sigma(h_s[I_{ir}, I_{vi}, g_{ir}, g_{vi}] + 2p)$ ,  $p = \pm 1$  names the larger local gradient

combination  $w = \tanh(\alpha) M$ ,  $F = Y + w \odot (K - Y)$ ;  $\alpha$  and the selector head are zero-initialised

At load  $\alpha = 0 \Rightarrow w \equiv 0 \Rightarrow F \equiv Y$ : the official checkpoint is reproduced exactly.