

[End Lab](#)

01:02:05

Score
10/10[Open Google Console](#)

Caution: When you are in the console, do not deviate from the lab instructions. Doing so may cause your account to be blocked. [Learn more](#).

Username

student-03-77e5497587d3@qwiklabs



Password

BV6ywHxD7T8



GCP Project ID

qwiklabs-gcp-03-0c1087426133



Implementing Cloud SQL


1 hour 30 minutes Free Rate Lab

Overview

In this lab, you configure a Cloud SQL server and learn how to connect an application to it via a proxy over an external connection. You also configure a connection over a Private IP link that offers performance and security benefits. The app we chose to demonstrate in this lab is Wordpress, but the information and best practices are applicable to any application that needs SQL Server.

By the end of this lab, you will have 2 working instances of the Wordpress frontend connected over 2 different connection types to their SQL instance backend, as shown in this diagram:

Project

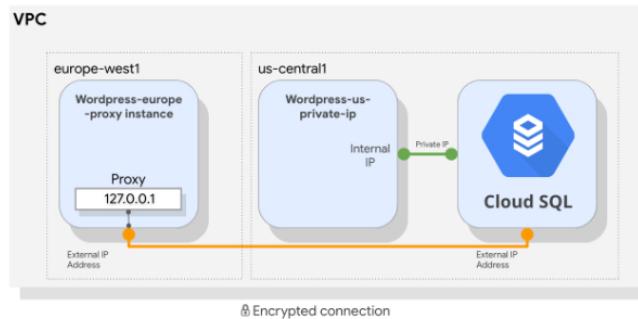

Objectives

In this lab, you learn how to perform the following tasks:

- Create a Cloud SQL database
- Configure a virtual machine to run a proxy
- Create a connection between an application and Cloud SQL
- Connect an application to Cloud SQL using Private IP address

Before you click the Start Lab button

Read these instructions. Labs are timed and you cannot pause them. The timer, which starts when you click Start Lab, shows how long Cloud resources will be made available to you.

This Qwiklabs hands-on lab lets you do the lab activities yourself in a real cloud environment, not in a simulation or demo environment. It does so by giving you new, temporary credentials that you use to sign in and access the Google Cloud Platform for the duration of the lab.

What you need

To complete this lab, you need:

- Access to a standard internet browser (Chrome browser recommended).
- Time to complete the lab.

Note: If you already have your own personal GCP account or project, do not use it for this lab.

Task 1: Create a Cloud SQL database

In this task, you configure a SQL server according to Google Cloud best practices and create a Private IP connection.

1. On the **Navigation menu** (≡), click **SQL**.
2. Click **Create instance**.
3. Click **Choose MySQL**.
4. Specify the following, and leave the remaining settings as their defaults:

Property	Value
Instance ID	wordpress-db
Root password	type a password
Region	us-central1
Zone	Any
Database Version	MySQL 5.7

Note the root password; it will be used in a later step and referred to as [ROOT_PASSWORD].

5. Expand **Show configuration options**.
6. Expand the **Connectivity** section.
7. Select **Private IP**.
8. In the dialog box, click **Enable API**, click **Allocate and connect**, and then click **Close**. This enables [Private Services Access](#) and attaches a Private IP address to your Cloud SQL server.
9. Expand the **Machine type and storage** section.
10. Provision the right amount of vCPU and memory. To choose a **Machine Type**, click **Change**, and then explore your options.

A few points to consider:

- Shared-core machines are good for prototyping, and are not covered by [Cloud SLA](#).
- Each vCPU is subject to a 250 MB/s network throughput cap for peak performance. Each additional core increases the network cap, up to a theoretical maximum of 2000 MB/s.

DISCUSSION (MAXIMUM OF 2000 WORDS)

- For performance-sensitive workloads such as online transaction processing (OLTP), a general guideline is to ensure that your instance has enough memory to contain the entire working set and accommodate the number of active connections.

11. For this lab, select **db-n1-standard-1**, and then click **Select**.

12. Next, choose **Storage type** and **Storage capacity**.

A few points to consider:

- SSD (solid-state drive) is the best choice for most use cases. HDD (hard-disk drive) offers lower performance, but storage costs are significantly reduced, so HDD may be preferable for storing data that is infrequently accessed and does not require very low latency.
- There is a direct relationship between the storage capacity and its throughput.

13. Add a few zeros to the storage capacity to see how it affects the throughput. Reset the slider to 10GB.

Setting your storage capacity too low without enabling an automatic storage increase can cause your instance to lose its SLA.

14. Click **Close**.

15. Click **Create** at the bottom of the page to create the database instance.

You might have to wait for the Private IP changes to propagate before the **Create** button becomes clickable.

Click *Check my progress* to verify the objective.

Create a Cloud SQL instance

Check my progress

It doesn't look like you've completed this step yet. Try again.

Task 2: Configure a proxy on a virtual machine

When your application does not reside in the same VPC connected network and region as your Cloud SQL instance, use a proxy to secure its external connection.

In order to configure the proxy, you need the Cloud SQL instance connection name.

The lab comes with 2 virtual machines preconfigured with Wordpress and its dependencies. You can view the startup script and service account access by clicking on a virtual machine name. Notice that we used the principle of least privilege and only allow SQL access for that VM. There's also a network tag and a firewall preconfigured to allow port 80 from any host.

1. On the **Navigation menu** (≡) click **Compute Engine**.

2. Click **SSH** next to **wordpress-europe-proxy**.

3. Download the Cloud SQL Proxy and make it executable:

```
wget https://dl.google.com/cloudsql/cloud_sql_proxy.linux.amd64 -o  
cloud_sql_proxy && chmod +x cloud_sql_proxy
```

In order to start the proxy, you need the connection name of the Cloud SQL instance. Keep your SSH window open and return to the Cloud Console.

4. On the **Navigation menu** (≡), click **SQL**.
5. Click on the **wordpress-db** instance and wait for a green checkmark next to its name, which indicates that it is operational (this could take a couple of minutes).
6. Note the **Instance connection name**; it will be used later and referred to as [SQL_CONNECTION_NAME].
7. In addition, for the application to work, you need to create a table. Click **Databases**.
8. Click **Create database**, type **wordpress**, which is the name the application expects, and then click **Create**.
9. Return to the SSH window and save the connection name in an environment variable, replacing [SQL_CONNECTION_NAME] with the unique name you copied in a previous step.

```
export SQL_CONNECTION=[SQL_CONNECTION_NAME]
```

10. To verify that the environment variable is set, run:

```
echo $SQL_CONNECTION
```

The connection name should be printed out.

11. To activate the proxy connection to your Cloud SQL database and send the process to the background, run the following command:

```
./cloud_sql_proxy -instances=$SQL_CONNECTION=tcp:3306 &
```

The expected output is

```
Listening on 127.0.0.1:3306 for [SQL_CONNECTION_NAME]
Ready for new connections
```

12. Press ENTER.

The proxy will listen on 127.0.0.1:3306 (localhost) and proxy that connects securely to your Cloud SQL over a secure tunnel using the machine's external IP address.

Click *Check my progress* to verify the objective.



Create a database and configure a proxy on a Virtual Machine

[Check my progress](#)

Task 3: Connect an application to the Cloud SQL instance

In this task, you will connect a sample application to the Cloud SQL instance.

1. Configure the Wordpress application. To find the external IP address of your virtual machine, query its metadata:

```
curl -H "Metadata-Flavor: Google"
http://169.254.169.254/computeMetadata/v1/instance/network-
interfaces/0/access-configs/0/external-ip && echo
```


2. Go to the **wordpress-europe-proxy** external IP address in your browser and configure the Wordpress application.

3. Click **Let's Go**.

4. Specify the following, replacing [ROOT_PASSWORD] with the password you configured upon machine creation, and leave the remaining settings as their defaults:

Property	Value
Username	root
Password	[ROOT_PASSWORD]
Database Host	127.0.0.1

You are using 127.0.0.1, localhost as the Database IP because the proxy you initiated listens on this address and redirects that traffic to your SQL server securely.

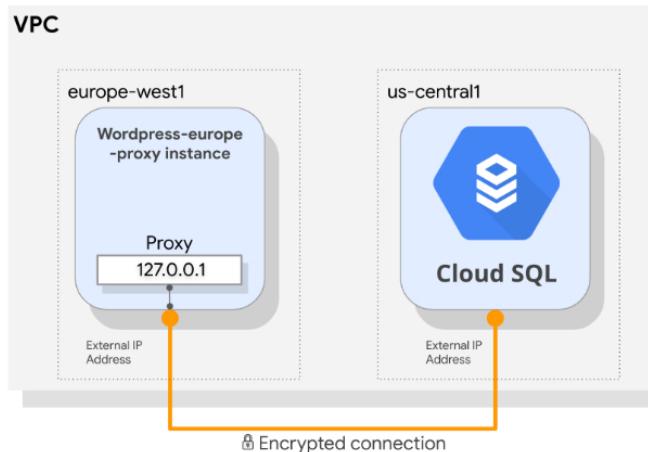

5. Click **Submit**.

6. When a connection has been made, click **Run the installation** to instantiate Wordpress and its database in your Cloud SQL. This might take a few moments to complete.

7. Populate your demo site's information with random information and click **Install Wordpress**. You won't have to remember or use these details.

Installing Wordpress might take up to 3 minutes, because it propagates all its data to your SQL Server.

7. When a 'Success!' window appears, remove the text after the IP address in your web browser's address bar and press ENTER. You'll be presented with a working Wordpress Blog!

Google Cloud Training — Just another WordPress site

Hello world!

Welcome to WordPress. This is your first post. Edit or delete it, then start writing!

Task 4: Connect to Cloud SQL via internal IP

If you can host your application in the same region and VPC connected network as your Cloud SQL, you can leverage a more secure and performant configuration using Private IP.

By using Private IP, you will increase performance by reducing latency and minimize the attack surface of your Cloud SQL instance because you can communicate with it exclusively over internal IPs.


1. In the Cloud Console, on the **Navigation menu** (≡), click **SQL**.
2. Click **wordpress-db**.
3. Note the Private IP address of the Cloud SQL server; it will be referred to as [SQL_PRIVATE_IP].
4. On the **Navigation menu**, click **Compute Engine**.


Notice that **wordpress-us-private-ip** is located at us-central1, where your Cloud SQL is located, which enables you to leverage a more secure connection.

5. Copy the external IP address of **wordpress-us-private-ip**, paste it in a browser window, and press ENTER.
6. Click **Let's Go**.
7. Specify the following, and leave the remaining settings as their defaults:

Property	Value
Username	root
Password	type the [ROOT_PASSWORD] configured when the Cloud SQL instance was created
Database Host	[SQL_PRIVATE_IP]

8. Click **Submit**.
- Notice that this time you are creating a direct connection to a Private IP, instead of configuring a proxy. That connection is private, which means that it doesn't egress to the internet and therefore benefits from better performance and security.
9. Click **Run the installation**. An 'Already Installed!' window is displayed, which means that your application is connected to the Cloud SQL server over private IP.
10. In your web browser's address bar, remove the text after the IP address and press ENTER. You'll be presented with a working Wordpress Blog!

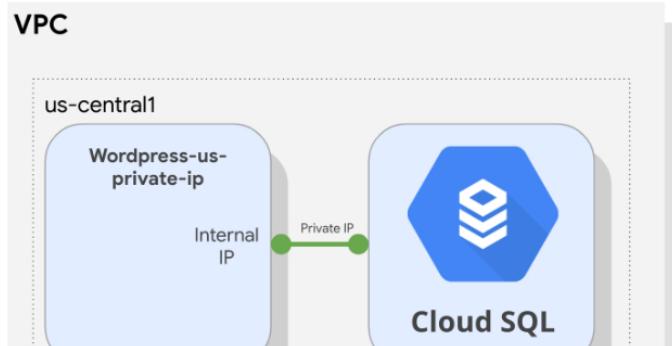


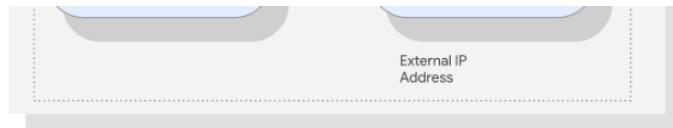

Task 5: Review

In this lab, you created a Cloud SQL database and configured it to use both an external connection over a secure proxy and a Private IP address, which is more secure and performant. Remember that you can only connect via Private IP if the application and the Cloud SQL server are collocated in the same region and are part of the same VPC network. If your application is hosted in another region, VPC, or even project, use a proxy to secure its connection over the external connection.

Project

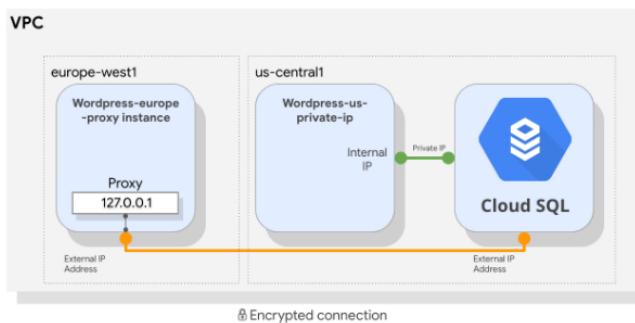

End your lab

When you have completed your lab, click **End Lab**. Qwiklabs removes the resources you've used and cleans the account for you.

You will be given an opportunity to rate the lab experience. Select the applicable number of stars, type a comment, and then click **Submit**.

The number of stars indicates the following:

- 1 star = Very dissatisfied
- 2 stars = Dissatisfied
- 3 stars = Neutral
- 4 stars = Satisfied
- 5 stars = Very satisfied

You can close the dialog box if you don't want to provide feedback.

For feedback, suggestions, or corrections, please use the **Support** tab.

Copyright 2019 Google LLC All rights reserved. Google and the Google logo are trademarks of Google LLC. All other company and product names may be trademarks of the respective companies with which they are associated.