

[End Lab](#)

00:59:11

Score
35/35[Open Google Console](#)

Caution: When you are in the console, do not deviate from the lab instructions. Doing so may cause your account to be blocked. [Learn more](#).

Username

student-04-be49985f8931@qwiklabs



Password

9wdQ5Gn4GD5



GCP Project ID 1

qwiklabs-gcp-04-801d51cf4d28



GCP Project ID 2

qwiklabs-gcp-04-cfce4c4acd7f



Cloud Storage

1 hour 30 minutes Free ★★★★☆ Rate Lab

Overview

[Objectives](#)

Cloud Storage is a fundamental resource in Google Cloud, with many advanced features. In this lab, you exercise many Cloud Storage features that could be useful in your designs. You explore Cloud Storage using both the console and the gsutil tool.

Objectives

In this lab, you learn how to perform the following tasks:

- Create and use buckets
- Set access control lists to restrict access
- Use your own encryption keys
- Implement version controls
- Use directory synchronization
- Share a bucket across projects using IAM

Before you click the Start Lab button

Read these instructions. Labs are timed and you cannot pause them. The timer, which starts when you click Start Lab, shows how long Cloud resources will be made available to you.

This Qwiklabs hands-on lab lets you do the lab activities yourself in a real cloud environment, not in a simulation or demo environment. It does so by giving you new, temporary credentials that you use to sign in and access the Google Cloud Platform for the duration of the lab.

What you need

To complete this lab, you need:

- Access to a standard internet browser (Chrome browser recommended).
- Time to complete the lab.

Note: If you already have your own personal GCP account or project, do not use it for this lab.

Task 1: Preparation

Create a Cloud Storage bucket

1. On the **Navigation menu** (), click **Storage > Browser**.

A bucket must have a globally unique name. You could use part of your PROJECT_ID_1 in the name to help make it unique. For example, if the PROJECT_ID_1 is "myproj-154920," your bucket name might be "storecore154920."

2. Click **Create bucket**.


3. Specify the following, and leave the remaining settings as their defaults:

Property	Value (type value or select option as specified)
Name	Enter a globally unique name
Location type	Multi-region
Access control	Fine-grained (<i>object-level permission in addition to your bucket-level permissions</i>)

4. Make a note of the bucket name. It will be used later in this lab and referred to as [BUCKET_NAME_1].

5. Click **Create**.

Click *Check my progress* to verify the objective.

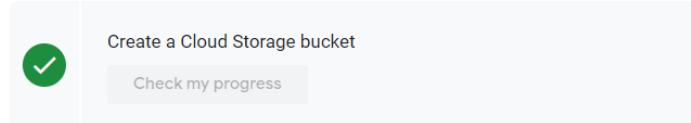

Download a sample file using CURL and make two copies

1. In the Cloud Console, click **Activate Cloud Shell** ().

2. If prompted, click **Continue**.

3. Store [BUCKET_NAME_1] in an environment variable:

```
export BUCKET_NAME_1=<enter bucket name 1 here>
```

4. Verify it with echo:

```
echo $BUCKET_NAME_1
```

5. Run the following command to download a sample file (this sample file is a publicly available Hadoop documentation HTML file):

```
curl \
http://hadoop.apache.org/docs/current/\
hadoop-project-dist/hadoop-common/\
ClusterSetup.html > setup.html
```

6. To make copies of the file, run the following commands:

```
cp setup.html setup2.html
cp setup.html setup3.html
```

Task 2: Access Control Lists (ACLs)

Copy the file to the bucket and configure the access control list

- Run the following command to copy the first file to the bucket:

```
gsutil cp setup.html gs://$BUCKET_NAME_1/
```

- To get the default access list that's been assigned to setup.html, run the following command:

```
gsutil acl get gs://$BUCKET_NAME_1/setup.html > acl.txt  
cat acl.txt
```

- To set the access list to private and verify the results, run the following commands:

```
gsutil acl set private gs://$BUCKET_NAME_1/setup.html  
gsutil acl get gs://$BUCKET_NAME_1/setup.html > acl2.txt  
cat acl2.txt
```

- To update the access list to make the file publicly readable, run the following commands:

```
gsutil acl ch -u AllUsers:R gs://$BUCKET_NAME_1/setup.html  
gsutil acl get gs://$BUCKET_NAME_1/setup.html > acl3.txt  
cat acl3.txt
```

Click *Check my progress* to verify the objective.



Examine the file in the Cloud Console

- In the Cloud Console, on the **Navigation menu** (≡), click **Storage > Browser**.

- Click [BUCKET_NAME_1].

- Verify that for file setup.html, **Public access** has a **Public link** available.

Delete the local file and copy back from Cloud Storage

- Return to **Cloud Shell**. If necessary, click **Activate Cloud Shell** (≡).

- Run the following command to delete the setup file:

```
rm setup.html
```

- To verify that the file has been deleted, run the following command:

```
ls
```

- To copy the file from the bucket again, run the following command:

```
gsutil cp gs://$BUCKET_NAME_1/setup.html setup.html
```

Task 3: Customer-supplied encryption keys (CSEK)

Generate a CSEK key

For the next step, you need an AES-256 base-64 key.

1. Run the following command to create a key:

```
python3 -c 'import base64; import os;
print(base64.encodebytes(os.urandom(32)))'
```

Result (do not copy; this is example output):

```
b'tmxElCaabWvJqR7uXEWQF39DhWTcDvChzuCmpHe6sb0=\n'
```

2. Copy the value of the generated key excluding `b'` and `\n'` from the command output. Key should be in form of

`tmxElCaabWvJqR7uXEWQF39DhWTcDvChzuCmpHe6sb0=`.

Modify the boto file

The encryption controls are contained in a gsutil configuration file named `.boto`.

1. To view and open the boto file, run the following commands:

```
ls -al
nano .boto
```

If the `.boto` file is empty, close the nano editor with **Ctrl+X** and generate a new `.boto` file using the `gsutil config -n` command. Then, try opening the file again with the above commands.

If the `.boto` file is still empty, you might have to locate it using the `gsutil version -l` command.

2. Locate the line with `#encryption_key=`

The bottom of the nano editor provides you with shortcuts to quickly navigate files. Use the **Where Is** shortcut to quickly locate the line with the `#encryption_key=`.

3. Uncomment the line by removing the `#` character, and paste the key you generated earlier at the end.

Example (do not copy; this is an example):

```
Before:
# encryption_key=

After:
encryption_key=tmxElCaabWvJqR7uXEWQF39DhWTcDvChzuCmpHe6sb0=
```

4. Press **Ctrl+O**, **ENTER** to save the boto file, and then press **Ctrl+X** to exit nano.


Upload the remaining setup files (encrypted) and verify in the Cloud Console

1. To upload the remaining setup.html files, run the following commands:

```
gsutil cp setup2.html gs://$BUCKET_NAME_1/
gsutil cp setup3.html gs://$BUCKET_NAME_1/
```

2. Return to the Cloud Console.
3. Click [BUCKET_NAME_1]. Both setup2.html and setup3.html files show that they are customer-encrypted.

Click *Check my progress* to verify the objective.

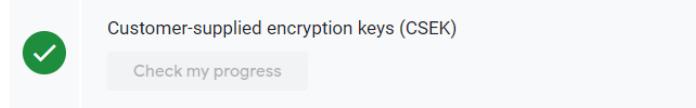

Delete local files, copy new files, and verify encryption

1. To delete your local files, run the following command in Cloud Shell:

```
rm setup*
```

2. To copy the files from the bucket again, run the following command:

```
gsutil cp gs://$BUCKET_NAME_1/setup* ./
```

3. To cat the encrypted files to see whether they made it back, run the following commands:

```
cat setup.html  
cat setup2.html  
cat setup3.html
```

Task 4: Rotate CSEK keys

Move the current CSEK encrypt key to decrypt key

1. Run the following command to open the `.boto` file:

```
nano .boto
```

2. Comment out the current `encryption_key` line by adding the `#` character to the beginning of the line.

The bottom of the nano editor provides you with shortcuts to quickly navigate files. Use the **Where Is** shortcut to quickly locate the line with the `#encryption_key=`.

3. Uncomment `decryption_key1` by removing the `#` character, and copy the current key from the `encryption_key` line to the `decryption_key1` line.

Result (**do not copy; this is example output**):

```
Before:  
encryption_key=2dFWQGnKhj0cz4h0CudPdVHLG2g+OoxP8FQ0IKKTzsg=  
  
# decryption_key1=  
  
After:  
# encryption_key=2dFWQGnKhj0cz4h0CudPdVHLG2g+OoxP8FQ0IKKTzsg=  
  
decryption_key1=2dFWQGnKhj0cz4h0CudPdVHLG2g+OoxP8FQ0IKKTzsg=
```

4. Press **Ctrl+O, ENTER** to save the `boto` file, and then press **Ctrl+X** to exit nano.

Note: In practice, you would delete the old CSEK key from the `encryption_key` line.

Generate another CSEK key and add to the boto file

- Run the following command to generate a new key:

```
python3 -c 'import base64; import os;
print(base64.encodebytes(os.urandom(32)))'
```

- Copy the value of the generated key excluding `b'` and `\n'` from the command output. Key should be in form of

```
tmxElCaabWvJqR7uXEWQF39DhWTcDvChzuCmpHe6sb0=.
```

- To open the boto file, run the following command:

```
nano .boto
```

- Add a new line with `encryption_key=` and paste the new key value.

Result (**do not copy; this is example output**):

```
Before:
# encryption_key=2dFWQGnKhj0cz4h0CudPdVHLG2g+OoxP8FQ0IKKTzsg=

After:
encryption_key=HbFK4I8CaStcvKKIx6aNpdTse0kTsfnNUjFpM+YUEjY=
```

- Press **Ctrl+O, ENTER** to save the boto file, and then press **Ctrl+X** to exit nano.

Rewrite the key for file 1 and comment out the old decrypt key

When a file is encrypted, rewriting the file decrypts it using the decryption_key1 that you previously set, and encrypts the file with the new encryption_key.

You are rewriting the key for setup2.html, but not for setup3.html, so that you can see what happens if you don't rotate the keys properly.

- Run the following command:

```
gsutil rewrite -k gs://$BUCKET_NAME_1/setup2.html
```

- To open the boto file, run the following command:

```
nano .boto
```

- Comment out the current decryption_key1 line by adding the # character back in.

Result (**do not copy; this is example output**):

```
Before:
decryption_key1=2dFWQGnKhj0cz4h0CudPdVHLG2g+OoxP8FQ0IKKTzsg=

After:
# decryption_key1=2dFWQGnKhj0cz4h0CudPdVHLG2g+OoxP8FQ0IKKTzsg=
```

- Press **Ctrl+O, ENTER** to save the boto file, and then press **Ctrl+X** to exit nano.

Note: In practice, you would delete the old CSEK key from the decryption_key1 line.

Download setup 2 and setup3

- To download setup2.html, run the following command:

```
gsutil cp gs://$BUCKET_NAME_1/setup2.html recover2.html
```

2. To download setup3.html, run the following command:

```
gsutil cp gs://$BUCKET_NAME_1/setup3.html recover3.html
```

What happened? setup3.html was not rewritten with the new key, so it can no longer be decrypted, and the copy will fail.

You have successfully rotated the CSEK keys.

Task 5: Enable lifecycle management

View the current lifecycle policy for the bucket

1. Run the following command to view the current lifecycle policy:

```
gsutil lifecycle get gs://$BUCKET_NAME_1
```

There is no lifecycle configuration. You create one in the next steps.

Create a JSON lifecycle policy file

1. To create a file named *life.json*, run the following command:

```
nano life.json
```

2. Paste the following value into the *life.json* file:

```
{
  "rule": [
    {
      "action": {"type": "Delete"},
      "condition": {"age": 31}
    }
  ]
}
```

These instructions tell Cloud Storage to delete the object after 31 days.

3. Press **Ctrl+O, ENTER** to save the file, and then press **Ctrl+X** to exit nano.

Set the policy and verify

1. To set the policy, run the following command:

```
gsutil lifecycle set life.json gs://$BUCKET_NAME_1
```

2. To verify the policy, run the following command:

```
gsutil lifecycle get gs://$BUCKET_NAME_1
```

Click *Check my progress* to verify the objective.



Enable lifecycle management

[Check my progress](#)

Task 6: Enable versioning

View the versioning status for the bucket and enable versioning

1. Run the following command to view the current versioning status for the bucket:

```
gsutil versioning get gs://$BUCKET_NAME_1
```

The Suspended policy means that it is not enabled.


2. To enable versioning, run the following command:

```
gsutil versioning set on gs://$BUCKET_NAME_1
```

3. To verify that versioning was enabled, run the following command:

```
gsutil versioning get gs://$BUCKET_NAME_1
```

Click *Check my progress* to verify the objective.

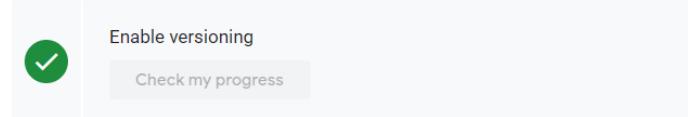

Create several versions of the sample file in the bucket

1. Check the size of the sample file:

```
ls -al setup.html
```

2. Open the setup.html file:

```
nano setup.html
```

3. Delete any 5 lines from setup.html to change the size of the file.

4. Press **Ctrl+O, ENTER** to save the file, and then press **Ctrl+X** to exit nano.

5. Copy the file to the bucket with the -v versioning option:

```
gsutil cp -v setup.html gs://$BUCKET_NAME_1
```

6. Open the setup.html file:

```
nano setup.html
```

7. Delete another 5 lines from setup.html to change the size of the file.

8. Press **Ctrl+O, ENTER** to save the file, and then press **Ctrl+X** to exit nano.

9. Copy the file to the bucket with the -v versioning option:

```
gsutil cp -v setup.html gs://$BUCKET_NAME_1
```

List all versions of the file

1. To list all versions of the file, run the following command:

```
gsutil ls -a gs://$BUCKET_NAME_1/setup.html
```

2. Highlight and copy the name of the oldest version of the file (the first listed), referred to as [VERSION_NAME] in the next step.

Make sure to copy the full path of the file, starting with **gs://**

3. Store the version value in the environment variable [VERSION_NAME].

```
export VERSION_NAME=<Enter VERSION name here>
```

4. Verify it with echo:

```
echo $VERSION_NAME
```

Result (**do not copy; this is example output**):

```
gs://BUCKET_NAME_1/setup.html#1584457872853517
```

Download the oldest, original version of the file and verify recovery

1. Download the original version of the file:

```
gsutil cp $VERSION_NAME recovered.txt
```

2. To verify recovery, run the following commands:

```
ls -al setup.html  
ls -al recovered.txt
```

You have recovered the original file from the backup version. Notice that the original is bigger than the current version because you deleted lines.

Task 7: Synchronize a directory to a bucket

Make a nested directory and sync with a bucket

Make a nested directory structure so that you can examine what happens when it is recursively copied to a bucket.

1. Run the following commands:

```
mkdir firstlevel  
mkdir ./firstlevel/secondlevel  
cp setup.html firstlevel  
cp setup.html firstlevel/secondlevel
```

2. To sync the firstlevel directory on the VM with your bucket, run the following command:

```
gsutil rsync -r ./firstlevel gs://$BUCKET_NAME_1/firstlevel
```

Examine the results

1. In the Cloud Console, on the **Navigation menu** (≡), click **Storage > Browser**.

2. Click [BUCKET_NAME_1]. Notice the subfolders in the bucket.

3. Click on **/firstlevel** and then on **/secondlevel**.

4. Compare what you see in the Cloud Console with the results of the following command:

```
gsutil ls -r gs://$BUCKET_NAME_1/firstlevel
```

5. Exit Cloud Shell:

```
exit
```

Task 8: Cross-project sharing

Switch to the second project

1. Open a new incognito tab.

2. Navigate to console.cloud.google.com.

3. Click the project selector dropdown in the title bar.

4. Click **All**, and then click the second project provided for you in the Qwiklabs Connection Details dialog. Remember that the Project ID is a unique name across all Google Cloud projects. The second project ID will be referred to as [PROJECT_ID_2].

Prepare the bucket

1. In the Cloud Console, on the **Navigation menu** (≡), click **Storage > Browser**.

2. Click **Create bucket**.

3. Specify the following, and leave the remaining settings as their defaults:

Property	Value (type value or select option as specified)
Name	Enter a globally unique name
Location type	Multi-region
Access control	Fine-grained (<i>object-level permission in addition to your bucket-level permissions</i>)

4. Note the bucket name. It will be referred to as [BUCKET_NAME_2] in the following steps.

5. Click **Create**.

Upload a text file to the bucket


1. Upload a file to [BUCKET_NAME_2]. Any small example file or text file will do.

2. Note the file name (referred to as [FILE_NAME]); you will use it later.

Create an IAM Service Account

1. In the Cloud Console, on the **Navigation menu** (≡), click **IAM & admin > Service accounts**.
2. Click **Create service account**.
3. On Service account details page, specify the **Service account name** as **cross-project-storage**.
4. Click **Create**.
5. On the Service account permissions page, specify the role as **Storage > Storage Object Viewer**.
6. Click **Continue**.
7. Click **Create Key**.
8. Select **JSON** as the key type.
9. Click **Create**. A JSON key file will be downloaded. You will need to find this key file and upload it in into the VM in a later step.
10. Click **Close**.
11. Click **Done**.
12. On your hard drive, rename the JSON key file to **credentials.json**.
13. In the upper pane, switch back to [PROJECT_ID_1].

Click *Check my progress* to verify the objective.

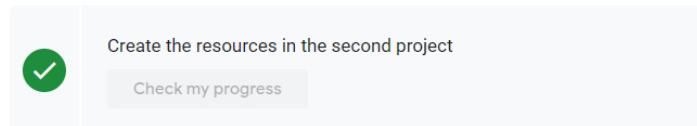

Create a VM

1. On the **Navigation menu** (≡), click **Compute Engine > VM instances**.

2. Click **Create**.

3. Specify the following, and leave the remaining settings as their defaults:

Property	Value (type value or select option as specified)
Name	crossproject
Region	europe-west1
Zone	europe-west1-d
Machine type	n1-standard-1

4. Click **Create**.

SSH to the VM

1. For **crossproject**, click **SSH** to launch a terminal and connect.

2. Store [BUCKET_NAME_2] in an environment variable:

```
export BUCKET_NAME_2=<enter bucket name 2 here>
```

3. Verify it with echo:

```
echo $BUCKET_NAME_2
```

4. Store [FILE_NAME] in an environment variable:

```
export FILE_NAME=<enter FILE_NAME here>
```

5. Verify it with echo:

```
echo $FILE_NAME
```

6. List the files in [PROJECT_ID_2]:

```
gsutil ls gs://$BUCKET_NAME_2/
```

Result (**do not copy; this is example output**):

```
AccessDeniedException: 403 Caller does not have storage.objects.list  
access to bucket [BUCKET_NAME_2].
```

Authorize the VM

1. To upload credentials.json through the SSH VM terminal, click on the gear icon (



) in the upper-right corner, and then click **Upload file**.

2. Select credentials.json and upload it.

3. Click **Close** in the File Transfer window.

4. Verify that the JSON file has been uploaded to the VM:

```
ls
```

Result (**do not copy; this is example output**):

```
credentials.json
```

5. Enter the following command in the terminal to authorize the VM to use the Google Cloud API:

```
gcloud auth activate-service-account --key-file credentials.json
```

The image you are using has the Google Cloud SDK pre-installed; therefore, you don't need to initialize the Google Cloud SDK. If you are attempting this lab in a different environment, make sure you have followed these procedures regarding installing the Google Cloud SDK:

<https://cloud.google.com/sdk/downloads>

Verify access

1. Retry this command:

```
gsutil ls gs://$BUCKET_NAME_2/
```

2. Retry this command:

```
gsutil cat gs://$BUCKET_NAME_2/$FILE_NAME
```

3. Try to copy the credentials file to the bucket:

```
gsutil cp credentials.json gs://$BUCKET_NAME_2/
```


Result (do not copy; this is example output):

```
Copying file://credentials.json [Content-Type=application/json]...
AccessDeniedException: 403 Caller does not have storage.objects.create
access to bucket [BUCKET_NAME_2].
```

Modify role

1. In the upper pane, switch back to [PROJECT_ID_2].
2. In the Cloud Console, on the **Navigation menu** (≡), click **IAM & admin > IAM**.
3. Click the pencil icon for the **cross-project-storage** service account (You might have to scroll to the right to see this icon).
4. Click on the **Storage Object Viewer** role, and then click **Storage > Storage Object Admin**.
5. Click **Save**. If you don't click **Save**, the change will not be made.

Click *Check my progress* to verify the objective.

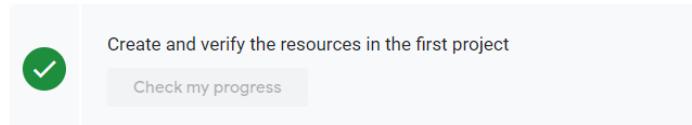

Verify changed access

1. Return to the SSH terminal for **crossproject**.
2. Copy the credentials file to the bucket:

```
gsutil cp credentials.json gs://$BUCKET_NAME_2/
```

Result (do not copy; this is example output):

```
Copying file://credentials.json [Content-Type=application/json]...
- [1 files][ 2.3 KiB/ 2.3 KiB]
Operation completed over 1 objects/2.3 KiB.
```

In this example the VM in PROJECT_ID_1 can now upload files to Cloud Storage in a bucket that was created in another project.

Note that the project where the bucket was created is the billing project for this activity. That means if the VM uploads a ton of files, it will not be billed to PROJECT_ID_1, but instead to PROJECT_ID_2.

Task 9: Review

In this lab you learned to create and work with buckets and objects, and you learned about the following features for Cloud Storage:

- CSEK: Customer-supplied encryption key
- Use your own encryption keys
- Rotate keys
- ACL • Access control list

- [ACL Access Control List](#)

- Set an ACL for private, and modify to public
- Lifecycle management
- Set policy to delete objects after 31 days
- Versioning
- Create a version and restore a previous version
- Directory synchronization
- Recursively synchronize a VM directory with a bucket
- Cross-project resource sharing using IAM
- Use IAM to enable access to resources across projects

End your lab

When you have completed your lab, click **End Lab**. Qwiklabs removes the resources you've used and cleans the account for you.

You will be given an opportunity to rate the lab experience. Select the applicable number of stars, type a comment, and then click **Submit**.

The number of stars indicates the following:

- 1 star = Very dissatisfied
- 2 stars = Dissatisfied
- 3 stars = Neutral
- 4 stars = Satisfied
- 5 stars = Very satisfied

You can close the dialog box if you don't want to provide feedback.

For feedback, suggestions, or corrections, please use the **Support** tab.

Copyright 2019 Google LLC All rights reserved. Google and the Google logo are trademarks of Google LLC. All other company and product names may be trademarks of the respective companies with which they are associated.

 Chat