

Hands-on Lab: CREATE, ALTER, TRUNCATE, DROP

Estimated time needed: 20 minutes

In this lab, you will learn how to create tables and load data using the phpMyAdmin graphical user interface (GUI) tool in the MySQL database service.

Software Used in this Lab

In this lab, you will use [MySQL](#). MySQL is a Relational Database Management System (RDBMS) designed to efficiently store, manipulate, and retrieve data.



To complete this lab, you will use MySQL relational database service available as part of IBM Skills Network Labs (SN Labs) Cloud IDE. SN Labs is a virtual lab environment used in this course.

Objectives

After completing this lab, you will be able to use phpMyAdmin with MySQL to:


- Create a database.
- Create a new table in a database.
- Add, delete, or modify columns in an existing table.
- Remove all rows from an existing table without deleting the table itself.
- Delete an existing table in a database.

Task 1: Create a database

Follow the steps below to create a new database in the phpMyAdmin GUI of MySQL.

1. Click on **Skills Network Toolbox**. In the **Database** section, click **MySQL**.

To start the MySQL, click **Start**.

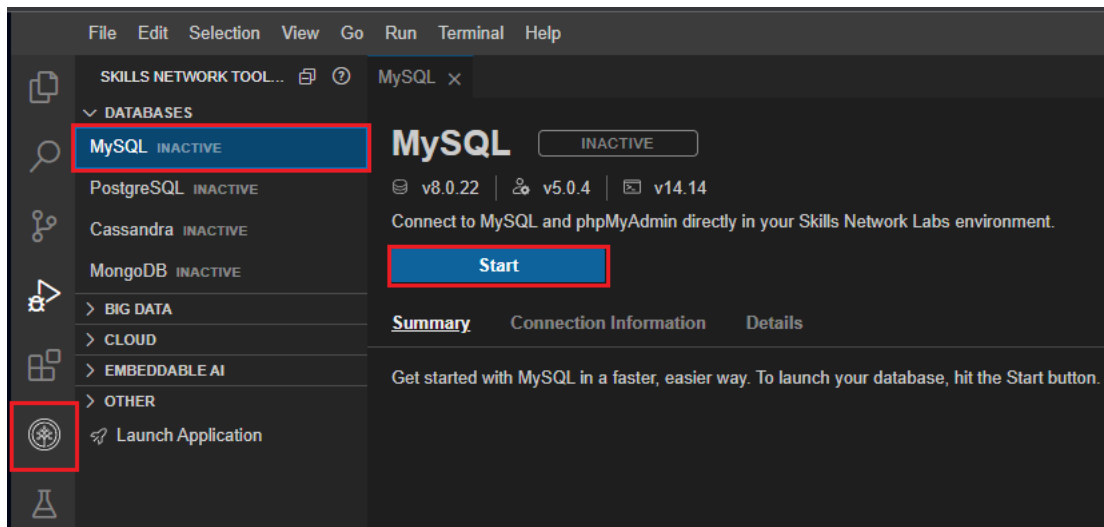

2. Once **MySQL** has started, click the **phpMyAdmin** button to open **phpMyAdmin** in the same window.

FileEditSelectionViewGoRunTerminalHelp

MySQL xphpMyAdmin

MySQL

ACTIVE

v8.0.22 | v5.0.4 | v14.14

Connect to MySQL and phpMyAdmin directly in your Skills Network Labs environment.

Stop

SummaryConnection InformationDetails

Your database and phpMyAdmin server are now ready to use and available with the following login credentials. For more details on how to navigate MySQL, please check out the Details section.

Username:malikas

Password:

You can manage MySQL via:

phpMyAdmin

Or to interact with the database in the terminal, select one of these options:

MySQL CLINew Terminal

3. You will see the phpMyAdmin GUI tool.



Databases

SQL

Status

User accounts

Export

Import

Settings

Binary log

Re

Databases

Create database

Mysql_learners

utf8mb4_0900_ai_ci

Create

	Database	Collation	Master replication	Action
<input type="checkbox"/>	information_schema	utf8_general_ci	✔ Replicated	Check privileges
<input type="checkbox"/>	mysql	utf8mb4_0900_ai_ci	✔ Replicated	Check privileges
<input type="checkbox"/>	performance_schema	utf8mb4_0900_ai_ci	✔ Replicated	Check privileges
<input type="checkbox"/>	sys	utf8mb4_0900_ai_ci	✔ Replicated	Check privileges
Total: 4				

⬆

☐ Check all

With selected:

Drop

Note: Enabling the database statistics here might cause heavy traffic between the web server and the MySQL server.

• Enable statistics

Task 2a : CREATE statement

Now, you will use the CREATE statement to create two new tables.
Follow the instructions to complete this task.

1. You need to create two tables, PETSale and PET. To create the two tables, copy the code below and paste it into the text area of the SQL tab. Click Go.

1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11
12. 12
13. 13

1. CREATE TABLE PETSale (
2. ID INTEGER NOT NULL,
3. PET CHAR(20),
4. SALEPRICE DECIMAL(6,2),
5. PROFIT DECIMAL(6,2),
6. SALEDATE DATE
7.);
8.
9. CREATE TABLE PET (
10. ID INTEGER NOT NULL,
11. ANIMAL VARCHAR(20),
12. QUANTITY INTEGER
13.);

Copied!

StructureSQLSearchQueryExportImportOperationsPrivilegesRoutinesEventsTriggersDesigner

Run SQL query/queries on database Mysql_learners: ⓘ

1CREATE TABLE PETALE (
2ID INTEGER NOT NULL,
3PET CHAR(20),
4SALEPRICE DECIMAL(6,2),
5PROFIT DECIMAL(6,2),
6SALEDATE DATE
7);
8
9CREATE TABLE PET (
10ID INTEGER NOT NULL,
11ANIMAL VARCHAR(20),
12QUANTITY INTEGER
13);

ClearFormatGet auto-saved query

☐ Bind parameters ⓘ

[Delimiter:]☐ Show this query here again☐ Retain query box☐ Rollback when finished☒ Enable foreign key checksGo

Hide query box

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0562 seconds.)

CREATE TABLE PETALE (ID INTEGER NOT NULL, PET CHAR(20), SALEPRICE DECIMAL(6,2), PROFIT DECIMAL(6,2), SALEDATE DATE)

phpMyAdmin

RecentFavorites

New

information_schema

mysql

Mysql_learners

New

PET

PETALE

performance_schema

sys

Server: mysql:3306 » Database: Mysql_learners

StructureSQLSearchQueryExportImportOperations

Show query box

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0196 seconds.)

CREATE TABLE PETALE (ID INTEGER NOT NULL, PET CHAR(20), SALEPRICE DECIMAL(6,2), PROFIT DECIMAL(6,2), SALEDATE DATE)

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0189 seconds.)

CREATE TABLE PET (ID INTEGER NOT NULL, ANIMAL VARCHAR(20), QUANTITY INTEGER)

Task 2b: INSERT statement

Now, insert some records into the two newly created tables. You can also add SELECT statements to print the contents of the tables once they are loaded with data.

Copy the code below and paste it into the text area of the SQL tab. Then, click Go.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11
12. 12
13. 13
14. 14

1. INSERT INTO PETALE VALUES
2.     (1, 'Cat', 450.09, 100.47, '2018-05-29'),
3.     (2, 'Dog', 666.66, 150.76, '2018-06-01'),
4.     (3, 'Parrot', 50.00, 8.9, '2018-06-04'),
5.     (4, 'Hamster', 60.60, 12, '2018-06-11'),
6.     (5, 'Goldfish', 48.48, 3.5, '2018-06-14');
7.
8. INSERT INTO PET VALUES
9.     (1, 'Cat', 3),
10.    (2, 'Dog', 4),
11.    (3, 'Hamster', 2);
12.
13. SELECT * FROM PETALE;
14. SELECT * FROM PET;
```

Copied!

```
1 INSERT INTO PETSale VALUES
2   (1,'Cat',450.09,100.47,'2018-05-29'),
3   (2,'Dog',666.66,150.76,'2018-06-01'),
4   (3,'Parrot',50.00,8.9,'2018-06-04'),
5   (4,'Hamster',60.60,12,'2018-06-11'),
6   (5,'Goldfish',48.48,3.5,'2018-06-14');
7
8 INSERT INTO PET VALUES
9   (1,'Cat',3),
10  (2,'Dog',4),
11  (3,'Hamster',2);
12
13 SELECT * FROM PETSale;
14 SELECT * FROM PET;
```

Showing rows 0 - 4 (5 total. Query took 0.0000 seconds.)

SELECT * FROM PETSale

Show all

Number of rows: 25

Filter rows: Search this table

+ Options

ID	PET	SALEPRICE	PROFIT	SALEDATE
1	Cat	450.09	100.47	2018-05-29
2	Dog	666.66	150.76	2018-06-01
3	Parrot	50.00	8.90	2018-06-04
4	Hamster	60.60	12.00	2018-06-11
5	Goldfish	48.48	3.50	2018-06-14

Showing rows 0 - 2 (3 total. Query took 0.0003 seconds.)

SELECT * FROM PET

Show all

Number of rows: 25

Filter rows: Search this table

+ Options

ID	ANIMAL	QUANTITY
1	Cat	3
2	Dog	4
3	Hamster	2

Task 3: ALTER statement

In this exercise, you will use the ALTER statement to add, delete, or modify columns in the existing tables.

1. Adding a column

Add a new column named QUANTITY to the PETSale table and display the altered table. For this, copy the code below and paste it into the text area of the SQL page. Click Go..

1. 1

2. 2

3. 3

4. 4
1. ALTER TABLE PETSale

2. ADD COLUMN QUANTITY INTEGER;

3.

4. SELECT * FROM PETSale;

Copied!

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0481 seconds.)

ALTER TABLE PETSale ADD COLUMN QUANTITY INTEGER

[Edit inline]

[Edit]

[Create PHP code]

⚠ Current selection does not contain a unique column. Grid edit, checkbox, Edit, Copy and Delete features are not available. ⓘ

Showing rows 0 - 4 (5 total. Query took 0.0005 seconds.)

SELECT * FROM PETSale

Profiling

[Edit inline]

[Edit]

[Explain SQL]

[Create PHP code]

[Refresh]

Show all

Number of rows: 25

Filter rows: Search this table

Options

D	PET	SALEPRICE	PROFIT	SALEDATE	QUANTITY
1	Cat	450.09	100.47	2018-05-29	NULL
2	Dog	666.66	150.76	2018-06-01	NULL
3	Parrot	50.00	8.90	2018-06-04	NULL
4	Hamster	60.60	12.00	2018-06-11	NULL
5	Goldfish	48.48	3.50	2018-06-14	NULL

Now update the newly added QUANTITY column of the PETSale table with some values and show all the table records. Copy the code below and paste it into text area of the SQL page. Click Go.

1. 1

2. 2

3. 3

4. 4

5. 5

6. 6

7. 7

1. UPDATE PETSale SET QUANTITY = 9 WHERE ID = 1;

2. UPDATE PETSale SET QUANTITY = 3 WHERE ID = 2;

3. UPDATE PETSale SET QUANTITY = 2 WHERE ID = 3;

4. UPDATE PETSale SET QUANTITY = 6 WHERE ID = 4;

5. UPDATE PETSale SET QUANTITY = 24 WHERE ID = 5;

6.

7. SELECT * FROM PETSale;

Copied!

UPDATE PETSale SET QUANTITY = 9 WHERE ID = 1;
UPDATE PETSale SET QUANTITY = 3 WHERE ID = 2;
UPDATE PETSale SET QUANTITY = 2 WHERE ID = 3;
UPDATE PETSale SET QUANTITY = 6 WHERE ID = 4;
UPDATE PETSale SET QUANTITY = 24 WHERE ID = 5;

SELECT * FROM PETSale;

ID	PET	SALEPRICE	PROFIT	SALEDATE	QUANTITY
1	Cat	450.09	100.47	2018-05-29	9
2	Dog	666.66	150.76	2018-06-01	3
3	Parrot	50.00	8.90	2018-06-04	2
4	Hamster	60.60	12.00	2018-06-11	6
5	Goldfish	48.48	3.50	2018-06-14	24

2. Deleting a column

about:blank

6/11

Delete the **PROFIT** column from the **PETSALE** table and show the altered table. Copy the code below and paste it into the text area of the **SQL** page. Click **Go**.

1. 1

2. 2

3. 3

4. 4
1. ALTER TABLE PETSALE

2. DROP COLUMN PROFIT;

3.

4. SELECT * FROM PETSALE;

Copied!

Browse

Structure

SQL

Search

Insert

Run SQL query/queries on table Mysql_learners.PETSALE:

1 ALTER TABLE PETSALE

2 DROP COLUMN PROFIT;

3

4 SELECT * FROM PETSALE;

+ Options

ID	PET	SALEPRICE	SALEDATE
1	Cat	450.09	2018-05-29
2	Dog	666.66	2018-06-01
3	Parrot	50.00	2018-06-04
4	Hamster	60.60	2018-06-11
5	Goldfish	48.48	2018-06-14

☐ Show all | Number of rows: 25

3. Modify a column

Change the data type to **VARCHAR(20)** type of the column **PET** of the table **PETSALE** and show the altered table. Copy the code below and paste it into the text area of the **SQL** page. Click **Go**.

1. 1

2. 2

3. 3
1. ALTER TABLE PETSALE

2. MODIFY PET VARCHAR(20);

3. SELECT * FROM PETSALE;

Copied!

You can click on the table name **PETSALE** in the tree structure on the left and then click on the **Structure** tab in the interface. You can then see the table structure shows the modified column data type, as shown in the image below.

Browse

Structure

SQL

Search

Insert

Export

Import

Privileges

Operations

Run SQL query/queries on table Mysql_learners.PETSALE:

1

2 ALTER TABLE PETSALE CHANGE `PET` `PET` VARCHAR(20);

3

4 SELECT * FROM PETSALE;

Table structure

Relation view

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
<input type="checkbox"/>	1 ID	int			No	None			Change Drop More
<input type="checkbox"/>	2 PET	varchar(20)	utf8mb4_0900_ai_ci		Yes	NULL			Change Drop More
<input type="checkbox"/>	3 SALEPRICE	decimal(6,2)			Yes	NULL			Change Drop More
<input type="checkbox"/>	4 SALEDATE	date			Yes	NULL			Change Drop More
<input type="checkbox"/>	5 QUANTITY	int			Yes	NULL			Change Drop More

4. Rename a Column

Rename the column PET to ANIMAL of the PETSALE table and show the altered table. Copy the code below and paste it into the text area of the SQL page. Click Go.

```
1. 1
2. 2
3. 3

1. ALTER TABLE `PETSALE` CHANGE `PET` `ANIMAL` varchar(20);
2.
3. SELECT * FROM PETSALE;
```

Copied!

about:blank

8/11

Browse

Structure

SQL

Search

Insert

Export

Import

Privileges

Operations

Run SQL query/queries on table Mysql_learners.PETSALE:

1 ALTER TABLE `PETSALE` CHANGE `PET` `ANIMAL` varchar(20);

Showing rows 0 - 4 (5 total, Query took 0.0006 seconds.)

```
select * from `PETSALE`
```

☐ Show all

Number of rows: 25

Filter rows:

- Options

ID	ANIMAL	SALEPRICE	SALEDATE	QUANTITY
1	Cat	450.09	2018-05-29	9
2	Dog	666.66	2018-06-01	3
3	Parrot	50.00	2018-06-04	2
4	Hamster	60.60	2018-06-11	6
5	Goldfish	48.48	2018-06-14	24

☐ Show all

Number of rows: 25

Filter rows:

Task 4: TRUNCATE statement

In this exercise, you will use the TRUNCATE statement to remove all rows from an existing table without deleting it.

Let's remove all rows from the PET table and show the empty table. Copy the code below and paste it into the text area of the SQL page. Click Go.

1. 1

2. 2

3. 3
1. TRUNCATE TABLE PET ;

2.

3. SELECT * FROM PET;

Copied!

Browse

Structure

SQL

Search

Insert

Export

Import

Privileges

Operations

Run SQL query/queries on table Mysql_learners.PETSALE:

1 TRUNCATE TABLE PET ;

2 SELECT * FROM PET;

Task 5: DROP statement

Finally, you will use the DROP statement to delete an existing table. Let's delete the PET table and verify if the table still exists or not (the SELECT statement should give an error if a table doesn't exist). Copy the code below and paste it into the text area of the SQL page. Click Go.

```
1. 1
2. 2
3. 3
```

```
1. DROP TABLE PET;
2.
3. SELECT * FROM PET;
```

Copied!

The screenshot shows a database management tool with a menu bar containing: Browse, Structure, SQL, Search, Insert, Export, Import, Privileges, and Operations. Below the menu bar is a toolbar with icons for each function. A modal window titled "Run SQL query/queries on table Mysql_learners.PETSALE:" is open, displaying two SQL queries:

```
1 DROP TABLE PET;
2 SELECT * FROM PET;
```

Practice problems

Try the following problems for an enhanced practice of the concepts learned in this lab.

1. Create a new table in the database named Toys with attributes as ID (integer), Variety (variable length string), and Quantity (integer). Make sure the ID is not Null.

▼ Click here for the solution

```
1. 1
2. 2
3. 3
4. 4
5. 5
```

```
1. CREATE TABLE Toys (
2.     ID INTEGER NOT NULL,
3.     Variety VARCHAR(20),
4.     Quantity INTEGER
5. );
```

Copied!

2. Add the below-mentioned entries to the table using the INSERT statement.

ID Variety Quantity

```
1 Chew toy    20
2 Balls       50
3 Bowls       30
4 Foldable bed 40
```

▼ Click here for the solution

```
1. 1
2. 2
3. 3
4. 4
5. 5
```

```
1. INSERT INTO Toys VALUES
2.     (1, 'Chew toy', 20),
3.     (2, 'Balls', 50),
4.     (3, 'Bowls', 30),
5.     (4, 'Foldable bed', 40);
```

Copied!

3. ALTER the length of 'Variety' in the table to 30 characters.

▼ Click here for the solution

1. 1

2. 2
1. ALTER TABLE Toys

2. MODIFY Variety VARCHAR(30);

Copied!

4. TRUNCATE the table 'Toys'

▼ Click here for the solution

1. 1
1. TRUNCATE TABLE Toys;

Copied!

5. DROP the table 'Toys'

▼ Click here for the solution

1. 1
1. DROP TABLE Toys;

Copied!

Conclusion

Congratulations on successfully completing this lab.

By now, you have learned how to:

- Create a database in phpMyAdmin GUI on MySQL.
- Use the CREATE statement to create new tables in the database.
- Use the INSERT statement to add records to the tables.
- Use the ALTER statement to add, delete, rename, or modify the columns of an existing table.
- Use the TRUNCATE statement to delete the contents of an existing table (but not the table).
- Use the DROP statement to delete an entire table.

Author(s)

[Lakshmi Holla](#)

[Malika Singla](#)

Additional Contributor(s)

[Abhishek Gagneja](#)

Changelog

Date	Version	Changed by	Change Description
2023-10-10	0.7	Mercedes Schneider	QA Pass w/Edits
2023-10-07	0.6	Misty Taylor	ID Check
2023-09-09	0.5	Abhishek Gagneja	Updated instructions
2022-10-28	0.4	Appalabhaktula Hema	Updated instructions
2022-07-27	0.3	Lakshmi Holla	updated html tag
2022-06-04	0.2	Lakshmi Holla, Malika Singla	Updated the MySQL starting commands
2021-11-01	0.1	Lakshmi Holla, Malika Singla	Initial Version

© IBM Corporation 2023. All rights reserved.