I'm on windows so I'm using powershell not curl

Build Docker Services

```
docker compose up --build kitchen-assignment assign-kitchen coordinate-
fulfilment new-orders rabbitmq notifications
```

Step 1 — Health check all services

```
Invoke-RestMethod -Uri "http://localhost:8091/health"  # kitchen-assignment
Invoke-RestMethod -Uri "http://localhost:8093/health"  # assign-kitchen
Invoke-RestMethod -Uri "http://localhost:8094/health"  # coordinate-fulfilment
Invoke-RestMethod -Uri "http://localhost:8082/health"  # new-orders
Invoke-RestMethod -Uri "http://localhost:8090/health"  # notifications
```

All should return `{"status": "healthy"}`.

Step 2 — Seed kitchens (Already done, don't do it again, check Supabase)

```
Invoke-RestMethod -Uri "http://localhost:8091/kitchens" -Method Post -ContentType

Invoke-RestMethod -Uri "http://localhost:8091/kitchens" -Method Post -ContentType

Invoke-RestMethod -Uri "http://localhost:8091/kitchens" -Method Post -ContentType
```

Step 3 — Create a test order

```
Invoke-RestMethod -Uri "http://localhost:8082/api/v1/orders" -Method Post -Conten
  "customer_id": "001231200-0000-0000-0000-00012300001",
  "items": [{"name": "Mystery meal", "qty": 1}],
  "total_cents": 129,
  "dropoff_address": "3 Temasek Blvd, Singapore 038983",
  "payment_id": "pay_test_023"
}'
```

Copy the `order_id` from the response.

Step 4 — Wait for assign-kitchen to poll

```
Start-Sleep -Seconds 5
Invoke-RestMethod -Uri "http://localhost:8082/api/v1/orders?status=pending"
```

The order should now have a `kitchen_id` populated. Check assign-kitchen logs to confirm:

```
docker compose logs assign-kitchen
```

You should see:

```
[assign-kitchen] 1 unassigned order(s) found, processing...
[assign-kitchen] Order <id> → kitchen Central Kitchen
```

Step 5 — Check RabbitMQ notification was published

(Won't see, this is sent to FCM) Go to `http://localhost:15672` → Queues → `notifications` → Get messages. You should see a message like:

```
{
  "order_id": "...",
  "status": "pending",
  "kitchen_name": "Central Kitchen",
  "kitchen_address": "313 Orchard Rd, Singapore",
  "duration_seconds": 300.0,
  "delivery_address": "1 Raffles Place, Singapore 048616"
}
```

Should see at this point:

```
assign-kitchen-1         | [assign-kitchen] 1 unassigned order(s) found, processing...
rabbitmq-1               | 2026-03-29 09:18:58.928190+00:00 [info] <0.1647.0> accepting AMQP connection <0.1647.0> (172.19.0.6:49340 -> 172.19
.0.3:5672)
rabbitmq-1               | 2026-03-29 09:18:58.942647+00:00 [info] <0.1647.0> connection <0.1647.0> (172.19.0.6:49340 -> 172.19.0.3:5672): use
r 'guest' authenticated and granted access to vhost '/'


new-orders-1             | INFO:     172.19.0.7:48740 - "GET /api/v1/orders?status=finished_cooking HTTP/1.1" 200 OK
coordinate-fulfilment-1  | INFO:     172.19.0.1:51832 - "GET /orders?status=finished_cooking HTTP/1.1" 200 OK
kitchen-assignment-1     | INFO:     172.19.0.6:39196 - "POST /assign HTTP/1.1" 200 OK
new-orders-1             | INFO:     172.19.0.6:34934 - "PUT /api/v1/orders/9aea84bb-c179-4cd8-9be1-dd2403facbcc/kitchen HTTP/1.1" 200 OK
rabbitmq-1               | 2026-03-29 09:19:00.804482+00:00 [info] <0.1647.0> closing AMQP connection <0.1647.0> (172.19.0.6:49340 -> 172.19.0
.3:5672, vhost: '/', user: 'guest')
assign-kitchen-1         | [assign-kitchen] Order 9aea84bb-c179-4cd8-9be1-dd2403facbcc → kitchen Central Kitchen


notifications-1          | FCM message sent successfully: projects/cloud-kitchen-50fcc/messages/6502398224494589 57
```

From assign-kitchen-1: 1 unassigned order from Step 3, then Order `<orderid>` -> kitchen `<kitchenName>` from Step 4

From notifications-1: FCM message sent successfully, from step 5

Step 6 — Kitchen Dashboard: fetch pending orders

```
Invoke-RestMethod -Uri "http://localhost:8094/orders?status=pending"
```

Should return the assigned order.

Step 7 — Kitchen presses "Started Cooking"

```
Invoke-RestMethod -Uri "http://localhost:8094/orders/<order_id>/status" -Method P
```

Verify status changed:

```
Invoke-RestMethod -Uri "http://localhost:8082/api/v1/orders/<order_id>"
```

```
coordinate-fulfilment-1  | [coordinate-fulfilment] 1 order(s) currently cooking.
new-orders-1             | INFO:     172.19.0.7:51566 - "GET /api/v1/orders?status=cooking HTTP/1.1" 200 OK
```

Step 8 — Fetch cooking orders

```
Invoke-RestMethod -Uri "http://localhost:8094/orders?status=cooking"
```

Step 9 — Kitchen presses "Finished Cooking"

```
Invoke-RestMethod -Uri "http://localhost:8094/orders/<order_id>/status" -Method P
```

This should:

- Update the order status in the DB
- Fire a RabbitMQ notification to the customer
  Verify status:

```
Invoke-RestMethod -Uri "http://localhost:8082/api/v1/orders/<order_id>"
```

Check RabbitMQ Management UI again — a second notification message should appear with `"status": "finished_cooking"`. **(Won't see, this is sent to FCM)**

```
new-orders-1             | INFO:     172.19.0.7:58238 - "GET /api/v1/orders?status=cooking HTTP/1.1" 200 OK
coordinate-fulfilment-1  | [coordinate-fulfilment] 1 order(s) currently cooking.
new-orders-1             | INFO:     172.19.0.6:39330 - "GET /api/v1/orders?status=pending HTTP/1.1" 200 OK
coordinate-fulfilment-1  | INFO:     172.19.0.1:53060 - "GET /orders?status=finished_cooking HTTP/1.1" 200 OK
new-orders-1             | INFO:     172.19.0.7:58240 - "GET /api/v1/orders?status=finished_cooking HTTP/1.1" 200 OK


new-orders-1             | INFO:     172.19.0.7:52512 - "PUT /api/v1/orders/9aea84bb-c179-4cd8-9be1-dd2403facbcc/status HTTP/1.1" 200 OK
new-orders-1             | INFO:     172.19.0.7:52512 - "GET /api/v1/orders/9aea84bb-c179-4cd8-9be1-dd2403facbcc HTTP/1.1" 200 OK
rabbitmq-1               | 2026-03-29 09:25:52.245036+00:00 [info] <0.2109.0> accepting AMQP connection <0.2109.0> (172.19.0.7:36406 -> 172.19
.0.3:5672)
rabbitmq-1               | 2026-03-29 09:25:52.251990+00:00 [info] <0.2109.0> connection <0.2109.0> (172.19.0.7:36406 -> 172.19.0.3:5672): use
r 'guest' authenticated and granted access to vhost '/'
coordinate-fulfilment-1  | [coordinate-fulfilment] Notified customer for order 9aea84bb-c179-4cd8-9be1-dd2403facbcc
rabbitmq-1               | 2026-03-29 09:25:52.268921+00:00 [warning] <0.2109.0> closing AMQP connection <0.2109.0> (172.19.0.7:36406 -> 172.1
9.0.3:5672, vhost: '/', user: 'guest'):


rabbitmq-1               | 2026-03-29 09:25:52.268921+00:00 [warning] <0.2109.0> client unexpectedly closed TCP connection
coordinate-fulfilment-1  | INFO:     172.19.0.1:34932 - "PUT /orders/9aea84bb-c179-4cd8-9be1-dd2403facbcc/status HTTP/1.1" 200 OK

notifications-1          | FCM message sent successfully: projects/cloud-kitchen-50fcc/messages/7792071054706989898
new-orders-1             | INFO:     172.19.0.7:52526 - "GET /api/v1/orders?status=cooking HTTP/1.1" 200 OK
coordinate-fulfilment-1  | [coordinate-fulfilment] 0 order(s) currently cooking.
```

At start:

coordinate-fulfilment-1: 1 order cooking

After kitchen finishes cooking, status is changed to `finished_cooking` and notification is sent to FCM via rabbitmq

coordinate-fulfilment-1: Notifies finished cooking via RabbitMQ, HTTP PUT to change status

notifications-1: FCM message sent

coordinate-fulfilment-1: 0 orders cooking

Kitchen UI

Just HTML, CSS and Javascript

Open up index.html
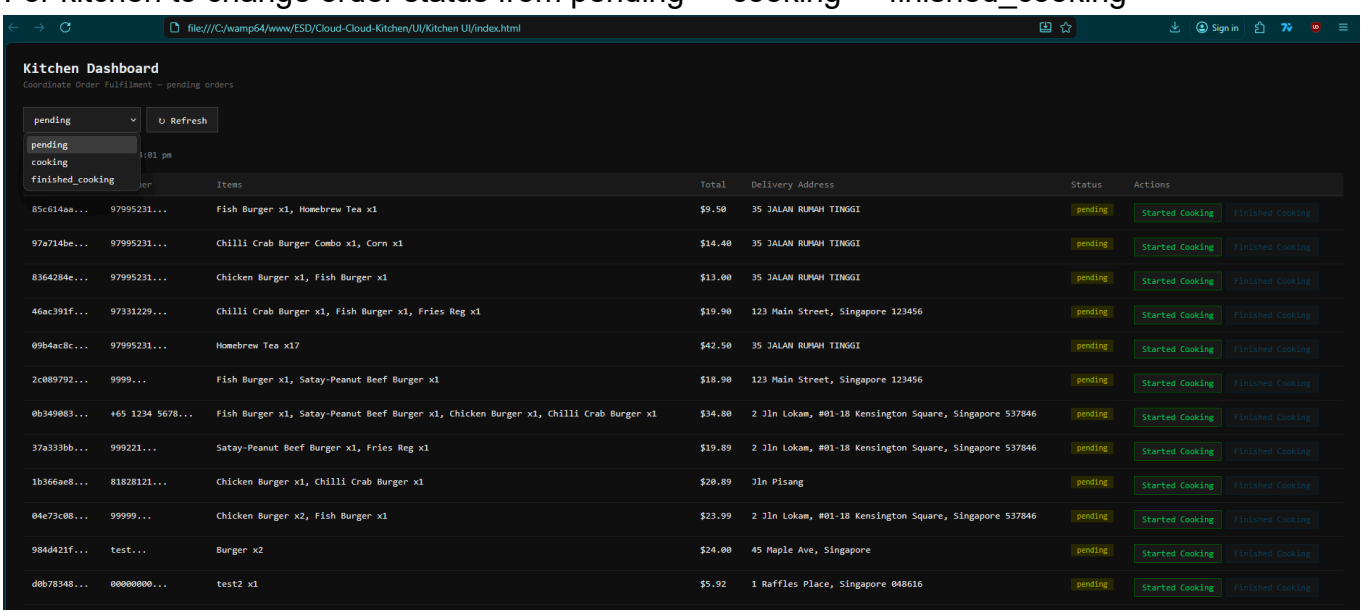
For kitchen to change order status from pending -> cooking -> finished_cooking