
Descargamos el .war y lo guardamos donde queramos


Abrimos el contenedor de docker

```
estudiante@DAW1:~$ docker start 362cd309971d
362cd309971d
estudiante@DAW1:~$ docker ps
                                                                    STATUS
CONTAINER ID
                            COMMAND
              IMAGE
                                                     CREATED
                                                    NAMES
        PORTS
362cd309971d
                            "catalina.sh run"
               tomcat:9.0
                                                     7 days ago
                                                                    Up 7 se
       0.0.0.0:8081->8080/tcp, :::8081->8080/tcp
                                                    kind hofstadter
                            "docker-entrypoint.s.."
f9de4c13616e
              mysql:5.6
                                                     7 weeks ago
                                                                    Up 2 ho
                                                     joomla_joomladb_1
urs
        3306/tcp
estudiante@DAW1:~S
```


Entramos en localhost:8081 y le damos a manager app. Nos pedirá el usuario y la contraseña (en nuestro caso es tomcat tomcat)

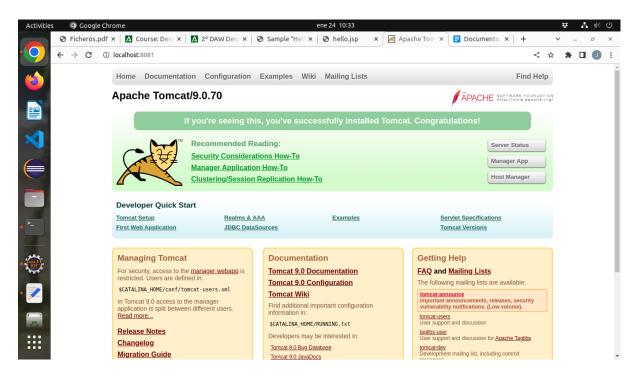

Bajamos hasta encontrar la opcion de desplegar un fichero war

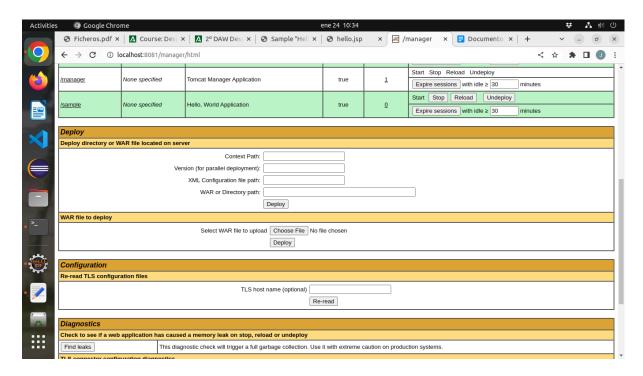

Pulsamos en choose file y seleccionamos nuestro .war

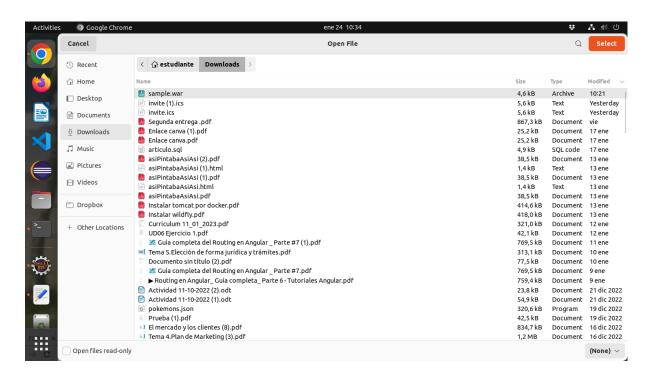

Se nos recargará la página y veremos que tenemos una nueva fila en la tabla de applications

Applications					
Path	Version	Display Name	Running	Sessions	Commands
Ĺ	None specified	Welcome to Tomcat	true	<u>0</u>	Start Stop Reload Undeploy
					Expire sessions with idle ≥ 30 minutes
/docs	None specified	Tomcat Documentation	true	<u>0</u>	Start Stop Reload Undeploy
					Expire sessions with idle ≥ 30 minutes
/examples	None specified	Servlet and JSP Examples	true	Ō	Start Stop Reload Undeploy
					Expire sessions with idle ≥ 30 minutes
/host-manager	None specified	Tomcat Host Manager Application	true	<u>0</u>	Start Stop Reload Undeploy
					Expire sessions with idle ≥ 30 minutes
/manager	None specified	Tomcat Manager Application	true	1	Start Stop Reload Undeploy
					Expire sessions with idle ≥ 30 minutes
<u>/sample</u>	None specified	Hello, World Application	true	Ō	Start Stop Reload Undeploy
					Expire sessions with idle ≥ 30 minutes

Pinchamos y ya tendremos la página desplegada 🙂

