Quarkdown logo

Markdown with superpowers

Versatile

One source code, many use cases. Export your Quarkdown project as:

-
-
-

Versatile

One source code, many use cases. Export your Quarkdown project as:

- beautiful slides for your next presentation, just like this one.

POWERED BY REVEAL.JS

-

-

Versatile

One source code, many use cases. Export your Quarkdown project as:

- beautiful slides for your next presentation, just like this one.

  POWERED BY REVEAL.JS

- a distinguished book.

  POWERED BY PAGED.JS

-

Versatile

One source code, many use cases. Export your Quarkdown project as:

- beautiful slides for your next presentation, just like this one.

  POWERED BY REVEAL.JS

- a distinguished book.

  POWERED BY PAGED.JS

- a plain document.

Versatile

One source code, many use cases. Export your Quarkdown project as:

- beautiful slides for your next presentation, just like this one.

  POWERED BY REVEAL.JS

- a distinguished book.

  POWERED BY PAGED.JS

- a plain document.

...in just one line, within your code.

```
.doctype {slides}
```

```
.doctype {paged}
```

```
.doctype {plain}
```

Same foundations...

Quarkdown's base features follow **CommonMark** and **GitHub Flavored Markdown** specifications, so that you'll feel at home typing code you're comfortable typing.

```
### Diving into _Quarkdown_

Somebody once said:
> Write once, run **anywhere**.
```

Same foundations...

Quarkdown's base features follow **CommonMark** and **GitHub Flavored Markdown** specifications, so that you'll feel at home typing code you're comfortable typing.

```
### Diving into _Quarkdown_

Somebody once said:
> Write once, run **anywhere**.
```

↓

Diving into *Quarkdown*

Somebody once said:

> *Write once, run **anywhere**.*

...brand-new everything

Go ahead to discover Quarkdown's capabilities.

Functions

Call any function from the extensive standard library from your Markdown code.

```
.somefunction {argument1} {argument2}
    Body argument
```

Functions

Call any function from the extensive standard library from your Markdown code.

```
.somefunction {argument1} {argument2}
    Body argument
```

Or define your own:

```
.function {greet}
    to from:
    **Hello, .to** from .from!

.greet {world} from:{Giorgio}
```

Functions

Call any function from the extensive standard library from your Markdown code.

```
.somefunction {argument1} {argument2}
    Body argument
```

Or define your own:

```
.function {greet}
    to from:
    **Hello, .to** from .from!

.greet {world} from:{Giorgio}
```

Hello, world from Giorgio!

Full layout control

```
.row alignment:{center} gap:{1cm}
    !(150x150)[Quarkdown](img/icon.png)

    .column cross:{start}
        .text {**Quarkdown is on GitHub!**} size:{large} variant:{smallcaps}

        https://github.com/iamgio/quarkdown
```

↓

Quarkdown

QUARKDOWN IS ON GITHUB!

https://github.com/iamgio/quarkdown

Multi-file project

```
.include {sources/other.qd}
```

↓

Error: include

Cannot call function include(...) with arguments (sources/other.qd):

File /home/javier/Documents/University/Control/TP_Final/sources/other.qd does not exist.

```
.include {sources/other.qd}
```

Multi-file project

```
.include {sources/other.qd}
```

↓

Error: include

```
Cannot call function include(...) with arguments (sources/other.qd):
File /home/javier/Documents/University/Control/TP_Final/sources/other.qd does not exist.
```

```
.include {sources/other.qd}
```

> **Tip:** functions declared in included files are imported as well.
> Use it to your advantage to make awesome libraries!

File data: code

```
The constructor of the class `Point` is as follows:

.code {java}
    .read {code/Point.java} lines:{5..8}
```

↓

The constructor of the class `Point` is as follows:

Error: code

Cannot call function code(...) with arguments (...):
Cannot call function read(Context context, String path, optional Range lines) with arguments (code/Point.java, 5..8): File /home/javier/Documents/University/Control/TP_Final/code/Point.java does not exist.

```
.code {java}
    .read {code/Point.java} lines:{5..8}
```

File data: CSV

```
.csv {csv/people.csv}
```

↓

Error: csv

Cannot call function csv(...) with arguments (csv/people.csv):

File /home/javier/Documents/University/Control/TP_Final/csv/people.csv does not exist.

```
.csv {csv/people.csv}
```

File data: Mermaid diagrams

```
.mermaid
    .read {mermaid/flow.mmd}
```

↓

Error: mermaid

Cannot call function mermaid(...) with arguments (.read {mermaid/flow.mmd}):
Cannot call function read(Context context, String path, optional Range lines) with arguments (mermaid/flow.mmd): File /home/javier/Documents/University/Control/TP_Final/mermaid/flow.mmd does not exist.

```
.mermaid
    .read {mermaid/flow.mmd}
```

Math

```
.var {radius} {8}

If we try to calculate the **surface** of a circle of **radius .radius**,
we'll find out it's **.pow {.radius} to:{2}::multiply {.pi}::truncate {2}**
```

↓

If we try to calculate the **surface** of a circle of **radius 8**, we'll find out it's **201.06**

Charts

```
.var {n} {100}

.xychart
    .repeat {.n}
        .1::pow {2}::divide {100}

    .repeat {.n}
        .1::logn::multiply {10}
```

→

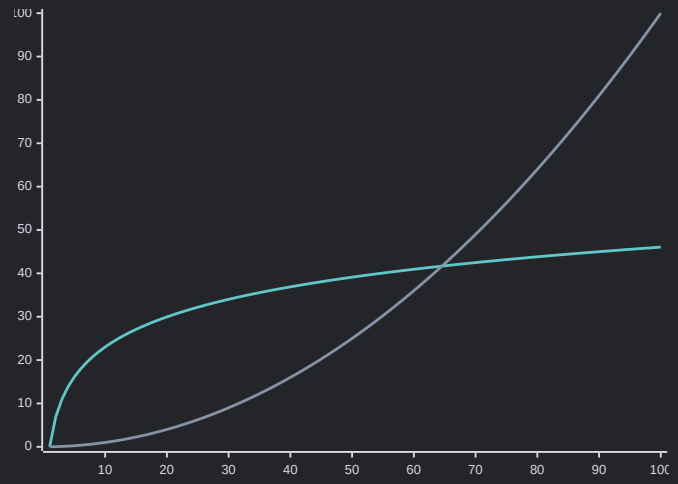

Scripting

Basic algorithm

```
.row alignment:{spacearound}
    .repeat {10}
        n:
        .if {.n::iseven}
            **.n** is even
```

↓

2 is even

4 is even

6 is even

8 is even

10 is even

Scripting

Fibonacci sequence

```
.var {t1} {0}
.var {t2} {1}

.table
    .foreach {0..8}
        n:
        | $ F_{.n} $ |
        |:----------:|
        |    .t1     |
        .var {tmp} {.sum {.t1} {.t2}}
        .t1 {.t2}
        .t2 {.tmp}
```

↓

F_0	F_1	F_2	F_3	F_4	F_5	F_6	F_7	F_8
0	1	1	2	3	5	8	13	21

Document customization

Metadata

```
.docname {Quarkdown demo}
.docauthor {iamgio}
.doctype {slides}
.doclang {english}
```

Layout and aesthetics

```
.theme {darko} layout:{minimal}
.pageformat {A4} orientation:{landscape}
.slides transition:{zoom} speed:{fast}
```

Fixed content on each page

```
.footer
    .docauthor

    **.docname**

    [GitHub](https://github.com/iamgio/quarkdown)
```

Intuitive error handling

```
.divide {x} by:{.pi}

.grid columns:{3} alignment:{right}
    Hello, world!
```

↓

Error: divide

Cannot call function divide(Number a, Number by) with arguments (x, 3.141592653589793):

Not a numeric value: x

```
.divide {x} by:{.pi}
```

Error: grid

Cannot call function grid(...) with arguments (3, right, Hello, world!):

No such element 'right' among values [start, center, end, spacebetween, spacearound, spaceevenly]

```
.grid columns:{3} alignment:{right}
    Hello, world!
```

Enhanced base Markdown

Not just functions.

The Quarkdown flavor introduces new features to the standard Markdown syntax.

TeX formulas

```
Let $ F(u) $ be the ***Fourier Transform*** of the function $ f(x) $:

$ F(u) = \int^{+\infty}_{-\infty} f(x) e^{-i 2\pi x} dx $
```

↓

Let $F(u)$ be the ***Fourier Transform*** of the function $f(x)$:

$$F(u) = \int^{+\infty}_{-\infty} f(x) e^{-i 2\pi x} dx$$

POWERED BY KATEX

Alerts

```
> Note: did you know Quarkdown is a flexible tool to generate modern documents?

> Tip: you might want to try it out. Feedback and suggestions are welcome!

> Warning: it's a young project and some things may change in the near future.
```

↓

> **Note:** did you know Quarkdown is a flexible tool to generate modern documents?

> **Tip:** you might want to try it out. Feedback and suggestions are welcome!

> **Warning:** it's a young project and some things may change in the near future.

Footnotes (standard)

```
Quarkdown[^qd] supports footnotes[^notes].
Take advantage of footnotes[^notes] to dive deeper into concepts.

[^qd]: A modern *typesetting system*.

[^notes]: This is what a footnote looks like.
```

↓

Quarkdown[1] supports footnotes[2].

Take advantage of footnotes[2] to dive deeper into concepts.

[1] A modern *typesetting system*.

[2] This is what a footnote looks like.

Footnotes (extension)

```
Quarkdown[^: A modern *typesetting system*.] supports footnotes[^notes2: This is what a footnote looks like.].
Take advantage of footnotes[^notes2] to dive deeper into concepts.
```

↓

Quarkdown[3] supports footnotes[4].

Take advantage of footnotes[4] to dive deeper into concepts.

[3] A modern *typesetting system*.

[4] This is what a footnote looks like.

Quotation source

```
> To be, or not to be, that is the question.
> - William Shakespeare, Hamlet
```

↓

> *To be, or not to be, that is the question.*
>
> *— William Shakespeare, Hamlet*

Image size

```
<!-- 200px width, auto height -->
![(200)[Quarkdown](img/banner.png)

<!-- auto width, 2cm height -->
![(_*2cm)[Quarkdown](img/banner.png)

<!-- 2-inch width, 2-centimeter height -->
![(2in*2cm)[Quarkdown](img/banner.png)
```

↓

Quarkdown

Quarkdown

Quarkdown

Labeled figure

```
![150x_][Quarkdown](https://iamgio.eu/quarkdown/img/icon-light.png "The Quarkdown icon")
```

↓



Quarkdown

The Quarkdown icon

Color preview

```
The color magenta's hexadecimal representation is `#FF00FF`.
The following are equivalent:
- `rgb(255, 0, 255)`
- `hsl(300, 100, 50)`
- `hsv(300, 100, 100)`
```

↓

The color magenta's hexadecimal representation is `#FF00FF` .

The following are equivalent:

- `rgb(255, 0, 255)`
- `hsl(300, 100, 50)`
- `hsv(300, 100, 100)`

It's a wrap

You've seen the **key features** of Quarkdown – the door to making stunning documents is now open.

The project is open source, still in development and **open to feedback and contributions**!

The **source code** of this presentation is available **here**.

Future plans include tutorials, wikis and docs. But for now, happy coding!

Table of Contents

Versatile 2

Same foundations… 7

…brand-new everything 9

Functions 10

- Full layout control 13
- Multi-file project 14
- File data: code 16
- File data: CSV 17
- File data: Mermaid diagrams 18
- Math 19
- Charts 20
- Scripting 21
- Scripting 22