



TOSHKENT SHAHRIDAGI INHA UNIVERSITETI INHA UNIVERSITY IN TASHKENT

STUDENT NAME:

Jaschirbek Xotamov

STUDENT ID NUMBER:

U2210251

TION NUMBER IN THIS COURSE:

004

HW2 – FALL 2025

COURSE NAME:

Big Data Analytics

COURSE NUMBER:

SOC4170

EXAMINATION DATE:

TIME:

EXAMINATION DURATION:

Minutes

ADDITIONAL MATERIALS
ALLOWED TO USE:

Calculator

SPECIAL INSTRUCTIONS:

- Answers will only be evaluated if they are readable.

- Show all your work. For some questions, you may get partial credit even if the end result is wrong due to a calculation mistake. If you make assumptions, state your assumptions clearly and precisely.

Please do not open the examination paper until directed to do so.

READ INSTRUCTIONS FIRST:

Desks should be free from all unnecessary items (books, notes, technology, food, water, clothes)

Use of any electronic device (Phone, iPod, iPad, laptop) is not allowed during the examination.

Cheating, talking to fellow students, singing, turning back are not allowed

Write your Name (capital letters), ID number and Section number in each page of your examination paper.

Final answers must be written by **only blue or black, non-erasable pen**. Do not use highlighters or correction pen.

All answers should be written in the space provided for each question, unless specified the other way.

If you have a problem please raise your hand and wait quietly for a Proctor.

You are not allowed to leave the exam room until you submit the exam papers.

CALCULATORS ARE ALLOWED.

STUDENT NAME:

Savithirani Kataravel

STUDENT ID NUMBER:

22210251

SECTION NUMBER IN THIS COURSE:

004

1.[16 points] (True/False questions) Write T if the following statement is True, write F otherwise inside the table below

a.	b.	c.	d.	e.	f.	g.	h.	i.	j.	k.	l.	m.	n.	o.	p.
T	F	F	F	T	T	T	T	T	T	T	F	F	F	F	F

- In FP mining if minsup threshold gets bigger, it takes less time to find all the frequent itemsets.
- The learning slowdown problems can be fixed by using the quadratic cost function.
- Softmax is used for output layer neurons because it makes them independent of each other.
- Sigmoid function is a step function.
- When we sample data for mini-batch, we do random sampling without replacement
- Unsupervised learning includes clustering
- The Bootstrap sample is taken from the original by sampling with replacement
- The first step of backpropagation is calculating "the error" of the output layer
- The direction of a gradient vector is the opposite direction from a function's minimum point
- When inputs are images, we can artificially increase the number of training inputs.
- When using dropout, half of hidden layer neurons are disabled before start of every mini-batch
- When deciding the learning rate, we need to start with big learning rate.
- Boosting stands for Bootstrap Aggregation
- Small changes of weights and biases of a perceptron causes small changes of output
- Regularization decreases overfitting by decreasing bias values.
- If a weight has a large magnitude, L1 regularization shrinks more weight.

STUDENT NAME:

Youshirbek Latamov

STUDENT ID NUMBER:

42210257

SECTION NUMBER IN THIS COURSE:

004

2.[10 points] Confusion Matrix

We have 2 models, M1 and M2 which detect fraud credit card transactions.

Total number of test data transactions are 1000. And the test data contains 4 actual fraud transactions.

- (a) [5 Points] M1 detected 5 fraud transactions, four of which are normal transactions.
Complete the confusion matrix and compute accuracy, precision, and recall.

Predicted class	Fraud = Yes	Fraud = No	Total
Actual class			
Fraud = Yes	1	4	5
Fraud = No	3	992	995
Total	4	996	1000

Accuracy: % (1 point) $\frac{1+992}{1000} = 99,3\%$

Precision: % (1 point) $\frac{1}{1+4} = 20\%$

Recall: % (1 point) $\frac{1}{3+1} = \frac{1}{4} = 25\%$

=

- (b) [5 Points] M2 detected 14 fraud transactions, 3 of which are fraud transactions.
Complete the confusion matrix and compute accuracy, precision, and recall.

Predicted class	Fraud = Yes	Fraud = No	Total
Actual class			
Fraud = Yes	3	11	14
Fraud = No	1	985	986
Total	4	986	1000

Accuracy: % (1 point) $\frac{3+985}{1000} = 98,8\%$

Precision: % (1 point) $\frac{3}{3+11} \approx 21,43\%$

Recall: % (1 point) $\frac{3}{1+3} = 75\%$

STUDENT NAME:

Javohirbek Xotamurodov

STUDENT ID NUMBER:

12210251

SECTION NUMBER IN THIS COURSE:

004

3.[8 points] BP4

$$\frac{\partial C}{\partial w_{jk}^l} = a_k^{l-1} \delta_j^l$$

(a) [8 Points] Prove the BP4 formula

using chain rule, respect to w_{jk}^l

$$\frac{\partial C}{\partial w_{jk}^l} = \frac{\partial C}{\partial z_j^l} \cdot \frac{\partial z_j^l}{\partial w_{jk}^l}$$

as $\delta_j^l = \frac{\partial C}{\partial z_j^l}$, $z_j^l = \sum_p w_{jp}^l a_p^{l-1} + b_j^l$

$$\frac{\partial z_j^l}{\partial w_{jk}^l} = a_k^{l-1}$$

substitute the above

$$\frac{\partial C}{\partial w_{jk}^l} = \delta_j^l \cdot a_k^{l-1} = a_k^{l-1} \delta_j^l$$

4.[16 points] Adaboost

Given a set of d class-labeled tuples, $(X_1, y_1), \dots, (X_d, y_d)$ Initially, all the weights of tuples are set the same ($1/d$)Let $d = 5$ and here is the sequence of your random numbers for sampling $D_1 : (x_3, x_1, x_1, x_2, x_2)$ From D_1 , your model M_1 is generated. M_1 predicted the class labels of X_1 and X_2 correctly but misclassified X_3 (a) [4 Points] What is the error (M_1)? Refer to the following equation and show all your work.

$$\text{error}(M_1) = \sum_j w_j \times \text{err}(X_j)$$

error is the sum of the weights of misclassified tuples.

$$\text{error}(M_1) = 0,2 \text{ as } \frac{1}{5}$$

STUDENT NAME:

Javohirbek Xotamurov

STUDENT ID NUMBER:

42210251

SECTION NUMBER IN THIS COURSE:

004

(b) [5 Points] What are the weights of 5 tuples (x_1, x_5) before normalization? Show all your work


$$\begin{aligned} \textcircled{1} d &= \frac{1}{2} \ln \left(\frac{1 - \text{err}}{\text{err}} \right) = \frac{1}{2} \ln \left(\frac{0,8}{0,2} \right) = \frac{1}{2} \ln(4) = \ln(2) \approx 0,69 \\ \textcircled{2} w_{\text{corr}} &= 0,2 \cdot 0,5 = 0,1 \\ \textcircled{3} w_{\text{incorr}} &= 0,2 \cdot 2 = 0,4 \quad \textcircled{4} x_1, x_2, x_4, x_5 = 0,1; x_3 = 0,4 \end{aligned}$$

(c) [7 Points] Write the sum of old weights and the sum of new weights. And write the weights of 5 tuples (x_1, x_5) after normalization? Show all your work

$$\begin{aligned} Z &= 0,1 + 0,1 + 0,4 + 0,1 + 0,1 = 0,8 & ; w_{\text{new}} &= \frac{w_{\text{old}}}{Z} \\ w(x_3) &= \frac{0,4}{0,8} = 0,5 \\ w(x_{\text{other}}) &= \frac{0,1}{0,8} = 0,125 \\ \text{Weights} &: [0,125, 0,125, 0,5, 0,125, 0,125] \end{aligned}$$

5. [50 points] Feedforward and back propagation

Below is a neural network:

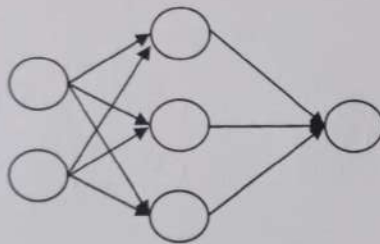

All the matrices and vectors are as follows:

$$w^1 = \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ -1 & 0 \end{bmatrix} \quad w^2 = \begin{bmatrix} 1 & 0 & -1 \end{bmatrix} \quad b^1 = \begin{bmatrix} -1 \\ 0 \\ 1 \end{bmatrix} \quad b^2 = \begin{bmatrix} 0 \end{bmatrix}$$

We are doing the mini-batch of size 4. And four inputs are

$$x_1 = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad x_2 = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad x_3 = \begin{bmatrix} 1 \\ 0 \end{bmatrix} \quad x_4 = \begin{bmatrix} 1 \\ 1 \end{bmatrix}$$

STUDENT NAME:

Javolimbek Solomurov

STUDENT ID NUMBER:

42210251

SECTION NUMBER IN THIS COURSE:

004

Labels are

$$y_1 = [0] \quad y_2 = [0] \quad y_3 = [1] \quad y_4 = [1]$$

And the learning rate is $\eta = 0.6$

We are processing 4 inputs at the same time by having all 4 of them as a matrix.

Round off all the number to the nearest 1000th. For example, 6.6543 is 6.654 and 3.3355 is 3.336.

The cost function C is a quadratic cost function.

And the back propagation equations are as follows:

Summary: the equations of backpropagation

$$\delta^L = \nabla_a C \odot \sigma'(z^L) \quad (\text{BP1})$$

$$\delta^l = ((w^{l+1})^T \delta^{l+1}) \odot \sigma'(z^l) \quad (\text{BP2})$$

$$\frac{\partial C}{\partial w_j^l} = \delta_j^l \quad (\text{BP3})$$

$$\frac{\partial C}{\partial w_{jk}^l} = a_k^{l-1} \delta_j^l \quad (\text{BP4})$$

z	-0.262	-0.362	-0.462	-0.962	-1.133	0.745	1.233	1.425	1.518
a	0.435	0.410	0.387	0.276	0.244	0.678	0.774	0.806	0.820

z	0	0.5	1	1.5	2	-0.5	-1	-1.5	-2
a	0.5	0.622	0.731	0.818	0.881	0.378	0.269	0.182	0.119

(a) [4 Points] What is Z^2 matrix? First represent it with matrix format and write the result. Show all your work.

$$z^2 = w^2 x + b^2$$

$$Z^2 = \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ -1 & 0 \end{bmatrix} \begin{bmatrix} 0 & 0 & 1 & 1 \\ 0 & 1 & 0 & 1 \end{bmatrix} + \begin{bmatrix} -1 \\ 0 \\ -1 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 & 1 \\ 0 & 1 & 0 & 1 \\ 0 & 0 & -1 & -1 \end{bmatrix} + \begin{bmatrix} -1 \\ 0 \\ -1 \end{bmatrix} = \begin{bmatrix} -1 & -1 & 0 & 0 \\ 0 & 1 & 0 & 1 \\ 1 & 1 & 0 & 0 \end{bmatrix}$$

STUDENT NAME:

Jewelabel Xatamoo

STUDENT ID NUMBER:

22210251

SECTION NUMBER IN THIS COURSE:

004

(b) [4 Points] What is a^2 matrix? Show all your work.

$$z = -1 \rightarrow 0,268; z = 0 \rightarrow 0,5; z = 1 \rightarrow 0,731$$

$$a^2 = \begin{bmatrix} 0,268 & 0,268 & 0,5 & 0,5 \\ 0,5 & 0,731 & 0,5 & 0,731 \\ 0,731 & 0,731 & 0,5 & 0,5 \end{bmatrix}$$

(c) [4 Points] What is z^3 matrix? First represent it with matrix format and write the result. Show all your work.

$$z^3 = w^3 a^2 + b^3$$

$$z^3 = \begin{bmatrix} 1 & 0 & -1 \end{bmatrix} \begin{bmatrix} 0,268 & 0,268 & 0,5 & 0,5 \\ 0,5 & 0,731 & 0,5 & 0,731 \\ 0,731 & 0,731 & 0,5 & 0,5 \end{bmatrix} + \begin{bmatrix} 0 \end{bmatrix}$$

$$z^3 = \begin{bmatrix} -0,462 & -0,462 & 0 & 0 \end{bmatrix}$$

*detailed multiplication is below

(d) [4 Points] What is a^3 matrix? Show all your work.

$$z = -0,462 \rightarrow 0,387; z = 0 \rightarrow 0,5$$

$$a^3 = \begin{bmatrix} 0,387 & 0,387 & 0,5 & 0,5 \end{bmatrix}$$

* 5(c) detailed:

$$\text{column 1: } 1 \cdot 0,268 + 0 \cdot 0,5 + (-1) \cdot 0,731 + 0 = -0,462$$

$$\text{col 2: } 1 \cdot 0,268 + 0 \cdot 0,731 + (-1) \cdot 0,731 + 0 = -0,462$$

$$\text{col 3: } 1 \cdot 0,5 + 0,5 \cdot 0 + (-1) \cdot 0,5 + 0 = 0$$

$$\text{col 4: } 1 \cdot 0,5 + 0,731 \cdot 0 + (-1) \cdot 0,5 + 0 = 0$$

STUDENT NAME:

Jauahirbek Xotamov

STUDENT ID NUMBER:

22210251

SECTION NUMBER IN THIS COURSE:

004

(e) [3 Points] What is ${}^1\delta^3$ value? ${}^1\delta^3$ is the layer 3 delta for input 1. Show all your work.

$$\delta = (a - y) \cdot a(1 - a)$$

$$y = 0, a = 0,587$$

$$\delta = 0,387 \cdot 0,387 \cdot 0,613 \approx 0,387 \cdot 0,237 = 0,092$$

(f) [3 Points] What is ${}^2\delta^3$ value? ${}^2\delta^3$ is the layer 3 delta for input 2. Show all your work.

$$\delta = 0,387 \cdot 0,387 \cdot 0,613 \approx 0,387 \cdot 0,237 = 0,092$$

(g) [3 Points] What is ${}^3\delta^3$ value? ${}^3\delta^3$ is the layer 3 delta for input 3. Show all your work.

$$y = 1, a = 0,5$$

$$\delta = (0,5 - 1) \cdot 0,5(1 - 0,5)$$

$$\delta = -0,5 \cdot 0,25 = -0,125$$

(h) [3 Points] What is ${}^4\delta^3$ value? ${}^4\delta^3$ is the layer 3 delta for input 4. Show all your work.

$$\delta = (0,5 - 1) \cdot 0,5(1 - 0,5)$$

$$\delta = -0,5 \cdot 0,25 = -0,125$$

STUDENT NAME:

Touvalimbeke Xotomoo

STUDENT ID NUMBER:

12210254

SECTION NUMBER IN THIS COURSE:

004

(i) [4 Points] What is average $\frac{\partial C}{\partial b}$ vector? Show all your work.average of δ^3

$$\text{avg} = \frac{0,082 + 0,082 - 0,125 - 0,125}{4}$$

$$\text{avg} = \frac{0,184 - 0,250}{4} = \frac{-0,066}{4} = -0,0165 \approx -0,017$$

(j) [12 Points] What is average $\frac{\partial C}{\partial w}$ matrix? Show all your work. $w_{3,1}$

$$\begin{aligned} & \frac{0,082(0,268) + 0,082(0,268) + (-0,125)(0,5) + (-0,125)(0,5)}{4} \\ &= \frac{2(0,02177) - 2(0,0625)}{4} = \frac{0,0435 - 0,125}{4} \approx -0,019 \end{aligned}$$

$$\begin{aligned} w_{3,2} &= \frac{0,082(0,5) + 0,082(0,731) - 0,125(0,5) - 0,125(0,731)}{4} \\ &= \frac{0,046 + 0,0643 - 0,0625 - 0,0914}{4} = \frac{-0,0406}{4} \approx -0,010 \end{aligned}$$

$$\begin{aligned} w_{3,3} &= \frac{0,082(0,731) + 0,082(0,731) - 0,125(0,5) - 0,125(0,5)}{4} \\ &= \frac{0,1345 - 0,125}{4} \approx 0,002 \end{aligned}$$

(k) [3 Points] What is new b^3 vector? Show all your work.

$$b_{\text{new}} = b_{\text{old}} - \eta \cdot \text{gradient}$$

 ~~b_{new}~~

$$b_{\text{new}} = 0 - 0,6(-0,017) = 0 + 0,0102 \approx 0,010$$

STUDENT NAME:

Yashinbek Xotamov

STUDENT ID NUMBER:

22210251

SECTION NUMBER IN THIS COURSE:

004

(I) [3 Points] What is new w^1 matrix? Show all your work.

$$w_{\text{new}} = w_{\text{old}} - \eta \cdot \text{gradient}$$

$$w_{\text{new}} = [1, 0, -1] - 0,6 \cdot [-0,018, -0,010, 0,002]$$

$$w_{\text{new}} = [1 - (-0,0114), 0 - (-0,006), -1 - (0,0012)]$$

$$w_{\text{new}} = [1,011 \quad 0,006 \quad -1,001]$$