


Documentación de mi práctica

Creación de la barra de menú con sus dropdown, logo y los botones para login y registrarse.	2
Contenido del dropdown 1:	3
Contenido del dropdown 2:	3
Contenido del dropdown 3:	4
Código de barra menú:	4
Creación de los títulos:	5
Código de alerta de cookies y footer:	6
Vista previa de títulos, alerta de cookies y footer:	6
Creación de ventanas modales:	7
Añadiendo formularios a las ventanas modales:	8
Código de ventanas modales:	9
Código de carousel:	10
Vista previa del carousel:	10
Vista previa de las cards:	11
Código de las cards:	11
Vista previa de los formularios para hablar con nosotros:	12
Código de los formularios:	13
Vista previa de la página en un iPad:	14
Vista previa de la página en un móvil:	16
Componente extra:	17
Código Jumbotron:	18

Javier Valverde Rivera


Creación de la barra de menú con sus dropdown, logo y los botones para login y registrarse.

Contenido nuevo: cambio de imagen del logo y cambio de contenido de los desplegables.

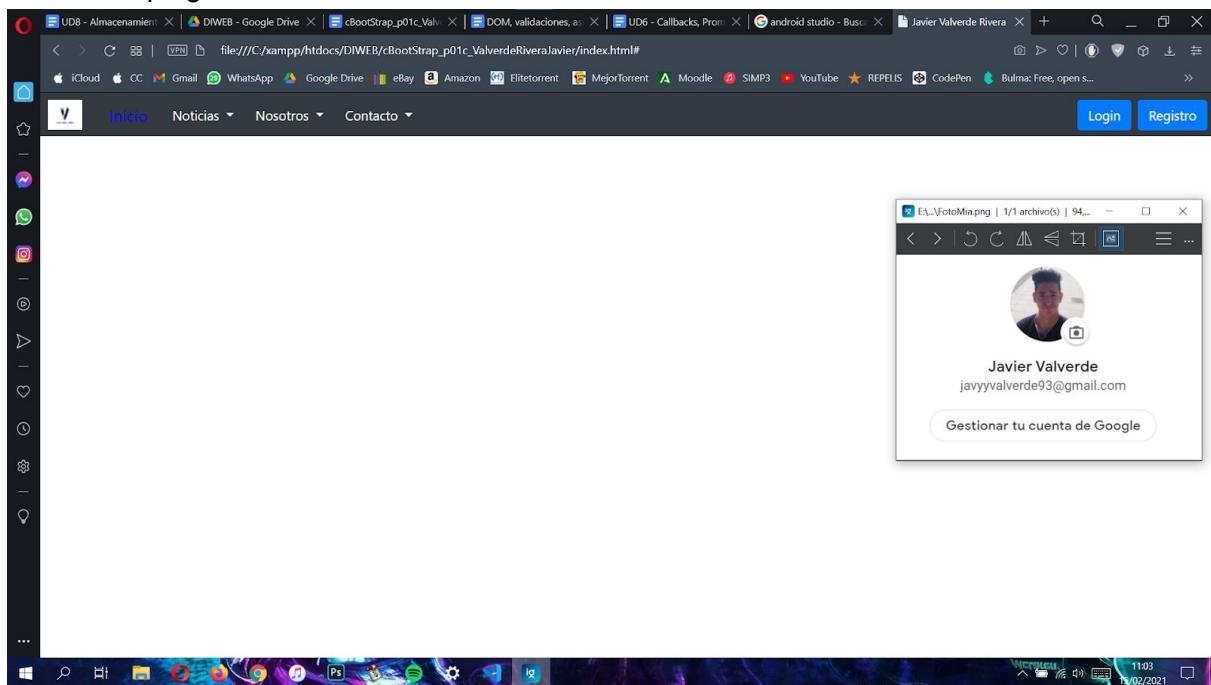


Javier Valverde Rivera

Contenido del dropdown 1:

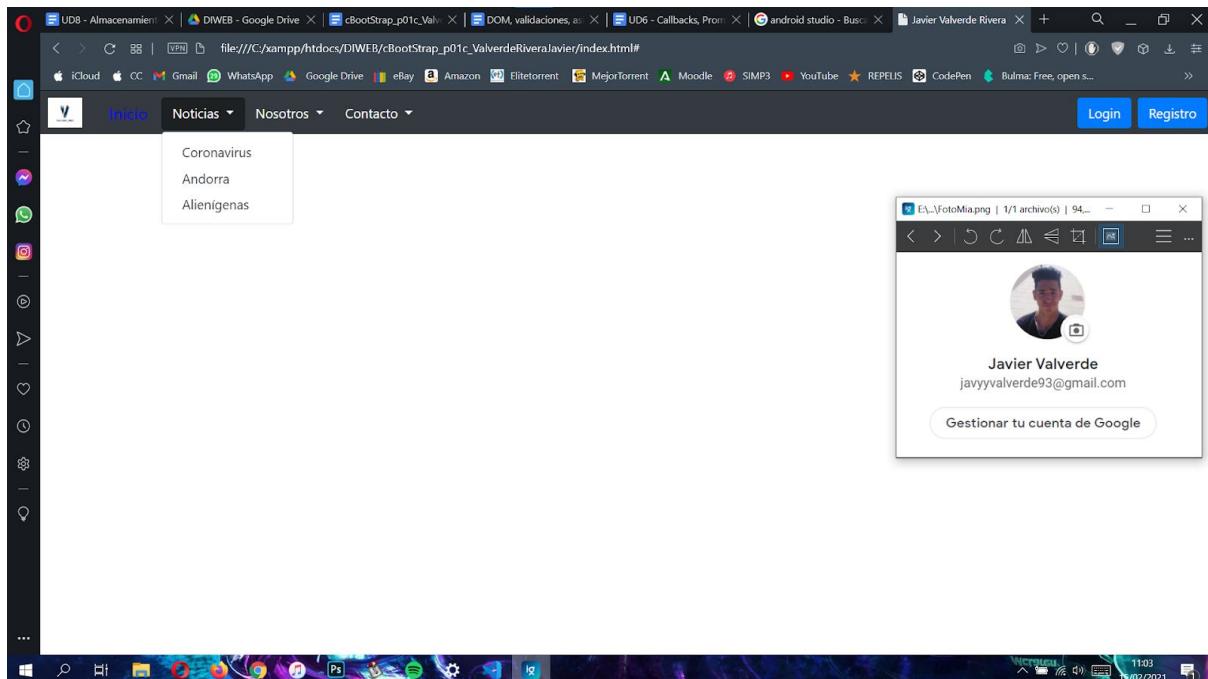


Contenido del dropdown 2:

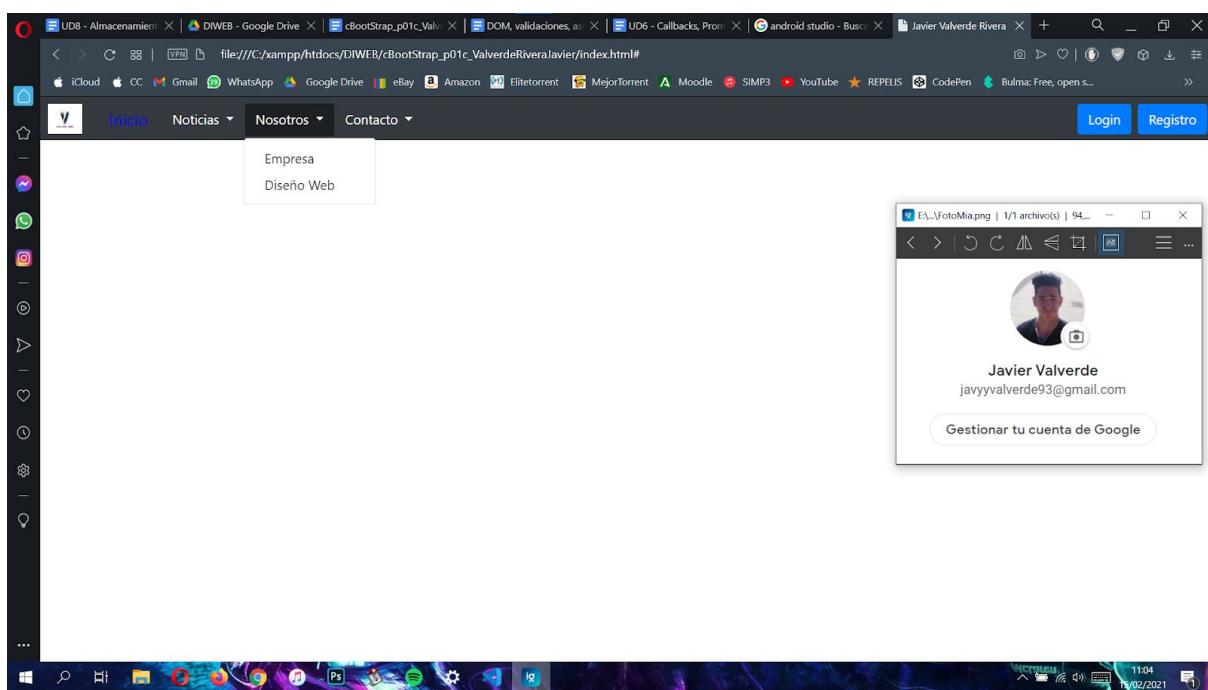

Javier Valverde Rivera

Contenido del dropdown 3:

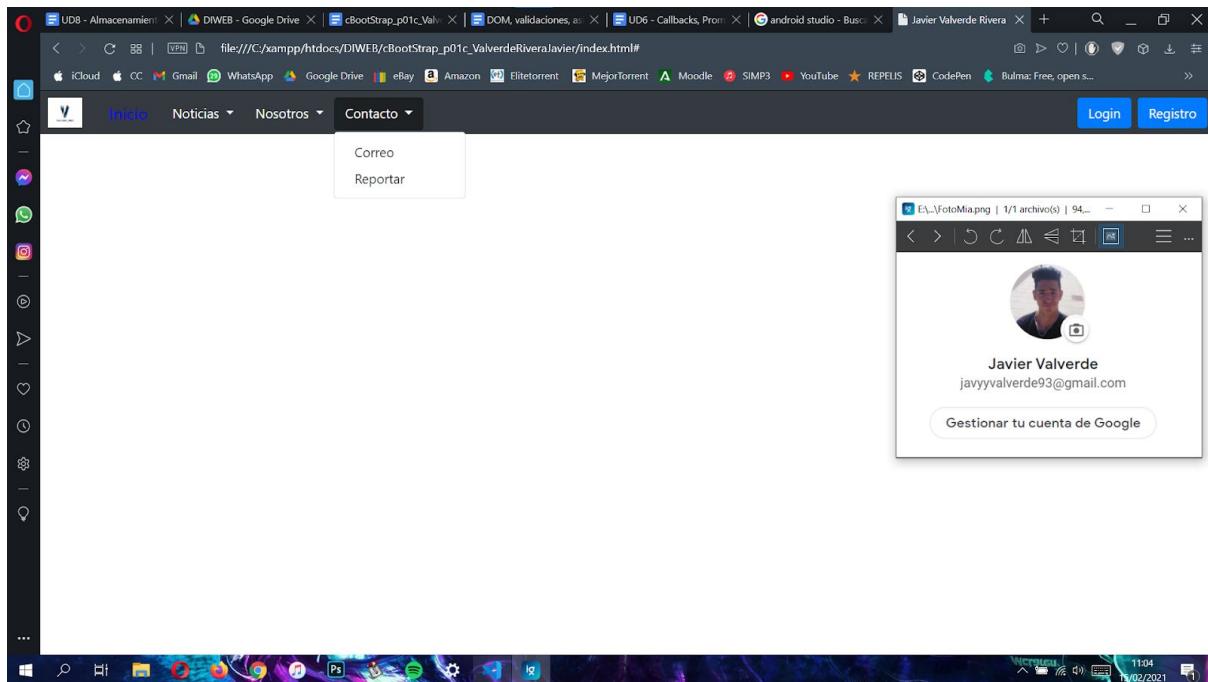

Código de barra menú:

The screenshot shows the Visual Studio Code interface with several files open in the editor. The main file is 'index.html', which contains the HTML code for the navigation bar. The code includes CSS classes like 'fixed-top row' and 'nav-item dropdown' for styling the dropdown menus. The 'Noticias' and 'Nosotros' dropdowns are expanded, showing their respective sub-options. The 'Contacto' dropdown is also present. The code uses Bootstrap's button components and dropdown utilities.

```
index.html - Sin título (área de trabajo) - Visual Studio Code
index.html
<nav class="fixed-top row" style="background-color: #343a40" id="navbar">
  <div>
    <a href="#"></a>
    <a href="#" type="button" class="nav-link pb-2 btn-dark float-left mt-1" style="font-size: 1.4vw; color: blue;">Inicio</a>
  </div>
  <div class="nav-item dropdown row pt-2 pl-3">
    <div>
      <button class="btn btn-dark dropdown-toggle pb-2" type="button" id="noticias" data-toggle="dropdown" aria-haspopup="true" aria-expanded="false">Noticias</button>
      <div class="dropdown-menu dropdown-menu-dark" aria-labelledby="noticias">
        <button class="dropdown-item" type="button">Coronavirus</button>
        <button class="dropdown-item" type="button">Andorra</button>
        <button class="dropdown-item" type="button">Alienigenas</button>
      </div>
    </div>
    <div>
      <button class="btn btn-dark dropdown-toggle pb-2" type="button" id="nosotros" data-toggle="dropdown" aria-haspopup="true" aria-expanded="false">Nosotros</button>
      <div class="dropdown-menu dropdown-menu-dark" aria-labelledby="nosotros">
        <button class="dropdown-item" type="button">Empresa</button>
        <button class="dropdown-item" type="button">Diseño Web</button>
      </div>
    </div>
    <div>
      <button class="btn btn-dark dropdown-toggle pb-2" type="button" id="contacto" data-toggle="dropdown" aria-haspopup="true" aria-expanded="false">Contacto</button>
      <div class="dropdown-menu dropdown-menu-dark" aria-labelledby="contacto">
        <button class="dropdown-item" type="button">Correo</button>
        <button class="dropdown-item" type="button">Reportar</button>
      </div>
    </div>
  </div>
</nav>
```

Javier Valverde Rivera

The screenshot shows the Visual Studio Code interface with the file `index.html` open. The code includes a navigation bar with a dropdown menu for 'Contacto' and buttons for 'Login' and 'Registro'. A preview window on the right shows a circular profile picture of a young man with the name 'Javier Valverde' and the email 'javyyvalverde93@gmail.com'. The status bar at the bottom indicates the file has 115 lines and 5 columns.

```
<button class="btn btn-dark dropdown-toggle pb-2" type="button" id="contacto" data-toggle="dropdown" aria-haspopup="true" aria-expanded="false"> Contacto </button>
<div class="dropdown-menu dropdown-menu-dark" aria-labelledby="contacto">
  <button class="dropdown-item" type="button">correo</button>
</div>
</div>
<div class="float-right col">
  <form action="#" id="formnav" class="form-inline pt-2 pr-2 float-right">
    <button type="button" class="btn btn-primary mr-2" data-toggle="modal" data-target="#modallogin">Login</button>
    <button type="button" class="btn btn-primary" data-toggle="modal" data-target="#modalRegister">Registro</button>
  </form>
</div>
```


Creación de los títulos:

The screenshot shows the Visual Studio Code interface with the file `index.html` open. The code now includes a modal login section with a header 'exampleModalCenterTitle', a content area with a login form, and a close button. The preview window on the right shows the same profile picture and information as before. The status bar at the bottom indicates the file has 152 lines and 2 columns.

```
<div class="float-right col">
  <form action="#" id="formnav" class="form-inline pt-2 pr-2 float-right">
    <button type="button" class="btn btn-primary mr-2" data-toggle="modal" data-target="#modallogin">Login</button>
    <button type="button" class="btn btn-primary" data-toggle="modal" data-target="#modalRegister">Registro</button>
  </form>
</div>
<div align="center" class="col-12 bg-dark text-white font-bold mt-5" style="font-size:3vw">Cursos Ofertados</div>
<div class="container">
  <div align="center" class="col-12 bg-dark text-white font-bold mt-5" style="font-size:3vw">¡Quieres hablar con nosotros?</div>
<div class="container">
  <div>
    <!-- Modal -->
    <div class="modal fade" id="modallogin" tabindex="-1" role="dialog" aria-labelledby="exampleModalCenterTitle" aria-hidden="true">
      <div class="modal-dialog modal-dialog-centered" role="document">
        <div class="modal-content">
          <div class="modal-header bg-primary">
            <h5 class="modal-title text-white">Login</h5>
            <button type="button" class="close" data-dismiss="modal" aria-label="Close">&times;</button>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
```

Javier Valverde Rivera

Código de alerta de cookies y footer:

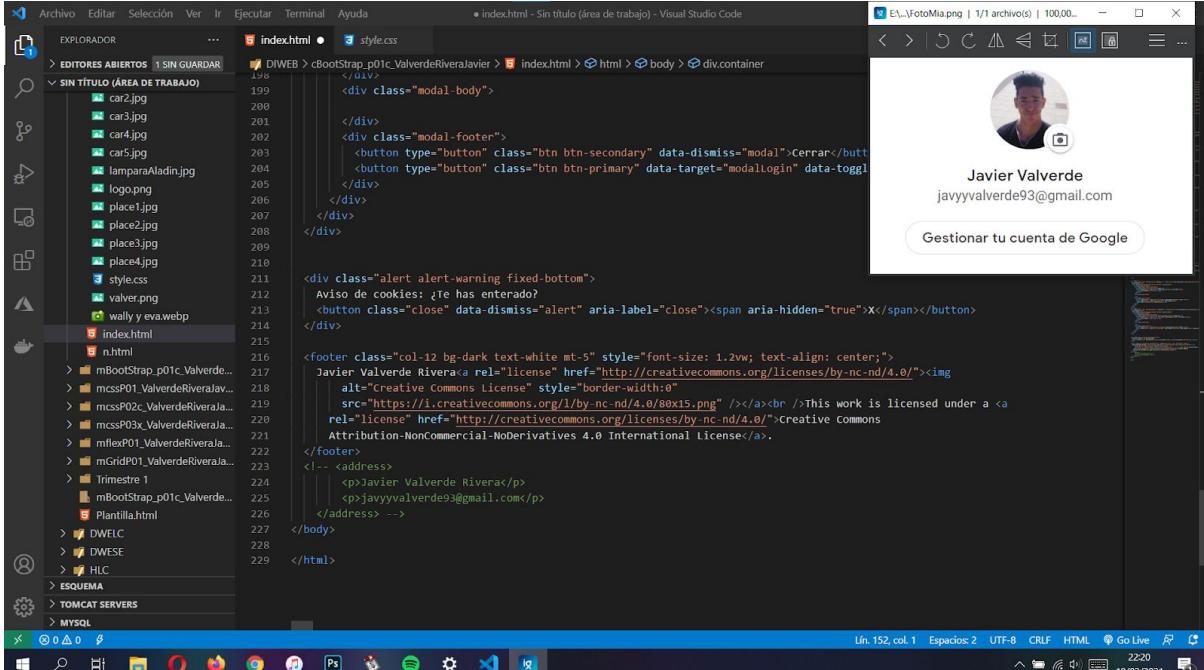


The screenshot shows the Visual Studio Code interface with the 'index.html' file open. The code includes a modal dialog for cookie consent and a footer section with a Creative Commons license notice.

```
<div class="modal-body">
</div>
<div class="modal-footer">
    <button type="button" class="btn btn-secondary" data-dismiss="modal">Cerrar</button>
    <button type="button" class="btn btn-primary" data-target="#modalLogin" data-toggle="modal">Entrar</button>
</div>
</div>

<div class="alert alert-warning fixed-bottom">
    Aviso de cookies: ¿Te has enterado?
    <button class="close" data-dismiss="alert" aria-label="close"><span aria-hidden="true">X</span></button>
</div>



<footer class="col-12 bg-dark text-white mt-5" style="font-size: 1.2vw; text-align: center;">
    Javier Valverde Rivera<a rel="license" href="http://creativecommons.org/licenses/by-nc-nd/4.0/"></a><br />This work is licensed under a <a rel="license" href="http://creativecommons.org/licenses/by-nc-nd/4.0/">Creative commons Attribution-NonCommercial-NoDerivatives 4.0 International license</a>.
    </footer>
<!-- <address>
        <p>Javier Valverde Rivera</p>
        <p>javyvalverde93@gmail.com</p>
    </address> -->
</body>
</html>
```

Vista previa de títulos, alerta de cookies y footer:

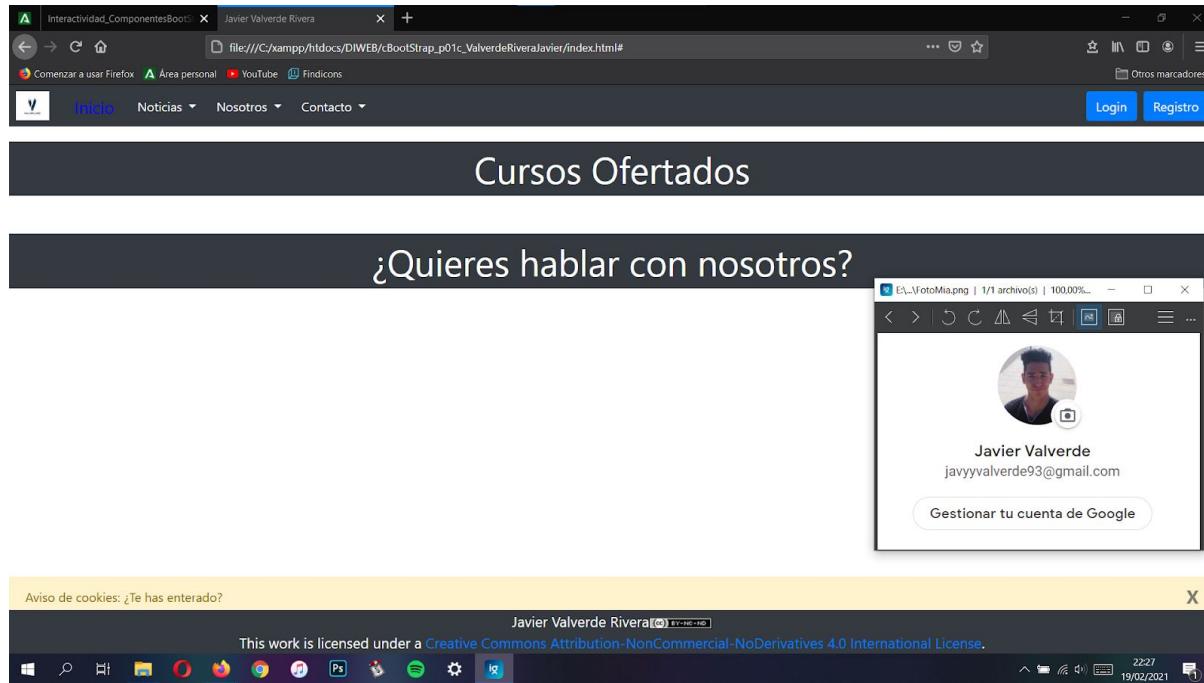



Javier Valverde Rivera

Creación de ventanas modales:

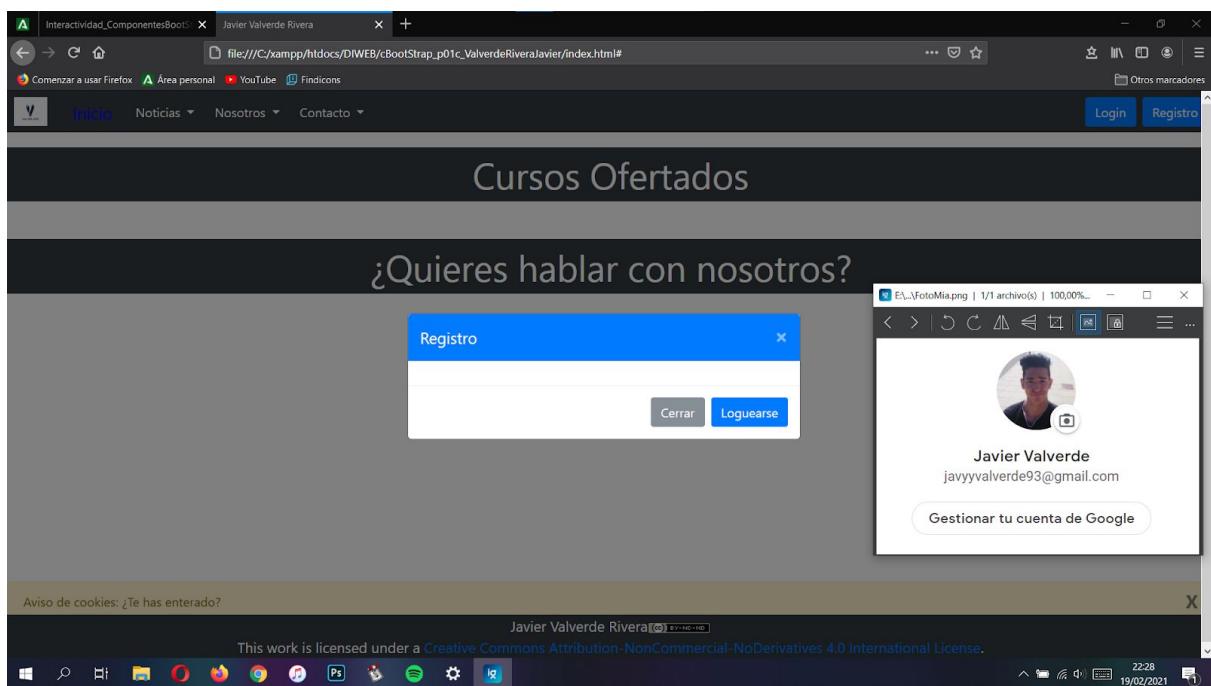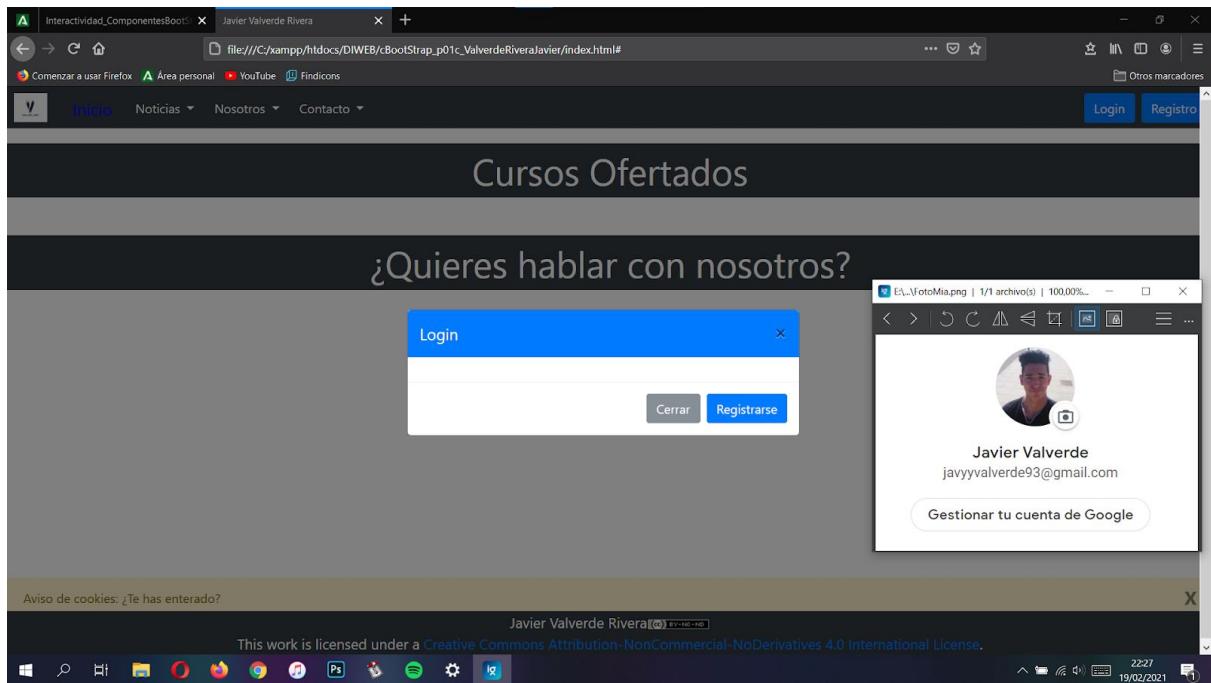

Javier Valverde Rivera

Añadiendo formularios a las ventanas modales:

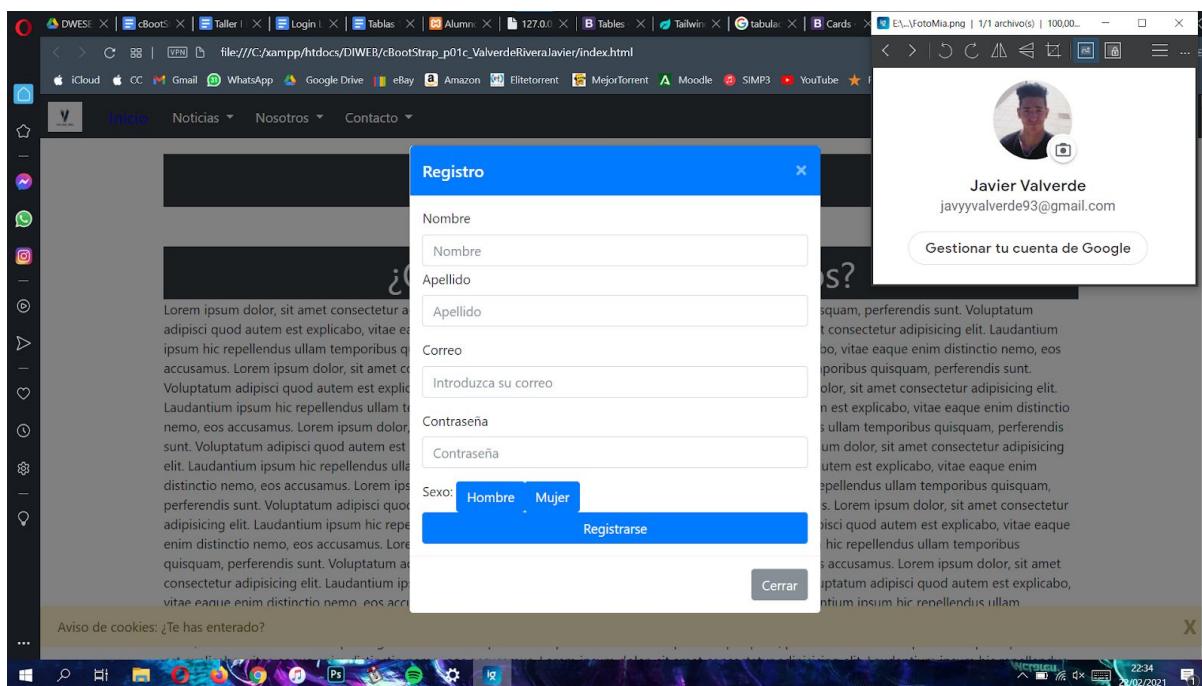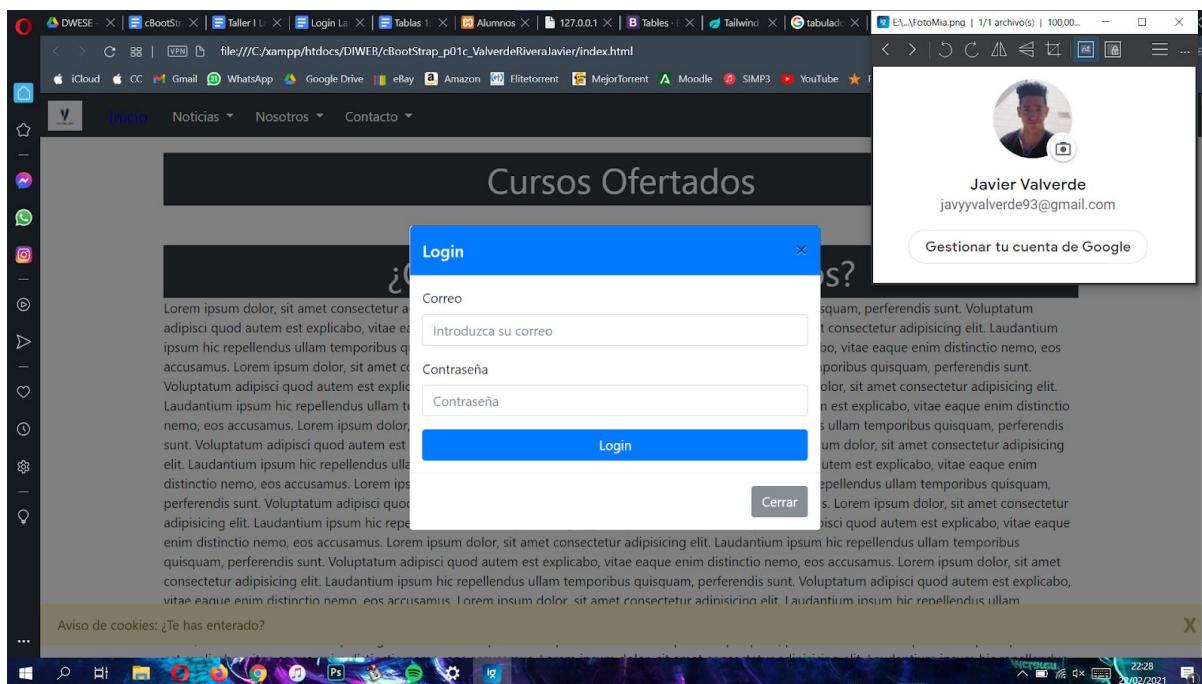

Javier Valverde Rivera

Código de ventanas modales:

The screenshot shows the Visual Studio Code interface with two tabs open: 'index.html - Sin título (área de trabajo)' and 'style.css'. The code editor displays the modal registration logic. A preview window on the right shows a placeholder profile picture and the user's details: 'Javier Valverde' and 'javayvalverde93@gmail.com'. A 'Gestionar tu cuenta de Google' button is also visible.


```
<!-- Modal -->
<div class="modal fade" id="modalLogin" tabindex="-1" role="dialog" aria-labelledby="exampleModalCenterTitle" aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered" role="document">
    <div class="modal-content">
      <div class="modal-header bg-primary">
        <h5 class="modal-title text-white">Login</h5>
        <button type="button" class="close" data-dismiss="modal" aria-label="Close">
          <span aria-hidden="true">&times;</span>
        </button>
      </div>
      <div class="modal-body">
        <form action="#" id="loginForm">
          <div class="form-group">
            <label>Correo:</label>
            <input type="email" class="form-control" placeholder="Introduzca su correo">
          </div>
          <div class="form-group">
            <label>Contraseña:</label>
            <input type="password" class="form-control" placeholder="Contraseña">
          </div>
          <button type="submit" class="btn btn-primary btn-block btn-large">Login</button>
        </form>
      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-secondary" data-dismiss="modal">Cerrar</button>
      </div>
    </div>
  </div>
</div>
```

The screenshot shows the Visual Studio Code interface with two tabs open: 'index.html - Sin título (área de trabajo)' and 'style.css'. The code editor displays the modal registration logic. A preview window on the right shows a placeholder profile picture and the user's details: 'Javier Valverde' and 'javayvalverde93@gmail.com'. A 'Gestionar tu cuenta de Google' button is also visible.

```
<!-- Modal -->
<div class="modal fade" id="modalRegister" tabindex="-1" role="dialog" aria-labelledby="exampleModalCenterTitle" aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered" role="document">
    <div class="modal-content">
      <div class="modal-header bg-primary">
        <h5 class="modal-title text-white" id="exampleModalLongTitle">Registro</h5>
        <button type="button" class="close text-white" data-dismiss="modal" aria-label="Close">
          <span aria-hidden="true">&times;</span>
        </button>
      </div>
      <div class="modal-body">
        <form action="#" id="registerForm">
          <div class="form-group">
            <label>Nombre:</label>
            <input type="text" class="form-control mb-1" placeholder="Nombre">
          </div>
          <div class="form-group">
            <label>Apellido:</label>
            <input type="text" class="form-control" placeholder="Apellido">
          </div>
          <div class="form-group">
            <label>Correo:</label>
            <input type="email" class="form-control" placeholder="Introduzca su correo">
          </div>
          <div class="form-group">
            <label>Contraseña:</label>
            <input type="password" class="form-control" placeholder="Contraseña">
          </div>
          <div class="btn-group">
            <label for="genero">Sexo: </label>
            <button type="button" class="btn btn-primary rounded ml-1">Hombre</button>
            <button type="button" class="btn btn-primary rounded">Mujer</button>
          </div>
          <button type="submit" class="btn btn-primary btn-block btn-large">Registrarse</button>
        </form>
      </div>
    </div>
  </div>
</div>
```

Javier Valverde Rivera

Código de carousel:

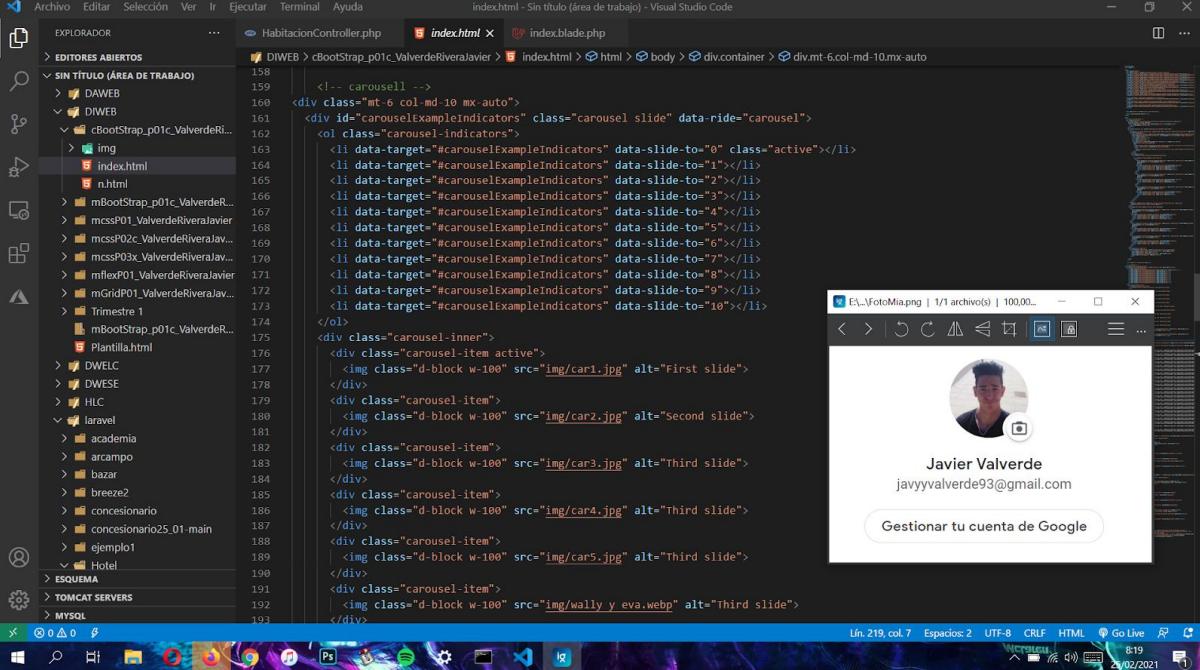


The screenshot shows the Visual Studio Code interface with the file 'index.html' open. The code displays a Bootstrap carousel setup with ten slides, each containing an image from a folder named 'img'. The code includes the necessary Bootstrap and jQuery imports at the top.

```
<!-- carousel -->
<div class="mt-4 col-md-10 mx-auto">
  <div id="carouselExampleIndicators" class="carousel slide" data-ride="carousel">
    <ol class="carousel-indicators">
      <li data-target="#carouselExampleIndicators" data-slide-to="0" class="active"></li>
      <li data-target="#carouselExampleIndicators" data-slide-to="1"></li>
      <li data-target="#carouselExampleIndicators" data-slide-to="2"></li>
      <li data-target="#carouselExampleIndicators" data-slide-to="3"></li>
      <li data-target="#carouselExampleIndicators" data-slide-to="4"></li>
      <li data-target="#carouselExampleIndicators" data-slide-to="5"></li>
      <li data-target="#carouselExampleIndicators" data-slide-to="6"></li>
      <li data-target="#carouselExampleIndicators" data-slide-to="7"></li>
      <li data-target="#carouselExampleIndicators" data-slide-to="8"></li>
      <li data-target="#carouselExampleIndicators" data-slide-to="9"></li>
    </ol>
    <div class="carousel-inner">
      <div class="carousel-item active">
        
      </div>
      <div class="carousel-item">
        
      </div>
```

Vista previa del carousel:


Contenido nuevo: imágenes de carousel.

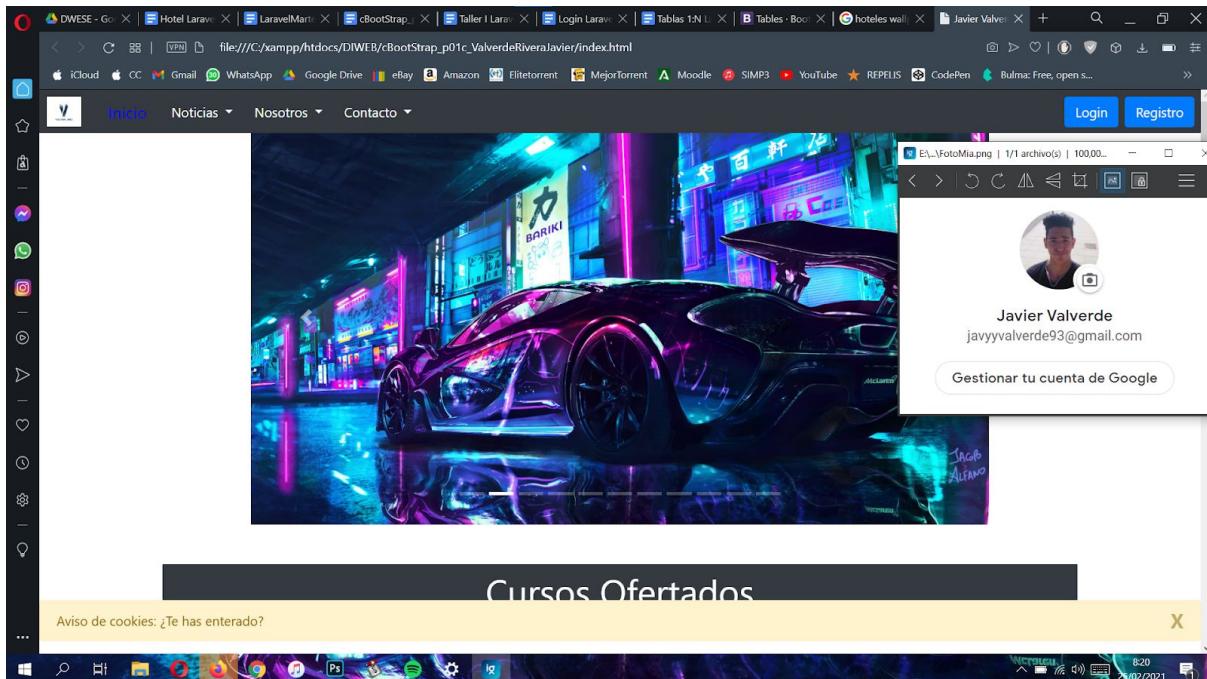

Javier Valverde Rivera

Vista previa de las cards:

Contenido nuevo: imágenes de las cards, título y contenido de las cards.

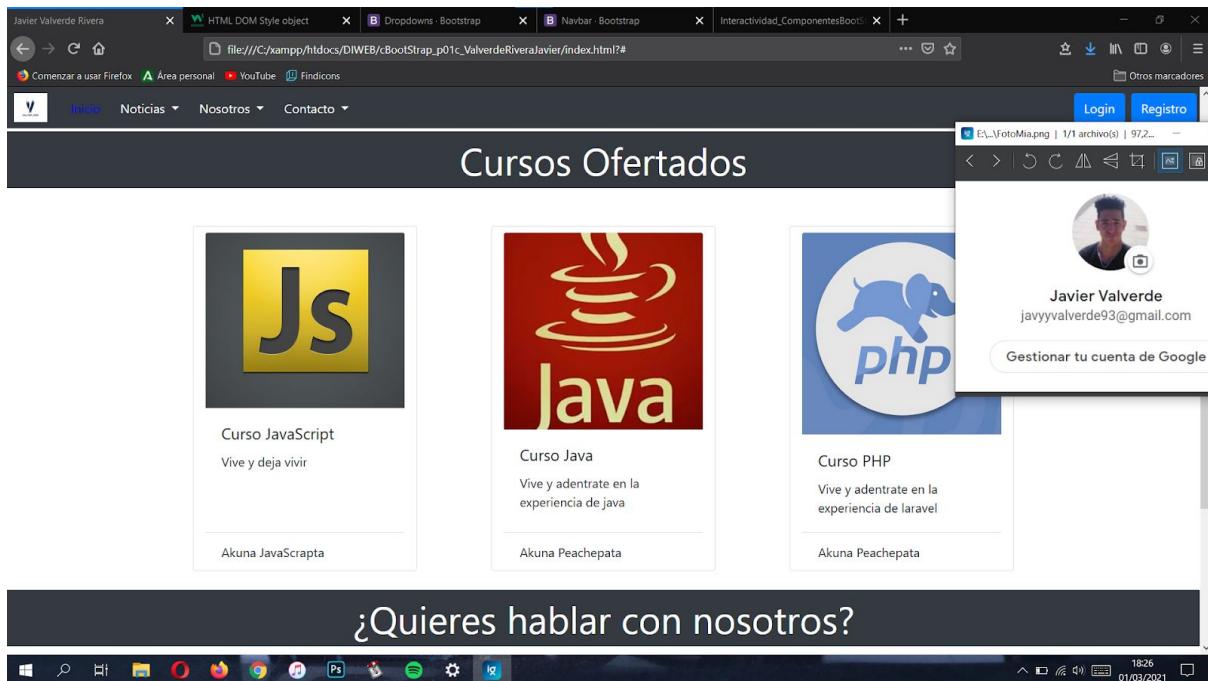

Código de las cards:

The screenshot shows the Visual Studio Code interface with the file "index.html" open. The code displays the HTML structure for the three cards shown in the previous screenshot. The code uses Bootstrap classes like "card", "card-img-top", and "list-group" to create the cards.

```
<div align="center" id="title" class="col-12 bg-dark text-white font-bold my-5" style="font-size:3rem">Cursos Ofertados</div>
<div class="container">
  <div class="row">
    <div class="card col-md-3 col-sm-11 mx-auto">
      
      <div class="card-body">
        <h5 class="card-title">Curso JavaScript</h5>
        <p class="card-text">Vive y deja vivir</p>
      </div>
    </div>
    <div class="card col-md-3 col-sm-11 mx-auto">
      
      <div class="card-body">
        <h5 class="card-title">Curso Java</h5>
        <p class="card-text">Vive y adentrate en la experiencia de java</p>
      </div>
    </div>
    <div class="card col-md-3 col-sm-11 mx-auto">
      
      <div class="card-body">
        <h5 class="card-title">Curso PHP</h5>
        <p class="card-text">Vive y adentrate en la experiencia de laravel</p>
      </div>
    </div>
  </div>
</div>
```


Javier Valverde Rivera

Vista previa de los formularios para hablar con nosotros:

The screenshot shows a web browser window with multiple tabs open. The main content area displays a website with a navigation bar at the top. Below the navigation, there are three boxes: 'Curso JavaScript' (Vive y deja vivir, Akuna JavaScripta), 'Curso Java' (Vive y adentrate en la experiencia de java, Akuna Peacheprata), and 'Curso PHP' (Vive y adentrate en la experiencia de laravel, Akuna Peacheprata). A large dark banner in the center says '¿Quieres hablar con nosotros?'. Below it is a contact form with fields for 'Email:' (Introduce tu correo) and 'Tu problema:' (with a large text input area). To the left of the form is a sidebar with buttons for 'Contatar', 'Sugerencia' (highlighted in blue), and 'Empresas'. On the right, a sidebar shows a user profile for 'Javier Valverde' with a photo, email (javayvalverde93@gmail.com), and a 'Gestionar tu cuenta de Google' button. The bottom of the screen shows a Windows taskbar with various icons.

This screenshot is similar to the one above, but the 'Contatar' button in the sidebar is highlighted in blue. The rest of the interface, including the banner, form fields, and sidebar profile, remains the same.


Javier Valverde Rivera

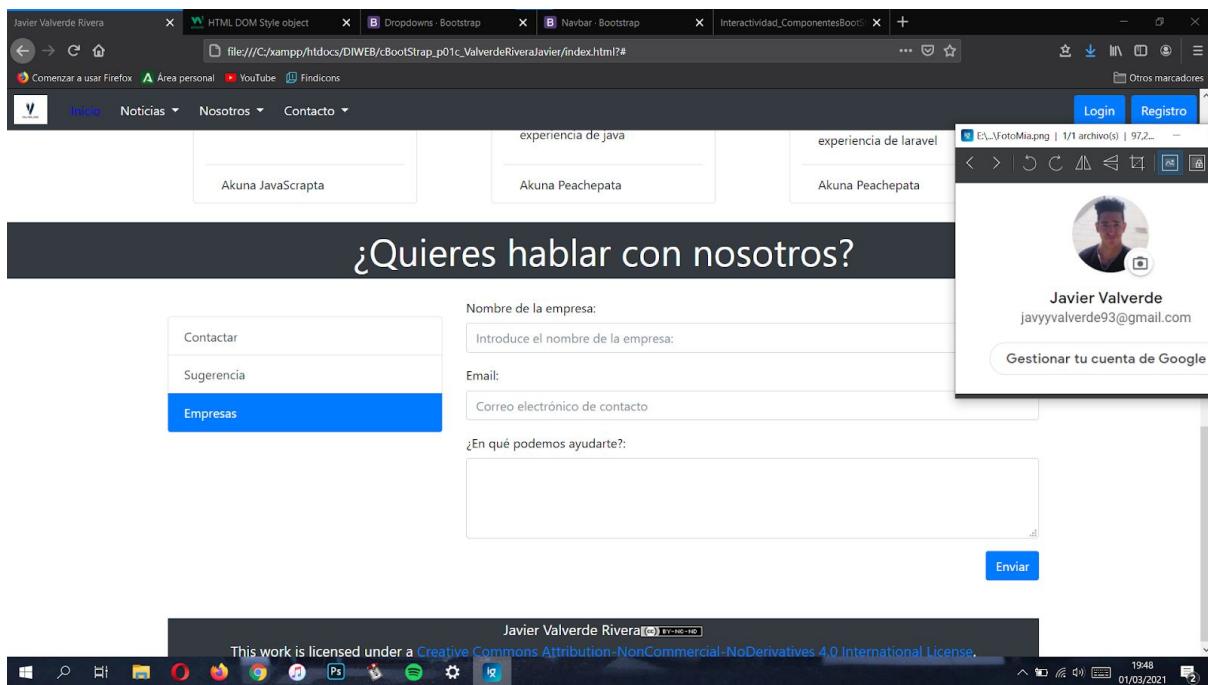

Código de los formularios:


A screenshot of the Visual Studio Code editor. The left sidebar shows a file tree with files like 'index.html', 'style.css', 'wally y eva.webp', 'n.html', 'mBootstrap_p01c_ValverdeR...', 'mcspP01_ValverdeRiveraJav...', 'mcspP02c_ValverdeRiveraJav...', 'ESQUEMA', 'TOMCAT SERVERS', and 'MYSQL'. The main editor pane displays the HTML code for the contact form. The code includes Bootstrap classes for styling, such as 'container', 'row', 'col-md-3', 'col-sm-12', and 'my-4'. It also includes tabs for 'Contactar', 'Sugerencia', and 'Empresas'. The 'Contactar' tab is active, showing input fields for 'Nombre de la empresa', 'Email', 'Correo electrónico de contacto', and a text area for '¿En qué podemos ayudarte?'. A 'Enviar' button is at the bottom. The code uses 'data-toggle="list"' and 'data-control="profile"' attributes for the tabs. The right sidebar of the editor shows the current file's structure and other open files.

Javier Valverde Rivera

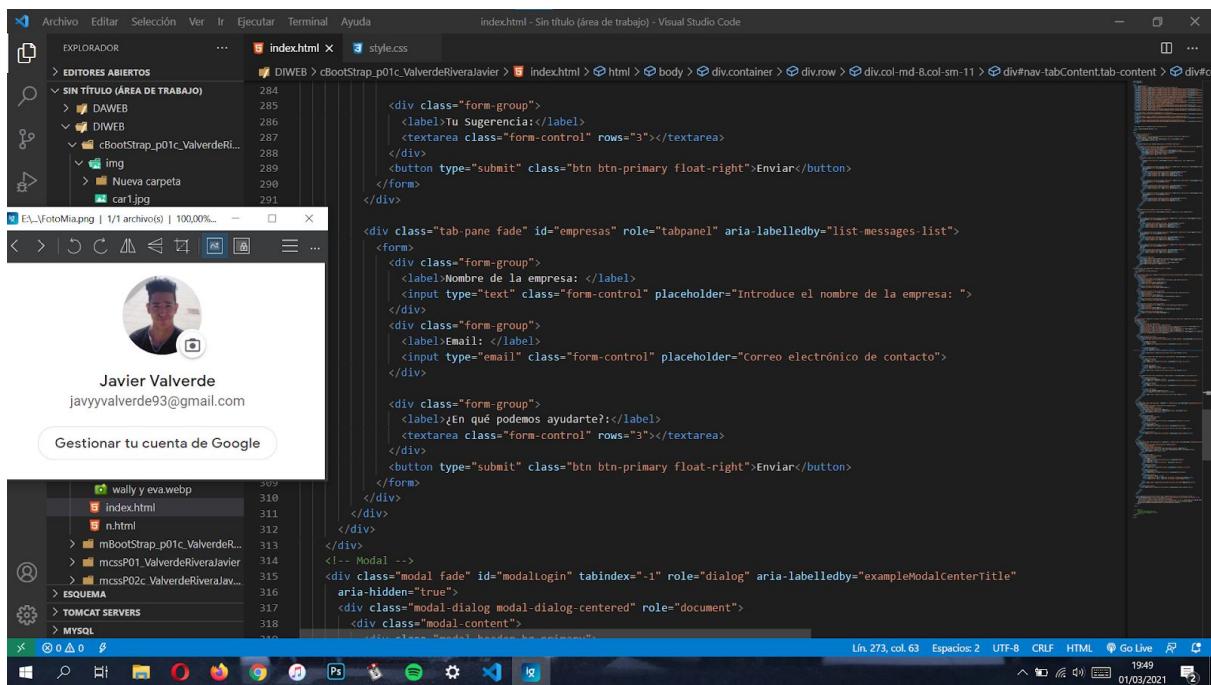

The screenshot shows a Windows desktop environment with Visual Studio Code open. The code editor displays a portion of an HTML file with a form for sending messages. The file includes fields for name, email, and message, along with a modal for login information. The file explorer on the left shows a project structure with files like index.html, style.css, and various Bootstrap and Java-related files. The terminal at the bottom shows standard command-line output.

Vista previa de la página en un iPad:

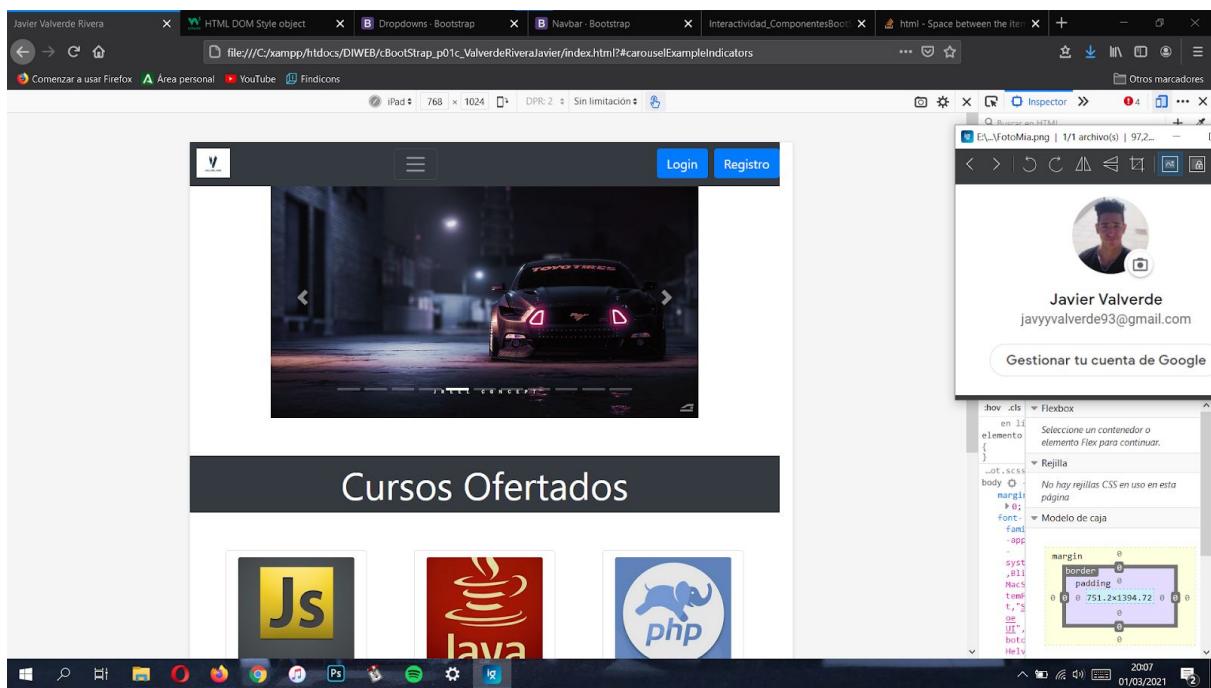



Javier Valverde Rivera

The screenshot shows a web browser window with multiple tabs open. The main content is a contact form titled "¿Quieres hablar con nosotros?". The form includes dropdown menus for "Contactar", "Sugerencia", and "Empresas", and input fields for "Email" and "Tu problema". A "Enviar" button is at the bottom right. To the right of the form is a sidebar with a profile picture of a man and contact information: "Javier Valverde" and "javyyvalverde93@gmail.com". Below this is a "Gestionar tu cuenta de Google" link. On the far right, a browser developer tool's "Inspector" panel is visible, showing the HTML structure and CSS styles for the selected element. The browser interface includes a toolbar with various icons and a status bar at the bottom.


This screenshot is similar to the one above, showing the same contact form and sidebar. However, it includes a yellow "Aviso de cookies" (Cookie notice) banner at the bottom of the page. The banner asks if the user has entered their cookies and has a "X" button to close it. The rest of the interface, including the browser toolbar and developer tools, remains the same.

Javier Valverde Rivera

Vista previa de la página en un móvil:

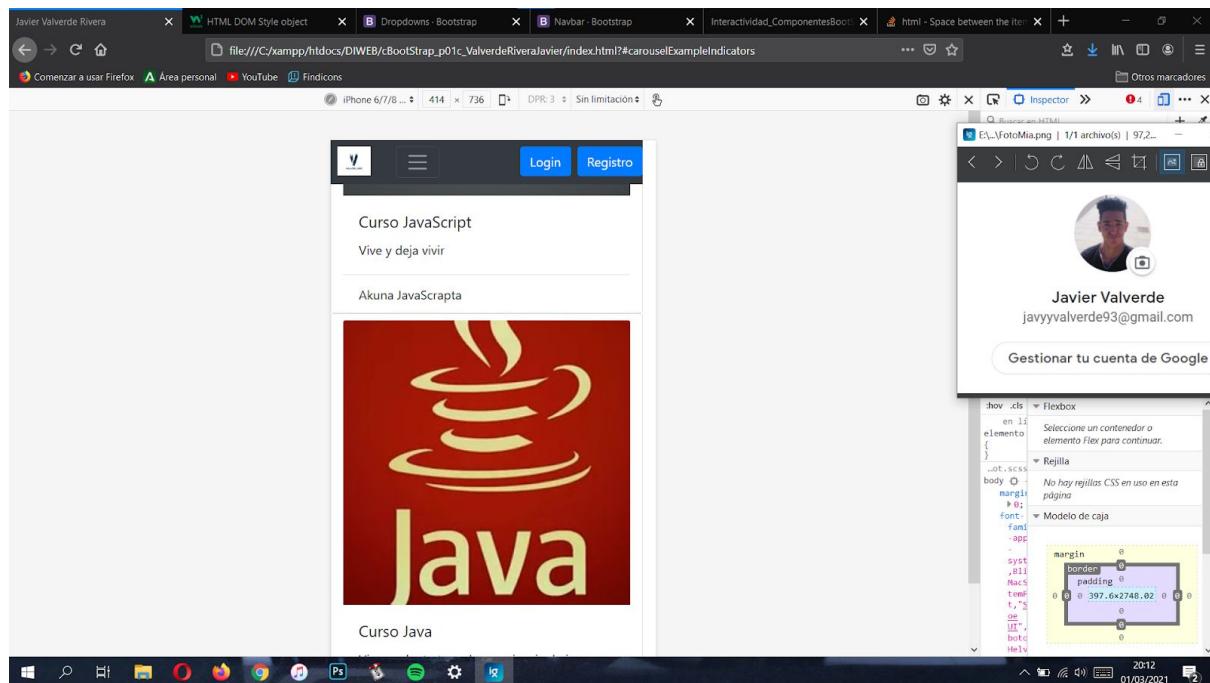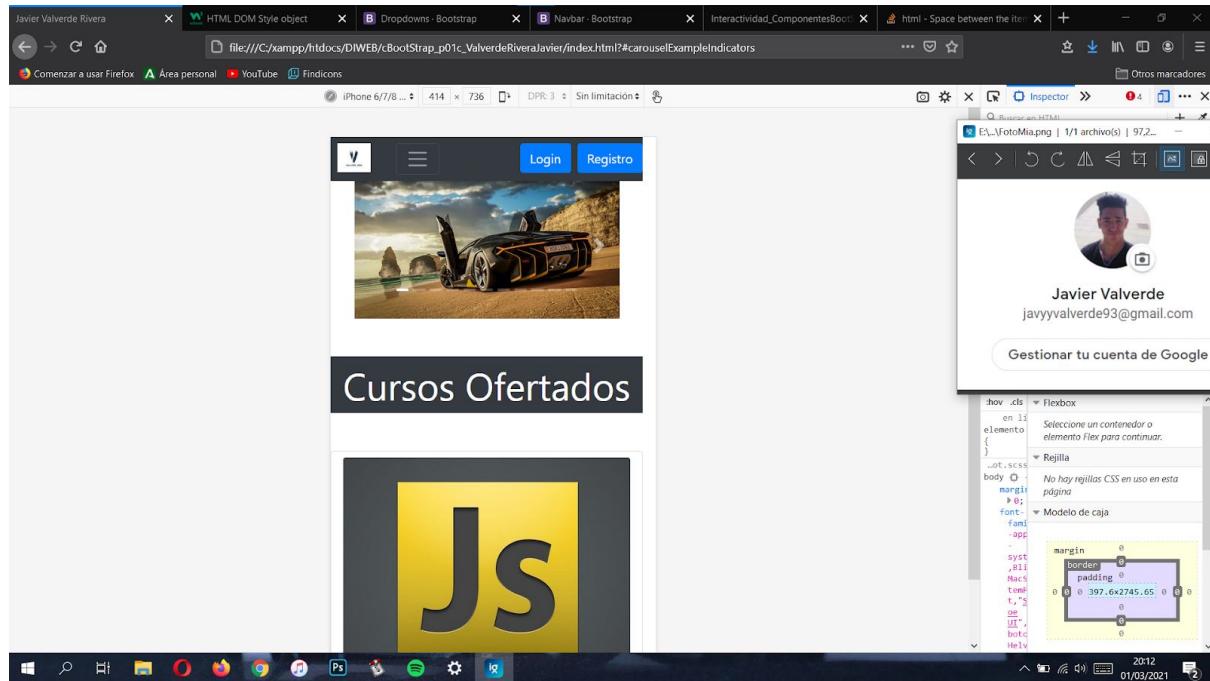


Javier Valverde Rivera

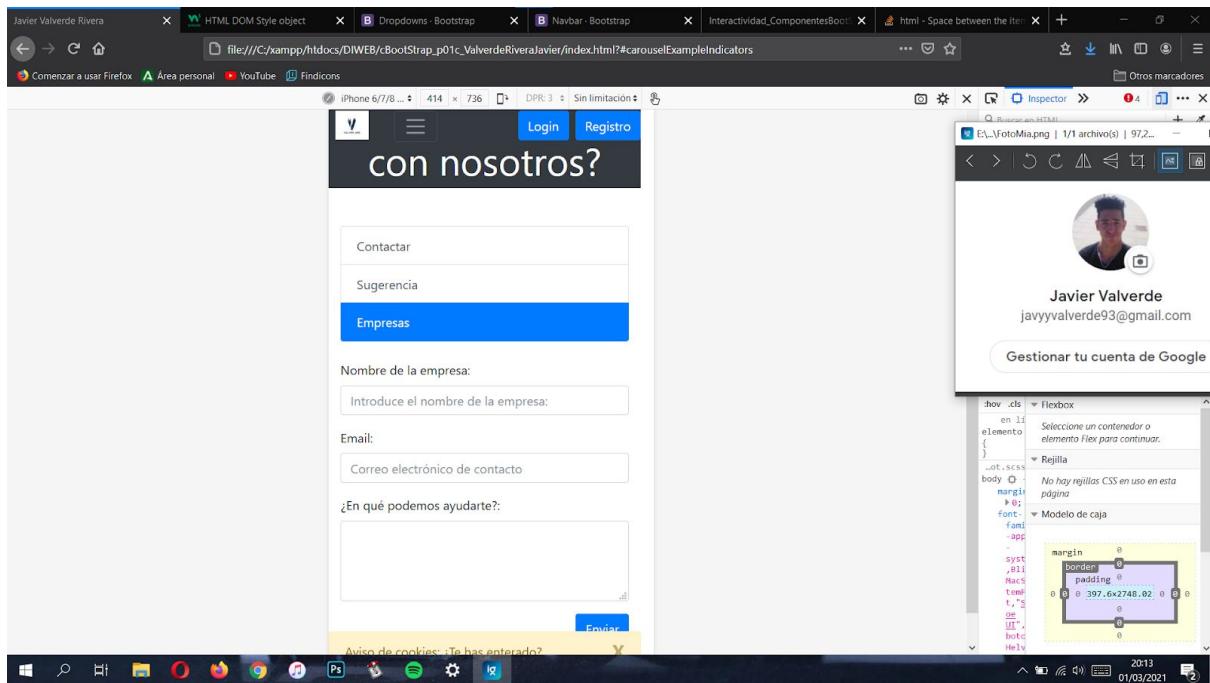


Últimos retoques: separar algunos botones del contenido, cambio de colores, cambio de algunas imágenes.

Componente extra:

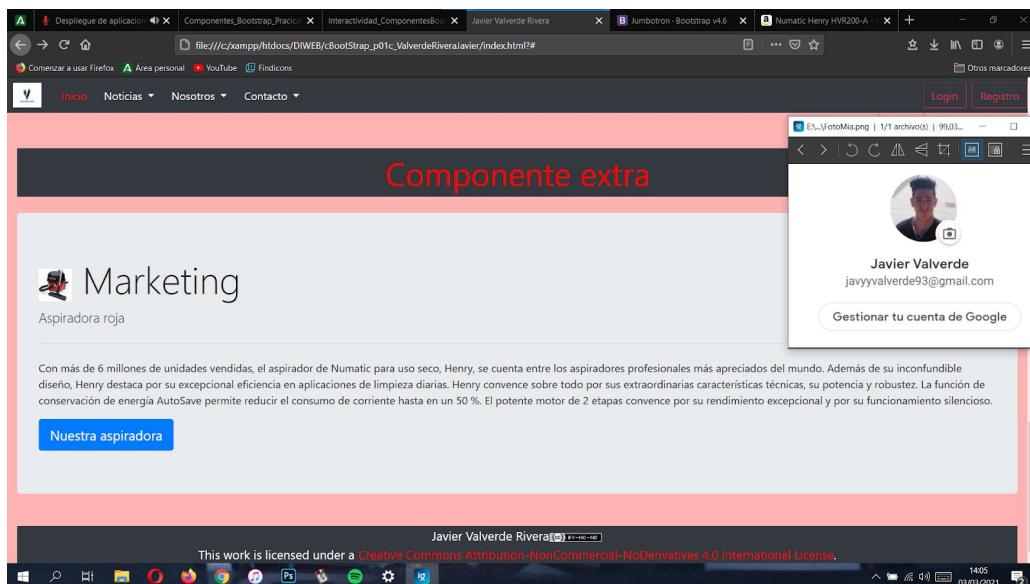

Javier Valverde Rivera

Código Jumbotron:

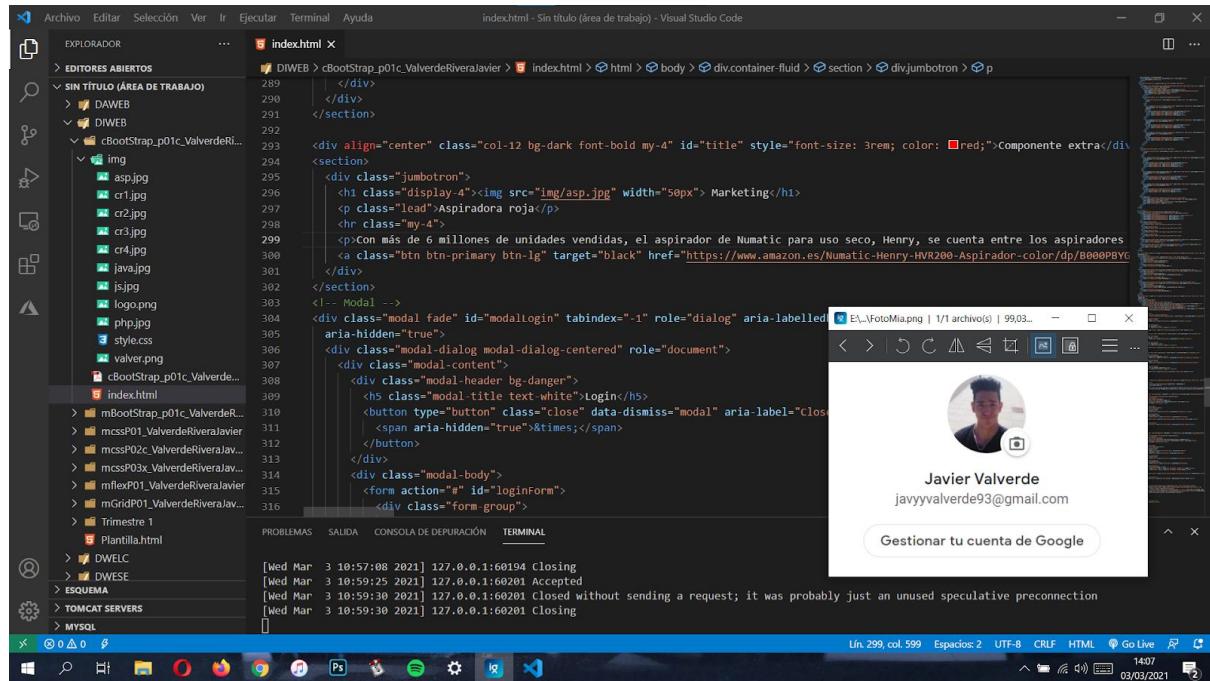

The screenshot shows a Visual Studio Code window with the following details:

- Title Bar:** index.html - Sin título (área de trabajo) - Visual Studio Code
- Explorer:** Shows files like index.html, asp.jpg, cr1.jpg, cr2.jpg, cr3.jpg, cr4.jpg, java.jpg, js.jpg, logo.png, php.jpg, style.css, valvere.png, and cBootstrap_p01c_Valverde... (with a red error icon).
- Editor:** Displays the HTML code for a Jumbotron component. The code includes a title section with a red background and bold text, a lead paragraph, a testimonial section with a quote and a button, and a modal dialog for logging in.
- Terminal:** Shows log entries from a Tomcat server, indicating connections closing and accepting requests.
- Bottom Status Bar:** Includes file navigation icons, a search bar, and system status indicators.