


Deploy wordpress website on aws using elastic beanstalk

step:1 Search RDS on aws console and then click on create database

Step:2 choose **standard create** and then aurora mysql engine

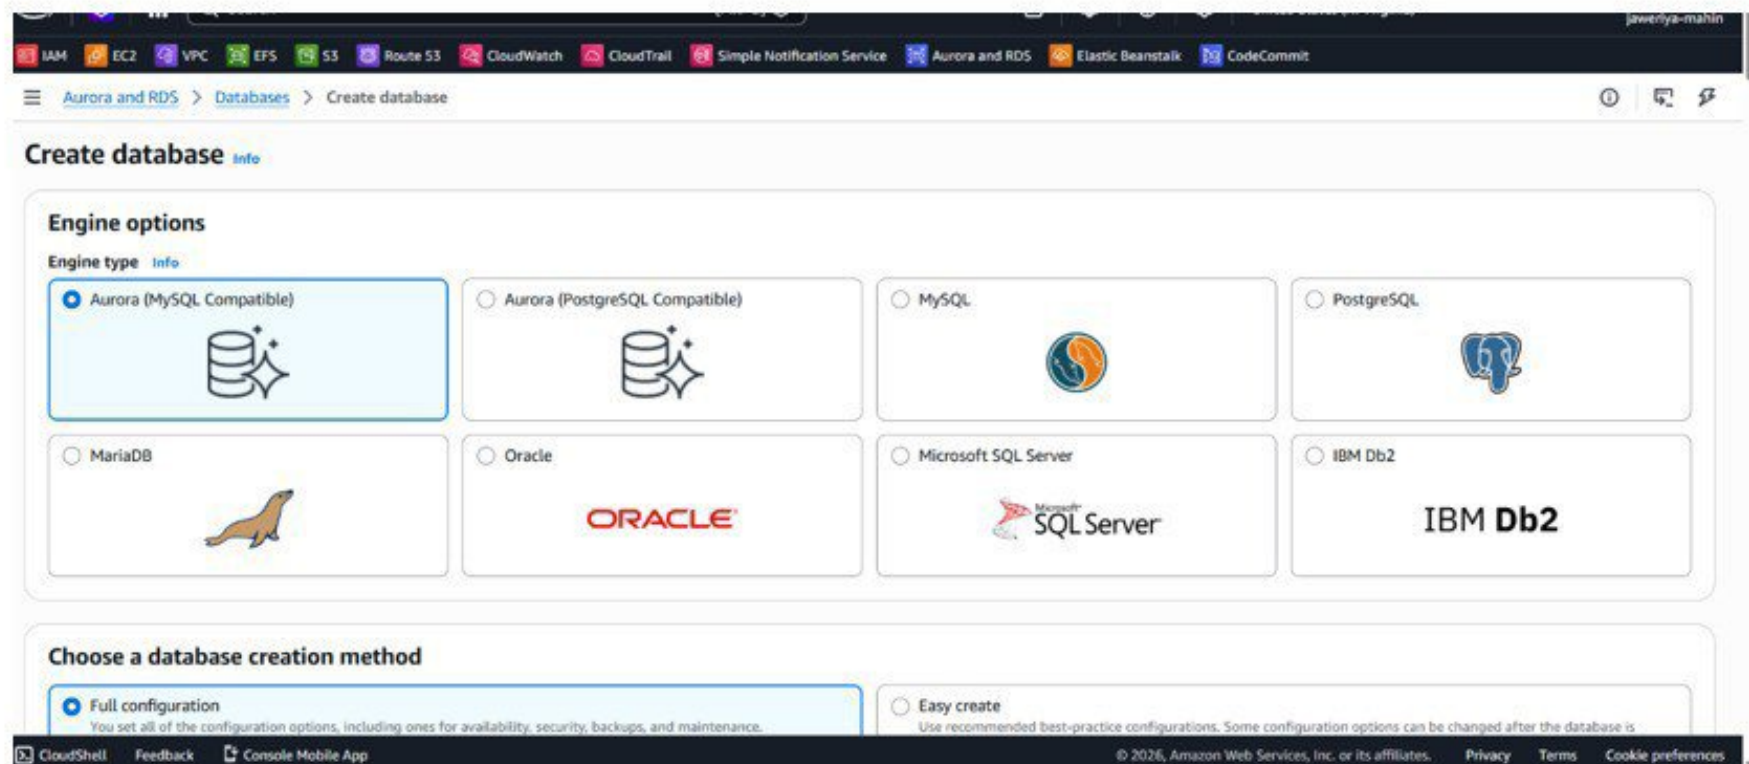

Step:3 set your **master name and password**

Step:4 give the name to your database in the **additional configuration section** and remain everything as it is .

← → ↻

us-east-2.console.aws.amazon.com/rds/home?region=us-east-2#modify-clusterid=database-1

🔍 ☆ 📄 ⬇️ 📱 ⋮

Google YouTube ChatGPT Adobe Acrobat A Tutorial for GitH... Introduction to Git... [Hindi] Introduction... github project dash... agile methodology L... servicenow ticketin...

Shahbazahmedkhan (615167489280) | jaweriyg-mahin

aws 🔍 Search [Alt+S]

IAM EC2 VPC EFS S3 Route 53 CloudWatch CloudTrail Simple Notification Service Aurora and RDS Elastic Beanstalk CodeCommit

☰ Aurora and RDS > Databases > Modify DB cluster: database-1

🔍 📄 ⚡

DB cluster identifier [Info](#)

Type a name for your DB cluster. The name must be unique across all DB clusters owned by your AWS account in the current AWS Region.

database-1

The DB cluster identifier is case-insensitive, but is stored as all lowercase (as in "mydbcluster"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

Credentials management

You can use AWS Secrets Manager or manage your master user credentials.

☐ Managed in AWS Secrets Manager - most secure
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.

☒ Self managed
Create your own password or have RDS create a password that you manage.

☐ Auto generate password
Amazon RDS can generate a password for you, or you can specify your own password.

Master password [Info](#)

Password strength **Weak**

Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / * ' @

Confirm master password [Info](#)

▼ Additional credentials settings

☐ IAM database authentication
Authenticate using IAM database authentication.

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step:5 In the additional configuration section give initial database name and remain everything as it is .

us-east-2.console.aws.amazon.com/rds/home?region=us-east-2#launch-dbinstance:

Google YouTube ChatGPT Adobe Acrobat A Tutorial for GitHub... Introduction to Git... [Hindi] Introduction... github project dash... agile methodology i... servicenow ticketin...

aws Search [Alt+S]

United States (Ohio) Shahbazahmedkhan (615167489280) jaweriyamahin

IAM EC2 VPC EFS S3 Route 53 CloudWatch CloudTrail Simple Notification Service Aurora and RDS Elastic Beanstalk CodeCommit

Aurora and RDS > Databases > Create database

▼ Additional configuration
Database options, encryption turned on, backup turned on, backtrack turned off, maintenance, delete protection turned on.

Initial database name [Info](#)
WORDPRESS
If you do not specify a database name, Amazon RDS does not create a database.

DB cluster parameter group [Info](#)
default.aurora-mysql8.0

DB parameter group [Info](#)
default.aurora-mysql8.0

Failover priority
No preference

Backup
Backup retention period [Info](#)
The number of days (1-35) for which automatic backups are kept.
2 days

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

:Now launch ELASTIC BEANSTALK environment

Step:1 Search Elastic beanstalk on aws console and then click on create application

step:2 choose **web server environment** and then give name to your application

The screenshot shows the AWS Elastic Beanstalk 'Create environment' page in the AWS console. The browser address bar shows the URL: `us-east-2.console.aws.amazon.com/elasticbeanstalk/home?region=us-east-2#/create-environment`. The page is titled 'Elastic Beanstalk > Create environment'. On the left, there is a sidebar with 'Elastic Beanstalk' and 'Recent environments' (listing 'Bean-stalk-env'). The main content area shows a progress bar with steps: 'Step 1: Configure service access' (completed), 'Step 2: Set up networking, database, and tags' (current step), 'Step 3: optional', 'Step 4: optional', 'Step 5: optional', and 'Step 6: Review'. The 'Environment tier' section shows two options: 'Web server environment' (selected) and 'Worker environment'. The 'Application information' section has a text input for 'Application name' with the value 'bean-stalk'. The 'Environment information' section has a text input for 'Environment name' with the value 'Bean-stalk-env'. The footer shows '© 2026, Amazon Web Services, Inc. or its affiliates.' and links for 'Privacy', 'Terms', and 'Cookie preferences'.

us-east-2.console.aws.amazon.com/elasticbeanstalk/home?region=us-east-2#/create-environment

Google YouTube ChatGPT Adobe Acrobat A Tutorial for GitHub Introduction to Git... [Hindi] Introduction... github project dash... agile methodology I... servicenow ticketin...

aws Search [Alt+S] United States (Ohio) Shahbazahmedkhan (615167489280) jaweriyamahin

Elastic Beanstalk > Create environment

Elastic Beanstalk

Applications
Environments
Change history

▼ Recent environments
Bean-stalk-env

Step 1: Configure service access
Step 2: Set up networking, database, and tags
Step 3: optional
Step 4: optional
Step 5: optional
Step 6: Review

Environment tier Info
Amazon Elastic Beanstalk has two types of environment tiers to support different types of web applications.

☒ **Web server environment**
Run a website, web application, or web API that serves HTTP requests. [Learn more](#)

☐ **Worker environment**
Run a worker application that processes long-running workloads on demand or performs tasks on a schedule. [Learn more](#)

Application information Info
Application name
bean-stalk
Maximum length of 100 characters.

► Application tags (optional)

Environment information Info
Choose the name, subdomain and description for your environment. These cannot be changed later.

Environment name
Bean-stalk-env

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

step:3 choose **php** from managed platform and then **click next**

The screenshot shows the AWS Elastic Beanstalk console in the 'us-east-2' region, specifically the 'Create environment' page. The left sidebar shows the 'Elastic Beanstalk' menu with options for 'Applications', 'Environments', and 'Change history'. Below this, 'Recent environments' lists 'Bean-stalk-erv'. The main content area is divided into sections: 'Platform', 'Application code', and 'Presets'. In the 'Platform' section, 'PHP' is selected for the Platform, 'PHP 8.5 running on 64bit Amazon Linux 2023' for the Platform branch, and '4.13.2 (Recommended)' for the Platform version. In the 'Application code' section, 'Sample application' is selected, with options for 'Existing version' and 'Upload your code'. The 'Presets' section is partially visible at the bottom. The top navigation bar shows the user's profile 'Shahbazahmedkhan (615167489280)' and the location 'United States (Ohio)'.

us-east-2.console.aws.amazon.com/elasticbeanstalk/home?region=us-east-2#/create-environment

Search [Alt+S]

United States (Ohio) Shahbazahmedkhan (615167489280) jaweriy-mahin

Elastic Beanstalk > Create environment

Elastic Beanstalk

Applications
Environments
Change history

▼ Recent environments
Bean-stalk-erv

Platform [Info](#)

Platform
PHP

Platform branch
PHP 8.5 running on 64bit Amazon Linux 2023

Platform version
4.13.2 (Recommended)

Application code [Info](#)

☒ Sample application
☐ Existing version
Application versions that you have uploaded.

☐ Upload your code
Upload a source bundle from your computer or copy one from Amazon S3.

Presets [Info](#)


CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step:4 In configuration service access section service role click **create a new service role** and **select aws-elasticbeanstalk-service-role** from it.



Step:5 choose your EC2 instance profile aws-elastic-beanstalk-ec2-role

Step:6 Choose EC2 key pair (remember key pair must be present in your local host)

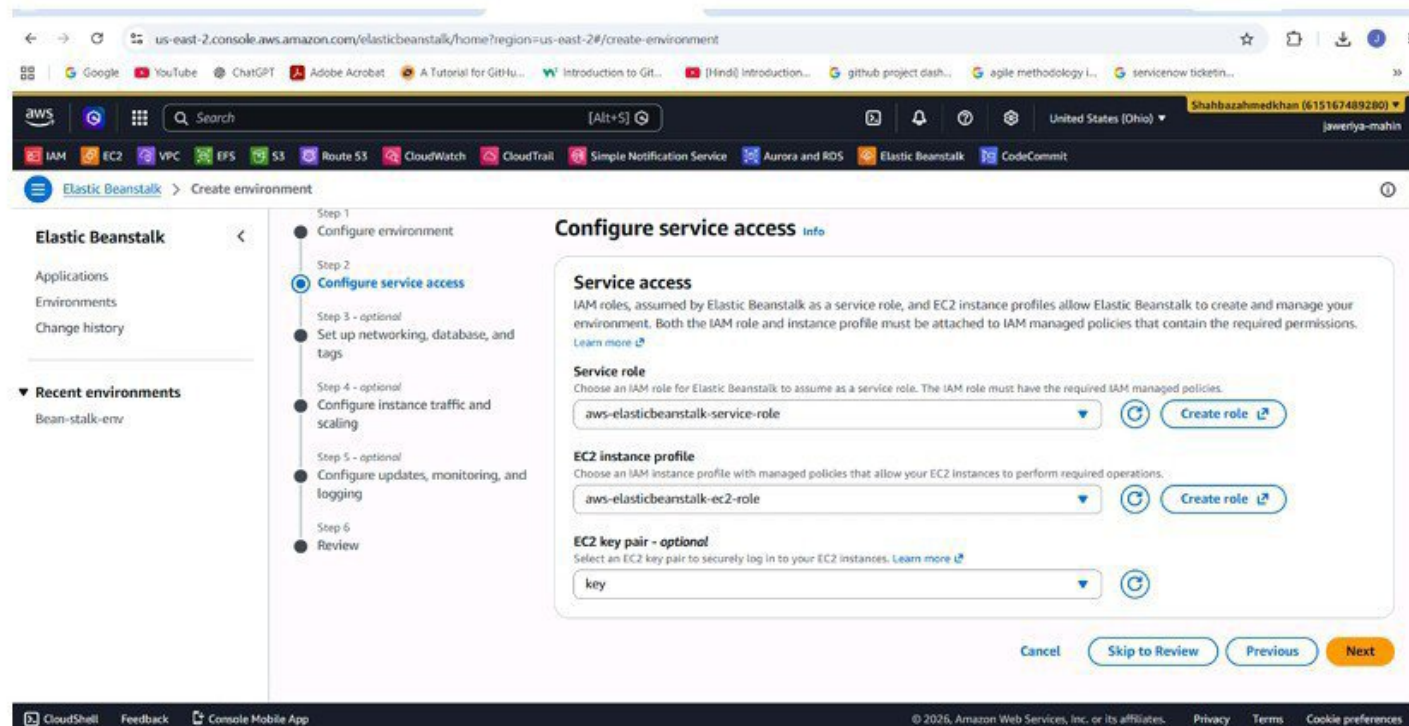

Step:6→ In VPC choose **default vpc** and then select your instance subnet.

step 7 →select the **default security group** from the options and click next.

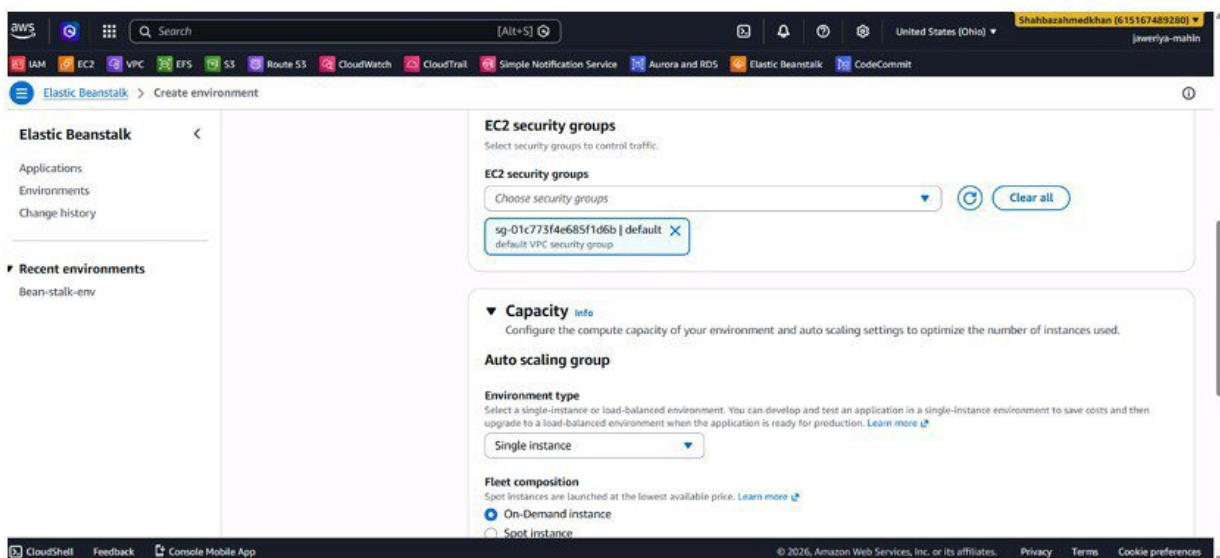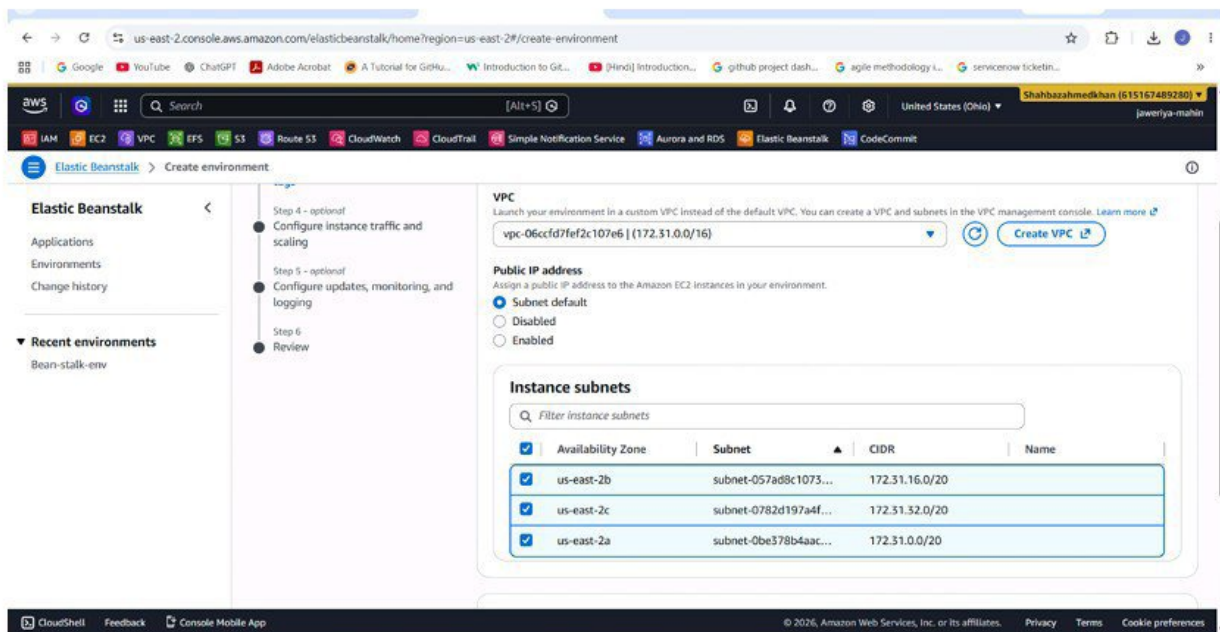

step 8 → in health reporting section choose basic and untick the managed updates options then click on next .

The screenshot shows the AWS Elastic Beanstalk console at the 'Create environment' stage, specifically Step 5: 'Configure updates, monitoring, and logging'. The left sidebar shows the 'Elastic Beanstalk' menu with 'Applications', 'Environments', and 'Change history'. Below it, 'Recent environments' lists 'Bean-stalk-env'. The main content area has a progress bar with steps 1-6, where Step 5 is highlighted. The 'Health reporting' section is expanded, showing 'System' with 'Basic' selected and 'Enhanced' unselected. Below this, 'Health event streaming to CloudWatch Logs' is configured with 'Log streaming' set to 'Enable'. The 'Managed platform updates' section is also expanded, showing 'Managed updates' set to 'Enable'. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

step 9 → Now connect your database by adding environment properties.

The screenshot shows the AWS Elastic Beanstalk console at the 'Create environment' stage, specifically Step 6: 'Environment properties'. The left sidebar is the same as in the previous screenshot. The main content area shows the 'Environment properties' section, which includes a table for adding properties. The table has columns for 'Source', 'Name', and 'Value'. Five properties are listed: 'RDS_HOSTNAME' (value: database-1.cluster-cle60sw), 'RDS_PORT' (value: 3306), 'RDS_DB_NAME' (value: WORDPRESS), 'RDS_USERNAME' (value: JAWERIYA03), and 'RDS_PASSWORD' (value: 85296374DB). Each row has a 'Remove' button. At the bottom of the table is an 'Add environment property' button. Below the table are 'Cancel', 'Previous', and 'Next' buttons.

Source	Name	Value	
Plain text	RDS_HOSTNAME	database-1.cluster-cle60sw	Remove
Plain text	RDS_PORT	3306	Remove
Plain text	RDS_DB_NAME	WORDPRESS	Remove
Plain text	RDS_USERNAME	JAWERIYA03	Remove
Plain text	RDS_PASSWORD	85296374DB	Remove

1.RDS hostname

2.RDS_PORT


3.RDS_DB_NAME

4.RDS_USERNAME


5. RDS_PASSWORD

STEP:10 Review your environment properties and click on create

It takes around 5 to 10 min to create your application and environment

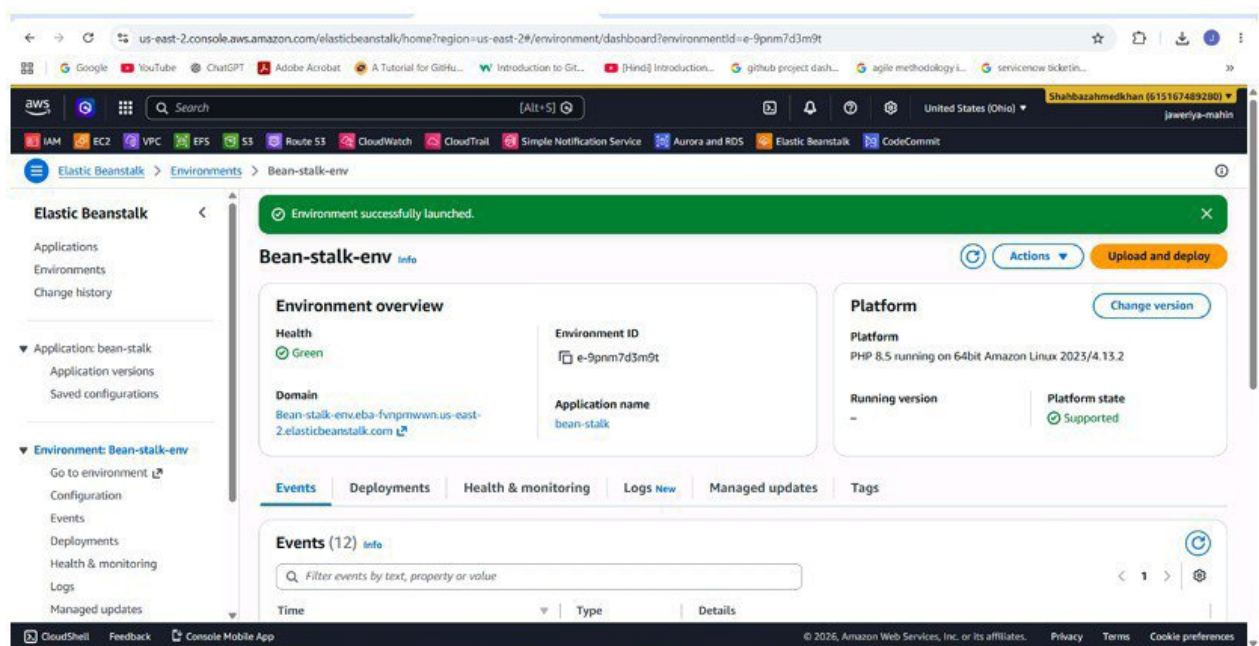

The environment successfully launched then click on domain link .

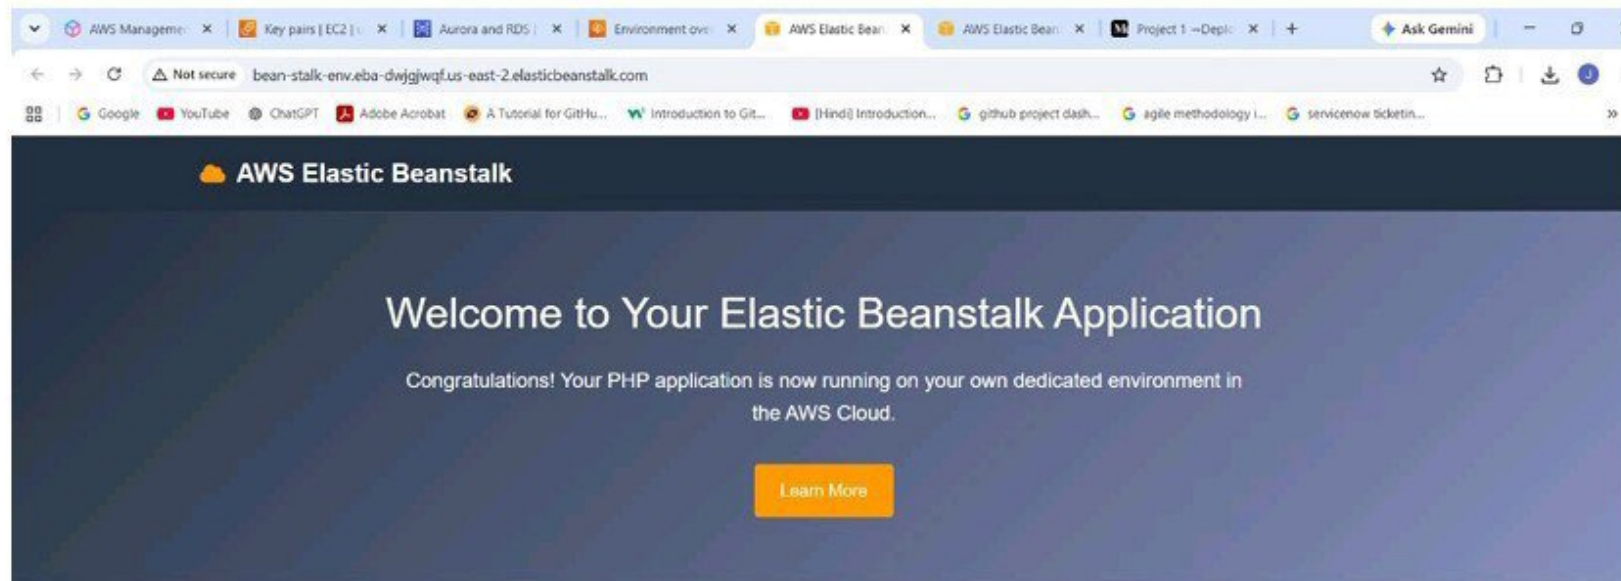

Benefits of AWS Elastic Beanstalk


Discover why thousands of developers rely on AWS Elastic Beanstalk to deploy and manage their applications.




In the next section download wordpress file .

Upload and deploy →

step 1 → go to your elastic beanstalk console choose the environment you created above and select **upload and deploy** option choose your wordpress file that you just downloaded and click on deploy.

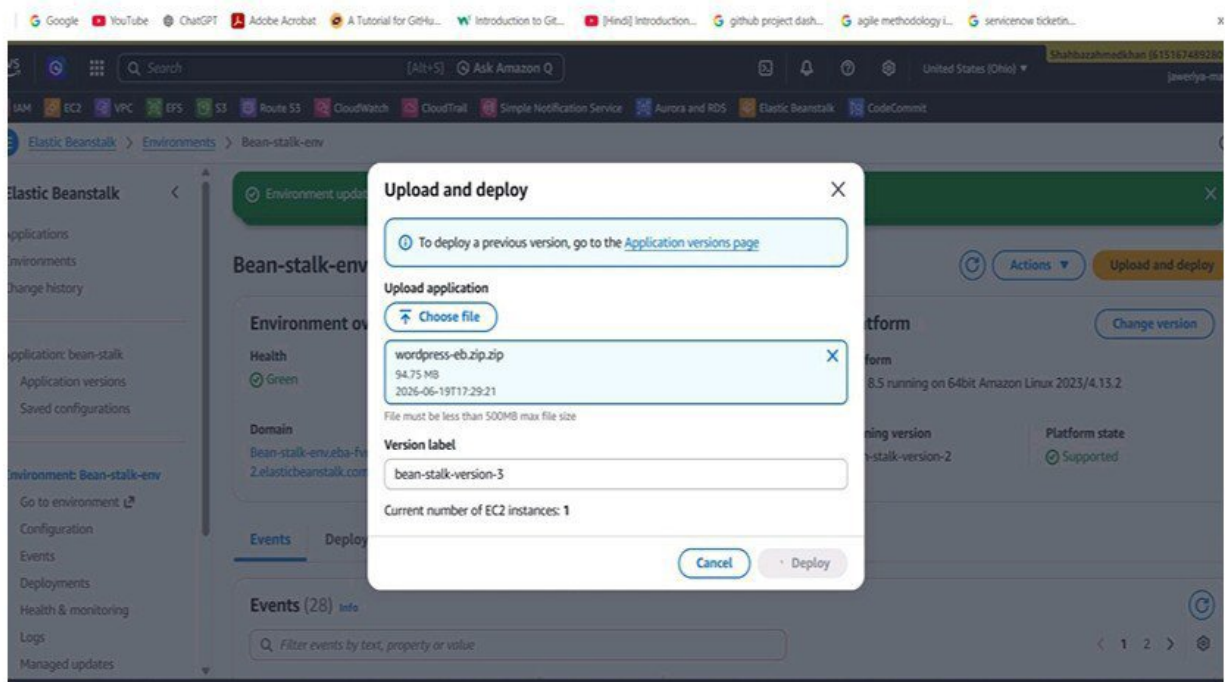

:now again click on url you will find a web page where you wordpress application running

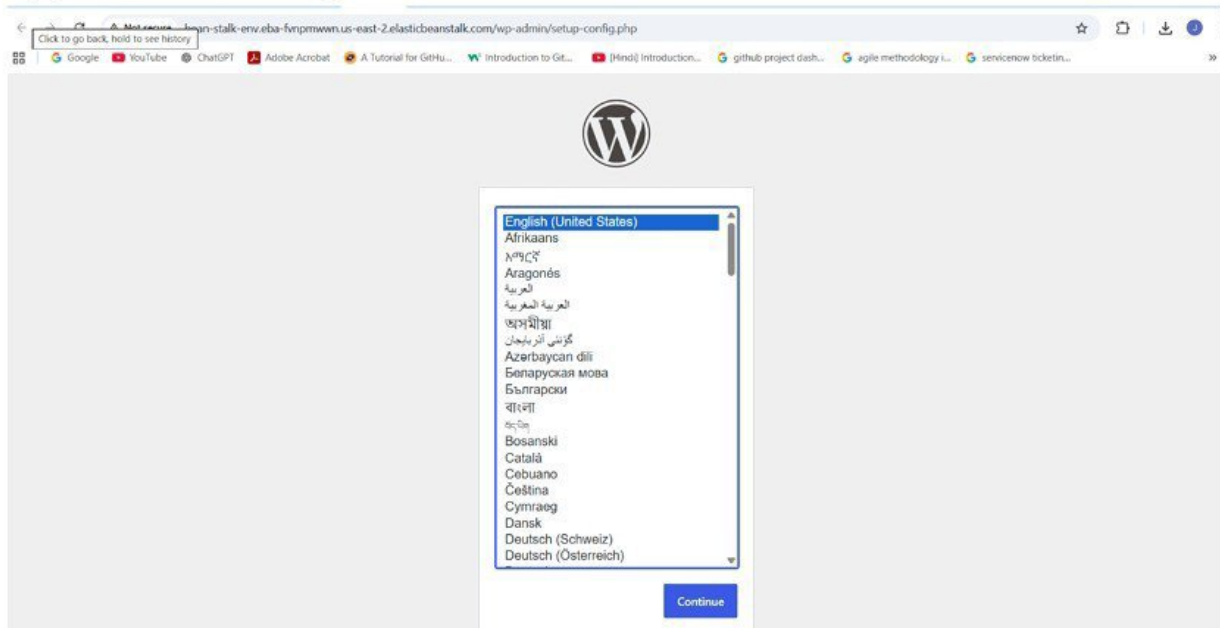

Project:01

Successfully-deploy-wordpress-website-on-aws-using-elastic-beanstalk.

congratulations!