SERENEDB CHALLENGE · NATIONAL AI HACKATHON 2026

Log Intelligence Agent

The right insights for the right people: one workflow from question to evidence to recommendation.

4,747,963
BGL log lines

207,820
OpenStack log lines

16
MCP tools Claude chooses from

THE PROBLEM

Millions of log lines don’t fit in a prompt

Engineer

What failed, in which component, and what happened just before and after?

Team lead

Which problems recur, how often, and which team owns them?


Manager

Which observed problems deserve attention first, and what happens next?

Same logs, three questions: each role needs **different evidence and a different action**, not just a shorter answer.

THE APPROACH

The database searches and counts; the agent explains

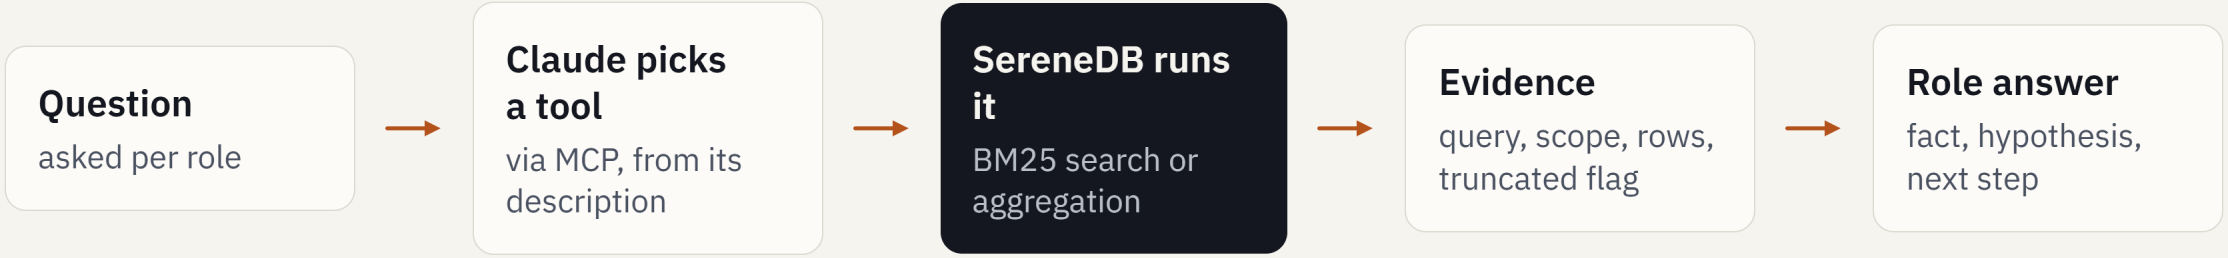

41 s

to load 4.7M BGL lines with SereneDB's server-side read_csv

BM25

inverted-index full-text search, with time filters

No free SQL

Claude chooses parameterized tools; results are capped

THE TOOLS

Sixteen tools, each with a clear job

Role	Tools Claude can call	Returns
Engineer	search_logs_fulltext · get_nearby_events · request_trace	BM25-ranked lines, context window
Team lead	alert_categories · alert_profile · count_alerts_by_team · trend_by_day · trend_by_week · top_nodes_for_alert	whole-corpus counts, spread, owners, trends
Manager	openstack_by_component · latency_stats · alert_profile	per-service rates, latency, owners
Any role	corpus_scope · team_ownership	data scope, component-to-team map
Huge data	otel_setup · otel_aggregate · otel_search	1B-row remote Parquet, in place

Every tool returns the same envelope: **scope, filters, the SQL that ran, rows, count, truncated**.

ENGINEER · LIVE CLAUDE SESSION

One chip error took down a whole job

QUESTION

“Investigate KERNRTSP alerts: which nodes and days, example lines, and what happened before and after the most recent one?”

SCOPE FOUND

3,983 lines on 3,394 nodes over 126 days; half from one mass event on 14 Jun 2005, then a steady trickle

MOST RECENT: 3 JAN 2006

R27-M0-NA-C:J11-U11

OBSERVED

02:24–03:24 cluster quiet, no warning

03:24:46 L2 d-cache parity machine check on that node

03:25:05 rts panic (KERNRTSP)

03:25:06+ APPSEV “link severed” on I/O nodes in six racks, all to one front-end

HYPOTHESIS

A hardware fault in that chip’s L2 cache ended one large job. Not a confirmed root cause.

NEXT STEP

Diagnose R27-M0-NA-C:J11-U11; R63-M0-NE-C:J12-U01 (22 panics, the most of any node) is the clearest replacement candidate.

Scope: BGL, 4,747,963 lines · full-text search, node and cluster time windows · 5

TEAM LEAD · LIVE CLAUDE SESSION

The loudest alert is not the recurring one

Category	Lines	Nodes	Days	Owner
KERNDTLB	152,734	541	10	Kernel Platform
KERNSTOR	63,491	22,529	4	Kernel Platform
APPSEV	49,651	1,024	70	App Runtime
KERNMNTF	31,531	1,024	26	Kernel Platform
KERNTERM	23,338	9,524	26	Kernel Platform
KERNRTSP	3,983	3,394	126	Kernel Platform

Orange row: one-day burst. Blue rows: still active at the end of the data.

99.6%

of KERNDTLB's 152,734 lines fell on one day, 12 Jun 2005: a burst, not a recurring defect.

Really recurring: KERNRTSP (126 days), APPSEV (70 days, all 1,024 nodes), KERNMNTF (26 days).

Scope: whole BGL corpus, Jun 2005 – Jan 2006 · alert_profile, count_alerts_by_team, trend_by_day · 6

MANAGER · LIVE CLAUDE SESSION

Persistent problems first, bursts as reviews

1	Kernel Platform	KERNRTSP (126 days) and KERNMNTF (26 days), both still active; 82% of BGL alert lines
2	Application Runtime	APPSEV: 49,651 lines on 70 days, across all 1,024 nodes
3	API Gateway	OpenStack nova-api: 2,068 error lines (2.01%), about 10× nova-compute (0.20%)
4	Kernel Platform	Retrospective on the 12 Jun 2005 KERNDTLB burst, not an ongoing fix
5	Monitor only	nova-compute, nova-scheduler (0 errors), small BGL components (271 lines)

Ranked by measured frequency and spread within each dataset · no invented downtime, cost or customer impact · 7

SHOWS ITS WORK

Every number comes with its query

```
[scope: BGL (4,747,963 lines) | period: whole corpus (no time
filter) | rows: 5 (TRUNCATED - more rows exist)]

[query: SELECT alert AS category, COUNT(*) AS n FROM bgl_logs
WHERE alert <> '-' GROUP BY alert ORDER BY n DESC LIMIT 5]
```

Answers label each claim as **observed**, **hypothesis** or **next step**.

JUDGES CAN REPRODUCE IT

1. Start SereneDB in Docker
2. Load BGL + OpenStack in about 2 min
3. Connect Claude Desktop to the MCP server and ask

SQL checked against the SereneDB docs MCP.

LIMITS

What the data does and does not establish

Establishes

- Measured line counts over the whole corpus
- Spread across nodes and days
- Owning team for each component
- What happened around an event

Does not establish

- Confirmed root causes
- Incidents: matching lines are not deduplicated
- Downtime, cost or customer impact
- Labelled anomalies for OpenStack (keyword rate)

Question → evidence → recommendation, per role. Every number checkable.