

Practical 8

Title: WALex Program to extract HTML tags from .html file.

Hint: In this practical, you will create a Lex program that reads an HTML file and extracts all the HTML tags (elements enclosed within < and >). The extracted tags will be written to an output file.

Program:

```
% {
    #include <stdio.h>
% }

%%

\<[^>]*\> { // Matches anything between '<' and '>' (HTML tags)
    printf("%s\n", yytext);      // Print the matched HTML tag to the console
    fprintf(yyout, "%s\n", yytext); // Write the matched HTML tag to output.txt
}

.|\\n; // Matches any other character or newline (ignored)

%%

int yywrap() {
    return 1;
}

int main() {
    printf("Jay Dalsaniya \n");
    printf("92100103336 \n");
    yyin = fopen("index.html", "r"); // Input file (HTML file)
    yyout = fopen("output.txt", "w"); // Output file (to store HTML tags)

    yylex(); // Start lexical analysis

    fclose(yyin); // Close input file
    fclose(yyout); // Close output file
    return 0;
}
```


Output:

```
F:\sem 7\CD\practical8>lex p8.l

F:\sem 7\CD\practical8>gcc lex.yy.c

F:\sem 7\CD\practical8>a.exe
Jay Dalsaniya
92100103336
<!DOCTYPE html>
<html>
<head>
<title>
</title>
</head>
<body>
<jay>
</jay>
<dalsaniya>
</dalsaniya>
<h1>
</h1>
<p>
</p>
</body>
</html>
```

Index.html :

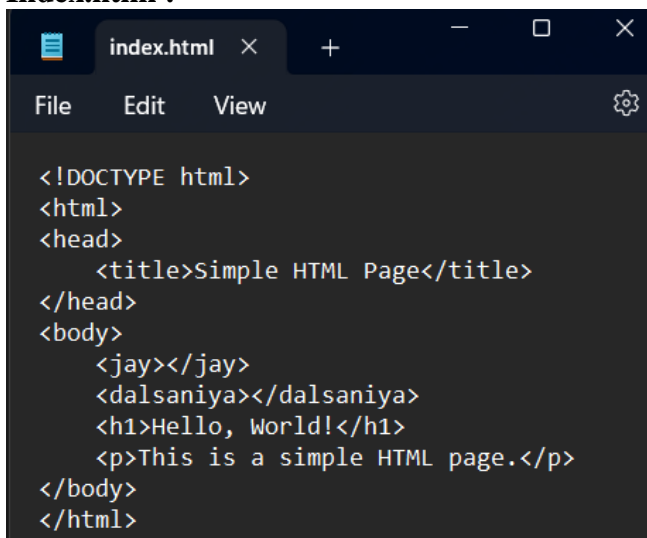

```
<!DOCTYPE html>
<html>
<head>
  <title>Simple HTML Page</title>
</head>
<body>
  <jay></jay>
  <dalsaniya></dalsaniya>
  <h1>Hello, World!</h1>
  <p>This is a simple HTML page.</p>
</body>
</html>
```



Output.txt :

```
<!DOCTYPE html>

<html>

<head>

<title>
</title>

</head>

<body>

<jay>
</jay>

<dalsaniya>
</dalsaniya>

<h1>
</h1>

<p>
</p>

</body>

</html>
```

Practical 9

Title: Write a C Program to compute FIRST Set of the given grammar.

Hint: Compute the FIRST set of a grammar by recursively determining the first terminals of productions, adding terminals and epsilon (if applicable) for each non-terminal, while avoiding duplicates in the resulting set.

Program:

```
#include <stdio.h>
#include <string.h>
#include <ctype.h>

#define MAX_PRODUCTIONS 10
#define MAX_FIRST_SET 20 // Increased size for FIRST set to handle more elements

int n; // Number of productions
char productions[MAX_PRODUCTIONS][MAX_PRODUCTIONS]; // Array to hold productions
char firstSet[MAX_FIRST_SET]; // Array to hold FIRST set

void first(char symbol);

int main() {
    int i;
    char c;

    printf("Jay Dalsaniya\nEnroll: 92100103336\n");
    printf("Enter the number of productions: ");
    scanf("%d", &n);
    printf("Enter the productions (epsilon = $):\n");

    for (i = 0; i < n; i++) {
        scanf("%s", productions[i]);
    }

    do {
        // Clear the FIRST set for each query
        memset(firstSet, 0, sizeof(firstSet));

        printf("Enter the non-terminal whose FIRST set is to be found: ");
        scanf(" %c", &c); // Notice space before %c to consume newline
```

```
first(c); // Compute FIRST set

printf("FIRST(%c) = { ", c);
for (i = 0; i < strlen(firstSet); i++) {
    if (firstSet[i] != 0) {
        printf("%c ", firstSet[i]);
    }
}
printf("}\n");

printf("Do you want to continue (0/1)? ");
scanf("%d", &i);
} while (i == 1);

return 0;
}

// Function to compute the FIRST set
void first(char symbol) {
    int i, j;

    // Check if the symbol is terminal
    if (!isupper(symbol)) { // Terminal
        if (strchr(firstSet, symbol) == NULL) { // Avoid duplicates
            strncat(firstSet, &symbol, 1); // Add to FIRST set
        }
    } else { // Non-terminal
        for (i = 0; i < n; i++) {
            if (productions[i][0] == symbol) { // Check productions
                if (productions[i][2] == '$') { // Epsilon production
                    if (strchr(firstSet, '$') == NULL) {
                        strncat(firstSet, "$", sizeof(firstSet) - strlen(firstSet) - 1); // Add epsilon to FIRST
                    }
                } else {
                    for (j = 2; j < strlen(productions[i]); j++) {
                        if (!isupper(productions[i][j])) { // Terminal
                            if (strchr(firstSet, productions[i][j]) == NULL) {
                                strncat(firstSet, &productions[i][j], 1);
                            }
                        } else {
                            break; // Stop after first terminal
                        }
                    }
                    first(productions[i][j]); // Recursive call for non-terminal
                    if (strchr(firstSet, '$') == NULL) {
                        break; // Stop if there's no epsilon
                    }
                }
            }
        }
    }
}
```

```
}  
}  
}  
}  
}  
}  
}  
}
```

Output:

Jay Dalsaniya

Enroll: 92100103336

Enter the number of productions: 3

Enter the productions (epsilon = \$):

S=AB

A=aA

B=b

Enter the non-terminal whose FIRST set is to be found: S

FIRST(S) = { a }

Do you want to continue (0/1)? 1

Enter the non-terminal whose FIRST set is to be found: A

FIRST(A) = { a }

Do you want to continue (0/1)? 1

Enter the non-terminal whose FIRST set is to be found: B

FIRST(B) = { b }

Do you want to continue (0/1)? 0

Practical 10

Title: Write a C Program to compute FOLLOW Set of the given grammar.

Hint: To fix the warning about strncpy, ensure that the destination buffer has enough space to accommodate the new character and the null terminator.

Program:

```
#include <stdio.h>
#include <string.h>
#include <ctype.h>

#define MAX_PRODUCTIONS 10
#define MAX_FOLLOW_SET 20 // Increased size for FOLLOW set

int n; // Number of productions
int m = 0; // Index for FOLLOW set
char productions[MAX_PRODUCTIONS][MAX_PRODUCTIONS]; // Array to hold productions
char followSet[MAX_FOLLOW_SET]; // Array to hold FOLLOW set

void follow(char c);
void first(char c);

int main() {
    int i, z;
    char c, ch;
    printf("Jay Dalsaniya\nEnrollment No.: 92100103336\n");
    printf("Enter the number of productions: ");
    scanf("%d", &n);
    printf("Enter the productions (epsilon = $):\n");
    for (i = 0; i < n; i++) {
        scanf("%s%c", productions[i], &ch); // Read production rules
    }

    do {
        m = 0; // Reset FOLLOW set index
        printf("Enter the element whose FOLLOW is to be found: ");
        scanf(" %c", &c); // Space before %c to consume newline

        follow(c); // Compute FOLLOW set

        printf("FOLLOW(%c) = { ", c);
        for (i = 0; i < m; i++) {
```

```
        printf("%c ", followSet[i]);
    }
    printf("}\n");

    printf("Do you want to continue (0/1)? ");
    scanf("%d%c", &z, &ch);
} while (z == 1);

return 0;
}

// Function to compute the FOLLOW set
void follow(char c) {
    if (productions[0][0] == c) {
        followSet[m++] = '$'; // Add $ to FOLLOW set if c is the start symbol
    }

    for (int i = 0; i < n; i++) {
        for (int j = 2; j < strlen(productions[i]); j++) {
            if (productions[i][j] == c) {
                if (productions[i][j + 1] != '\0') {
                    first(productions[i][j + 1]); // Call first for next symbol
                }
                if (productions[i][j + 1] == '\0' && c != productions[i][0]) {
                    follow(productions[i][0]); // Follow the left side non-terminal
                }
            }
        }
    }
}

// Function to compute the FIRST set
void first(char c) {
    int k;

    if (!isupper(c)) { // If terminal, add to FOLLOW set
        followSet[m++] = c;
    } else {
        for (k = 0; k < n; k++) {
            if (productions[k][0] == c) {
                if (productions[k][2] == '$') {
                    follow(productions[k][0]); // Epsilon production
                } else if (islower(productions[k][2])) {
                    followSet[m++] = productions[k][2];
                } else {

```



```
        first(productions[k][2]); // Recursive call for non-terminal
    }
}
}
}
```

Output:

Jay Dalsaniya

Enrollment No.: 92100103336

Enter the number of productions: 5

Enter the productions (epsilon = \$):

S=AB

A=a

B=b

A=\$

B=c

Enter the element whose FOLLOW is to be found: S

FOLLOW(S) = { \$ }

Do you want to continue (0/1)? 1

Enter the element whose FOLLOW is to be found: A

FOLLOW(A) = { b c }

Do you want to continue (0/1)? 1

Enter the element whose FOLLOW is to be found: B

FOLLOW(B) = { \$ }

Do you want to continue (0/1)? 1

Practical 11

Title: Write a C Program to implement Operator precedence parser.

Hint: This code implements a shift-reduce parser using a stack to analyze expressions based on predefined grammar rules and operator precedence.

Program:

```
#include <stdio.h>
#include <string.h>
#include <stdlib.h>

char *input;
int i = 0;
char lasthandle[6], stack[50], handles[][5] = {"")E(", "E*E", "E+E", "i", "E^E"};
int top = 0, l;
char prec[9][9] = {
    /*input*/
    /*stack + - * / ^ i ( ) $ */
    /* + */ '>', '>', '<', '<', '<', '<', '<', '>', '>',
    /* - */ '>', '>', '<', '<', '<', '<', '<', '>', '>',
    /* * */ '>', '>', '>', '>', '<', '<', '<', '>', '>',
    /* / */ '>', '>', '>', '>', '<', '<', '<', '>', '>',
    /* ^ */ '>', '>', '>', '>', '<', '<', '<', '>', '>',
    /* i */ '>', '>', '>', '>', '>', 'e', 'e', '>', '>',
    /* ( */ '<', '<', '<', '<', '<', '<', '<', '>', 'e',
    /* ) */ '>', '>', '>', '>', '>', 'e', 'e', '>', '>',
    /* $ */ '<', '<', '<', '<', '<', '<', '<', '>', '>',
};

int getindex(char c) {
    switch (c) {
        case '+': return 0;
        case '-': return 1;
        case '*': return 2;
        case '/': return 3;
        case '^': return 4;
        case 'i': return 5;
        case '(': return 6;
        case ')': return 7;
        case '$': return 8;
    }
}
```

```
int shift() {
    stack[++top] = *(input + i++);
    stack[top + 1] = '\0';
}

int reduce() {
    int i, len, found, t;
    for (i = 0; i < 5; i++) { // selecting handles
        len = strlen(handles[i]);
        if (stack[top] == handles[i][0] && top + 1 >= len) {
            found = 1;
            for (t = 0; t < len; t++) {
                if (stack[top - t] != handles[i][t]) {
                    found = 0;
                    break;
                }
            }
            if (found == 1) {
                stack[top - t + 1] = 'E';
                top = top - t + 1;
                strcpy(lasthandle, handles[i]);
                stack[top + 1] = '\0';
                return 1; // successful reduction
            }
        }
    }
    return 0;
}

void dispstack() {
    for (int j = 0; j <= top; j++)
        printf("%c", stack[j]);
}

void dispinput() {
    for (int j = i; j < 1; j++)
        printf("%c", *(input + j));
}

int main() {
    int j;
    input = (char *)malloc(50 * sizeof(char));

    // Print name and enrollment number
    printf("Jay Dalsaniya\nEnrollment No.: 92100103336\n");
}
```

```
printf("\nEnter the string\n");
scanf("%s", input);
input = strcat(input, "$");
l = strlen(input);
strcpy(stack, "$");
printf("\nSTACK\tINPUT\tACTION");

while (i <= l) {
    shift();
    printf("\n");
    dispstack();
    printf("\t");
    dispinput();
    printf("\tShift");

    if (prec[getindex(stack[top])][getindex(input[i])] == '>') {
        while (reduce()) {
            printf("\n");
            dispstack();
            printf("\t");
            dispinput();
            printf("\tReduced: E->%s", lasthandle);
        }
    }
}

if (strcmp(stack, "$E$") == 0)
    printf("\nAccepted;");
else
    printf("\nNot Accepted;");

// Free allocated memory
free(input);

return 0;
}
```

Output:

Jay Dalsaniya

Enrollment No.: 92100103336

Enter the string

i+i*i

STACK	INPUT	ACTION
\$i	+i*i\$	Shift
\$E	+i*i\$	Reduced: E->i
\$E+	i*i\$	Shift
\$E+i	*i\$	Shift
\$E+E	*i\$	Reduced: E->i
\$E	*i\$	Reduced: E->E+E
\$E*	i\$	Shift
\$E*i	\$	Shift
\$E*E	\$	Reduced: E->i
\$E	\$	Reduced: E->E*E
\$E\$		Shift
\$E\$...		Shift
Accepted;		

Jay Dalsaniya

Enrollment No.: 92100103336

Enter the string

i+i(

STACK	INPUT	ACTION
\$i	+i(\$	Shift
\$E	+i(\$	Reduced: E->i
\$E+	i(\$	Shift
\$E+i	(\$	Shift
\$E+i(\$	Shift
\$E+i(\$		Shift
\$E+i(\$...		Shift
Not Accepted;		

Practical 12

Title: Write a C Program for constructing LL (1) parsing.

Hint: To parse arithmetic expressions using a shift-reduce parser, ensure that your parsing table correctly maps non-terminals to productions based on the current input and stack contents.

Program:

```
#include <stdio.h>
#include <string.h>
#include <stdlib.h>

char s[20], stack[20];

void main() {
    char m[5][6][3] = {
        "tb", " ", " ", "tb", " ", " ",
        " ", "+tb", " ", "n", "n", "fc", " ", " ", "fc", " ", " ", "n", "*fc", "a", "n", "n", "i", " ", "",
        "(e)", " ", " ", " "
    };
    int size[5][6] = {
        2, 0, 0, 2, 0, 0,
        0, 3, 0, 0, 1, 1, 2, 0, 0,
        2, 0, 0, 0, 1, 3, 0, 1, 1, 1, 0, 0, 3, 0, 0
    };
    int i, j, k, n, str1, str2;

    printf("Jay Dalsaniya\nEnrollment No.: 92100103336\n");

    printf("\nEnter the input string: ");
    scanf("%s", s);
    strcat(s, "$"); // Append '$' to mark the end of input
    n = strlen(s);
    stack[0] = '$'; // Stack initialization
    stack[1] = 'e'; // Start symbol
    i = 1; // Stack pointer
    j = 0; // Input pointer

    printf("\nStack\tInput\n");
    printf("\n");

    // Parsing loop
    while ((stack[i] != '$') && (s[j] != '$')) {
```

```
// Check if the top of the stack matches the current input character
if (stack[i] == s[j]) {
    i--;
    j++;
}

// Determine the current production rules
switch (stack[i]) {
    case 'e': str1 = 0; break; // e -> tb | b
    case 'b': str1 = 1; break; // b -> +tb | fc
    case 't': str1 = 2; break; // t -> i
    case 'c': str1 = 3; break; // c -> (e)
    case 'f': str1 = 4; break; // f -> i
    default: str1 = -1; // Invalid stack character
}
switch (s[j]) {
    case 'i': str2 = 0; break; // Input character 'i'
    case '+': str2 = 1; break; // Input character '+'
    case '*': str2 = 2; break; // Input character '*'
    case '(': str2 = 3; break; // Input character '('
    case ')': str2 = 4; break; // Input character ')'
    case '$': str2 = 5; break; // End of input
    default: str2 = -1; // Invalid input character
}

// Error handling
if (str1 == -1 || str2 == -1 || m[str1][str2][0] == ' ') {
    printf("\nERROR: Invalid input or production rule.\n");
    exit(0);
} else if (m[str1][str2][0] == 'n') {
    i--; // Do nothing, just pop the stack
} else if (m[str1][str2][0] == 'i') {
    stack[i] = 'i'; // Push 'i' onto the stack
} else {
    // Expand the stack based on the production rules
    for (k = size[str1][str2] - 1; k >= 0; k--) {
        stack[i] = m[str1][str2][k];
        i++;
    }
    i--; // Move back to the last pushed item
}

// Print current stack and input status
for (k = 0; k <= i; k++) {
    printf("%c", stack[k]); // Print the stack
}
```

```

    }
    printf("\t");
    for (k = j; k <= n; k++) {
        printf("%c", s[k]); // Print the remaining input
    }
    printf("\n");
}

printf("\nSUCCESS\n");
}

```

Output:

<p>Jay Dalsaniya Enrollment No.: 92100103336</p> <p>Enter the input string: i+i*i</p> <p>Stack Input</p> <pre> \$bt i+i*i\$. \$bcf i+i*i\$. \$bc i i+i*i\$. \$b +i*i\$. \$bt+ +i*i\$. \$bcf i*i\$. \$bc i i*i\$. \$bcf* *i\$. \$bc i i\$. \$b \$. </pre> <p>SUCCESS</p>	<p>Jay Dalsaniya Enrollment No.: 92100103336</p> <p>Enter the input string: (i+i*i)</p> <p>Stack Input</p> <pre> \$bt (i+i*i)\$· \$bcf (i+i*i)\$· \$bc)e((i+i*i)\$· \$bc)bt i+i*i)\$· \$bc)bcf i+i*i)\$· \$bc)bci i+i*i)\$· \$bc)b +i*i)\$· \$bc)bt+ +i*i)\$· \$bc)bcf i*i)\$· \$bc)bci i*i)\$· \$bc)bcf* *i)\$· \$bc)bci i)\$· \$bc)b)\$· \$bc))\$· \$b \$· </pre> <p>SUCCESS</p>
---	--

Practical 13

Title: Write a C program to implement SLR parsing

Hint: The code implements a simple shift-reduce parser using a finite state machine (FSM) and a syntax analysis table (axn). Ensure that the input string adheres to the expected grammar for successful acceptance.

Program:

```
#include<stdio.h>
#include<string.h>

int axn[][6][2]={
    {{ 'S',5},{-1,-1},{-1,-1},{ 'S',4},{-1,-1},{-1,-1}},
    {{-1,-1},{ 'S',6},{-1,-1},{-1,-1},{-1,-1},{ 'R',102}},
    {{-1,-1},{ 'R',2},{ 'S',7},{-1,-1},{ 'R',2},{ 'R',2}},
    {{-1,-1},{ 'R',4},{ 'R',4},{-1,-1},{ 'R',4},{ 'R',4}},
    {{ 'S',5},{-1,-1},{-1,-1},{ 'S',4},{-1,-1},{-1,-1}},
    {{-1,-1},{ 'R',6},{ 'R',6},{-1,-1},{ 'R',6},{ 'R',6}},
    {{ 'S',5},{-1,-1},{-1,-1},{ 'S',4},{-1,-1},{-1,-1}},
    {{ 'S',5},{-1,-1},{-1,-1},{ 'S',4},{-1,-1},{-1,-1}},
    {{-1,-1},{ 'S',6},{-1,-1},{-1,-1},{ 'S',1},{-1,-1}},
    {{-1,-1},{ 'R',1},{ 'S',7},{-1,-1},{ 'R',1},{ 'R',1}},
    {{-1,-1},{ 'R',3},{ 'R',3},{-1,-1},{ 'R',3},{ 'R',3}},
    {{-1,-1},{ 'R',5},{ 'R',5},{-1,-1},{ 'R',5},{ 'R',5}}
};

int gotot[12][3]={1,2,3,-1,-1,-1,-1,-1,-1,-1,-1,8,2,3,-1,-1,-1,
    -1,9,3,-1,-1,10,-1,-1,-1,-1,-1,-1,-1,-1,-1,-1,-1}; // GoTo table

int a[10];
char b[10];

int top=-1, btop=-1, i;

void push(int k) {
    if(top < 9)
        a[++top] = k;
}

void pushb(char k) {
    if(btop < 9)
        b[++btop] = k;
}
```

```
char TOS() {
    return a[top];
}

void pop() {
    if(top >= 0)
        top--;
}

void popb() {
    if(btop >= 0)
        b[btop--] = '\0';
}

void display() {
    for(i = 0; i <= top; i++)
        printf("%d%c", a[i], b[i]);
}

void display1(char p[], int m) { // Displays The Present Input String
    int l;
    printf("\t\t");
    for(l = m; p[l] != '\0'; l++)
        printf("%c", p[l]);
    printf("\n");
}

void error() {
    printf("Syntax Error\n");
    printf("Given String is rejected\n");
}

void reduce(int p) {
    int len, k, ad;
    char src, *dest;

    switch(p) {
        case 1: dest = "E+T"; src = 'E'; break;
        case 2: dest = "T"; src = 'E'; break;
        case 3: dest = "T*F"; src = 'T'; break;
        case 4: dest = "F"; src = 'T'; break;
        case 5: dest = "(E)"; src = 'F'; break;
        case 6: dest = "i"; src = 'F'; break;
        default: dest = "\0"; src = '\0'; break;
    }
}
```

```
}

for(k = 0; k < strlen(dest); k++) {
    pop();
    popb();
}

pushb(src);
switch(src) {
    case 'E': ad = 0; break;
    case 'T': ad = 1; break;
    case 'F': ad = 2; break;
    default: ad = -1; break;
}
push(gotot[TOS()][ad]);
}

int main() {
    int j, st, ic;
    char ip[20] = "\0", an;
    int accepted = 0;

    printf("Jay Dalsaniya\nEnrollment No.: 92100103336\n");
    printf("Enter any String\n");

    scanf("%s", ip);
    push(0);
    display();
    printf("\t%s\n", ip);

    for(j = 0; ip[j] != '\0';) {
        st = TOS();
        an = ip[j];

        if(an >= 'a' && an <= 'z') ic = 0;
        else if(an == '+') ic = 1;
        else if(an == '*') ic = 2;
        else if(an == '(') ic = 3;
        else if(an == ')') ic = 4;
        else if(an == '$') ic = 5;
        else {
            error();
            accepted = 0;
            break;
        }
    }
}
```

```
if(axn[st][ic][0] == 'S') {
    pushb(an);
    push(axn[st][ic][1]);
    display();
    j++;
    display1(ip, j);
}

if(axn[st][ic][0] == 'R') {
    reduce(axn[st][ic][1]);
    display();
    display1(ip, j);
}

if(axn[st][ic][1] == 102) {
    printf("Given String is accepted \n");
    accepted = 1;
    break;
}

if (!accepted) {
    printf("Given String is rejected\n");
}

return 0;
}
```

Output:

<pre> Jay Dalsaniya Enrollment No.: 92100103336 Enter any String i+i*i\$ 0..i+i*i\$ 0i5...+i*i\$ 0F3...+i*i\$ 0T2...+i*i\$ 0E1...+i*i\$ 0E1+6...i*i\$ 0E1+6i5...*i\$ 0E1+6F3...*i\$ 0E1+6T9...*i\$ 0E1+6T9*7...i\$ 0E1+6T9*7i5...\$ 0E1+6T9*7F10...\$ 0E1+6T9...\$ 0E1...\$ 0E1.3...\$ Given String is accepted </pre>	<pre> Jay Dalsaniya Enrollment No.: 92100103336 Enter any String i+i*i 0..i+i*i 0i5...+i*i 0F3...+i*i 0T2...+i*i 0E1...+i*i 0E1+6...i*i 0E1+6i5...*i 0E1+6F3...*i 0E1+6T9...*i 0E1+6T9*7...i 0E1+6T9*7i5... Given String is rejected </pre>
--	---