
1. Open MySQL Workbench or CLI and write a CREATE TABLE statement to create a table called 'restaurants' with columns: id (INT, primary key, auto-increment), name (VARCHAR(100)), location (VARCHAR(100)), and rating (DECIMAL(2,1)).

➔

```
CREATE DATABASE db_restaurant;
USE db_restaurant;
CREATE TABLE restaurants(
    id INT(11) PRIMARY KEY AUTO_INCREMENT,
    name VARCHAR(100),
    location VARCHAR(100),
    rating DECIMAL(2,1)
);
```

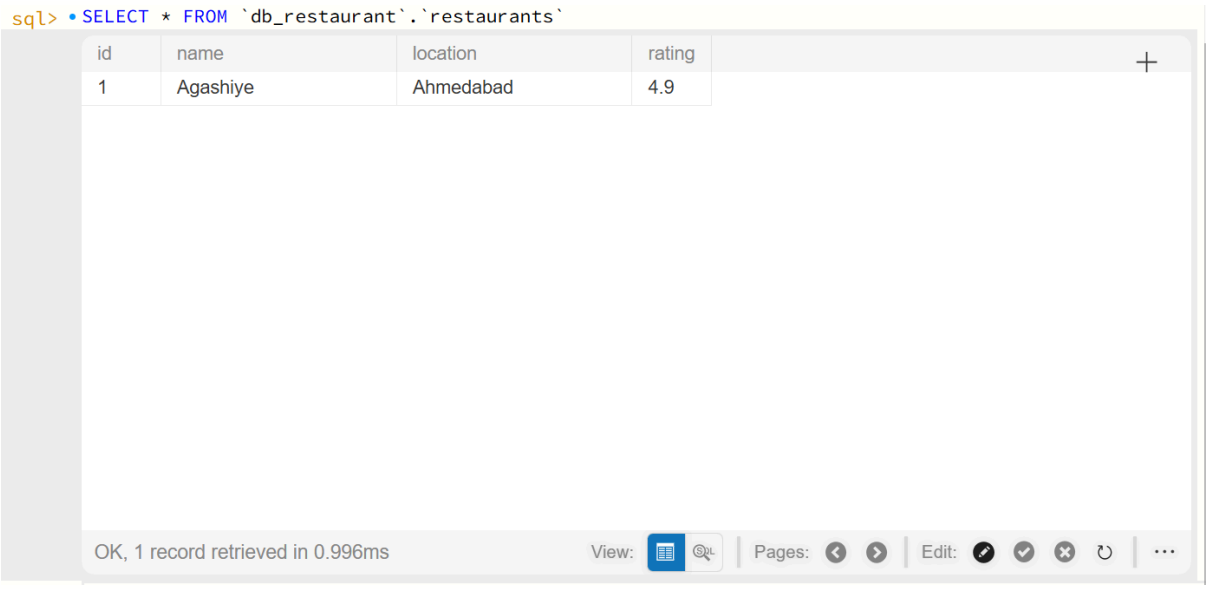


2. Use the ALTER TABLE command in MySQL to add a new column 'average_cost' (INT) to your 'restaurants' table. Hint: Remember to specify the data type when adding a new column.

➔

```
USE db_restaurant;

ALTER TABLE restaurants
ADD COLUMN average_costs INT(11);
```

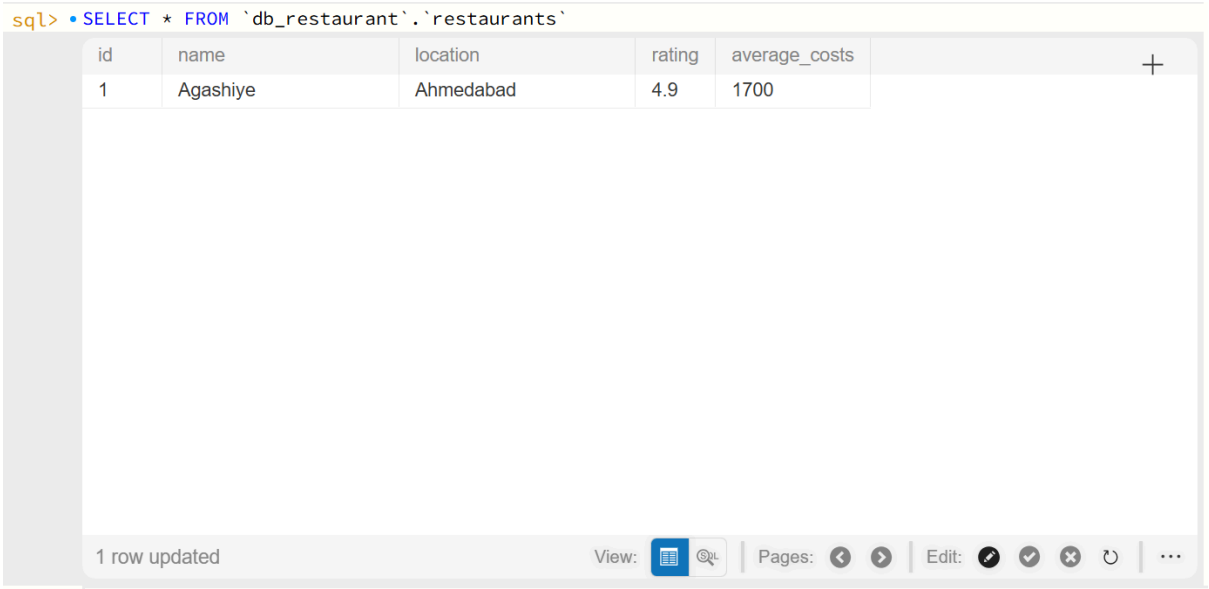

3. Write a SQL statement to DROP the 'restaurants' table you created earlier. Double-check your command before running it to avoid accidental data loss.

➔

```
USE db_restaurant;

DROP TABLE restaurants;
```

```
sql> • SELECT * FROM `db_restaurant`.`restaurants`
       MySQL Error (1146): Table 'db_restaurant.restaurants' doesn't exist
```

4. Create a new table called 'playlists' for a music app like Spotify, with columns: playlist_id (INT, primary key, auto-increment), title (VARCHAR(50)), created_by (VARCHAR(50)), and created_at (DATE).

➔

```
CREATE DATABASE playlist;

CREATE TABLE playlists(
    playlist_id INT(11) AUTO_INCREMENT PRIMARY KEY,
    title VARCHAR(50),
    created_by VARCHAR(50),
    created_date DATE
);
```

