
Session - 3

1. Create a SQL table called Restaurants with columns: id (INT, auto-increment), name (VARCHAR), cuisine (VARCHAR), rating (DECIMAL), and city (VARCHAR). Insert 5 sample restaurants into the table, each with a different cuisine and rating.

➔

```
USE db_restaurant;
CREATE TABLE restaurants (
    id INT(11) AUTO_INCREMENT PRIMARY KEY,
    name VARCHAR(255),
    cuisine VARCHAR(255),
    rating DECIMAL(2.1),
    city VARCHAR(255)
);

INSERT INTO restaurants(name,cuisine,rating,city)
VALUES
('Agashiye','Gujarati',4.2,'Ahmedabad'),
('Leopold Cafe','Continental',3.2,'Mumbai'),
('Punjab Grill','Punjabi',3.4,'Ahmedabad'),
('Punjab Grill','South Indian',4.1,'Chennai'),
('Paradise Biryani','Hyderabadi',4.4,'Hyderabad');
```

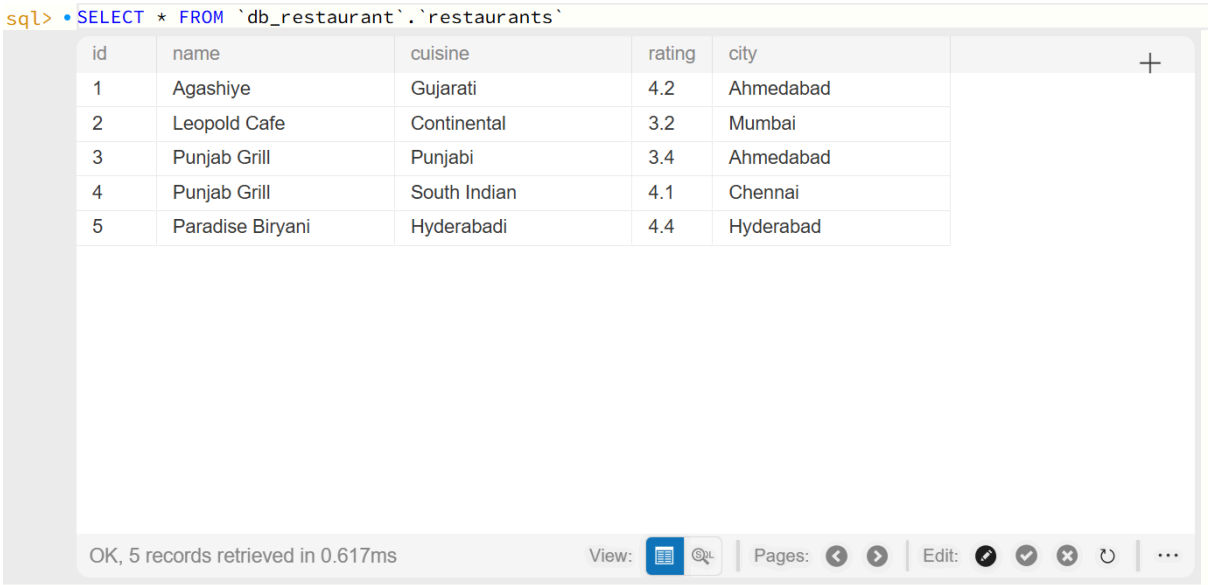


2. Write a SQL UPDATE statement to change the rating of the restaurant named 'Spice Villa' to 4.7 in the Restaurants table.

➔

```
USE db_restaurant;

UPDATE restaurants
SET rating = 4.9
WHERE name = 'Agashiye';
```

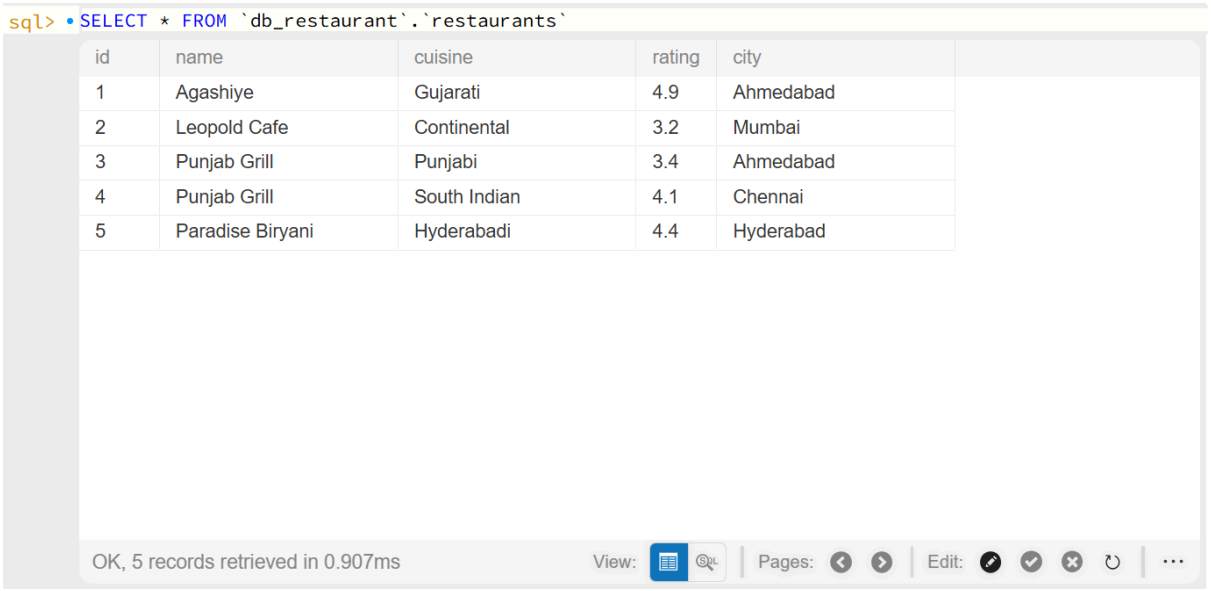

```
sql> SELECT * FROM `db_restaurant`.`restaurants`
```


id	name	cuisine	rating	city
1	Agashiye	Gujarati	4.9	Ahmedabad
2	Leopold Cafe	Continental	3.2	Mumbai
3	Punjab Grill	Punjabi	3.4	Ahmedabad
4	Punjab Grill	South Indian	4.1	Chennai
5	Paradise Biryani	Hyderabadi	4.4	Hyderabad

3. Delete all restaurants from the Restaurants table where the rating is less than 3.5 using a SQL DELETE statement.

➔

```
USE db_restaurant;

DELETE FROM restaurants
WHERE rating < 3.5;
```

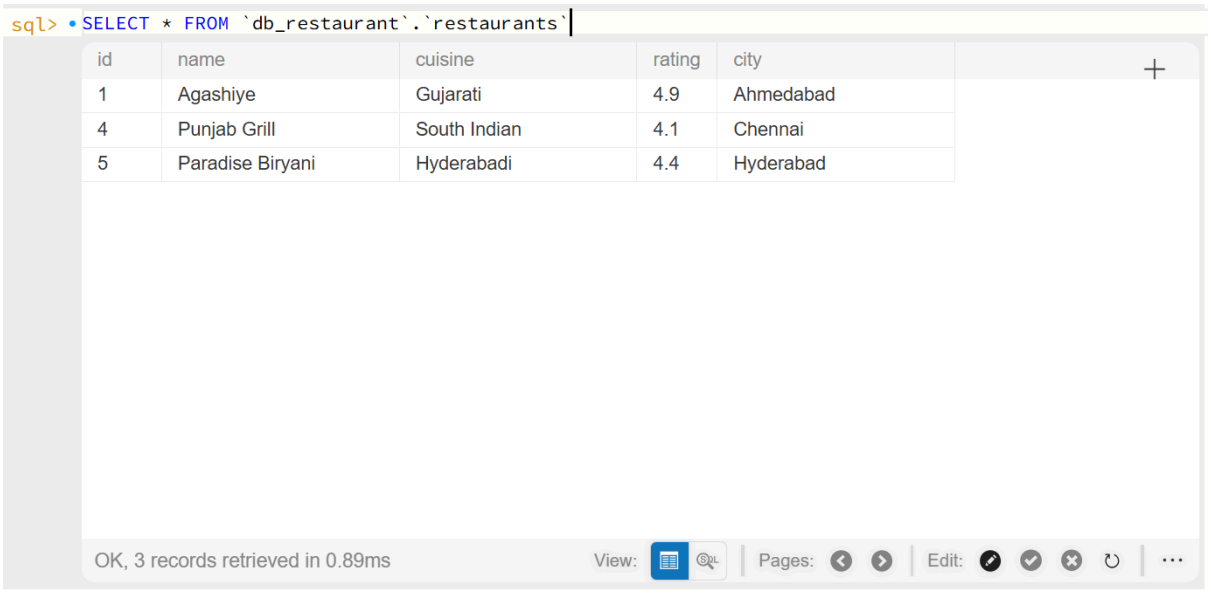


4. Use a SELECT query with WHERE and LIMIT to fetch the top 2 restaurants in the city 'Ahmedabad with a rating above 4.0 from the Restaurants table. Hint: Combine WHERE for city and rating, and LIMIT to restrict the number of results.

➔

```
USE db_restaurant;

SELECT * FROM restaurants
WHERE city = 'Ahmedabad' AND rating > 4.0
ORDER BY rating DESC
LIMIT 2;
```

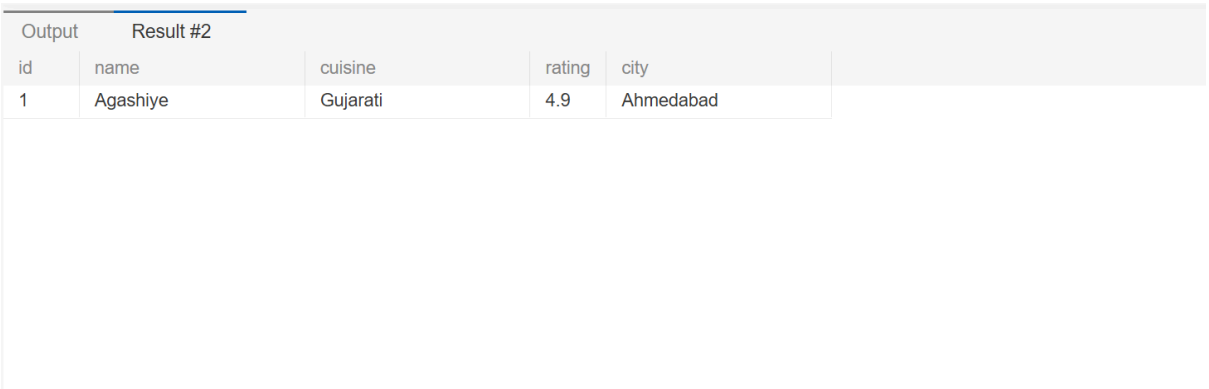

Output Result #2

id	name	cuisine	rating	city
1	Agashiye	Gujarati	4.9	Ahmedabad