


Procedure

- ① Build output → look back @ reactives & inputs for initial build [Note - Shiny records mapping]
- ② Input changes → shiny rer & outputs all query their inputs → values cached so they only change if necessary (lazy)
- ③ Repeat.

INPUTS

REACTIVE EXPRESSIONS

OUTPUTS

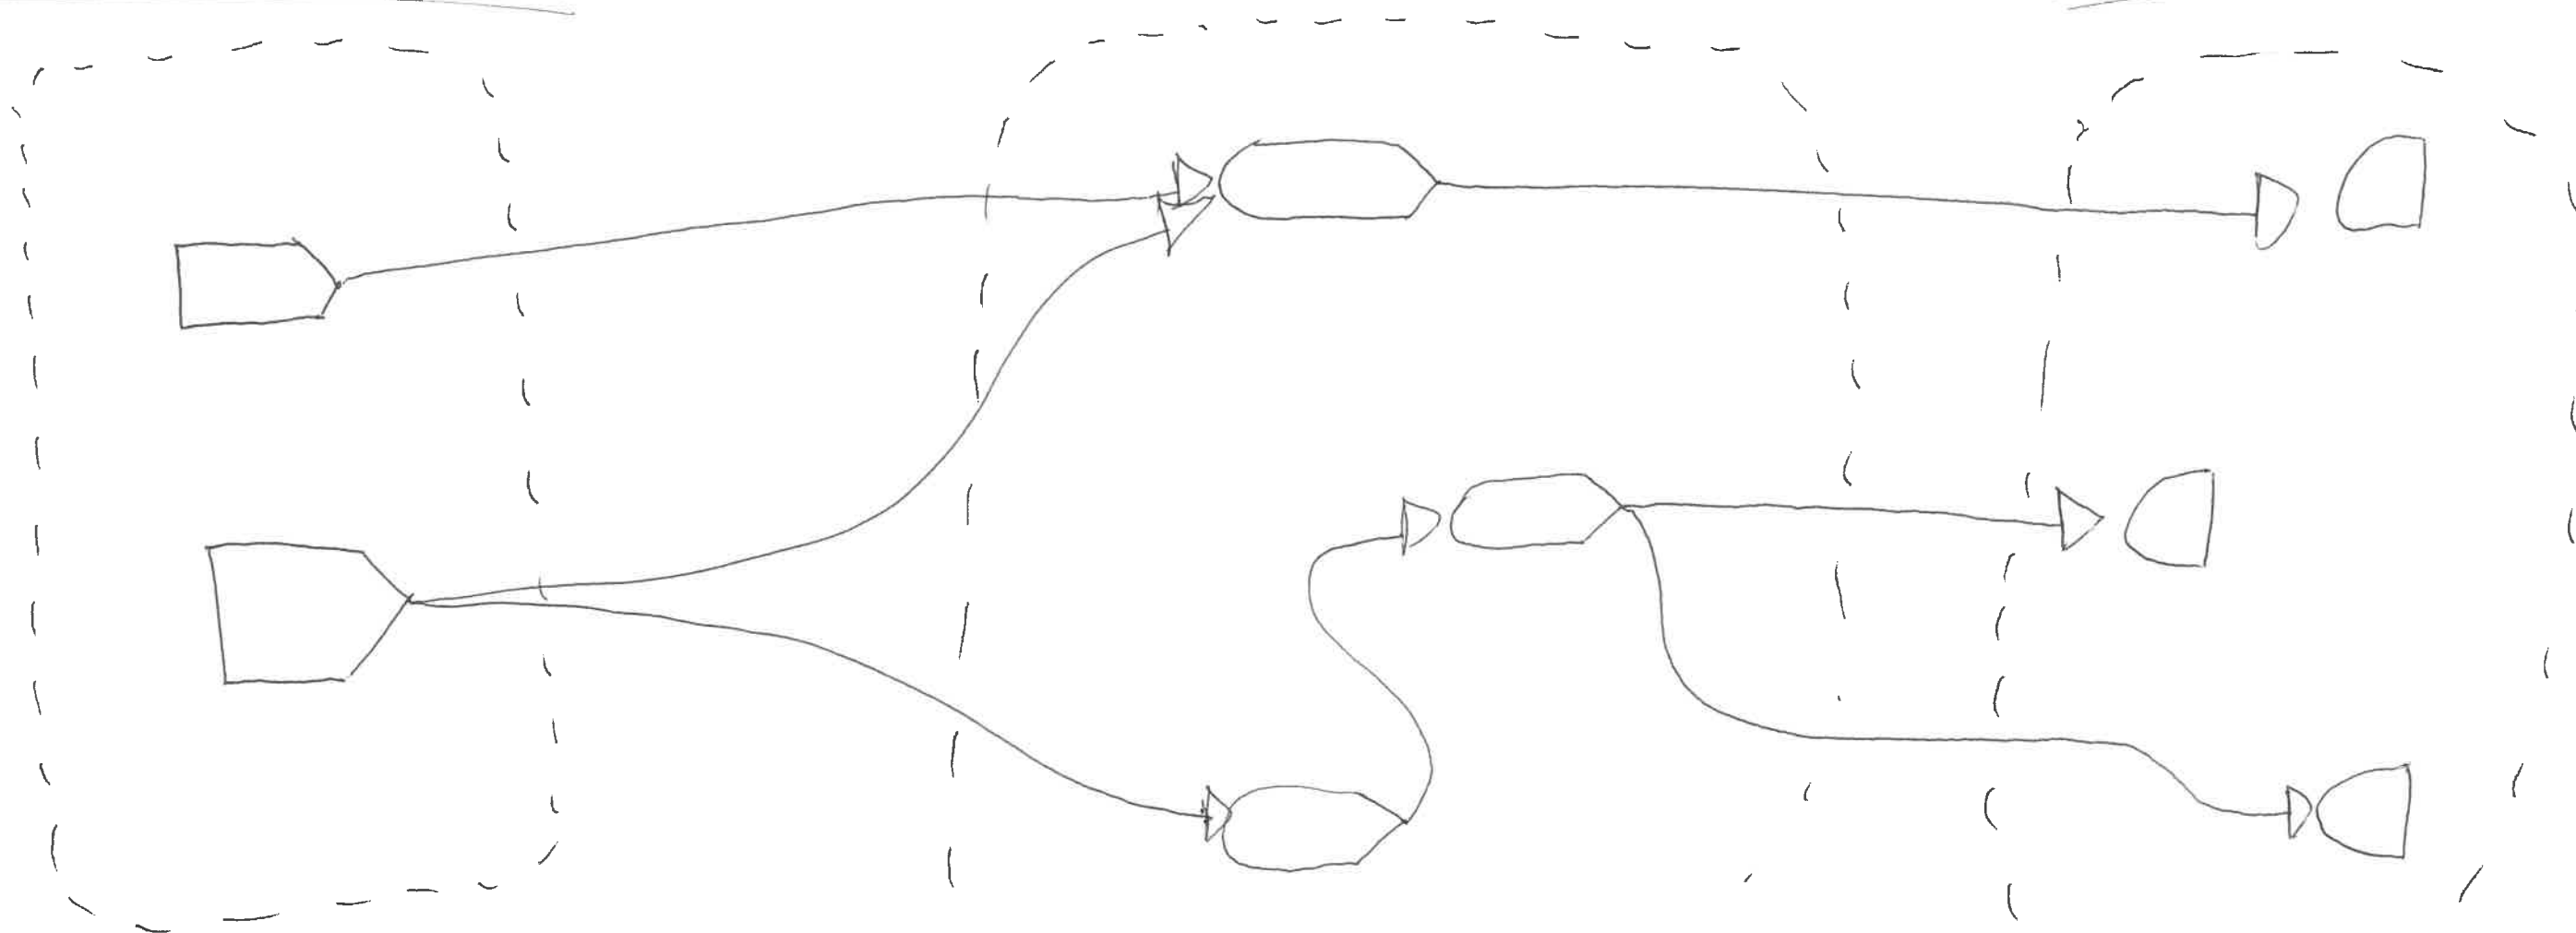

* generates values
input by user

* waits for outputs to call
then checks inputs & generates a manipulation
of inputs if they have changed

* does nothing if reactive
unchanged. Else takes result
of reactive and rebuilds itself

