



MONASH University

Developing a grammar to define interactive graphics with application to complex model diagnostics

Piyadi Gamage Jayani Lakshika

B.Sc. (Hons) in Statistics, University of Sri Jayewardenepura (USJ), Sri Lanka

A thesis submitted for the degree of
Doctor of Philosophy
at Monash University in 2025
Department of Econometrics & Business Statistics

Table of contents

Copyright notice	iv
Abstract	1
Declaration	2
Acknowledgements	4
1 Introduction	0
1.1 Thesis Outline	2
2 Visualising how non-linear dimension reduction warps your data	3
3 quollr: An R Package for Visualizing 2– D Models from Non-linear Dimension Reductions in High Dimensional Space	4
4 A user study to explore perception and misperception in NLDR representations	5
5 cardinalR: Generating interesting high-dimensional data structures	6
6 Development of an interactive and dynamic graphics system for NLDR users	7
6.1 Availability	7
7 Conclusion and future plans	8
7.1 Contributions	8
7.2 Future work	9
Bibliography	10
Appendices	12
A Appendix to “Visualising how non-linear dimension reduction warps your data”	12
B Appendix to “quollr”	13
C Appendix to “A user study to explore perception and misperception in NLDR representations”	14
D Appendix to “cardinalR”	15
E Appendix to “Development of an interactive and dynamic graphics system for NLDR users”	16

Copyright notice

Produced on 3 May 2025.

© Piyadi Gamage Jayani Lakshika (2025).

I certify that I have made all reasonable efforts to secure copyright permissions for third-party content included in this thesis and have not knowingly added copyright content to my work without the owner's permission.

Abstract

Declaration

I hereby declare that this thesis contains no material which has been accepted for the award of any other degree or diploma at any university or equivalent institution and that, to the best of my knowledge and belief, this thesis contains no material previously published or written by another person, except where due reference is made in the text of the thesis.

This thesis includes one original papers published in a peer reviewed journal and four unpublished papers. The core theme of the thesis is “interactive and dynamic graphics for studying non-linear dimension reduction models of high-dimensional data”. The ideas, development and writing up of all the papers in the thesis were the principal responsibility of myself, the student, working within the Department of Econometrics and Business Statistics under the supervision of Professor Dianne Cook, Dr Paul Harrison, Dr Michael Lydeamore, and Dr Thiyanga S. Talagala (University of Sri Jayewardenepura).

The inclusion of co-authors reflects the fact that the work came from active collaboration between researchers and acknowledges input into team-based research. In the case of [Chapter 2](#), my contribution to the work involved the following:

Chapter	Publication title	Status	Student contribution	Co-authors contribution	Coauthors are Monash students
2		Published in the Journal of Computational and Graphical Statistics	80% Concept, Analysis, Software, Writing		No

Chapters 3, *k*, and Chapter 4, **, are planned for submission to peer-reviewed journals.

To ensure the clarity and coherence of the written content, artificial intelligence tools were employed to assist in smoothing and refining the language throughout the thesis.

I have not renumbered sections of submitted or published papers in order to generate a consistent presentation within the thesis.

Student name: Piyadi Gamage Jayani Lakshika

Student signature:

Date: 15th January 2026

I hereby certify that the above declaration correctly reflects the nature and extent of the student's and co-authors' contributions to this work. In instances where I am not the responsible author I have consulted with the responsible author to agree on the respective contributions of the authors.

Main Supervisor name: Dianne Cook

Main Supervisor signature:

Date: 15th January 2026

Acknowledgements

This thesis would have never been a success without the guidance, encouragement, and support of my supervisors, family, and friends. This note is to show my gratitude to them.

First, I would like to express my deepest gratitude to my supervisors,...

I would also like to thank my milestone evaluation panel...

This research was financially supported by Monash University and the Dean's Excellence Award of Monash Business School. I am grateful for the financial support that I received. Further, I would like to thank Professor Rob Hyndman, Head of the Department of Econometrics and Business Statistics, for arranging financial support that helped me to comfortably focus on my research at the end of my candidature. I take this opportunity to express my sincere gratitude to all other academic and administrative staff members of the Department of Econometric and Business Statistics at Monash University.

I am also grateful to my PhD cohort, including, but not limited to...

Chapter 1

Introduction

Historically, 2D representations of high-dimensional data have been computed using multidimensional scaling (MDS) ([Borg and Groenen 2005](#)), which includes principal components analysis (PCA) ([Jolliffe 2011](#)) as a special case. The 2D representation can be viewed as a layout of points in 2D produced by an embedding procedure that maps the data from high dimensions. In MDS, the 2D layout is constructed by minimizing a stress function that differences distances between points in high-dimensions with potential distances between points in 2D. Various formulations of the stress function result in non-metric scaling ([Saeed et al. 2018](#)) and isomap ([Silva and Tenenbaum 2002](#)). Challenges in working with high-dimensional data, including visualization, are outlined in Johnstone and Titterton ([2009](#)).

Non-linear dimension reduction (NLDR) is popular for making a convenient low-dimensional representation of high-dimensional data by applying non-linear transformation and all designed to better capture specific structures potentially existing in high-dimensions. Here we focus on five currently popular techniques, t-distributed stochastic neighbor embedding (tSNE) ([Maaten and Hinton 2008](#)), uniform manifold approximation and projection (UMAP) ([McInnes and Healy 2018](#)), potential of heat-diffusion for affinity-based trajectory embedding (PHATE) algorithm ([Moon et al. 2019](#)), large-scale dimensionality reduction Using triplets (TriMAP) ([Amid and Warmuth 2022](#)), and pairwise controlled manifold approximation (PaCMAP) ([Wang et al. 2021](#)). tNSE and UMAP can be considered to produce the 2D minimizing the divergence between two distributions, where the distributions are modeling the inter-point distances. PHATE, TriMAP and PaCMAP are examples of diffusion processes ([Coifman et al. 2005](#)) spreading to capture geometric shapes, that include both global and local structure.

The various layouts created by Figure [1.1](#) demonstrate the different outcomes that can result from

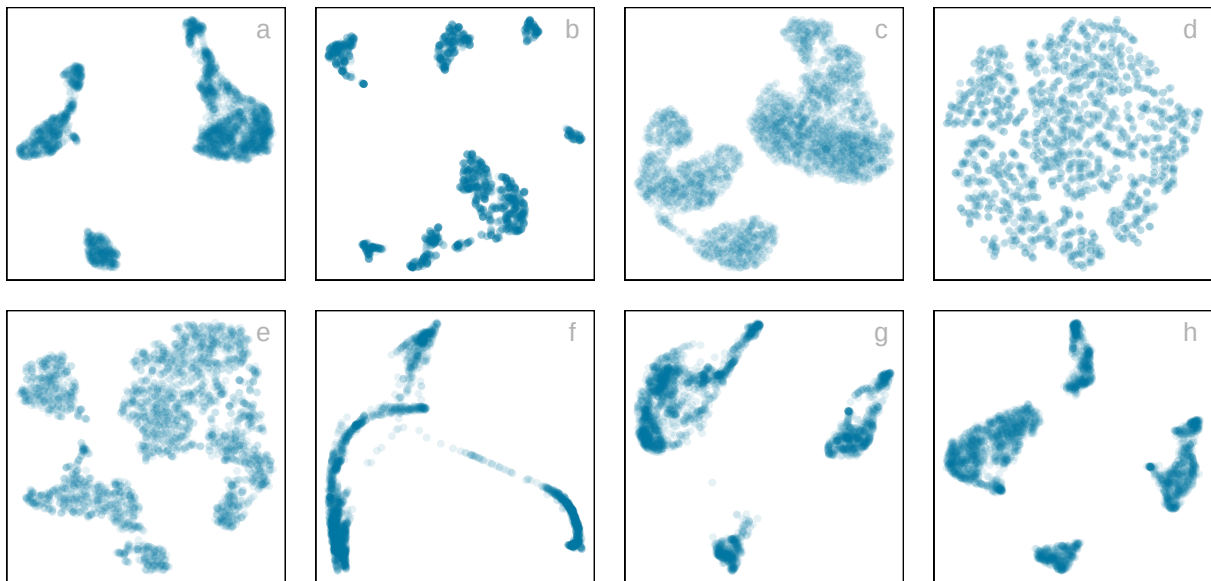


Figure 1.1: *Eight different NLDR representations of the same data. Different techniques and different parameter choices are used. Researchers may have seen any of these in their analysis of this data, depending on their choice of method, or typical parameter choice. Would they make different decisions downstream in the analysis depending on which version seen? Which is the most accurate representation of the structure in high dimensions?*

the choices of methods and parameters, as well as the random seed used to start the calculation. Key structures interpreted from these views suggest: (1) highly **separated clusters** (a, b, e, g, h) with the number ranging from 3-6; (2) **stringy branches** (f), and (3) **barely separated clusters** (c, d) which would **contradict** the other representations.

These variations occur due to the different perspectives on the distances between data points provided by the methods and parameter choices.

Another way to visualize high-dimensional data is through linear projections. PCA is the traditional method, resulting in a new set of variables that are linear combinations of the original variables. Tours, as defined by Lee et al. (2021), expand on this concept by producing dynamic linear projection visualizations that offer views of the data from all angles. Lee et al. (2021) provides an overview of the key advancements in tours. Numerous tour algorithms are available, with many included in the R package `tourr` (Wickham et al. 2011), and versions that offer enhanced interactivity in `langevitour` (?) and `detourr` (Hart and Wang 2022). Linear projections offer a reliable way to view high-dimensional data as they do not distort the space, making them more accurate representations of the data structure. However, linear projections can become cluttered, and global patterns can obscure local structure. The simple act of projecting data from high-dimensional spaces leads to piling (Laa et al. 2022), where data concentrates in the center of the projections.

NLDR is designed to escape these issues, to exaggerate structure so that it can be observed. However,

NLDR can hallucinate wildly, to suggest patterns that are not actually present in the data. The research project addresses this significant issue by proposing methods to understand better whether the NDLR representations are reliable or hallucinations. These methods are designed to enable a more profound understanding of the quality and validity of NLDR-derived low-dimensional representations. By incorporating rigorous evaluation techniques, the project seeks to identify instances where the NLDR models genuinely capture the essential structures present in the data and where they might introduce artifacts or distortions, leading to potentially misleading representations. This meticulous examination and validation process contribute to enhancing the robustness and credibility of NLDR techniques in high-dimensional data analysis.

1.1 Thesis Outline

The rest of the thesis is organized as follows:

Chapter 2 algorithm

Chapter 3 quollr

Chapter 4 user study

Chapter 5 cardinalR

Chapter 6 shiny app

Chapter 7 summarises the contribution of the work, concludes the thesis, and discusses some future plans.

Chapter 2

Visualising how non-linear dimension reduction warps your data

Chapter 3

quollr: An R Package for Visualizing $2 - D$ Models from Non-linear Dimension Reductions in High Dimensional Space

Chapter 4

A user study to explore perception and misperception in NLDR representations

Chapter 5

cardinalR: Generating interesting high-dimensional data structures

Chapter 6

Development of an interactive and dynamic graphics system for NLDR users

6.1 Availability

Chapter 7

Conclusion and future plans

The five pieces of work assembled in this thesis share a common theme of advancing Non-linear dimension reduction (NLDR) diagnostics, with a focus on improving the NLDR methods, visual inference, and developing innovative solutions to automate diagnostic processes.

7.1 Contributions

The primary contributions of this research are fivefold. Firstly, we develop an algorithm. Secondly, we develop a package. Next, package for high-dimensional data structures. Then, a user study to explore perception and misperception in NLDR representations. Lastly, we share a user-focused R package and Shiny app, making the automated diagnostic tools accessible to a broad range of analysts and practitioners.

The aforementioned R package (and its dependency) is available on CRAN with the latest development versions in the links below:

- `quollr` (<https://github.com/jayanolakshika/quollr>), and
- `cardinalR` (<https://github.com/jayanolakshika/cardinalR>).

The Shiny app for `quollr` is available at one of the mirror sites listed at <https://vimror.netlify.app/> with the source code available at <https://github.com/jayanolakshika/ViMRoR>.

Principles of transparency and reproducible research have guided the work with all materials related to the thesis at https://github.com/JayaniLakshika/Monash_PhD_thesis. The thesis is written using Quarto (?) and is available online at <https://jayani-lakshika-phd-thesis.netlify.app>.

The R packages used throughout the thesis include tidyverse (?), lmtest (?), kableExtra (?), patchwork (?), glue (?), ggpcp (?), here (?), and knitr (?). (Need to finalize at the end of writing)

7.2 Future work

There are several directions that this work can be developed.

- Scagnostics to evaluate NLDR
- Prediction with model built
- More diagnostics for NLDR (diadem app)
- Visualizations to validate experiment design/results
- Investigate perception and misperception happening with background noise, number of clusters, noise dimensions, sample size, seed.

Bibliography

- Amid, E., and Warmuth, M. K. (2022), “TriMap: Large-scale dimensionality reduction using triplets.”
- Borg, I., and Groenen, P. J. F. (2005), *Modern multidimensional scaling theory and applications*, New York: Springer. <https://doi.org/10.1007/0-387-28981-X>.
- Coifman, R., Lafon, S., Lee, A., Maggioni, M., Nadler, B., Warner, F., and Zucker, S. (2005), “Geometric diffusions as a tool for harmonic analysis and structure definition of data: Diffusion maps,” *Proceedings of the National Academy of Sciences of the United States of America*, 102, 7426–31. <https://doi.org/10.1073/pnas.0500334102>.
- Hart, C., and Wang, E. (2022), *Detourr: Portable and performant tour animations*.
- Johnstone, I. M., and Titterton, D. M. (2009), “Statistical challenges of high-dimensional data,” *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 367, 4237–4253. <https://doi.org/10.1098/rsta.2009.0159>.
- Jolliffe, I. (2011), “Principal component analysis,” in *International encyclopedia of statistical science*, Berlin, Heidelberg: Springer Berlin Heidelberg, pp. 1094–1096. https://doi.org/10.1007/978-3-642-04898-2_455.
- Laa, U., Cook, D., and Lee, S. (2022), “Burning sage: Reversing the curse of dimensionality in the visualization of high-dimensional data,” *J. Comput. Graph. Stat.*, 31, 40–49. <https://doi.org/10.1080/10618600.2021.1963264>.
- Lee, S., Cook, D., Silva, N. da, Laa, U., Wang, E., Spyrisson, N., and Zhang, H. S. (2021), “A review of the state-of-the-art on tours for dynamic visualization of high-dimensional data.”
- Maaten, L. van der, and Hinton, G. E. (2008), “Visualizing data using t-SNE,” *Journal of Machine Learning Research*, 9, 2579–2605.
- McInnes, L., and Healy, J. (2018), “UMAP: Uniform manifold approximation and projection for dimension reduction,” *ArXiv*, abs/1802.03426.
- Moon, K. R., Dijk, D. van, Wang, Z., Gigante, S. A., Burkhardt, D. B., Chen, W. S., Yim, K., Elzen, A. van den, Hirn, M. J., Coifman, R. R., Ivanova, N. B., Wolf, G., and Krishnaswamy, S. (2019), “Visualizing structure and transitions in high-dimensional biological data,” *Nature Biotechnology*, 37, 1482–1492.

- Saeed, N., Nam, H., Haq, M. I. U., and Muhammad Saqib, D. B. (2018), “A survey on multidimensional scaling,” *ACM Comput. Surv.*, New York, NY, USA: Association for Computing Machinery, 51. <https://doi.org/10.1145/3178155>.
- Silva, V., and Tenenbaum, J. (2002), “Global versus local methods in nonlinear dimensionality reduction,” *Advances in neural information processing systems*, 15.
- Wang, Y., Huang, H., Rudin, C., and Shaposhnik, Y. (2021), “[Understanding how dimension reduction tools work: An empirical approach to deciphering t-SNE, UMAP, TriMap, and PaCMAP for data visualization](#),” *Journal of Machine Learning Research*, 22, 1–73.
- Wickham, H., Cook, D., Hofmann, H., and Buja, A. (2011), “[Tourr: An r package for exploring multivariate data with projections](#),” *Journal of Statistical Software*, 40, 1--18.

Appendix A

Appendix to “Visualising how non-linear dimension reduction warps your data”

Appendix B

Appendix to “quollr”

Appendix C

Appendix to “A user study to explore perception and misperception in NLDR representations”

Appendix D

Appendix to “cardinalR”

Appendix E

Appendix to “Development of an interactive and dynamic graphics system for NLDR users”