



Fragments (X)

- A Fragment is a piece of an activity which enable more modular activity Design
- Application can embed two fragments in Activity A When running on tablet-sized device.

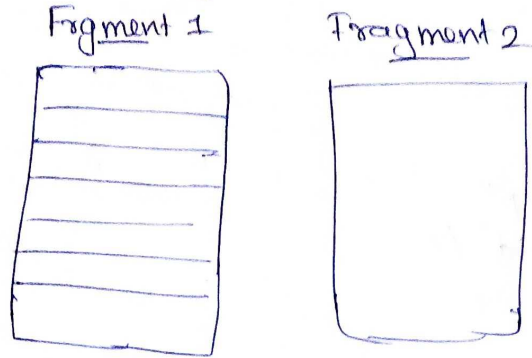

Activity 1

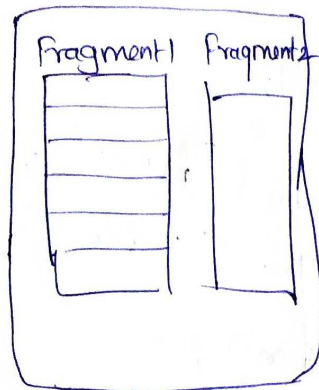

Some Important Points

- A Fragment has its own Layout and its own behaviour with its own life cycle callbacks
- can combine Multiple fragments in Single activity to build Multi-pane UI
- Fragment life-cycle is closely related to the life cycle of its host activity, means When activity is paused, fragments available in activity will also stopped.
- Fragments added to the android Api in Honeycomb Version of Android which Api version 11

Basic Implementation of Fragment

Fragment Activity - Base class for all activities using compatibility based Fragment Features.

Fragment - Base class for all fragment

FragmentManager - class for interacting with Fragment object inside activity

FragmentManager - class for atomic set of Fragment operations such as Replace or Add of a Fragment

Interaction

Step 1: Create new project named FragmentDemo.

Step 2: In activity-main.xml

```
<LinearLayout . . . . .  
    android:orientation = "vertical">
```

```
<Button  
    android:id="@+id/First Fragment"  
    android:layout_width="match Parent"  
    android:layout_height="wrap center"  
    " : text = "First Fragment" />
```

```
<Button  
    android:id="@+id/Second Fragment"  
    android:layout_width="match Parent"  
    android:layout_height="wrap center"  
    android:text = "Second Fragment" />
```

Basic
Fragment
code

```
<FrameLayout  
    android:id="@+id/FrameLayout"  
    android:layout_width="match Parent"  
    android:layout_height="wrap center" />
```

```
</LinearLayout>
```


Step 3: In MainActivity.java .

Package

import android.app.Fragment ;

" " " - Fragment Manager ;

" " " - FragmentTransaction ;

public class MainActivity extends AppCompatActivity {

Button b1, b2 ;

@Override

protected void onCreate (.....)

Super

Set

b1 = (Button) findViewById (R.id. firstfragment)

b2 = (Button) findViewById (R.id. Secondfragment)

b1. setOnClickListener (new {

public void onClick ()

{

First_Fragment first ~~fragm~~ = new First_Fragment ();

FragmentTransaction transaction = ~~getSupportFragmentManager~~
getSupportFragmentManager().beginTransaction();

transaction.replace (R.id.layout, first).commit();

y
});

b2. setOnClickListener (new {

public void onClick ()

{

Second_Fragment Second = new Second_Fragment ();

FragmentTransaction transaction =

getSupportFragmentManager().beginTransaction();

transaction.replace (R.id.layout, Second).commit()

y

Step 4: Fragment class in Android

```
public class first_Fragment extends Fragment
```

```
{  
    public View onCreateView(LayoutInflater,  
        ViewGroup container)
```

```
{  
    return inflater.inflate(R.layout.first_Fragment,  
        container, false);  
}
```

// inflate parameter is a LayoutInflater used to
inflate the layout, container parameter is
the parent ViewGroup in which our
fragment layout will be inserted.

o/p

