


Aim:

Develop an application to find highest no using Android Studio.

- Step 1 : Create new project
File $\rightarrow$ New $\rightarrow$ New Project
- Step 2 : Design application in activity xml using components
Edit text, EditText, EditText, Button TextView.
- Step 3 : Write java code in MainActivity.java
- Step 4 : Initialize components like
EditText number1;
EditText number2;
Button Btn;
- Step 5 : Assigning id to the components which initial
number 1 = (EditText) findViewById(R.id.num1);
number 2 = (EditText) findViewById(R.id.num2);
- Step 6 : For Button click set set onclick listener
Btn.setOnClickListener(new . . .)
- Step 7 : Get Text from the components using
 $\text{int getText() = Integer.parseInt(number1.getText().toString())}$
- Step 8 : using condition find the greatest number.
 $\text{if}(n_1 > n_2)$
 $\{ \text{if}(n_1 > n_2)$
 $\{ \text{result.setText("N1 is greater");}$
 $\}$ else $\}$
 $\text{result.setText("N2 is greater");}$

Designing in activity.xml

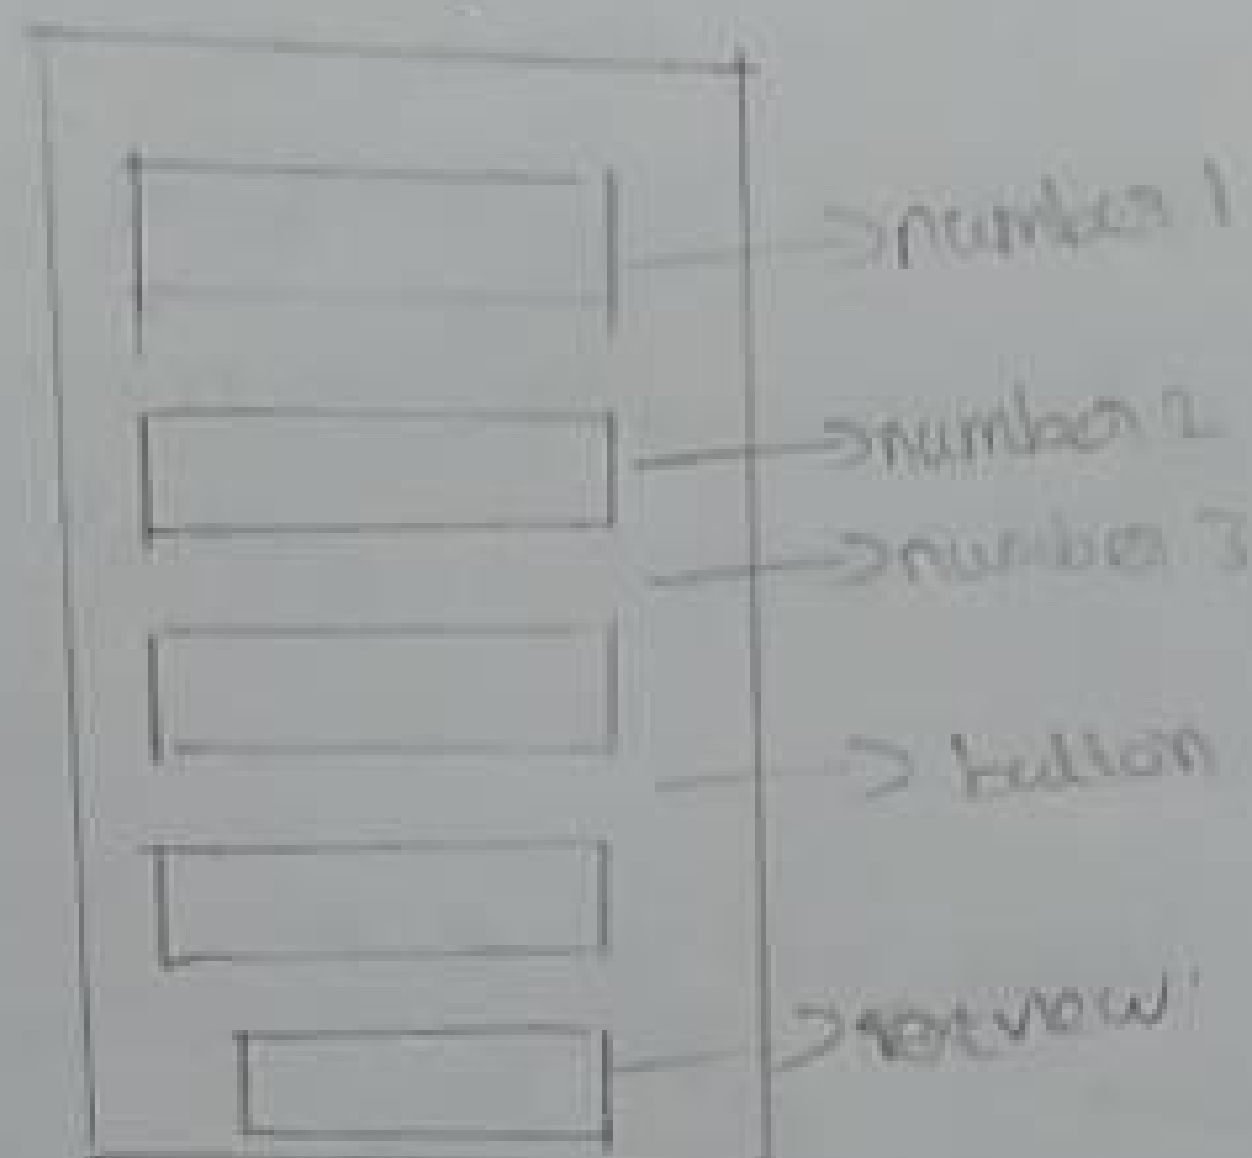

XML code in activity.xml

```
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
```

```
    android:gravity="center"
```

```
    android:orientation="vertical"
```

```
<EditText
```

```
    android:id="@+id/number1"
```

```
    android:layout_width="match_parent"
```

```
    android:layout_height="wrap_content"
```

```
    android:inputType="number"/>
```

```
<EditText
```

```
    android:id="@+id/number2"
```

```
    android:layout_width="match_parent"
```

```
    android:layout_height="wrap_content"
```

```
    android:inputType="number"/>
```

```
<EditText
```

```
    android:id="@+id/number3"
```

```
    android:layout_width="match_parent"
```

```
    android:layout_height="wrap_content"
```

```
    android:inputType="number"/>
```


< Button

```
android : id = "@id/btn"  
android : Layout_width = "340dp"  
android : Layout_height = "wrap-content"  
android : Text = "Find Number Find Greatest No"  
android : TextSize = "24dp" />
```

< Text View

```
android : id = "@id/result"  
android : Layout_width = "match-parent"  
android : Layout_height = "wrap-content"  
android : TextSize = "24dp" />
```

< /LinearLayout >

Main Activity.java

Package .com

Import . . .

Public class MainActivity extends AppCompatActivity . . .

{

@Override

protected void onCreate()

{

super

EditText num1, num2, num3

Button button,

TextView result;

num1 = (EditText) findViewById (R.id.number1);

num2 = (EditText) findViewById (R.id.number2);

num3 = (EditText) findViewById (R.id.number3);

button = (Button) findViewById (R.id.btn1);

result = (TextView) findViewById (R.id.result);

button.setOnClickListener (new View.OnClickListener() {

Output:


40
50
60
Find frequency no
60

off
Vuler


```

{
    @Override
    public void onClick (View v) {
        int n1 = Integer.parseInt (num1.getText ().toString());
        int n2 = Integer.parseInt (num2.getText ().toString());
        int n3 = Integer.parseInt (num3.getText ().toString());
        if (n1 > n2)
        {
            if (n1 > n3)
            {
                result.setText ("number 1 is greater");
            }
            else {
                result.setText ("number 3 is greater");
            }
        }
        else if (n2 > n3)
        {
            result.setText ("number 2 is greater");
        }
        else {
            result.setText ("number 3 is greater");
        }
    }
}

```

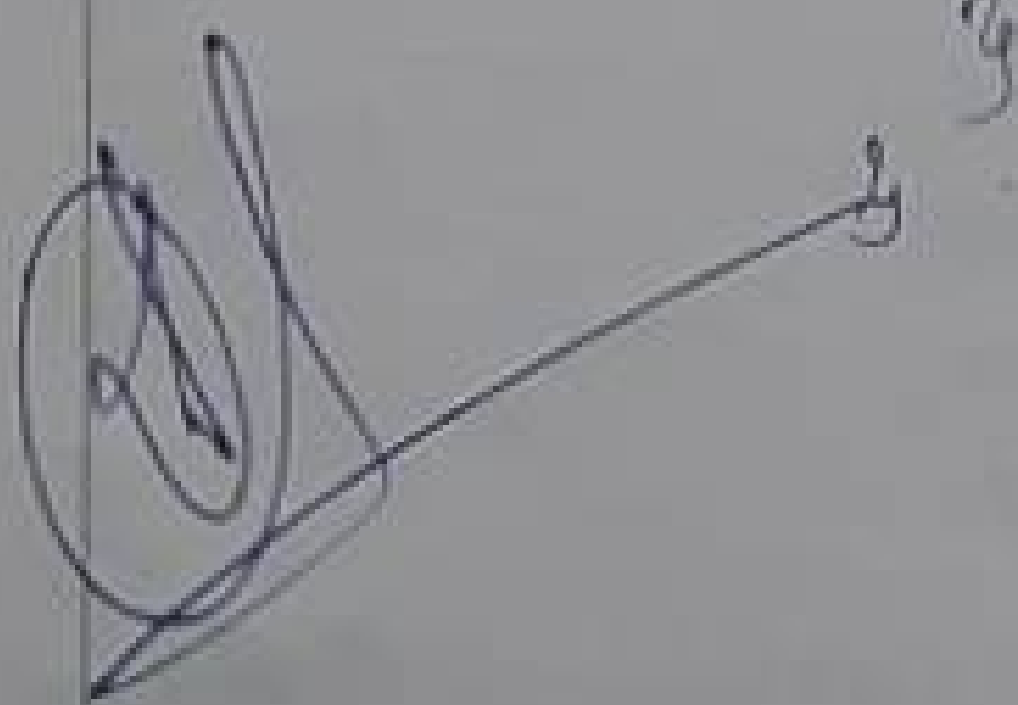

Personal Information

2,

Aim:

To develop an application for the personal information.

Algorithm:

Step 1: create new project

File → new → new project

Step 2: Design application in activity.xml using component of TextView, EditText, Button.

Step 3: Write java code in main activity.java

Step 4: Initialize components like

TextView textView;

EditText name;

EditText Email;

EditText DOB;

EditText phone no;

EditText Address;

Button btn;

Step 5: Assigning id to the components which initial

Name = (EditText) findViewById(R.id.Name_id);

Email = (EditText) findViewById(R.id.Email_id);

DOB = (EditText) findViewById(R.id.DOB_id);

Phone no = (EditText) findViewById(R.id.phone no);

Address = (EditText) findViewById(R.id.Address);

TextView = (TextView) findViewById(R.id.textView_id);

Button = (Button) findViewById(R.id.Button_id);

8

: For Button click set ~~set~~ `setOnClickListener`
`Button.setOnClickListener(this)`.

: Get text from the components using

`String Name1 = name.getText().toString();`

`String Email1 = Email.getText().toString();`

`String DOB1 = DOB.getText().toString();`

`String phone1 = phone_no.getText().toString();`

`String Add1 = Address.getText().toString();`

: Using the condition to view the personal information

`TextView.setText(Name: "+Name1+" /n Email: +`


`Email + "/n DOB: + DOB1 +`

`/n Phone_no: "+phone1+" /n`

`Address: "+Add1);`

: Run the application to get the personal information.

Designing in activity.xml

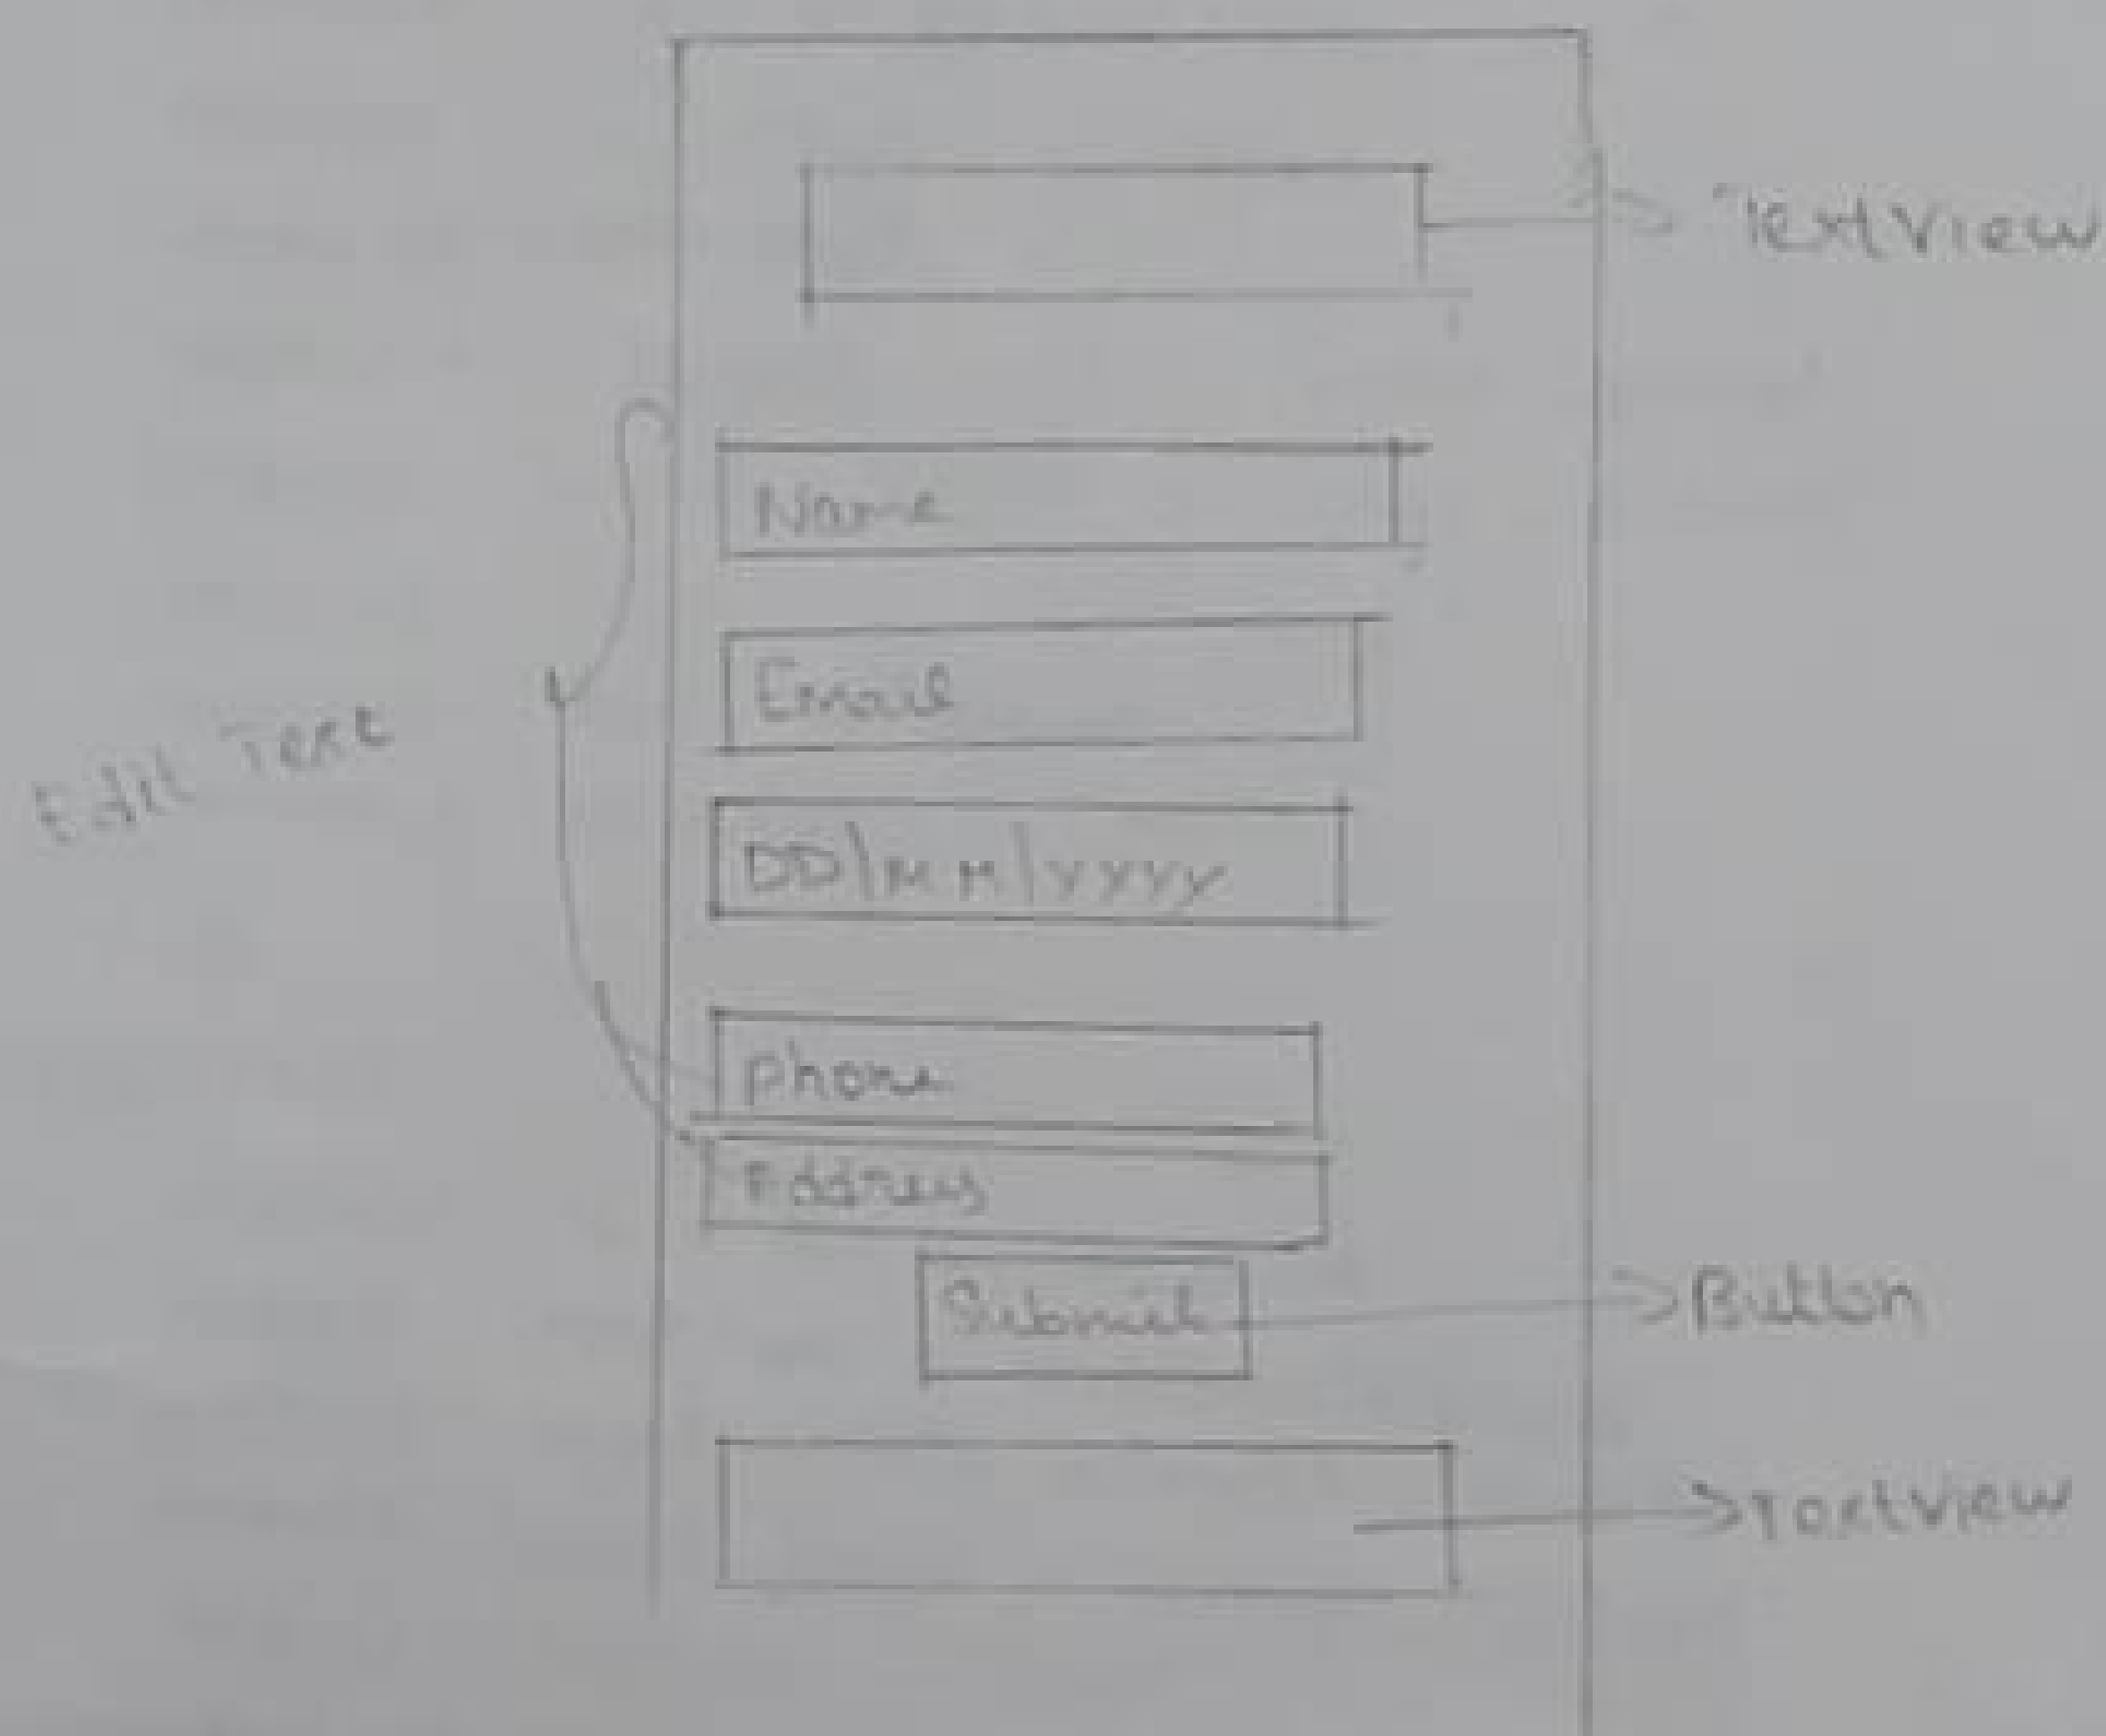

```
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
```

```
xmlns:app="http://schemas.android.com/apk/res-auto"
```

```
xmlns:tools="http://schemas.android.com/tools"
```

```
android:layout_width="match-parent"
```

```
android:layout_height="match-parent"
```

```
android:orientation="vertical">
```

```
<TextView
```

```
android:layout_width="match-parent"
```

```
android:layout_height="wrap-content"
```

```
android:gravity="center"
```

```
android:layout_marginTop="10dp"
```

```
android:textStyle="bold"
```

```
android:textSize="30dp"
```

```
android:textColor="@color/purple_700"
```

```
android:layout_marginBottom="20dp"
```

```
android:text="Personal info">
```


<EditText

```
android:id="@+id/Name_id"  
android:inputType="text"  
android:maxLength="25"  
android:layout-width="match-parent"  
android:layout-height="wrap-content"  
android:textSize="20sp"  
android:hint="Name"  
android:textStyle="bold"  
/>
```

<EditText

```
android:id="@+id/Email_id"  
android:inputType="textEmailAddress"  
android:layout-width="match-parent"  
android:layout-height="wrap-content"  
android:textSize="20sp"  
android:hint="Email"  
android:textStyle="bold"  
android:layout-marginTop="5dp"/>
```

<EditText

```
android:id="@+id/DOB_id"  
android:layout-width="match-parent"  
android:layout-height="wrap-content"  
android:inputType="date"  
android:maxLength="10"  
android:hint="DD/MM/YYYY"  
android:textSize="20sp"  
android:layout-marginTop="5dp"/>
```

<EditText

```
android:id="@+id/Phone_no"  
android:inputType="number"  
android:layout-width="match-parent"  
android:layout-height="wrap-content"  
android:hint="Phone_no"  
android:maxLength="10"  
android:textStyle="bold"  
android:layout-marginTop="5dp"/>
```

< EditText

```
android:id="@+id/Address"
android:inputType="text"
android:maxLength="25"
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:textSize="20sp"
android:hint="Address"
android:textStyle="bold"/>
```

< Button

```
android:id="@+id/Button_id"
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:text="Submit"
android:textSize="20sp"
android:textAllCaps="false"
android:layout_marginTop="15dp"
android:background="#E91E63"
android:layout_gravity="center"/>
```

< TextView

```
android:id="@+id/textview_id"
android:layout_marginTop="10dp"
android:textSize="20sp"
android:gravity="center"
android:layout_width="match_parent"
android:layout android:layout_height="match_parent"/>
```

< /LinearLayout >

Package com.example.personalinfo:

import androidx.appcompat.app.AppCompatActivity;


```
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.TextView;
import android.content.Intent;
```

```
public class MainActivity extends AppCompatActivity implements
View.OnClickListener {
```

```
    private EditText Name, Email, DOB, Phone_no, Address;
    private Button button;
    private TextView textView;
```

```
@Override
```

```
protected void onCreate(Bundle savedInstanceState) {
    super.onCreate(savedInstanceState);
    setContentView(R.layout.activity_main);
```

```
    Name = (EditText) findViewById(R.id.Name_id);
```

```
    Email = (EditText) findViewById(R.id.Email_id);
```

```
    DOB = (EditText) findViewById(R.id.DOB_id);
```

```
    Phone_no = (EditText) findViewById(R.id.Phone_no);
```

```
    Address = (EditText) findViewById(R.id.Address);
```

```
    textView = (TextView) findViewById(R.id.textView_id);
```

```
    button = (Button) findViewById(R.id.Button_id);
```

```
    button.setOnClickListener(this);
```

```
}
```

```
@Override
```

```
public void onClick(View v) {
```

Name
Email
DD/YY/MM
Phone no
Address
Submit


[Handwritten signature]


```

String Name1 = Name.getText().toString();
String Email1 = Email.getText().toString();
String DOB1 = DOB.getText().toString();
String Phone1 = Phone_no.getText().toString();
String Add1 = Address.getText().toString();
if (v.getId() == R.id.Button_id)
{
    textView.setText(Name: " + Name1 + "\n Email: " +
    Email1 + "\n DOB: " + DOB1 + "\n Phone_no: " + Phone1 +
    "\n Address: " + Add1);

    Name.getText().clear();
    Email.getText().clear();
    DOB.getText().clear();
    Phone_no.getText().clear();
    Address.getText().clear();
}

```

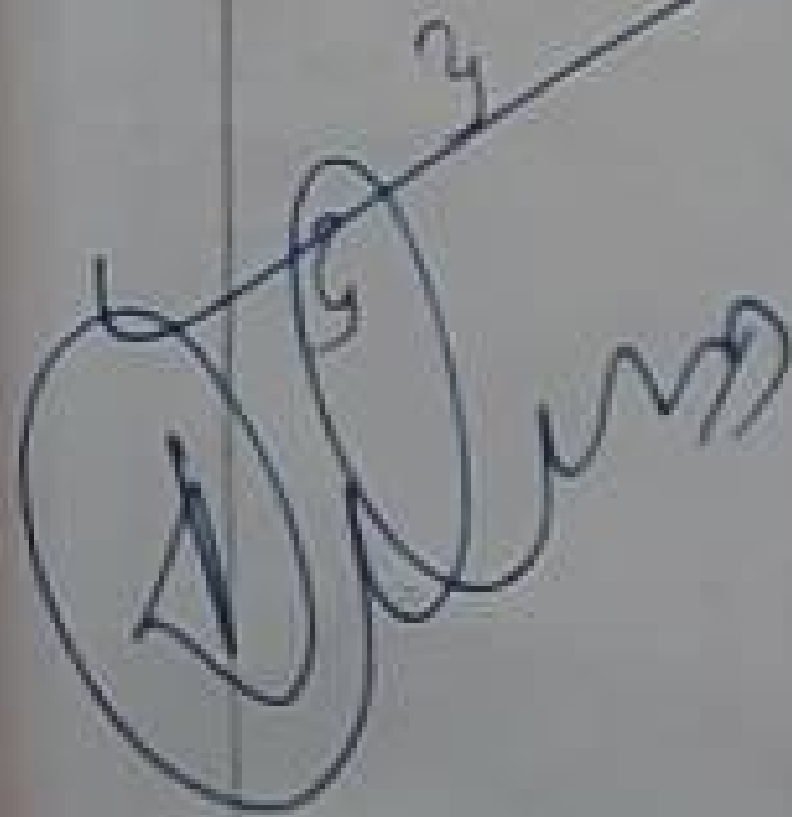

Intent

3
(a)

Aim:

Develop an application that uses intent.

Algorithm

Step 1: Create new project

File → New → new project

Step 2: Design application in activity.xml using components
EditText, Button

Step 3: Write java code in main activity.java

Step 4: Initialize components like

EditText;

Button btn1;

Button btn2;

Step 5: Assigning id to the component which initialize

Step 6: For Button click setOnClickListener

btn2.setOnClickListener(new View.OnClickListener() {

btn1.setOnClickListener(new View.OnClickListener() {

Step 7: Get text from the component using String
name = ~~btn~~ ^{name} .getText().toString();

Step 8: Use this intent action view condition code
Intent i = new Intent(Intent.ACTION_VIEW);

Step 9: Use the toast condition to view the text
Toast.makeText(getApplicationContext(), "Plz
Enter Name", Toast.LENGTH_SHORT).show();

Step 10 : use the intent condition

```
Intent i = new Intent (getApplicationContext()
                        SecondActivity.class);
inputText.setOnClickListener() {
    startActivity(i);
}
```

Step 11 : create a SecondActivity.xml

com - package


↳ Right click New → Activity → Empty Activity

Step 12 : Design UI of SecondActivity.xml.

Step 13 : Implement the onclick event and initialize components for the button or an text view inside MainActivity.java.

Step 14 : write java code in SecondActivity.java to implement the components

Activity main.xml

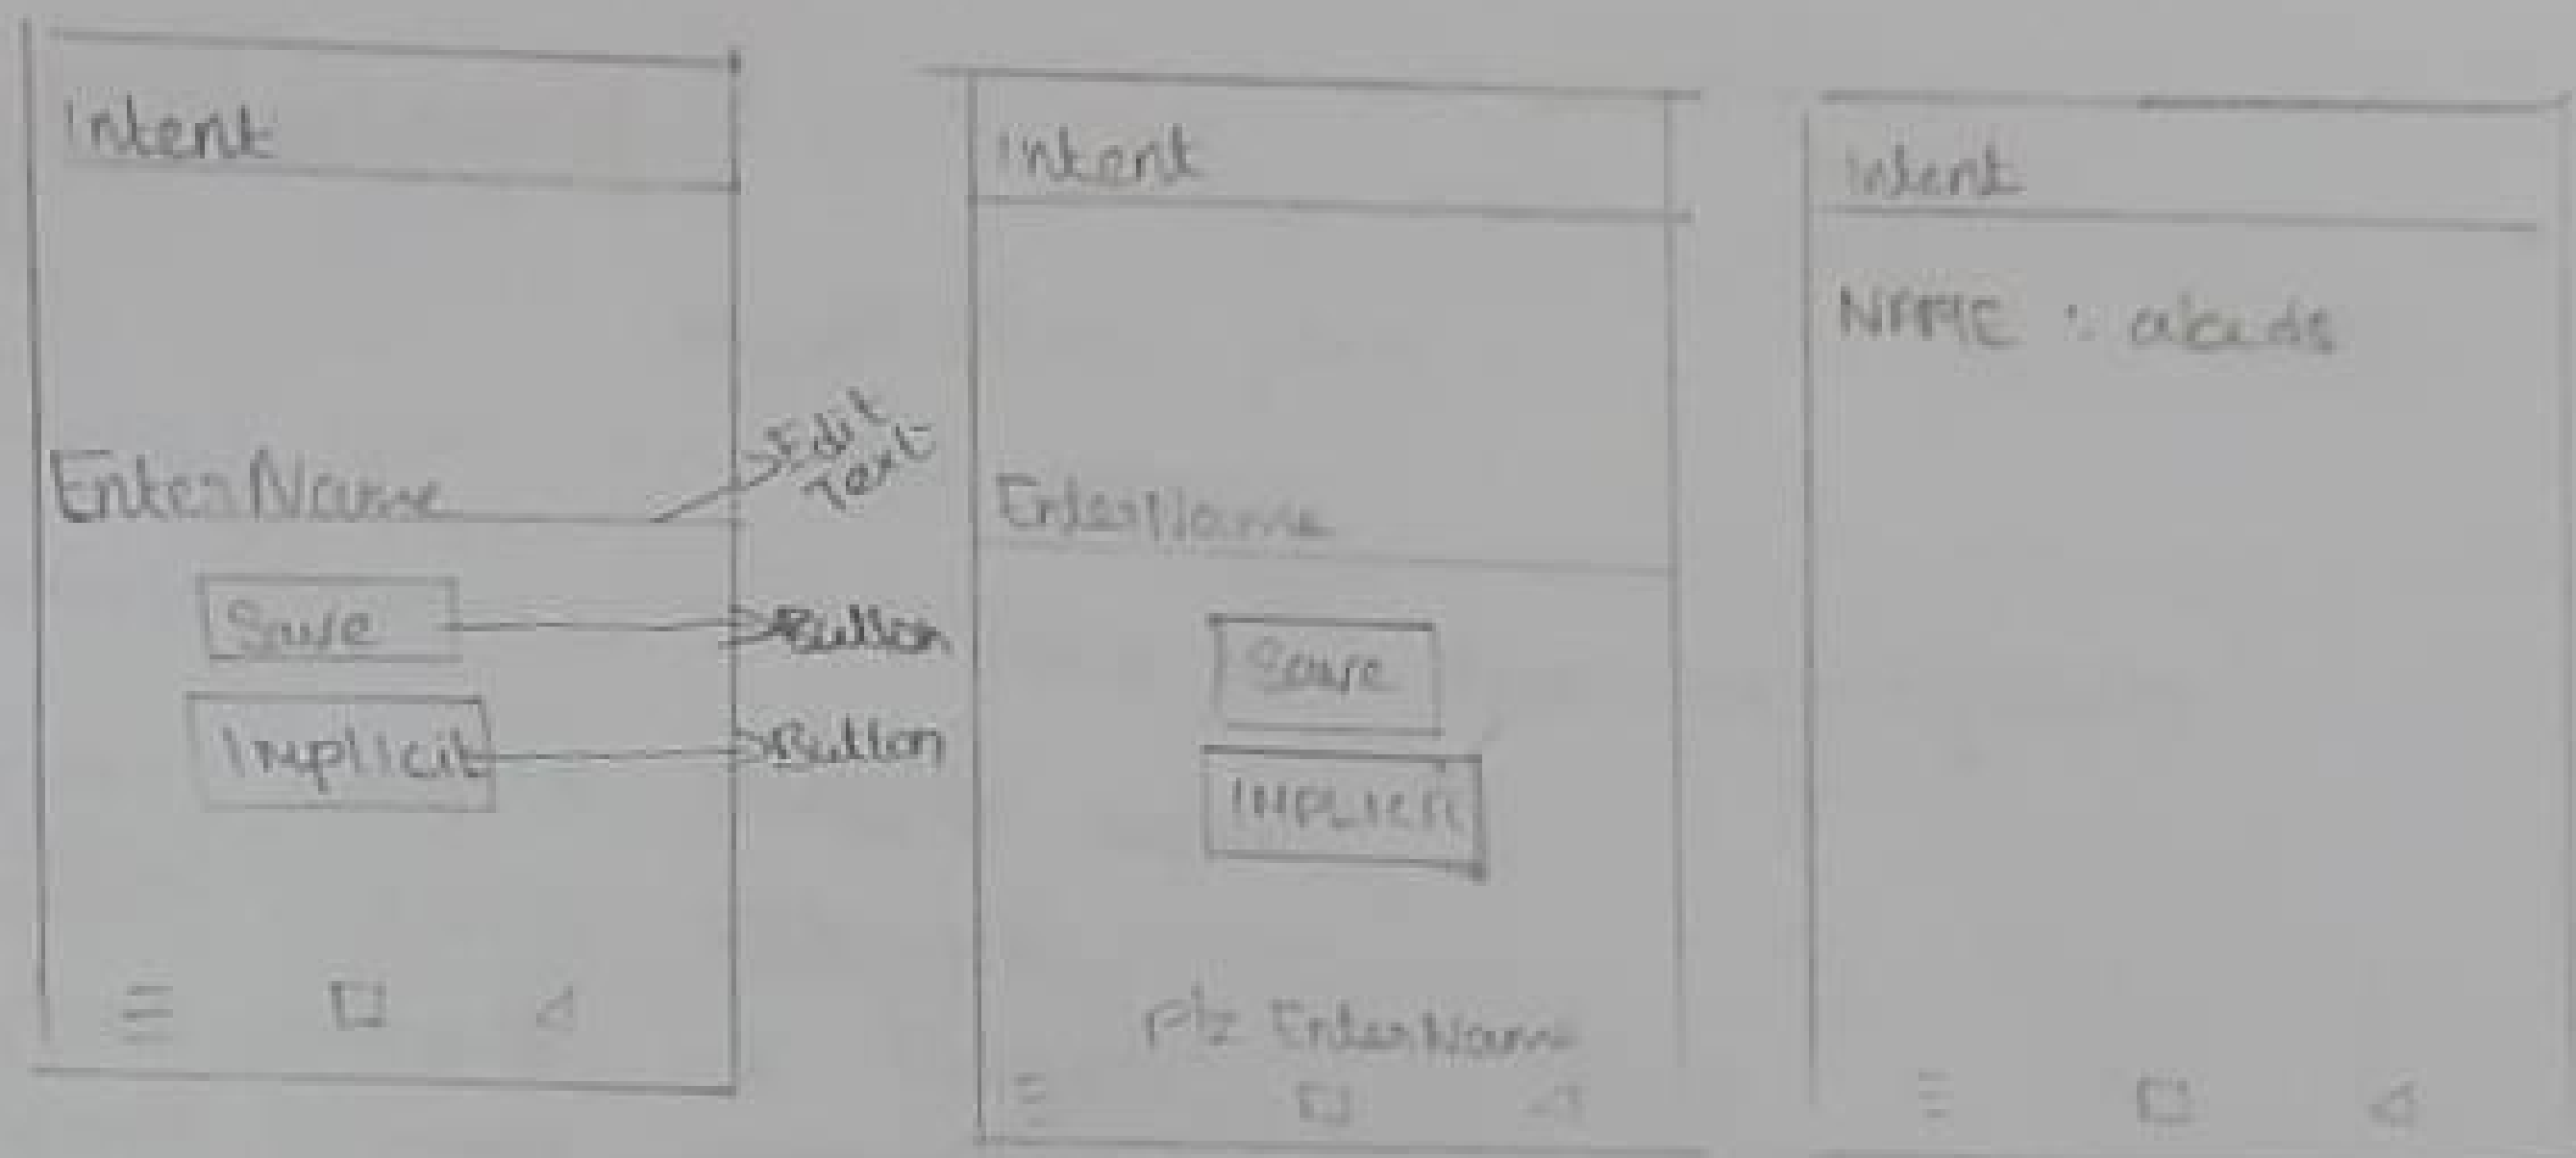

<?xml version="1.0" encoding="utf-8"?>

<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"

xmlns:app="http://schemas.android.com/apk/res-auto"

xmlns:tools="http://schemas.android.com/tools"

android:layout_width="match-parent"

android:layout_height="match-parent"

android:orientation="vertical"

android:gravity="center"

tools:context=".MainActivity">

<EditText

android:layout_width="match-parent"

android:layout_height="wrap-content"

android:id="@+id/name"

android:hint="Enter Name"/>

<Button

android:layout_width="wrap-content"

android:layout_height="wrap-content"

android:id="@+id/btn1"

android:text="SAVE"

android:textStyle="bold"/>

<Button

android:layout_width="wrap-content"

android:layout_height="wrap-content"

android:id="@+id/btn2"


```

        android:text = "implicit"
        android:textStyle = "bold" />
    </LinearLayout>

```

```

MainActivity.java
Package com.example.intent;

import androidx.appcompat.app.AppCompatActivity;
import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

```

```

public class MainActivity extends AppCompatActivity {
    EditText t1;

```

```

    Button bt1;

```

```

    Button btn2;

```

```

    @Override

```

```

    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);

```

```

        setContentView(R.layout.activity_main);

```

```

        t1 = (EditText) findViewById(R.id.name);

```

```

        bt1 = (Button) findViewById(R.id.btn1);

```

```

        btn2 = (Button) findViewById(R.id.btn2);

```

```

        btn2.setOnClickListener(new View.OnClickListener() {

```

```

            @Override

```

```

            public void onClick(View view) {

```

```

                Intent i = new Intent(Intent.ACTION_VIEW);

```

```

                i.setData(Uri.parse("https://www.google.com/"));

```

```

                startActivity(i);
            }

```

```

        }

```

```

    }

```

```

    bt1.setOnClickListener(new View.OnClickListener() {

```

```

        @Override

```

```

        public void onClick(View view) {

```

```

String Name = t1.getText().toString();
if (Name.trim().isEmpty()) {
    Toast.makeText(getApplicationContext(), "Plz
        Enter Name < Toast.LENGTH_SHORT).show();
} else {
    Intent i = new Intent(getApplicationContext(), Second
        Activity.class);
    i.putExtra("NAME", Name);
    startActivity(i);
}
}
}
}
}
}

```

Activity - Second.xml

```

<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/
    android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    tools:context=".SecondActivity">
    <TextView
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:id="@+id/result"/>
</LinearLayout>

```

SecondActivity.java

```

Package com.example.intent;
import androidx.appcompat.app.AppCompatActivity;
import android.content.Intent;
import android.os.Bundle;
import android.widget.TextView;

```


Intent
Enter name
Save Implicit

Intent
Enter Name
Save Implicit
plz Enter Name

Intent
Name : abcd

SP
Vedant

```
public class SecondActivity extends AppCompatActivity {
```

```
    TextView res;
```

```
    @Override
```

```
    protected void onCreate(Bundle savedInstanceState) {
```

```
        super.onCreate(savedInstanceState);
```

```
        setContentView(R.layout.activity_second);
```

```
        Intent i = getIntent();
```

```
        String UserName = i.getStringExtra("NAME");
```

```
        res = (TextView) findViewById(R.id.result);
```

```
        res.setText("NAME : " + UserName);
```

```
    }  
}
```


Send data from one activity to another Activity.

8
(b)

Aim:

Develop an application that uses to send data from one activity to another activity.

Algorithm:

Step 1: Create New project . App.

File → New → New Project

Step 2: Design application in activity.xml using components

EditText, EditText, Button.

Step 3: Write java code in main activity.java.

Step 4: Initialize components like, TextView personal info

```
if (EditText t1, t2;  
    Button B1;
```

Step 5: Assigning id to the components which in file

```
t1 = (EditText) findViewById (R.id.Name);
```

```
t2 = (EditText) findViewById (R.id.Email);
```

```
B1 = (Button) findViewById (R.id.SaveBtn);
```

Step 6: for button click set SetOnClickListener

```
B1 = SetOnClickListener (new view . . . )
```

Step 7: Get text from the components using

```
String Name = t1.getText().toString();
```

```
String Email = t2.getText().toString();
```

Step 8: Using intent condition

```
Intent i = new Intent (MainActivity, this Second Activity
```

```
i.putExtra ("NAME", Name);
```

```
i.putExtra ("Email", Email);
```

```
start  
SecondActivity (i);
```

Step 9 : Create a SecondActivity.xml and design theme for the Second activity.xml

Step 10 : write a java code for the Second activity.java and to implement res components and intent components.

Activity - main.xml

<LinearLayout

orientation = "vertical"

gravity = "center" >

<EditText

android:id = name

android:hint = "Enter Name"

android:layout_width = " "

android:layout_height = " "

android:inputType = "text" />

<EditText

android:id = Email

android:hint = "Enter Email"

android:layout_width = "match parent"

android:layout_height = "wrap content"

android:inputType = "text Email Address" />

<Button

android:id="@+id/saveBtn"

android:text="Save"/>

</LinearLayout>

First Main Activity.java.

public class . . .

EditText t1, t2;

Button B1;

@Override

protected
super

set . . .

ActionBar actionBar = getSupportActionBar();
actionBar.setTitle("First Activity");

t1 = (EditText) findViewById(R.id.name);

t2 = (EditText) findViewById(R.id.email);

B1 = (Button) findViewById(R.id.saveButton);

B1.setOnClickListener(new View.OnClickListener() {

@Override

public void onClick(View v)

{

String Name = t1.getText().toString();

String Email = t2.getText().toString();

Intent i = new Intent(MainActivity.this, Second

Activity.class);
i.putExtra("NAME", Name);

i.putExtra("EMAIL", Email);

startActivity(i);

Second.xml

@Override

protected void onCreate

{

Enter name

Email

Save

Regi
Regilla@gmail.com

Op
Vaidh

ActionBar - - -

- - - - - ("SecondActivity");

Intent i = getIntent();

String name = i.getStringExtra("NAME");

String email = i.getStringExtra("Email");

res = (TextView) findViewById(R.id.res);

res.setText("Name : " + name + "In Email : " + email);



Develop an Application that uses radioButton.

Aim:

Develop an application that uses radioButton

Algorithm:

Step 1: Create new project

File → New → New Project.

: Design application in activity.xml using components
EditText, EditText, EditText, RadioButton, checkbox,
button.

: Write a java code in MainActivity.java

: Initialize components like-

EditText Name, Email, Gender.

RadioGroup rg;

RadioButton Selected RadioButton;

Button btn;

checkbox cb;

TextView tv;

: Assigning id to the components with initial

name = (EditText) findViewById(R.id.name);

: For button click set OnClickListener.

Button.setOnClickListener(this).

: Get text from the components with

String Name = name.getText().toString();

: Use the toast condition to view the text


Toast.makeText(getApplicationContext(), "Enter Name",

Toast.LENGTH_SHORT).show();

Toast.makeText(getApplicationContext(), "Enter Email",

Toast.LENGTH_SHORT).show();

changing the condition to view
tv1.setText (name : " + name + "
+ Email + " In Gender :

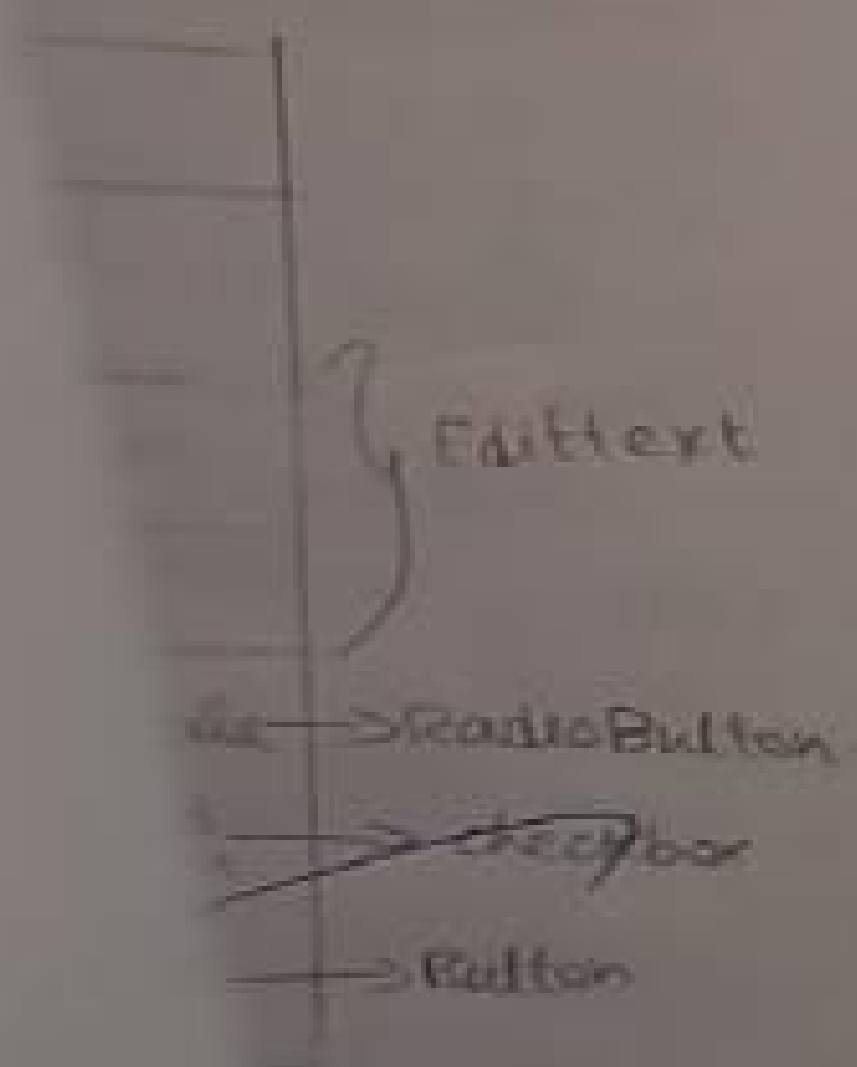


```

:avig the condition to view the radioButton
tv1.setText ( name : " + name + " / n Email : "
+ Email + " / n Gender : + G);

```

RadioButton	
Name	
Email	
Select Gender	
☐ Male	☐ Female → RadioButton
☐ Apply Terms and Condition	→ checkbox
SUBMIT → Button	

→ EditText

activity-main.xml

<?xml version="1.0" encoding="utf-8"?>

<RelativeLayout xmlns:android="http://schemas.android.com/

xmlns:app="http://schemas.android.com/apk/res/android"

xmlns:tools="http://schemas.android.com/tools"

android:layout_width="match-parent"

android:layout_height="match-parent"

tools:context=".MainActivity">

<EditText

android:id="@+id/Name"

android:layout_width="match-parent"

android:layout_height="wrap-content"

android:layout_alignParentStart="true"

android:layout_alignParentTop="true"

android:layout_alignParentEnd="true"

android:layout_marginStart="-2dp"

android:layout_marginTop="0dp"

android:layout_marginEnd="0dp"

android:gravity="left"

android:hint="Name"

android:textSize="30dp"/>

<EditText

android:id="@+id/Email"

android:layout_width="match-parent"

android:layout_height="wrap-content"

android:layout_alignParentStart="true"

android:layout_alignParentTop="true"

android:layout_marginTop="76dp"

android:gravity="left"

android:inputType="textEmailAddress"

android:hint="Email"

android:textSize="30dp"/>

<EditText

android:id="@+id/Gender"

android:layout_width="match-parent"

android:layout_height="wrap-content"

android:layout_alignParentStart="true"

android:layout_alignParentTop="true"

android:layout_marginStart="8dp"


```
android:layout_marginLeft = "30dp"  
android:layout_marginTop = "137dp"  
android:gravity = "left"  
android:text = "Select Gender"  
android:textSize = "30dp" />
```

<RadioGroup

```
android:layout_width = "match-parent"  
android:layout_height = "wrap-content"  
android:layout_alignParentTop = "true"  
android:layout_alignParentEnd = "true"  
android:layout_marginTop = "200dp"  
android:layout_marginEnd = "9dp"  
android:id = "@+id/rb"  
android:orientation = "horizontal">
```

<RadioButton

```
android:id = "@+id/radioButton"  
android:layout_width = "wrap-content"  
android:layout_height = "wrap-content"  
android:text = "Male"  
android:textSize = "20dp" />
```

<RadioButton

```
android:id = "@+id/radioButton2"  
android:layout_width = "wrap-content"  
android:layout_height = "wrap-content"  
android:layout_marginLeft = "110dp"  
android:text = "Female"  
android:textSize = "20dp" />
```

</RadioGroup>

<Button

```
android:id = "@+id/submit"  
android:layout_width = "wrap-content"  
android:layout_height = "wrap-content"  
android:layout_alignParentStart = "true"  
android:layout_alignParentBottom = "true"  
android:layout_centerInParent = "true"  
android:layout_marginStart = "123dp"  
android:layout_marginBottom = "288dp"  
android:gravity = "center"  
android:text = "Submit"  
android:textSize = "30dp" />
```



```
public class MainActivity extends AppCompatActivity {
```

```
    EditText name, Email, Gender;
```

```
    RadioGroup rg;
```

```
    RadioButton selectedRadioButton;
```

```
    Button btn;
```

```
    CheckBox cb1;
```

```
    TextView tv1;
```

```
    @Override
```

```
    protected void onCreate(Bundle savedInstanceState) {
```

```
        super.onCreate(savedInstanceState);
```

```
        setContentView(R.layout.activity_main);
```

```
        Name = (EditText) findViewById(R.id.Name);
```

```
        Email = (EditText) findViewById(R.id.Email);
```

```
        Gender = (EditText) findViewById(R.id.Gender);
```

```
        rg = (RadioGroup) findViewById(R.id.rg);
```

```
        cb1 = (CheckBox) findViewById(R.id.cb1);
```

```
        btn = (Button) findViewById(R.id.Submit);
```

```
        tv1 = (TextView) findViewById(R.id.tv1);
```

```
        btn.setOnClickListener(new View.OnClickListener() {
```

```
            @Override
```

```
            public void onClick(View view) {
```

```
                String Name1 = Name.getText().toString();
```

```
                String Email1 = Email.getText().toString();
```

```
                String Gender1 = Gender.getText().toString();
```

```
                SelectedRadioButton = rg.findViewById(R.id.rg).get  
                    checkedRadioButton();
```

```
                String G1 = SelectedRadioButton.getText().toString();
```

```
                if (Name1.isEmpty())
```

```
                {
```

```
                    Toast.makeText(getApplicationContext(),
```

```
                        "Enter name", Toast.LENGTH_SHORT).show();
```

```
                }
```

```
                else if (Email1.trim().isEmpty())
```

```
                {
```

```
                    Toast.makeText(getApplicationContext(), "Enter Email",
```

```
                        Toast.LENGTH_SHORT).show();
```

```
                }
```

RadioButton
Name
Email
Select Gender
☐ Male ☐ Female
☐ Apply Terms and conditions
SUBMIT

RadioButton
radio
bbas12b
Select Gender
☐ Male ☒ Female
☐ Apply Terms and conditions
SUBMIT
Select condition

of the

RadioButton
radio
bbas12b
Select Gender
☐ Male ☒ Female
☐ Apply Terms and conditions
SUBMIT
Name: radio
Email: bbas12b
Gender: Female

else if (!cbl.ischecked())

↑ Toast.makeText(getApplicationContext(), "Select
condition", Toast.LENGTH_SHORT).show();

3

else if (view.getId() == R.id.Submit) {

tv1.setText(Name + Name1 + "In Email:" + Email1 +
"In Gender:" + G);

3

3

3);

2



Develop an application that uses image.

5) Aim:

To develop an application that uses images.

Algorithm:

Step 1: Create new project

File → New → new project.

Step 2: Design application in activity.xml using components Image View, Button.

Step 3: write a java code in MainActivity.java.

Step 4: initialise the components like;

Button bt:

Step 5: assigning id to the components with initial
bt = (Button) findViewById(R.id.button);

Step 6: For button click set onClickListener
bt.setOnClickListener(new View.OnClickListener() {


Step 7: let to use the intent (new View.OnClickListener() {
Listener() {
Intent intent = new Intent(MainActivity.this, MainActivity2.class);
startActivity(intent);

Step 8: Create SecondActivity.xml
com package → Right click (new) → Activity → Empty Activity.

Step 9: Design UI for SecondActivity.xml

Step 10: write a code in SecondActivity.java

Step 11 : use this condition assign id for component
which install
imageView imageView = (imageView) findViewById
R.id (R.id.imageView)

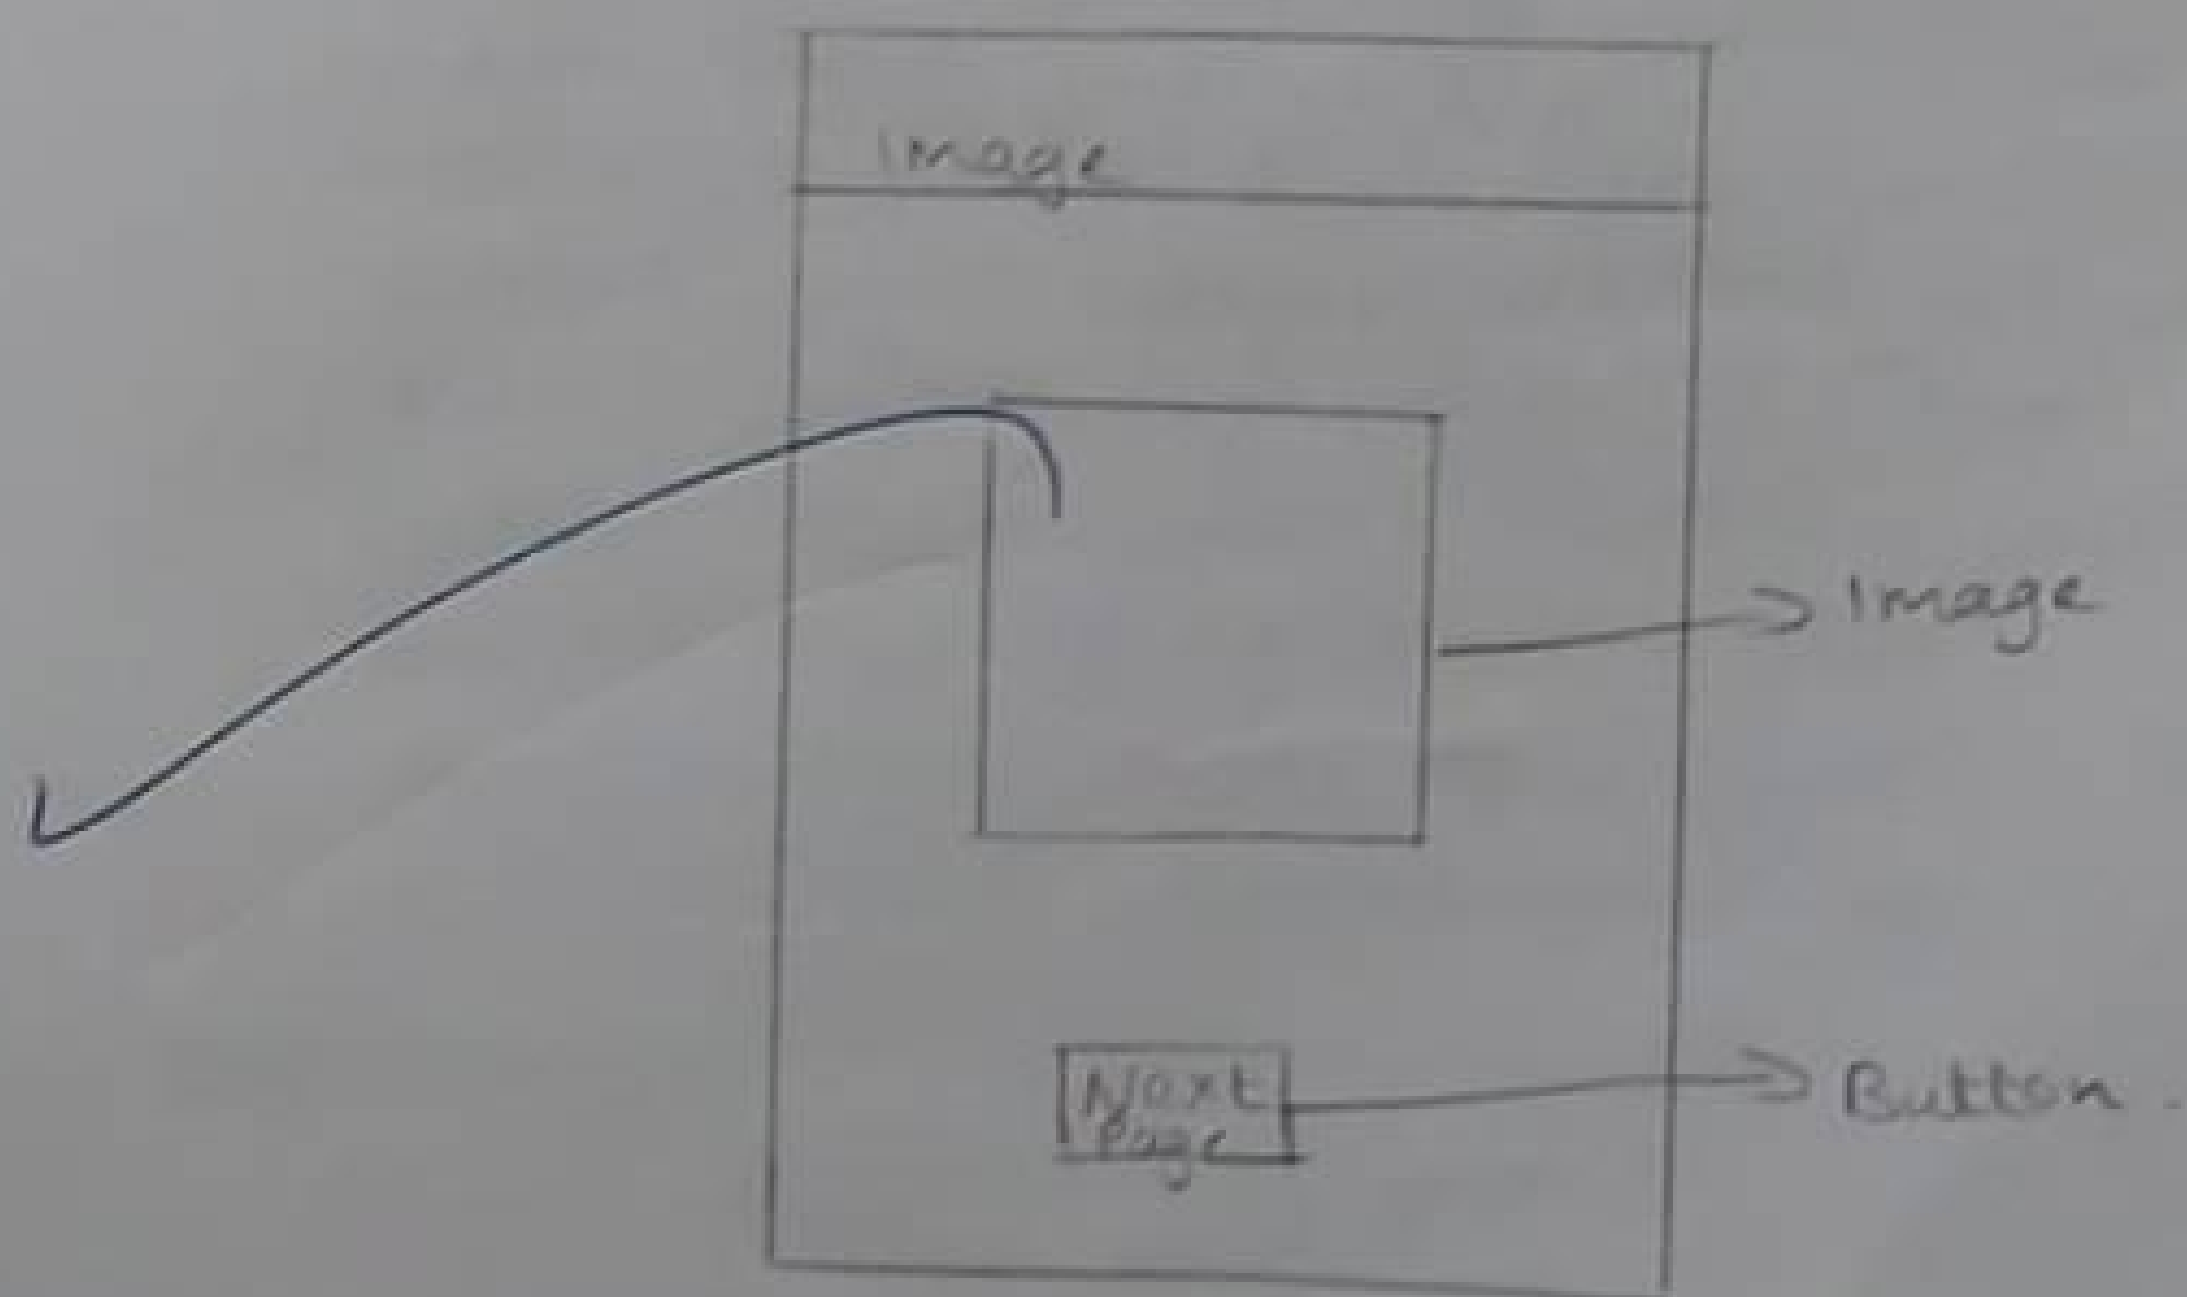

activity_main.xml

<?xml version="1.0" encoding="utf-8"?>

<RelativeLayout xmlns:android="http://schemas.android.com/apk/res/android"

xmlns:app="http://schemas.android.com/apk/res-auto"

xmlns:tools="http://schemas.android.com/tools"

android:layout_width="match_parent"

android:layout_height="match_parent"

tools:context=".MainActivity">

<Button

android:id="@+id/button"

android:layout_width="150dp"

android:layout_height="50dp"

android:layout_alignParentStart="true"

android:layout_alignParentTop="true"

android:layout_centerHorizontal="true"

android:layout_marginStart="138dp"

android:layout_marginTop="127dp"

android:layout_backgroundTint="@android:color/holo_orange_dark"

android:text="Next page"

android:textColor="@color/black"/>

<ImageView

android:id="@+id/image"

android:layout_width="336dp"

android:layout_height="214dp"

android:layout_alignParentStart="true"

android:layout_alignParentTop="true"

android:layout_centerHorizontal="true"

android:layout_marginStart="36dp"

android:layout_marginTop="134dp"

app:srcCompat="@drawable/image"/>

</RelativeLayout>

MainActivity.java

Package com.example.image

import androidx.appcompat.app.AppCompatActivity;

import android.content.Intent;

import android.os.Bundle;


```
import android.view.View;
import android.widget.Button;
```

```
public class MainActivity extends AppCompatActivity {
```

```
    Button bt;
```

```
    @Override
```

```
    protected void onCreate(Bundle savedInstanceState) {
```

```
        super.onCreate(savedInstanceState);
```

```
        setContentView(R.layout.activity_main);
```

```
        bt = (Button) findViewById(R.id.Button);
```

```
        bt.setOnClickListener(new View.OnClickListener() {
```

```
            @Override
```

```
            public void onClick(View view) {
```

```
                Intent intent = new Intent(MainActivity.this,
```

```
                    MainActivity2.class);
```

```
                startActivity(intent);
```

```
            }  
        });
```

```
    }
```

```
}
```

activity_main2.xml

```
<?xml version="1.0" encoding="utf-8"?>
```

```
<RelativeLayout xmlns:android="http://schemas.android.com/apk/
```

```
    xmlns:app="http://schemas.android.com/apk/res-auto"
```

```
    xmlns:tools="http://schemas.android.com/tools"
```

```
    android:layout_width="match_parent"
```

```
    android:layout_height="match_parent"
```

```
    tools:context=". MainActivity2">
```

```
<TextView
```

```
    android:layout_width="wrap_content"
```

```
    android:layout_height="wrap_content"
```

```
    android:layout_alignParentTop="true"
```

```
    android:layout_centerHorizontal="true"
```


```
    android:layout_marginTop="0dp"
```

```
    android:gravity="center"
```

```
    android:text="This is my second Activity"
```

```
    android:textSize="30dp"
```

```
    android:textStyle="bold">
```

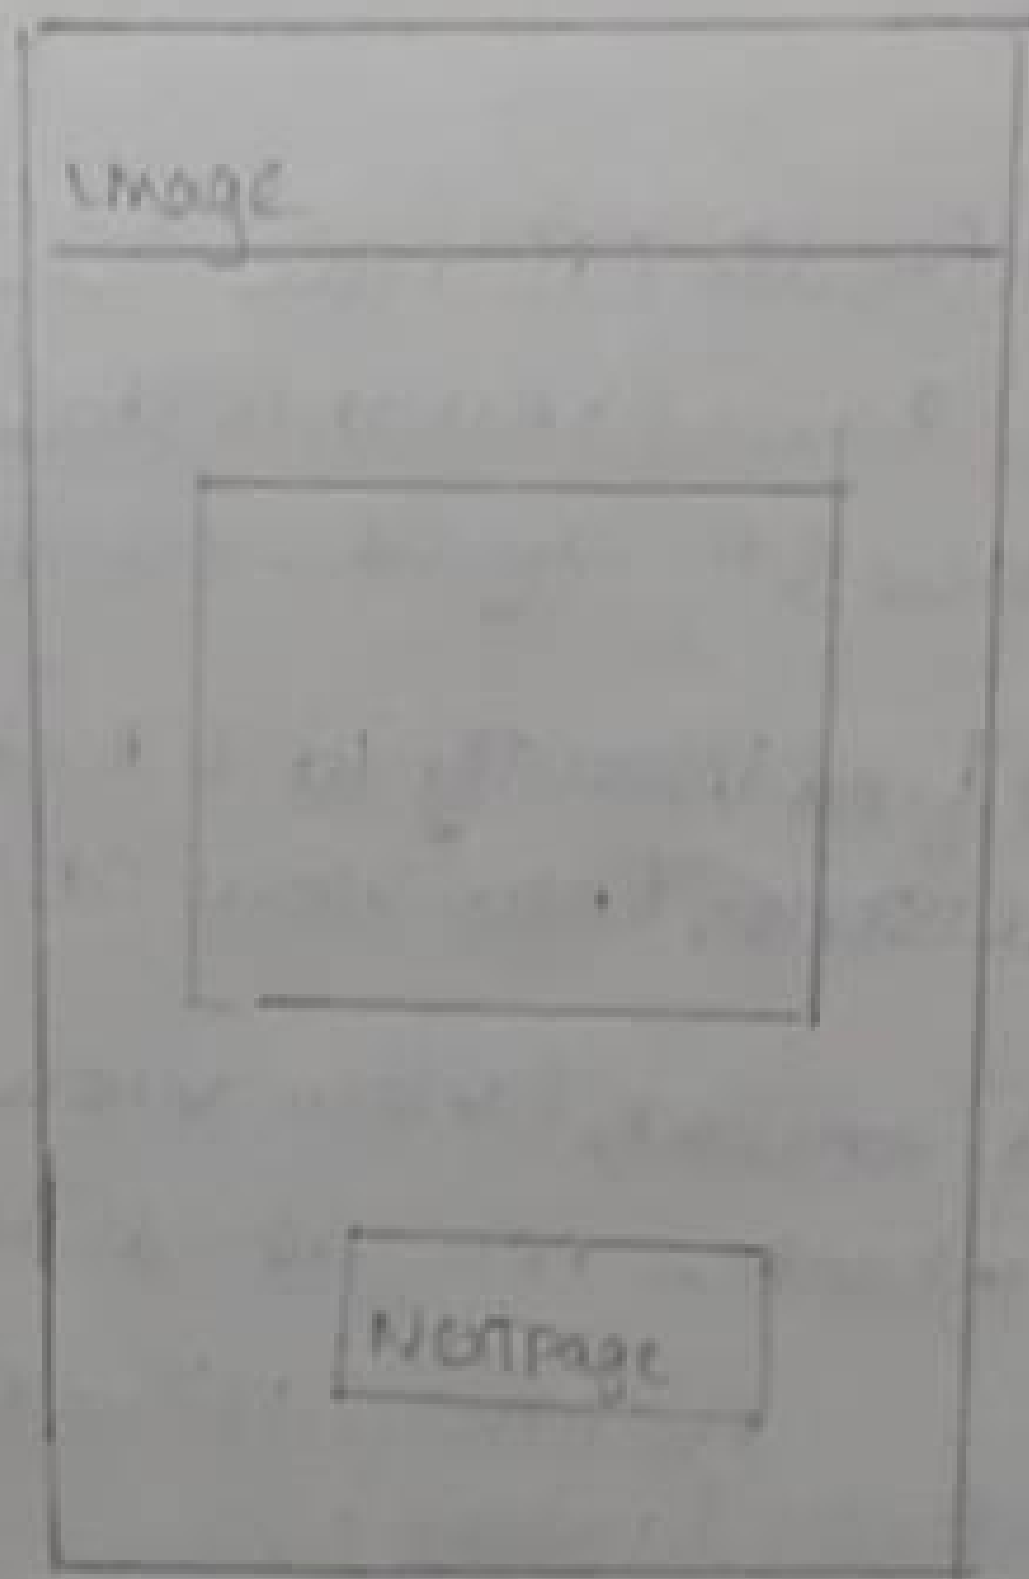



<ImageView

```
android:ld="@+id/image2"  
android:layout_width="325dp"  
android:layout_height="204dp"  
android:layout_alignParentStart="true"  
android:layout_marginStart="41dp"  
android:layout_marginTop="203dp"  
app:srcCompat="@drawable/flower"/>
```

<Relative Layout>

```
Package com.example.image;  
import androidx.appcompat.app.AppCompatActivity;  
import android.os.Bundle;  
import android.widget.ImageView;  
public class MainActivity2 extends AppCompatActivity {  
    @Override  
    protected void onCreate(Bundle savedInstanceState) {  
        super.onCreate(savedInstanceState);  
        setContentView(R.layout.activity_main2);  
        ImageView imageView = (ImageView) findViewById(R.id.  
            image2);  
    }  
}
```

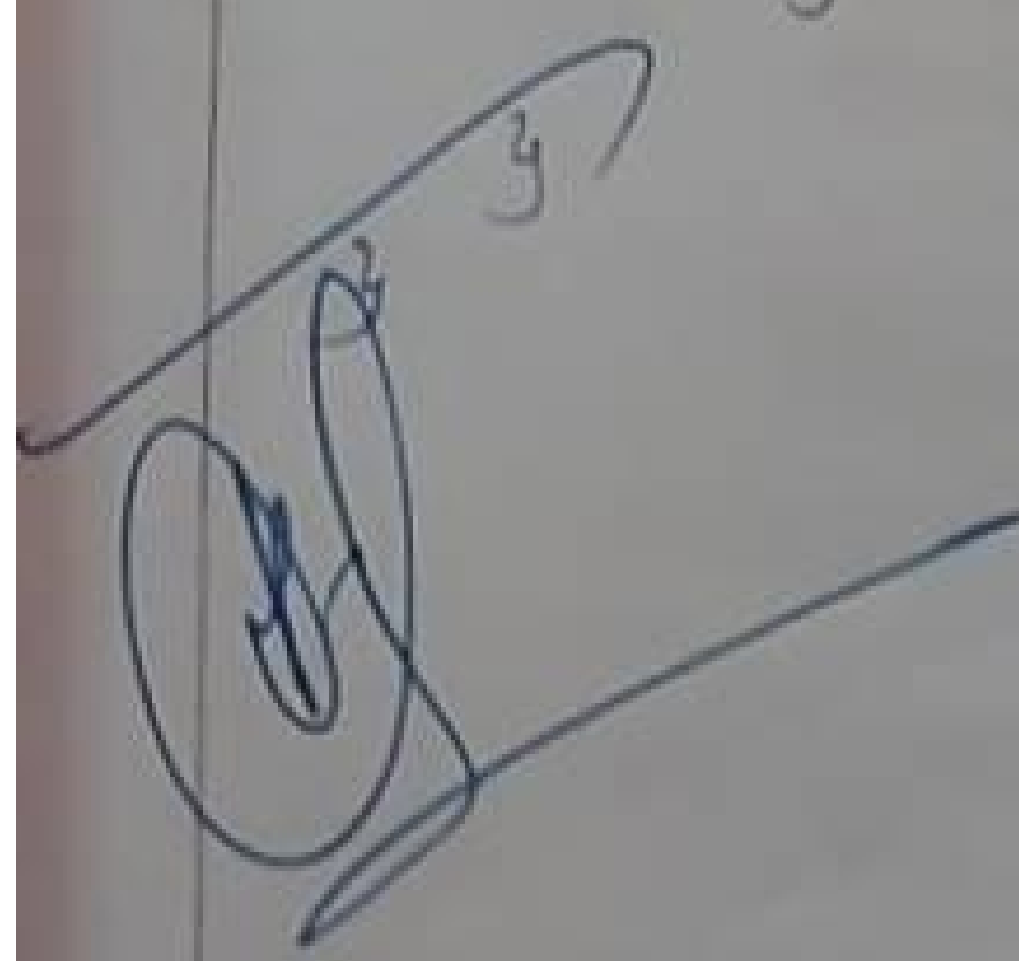

Develop an application that uses Alert Dialog Box

Aim:

To develop an application that uses Alert Dialog Box

Algorithm:

Step 1: Create new project

file → new → new project

Step 2: Design application in activity.xml using components TextViews, EditText, EditText, Button, Button.

Step 3: write java code in MainActivity.java.

Step 4: initialize components like

Private EditText Name, Email;

Private Button button, button1;

Private TextView textView;

AlertDialog.Builder builder;


Step 5: Assigning id to the components which initial
Name (EditText) find view by id (R.id.Name_id);

Step 6: For button click set set onclick Listener
button1.setOnClickListener(new View.OnClickListener())

Step 7: Assigning set title, set message, set
cancelable, set positive button for alert dialog box

Step 8: Set navigation button for a dialog interface
in onclickListener.

: use the condition to get the text
Name.getText().toString()

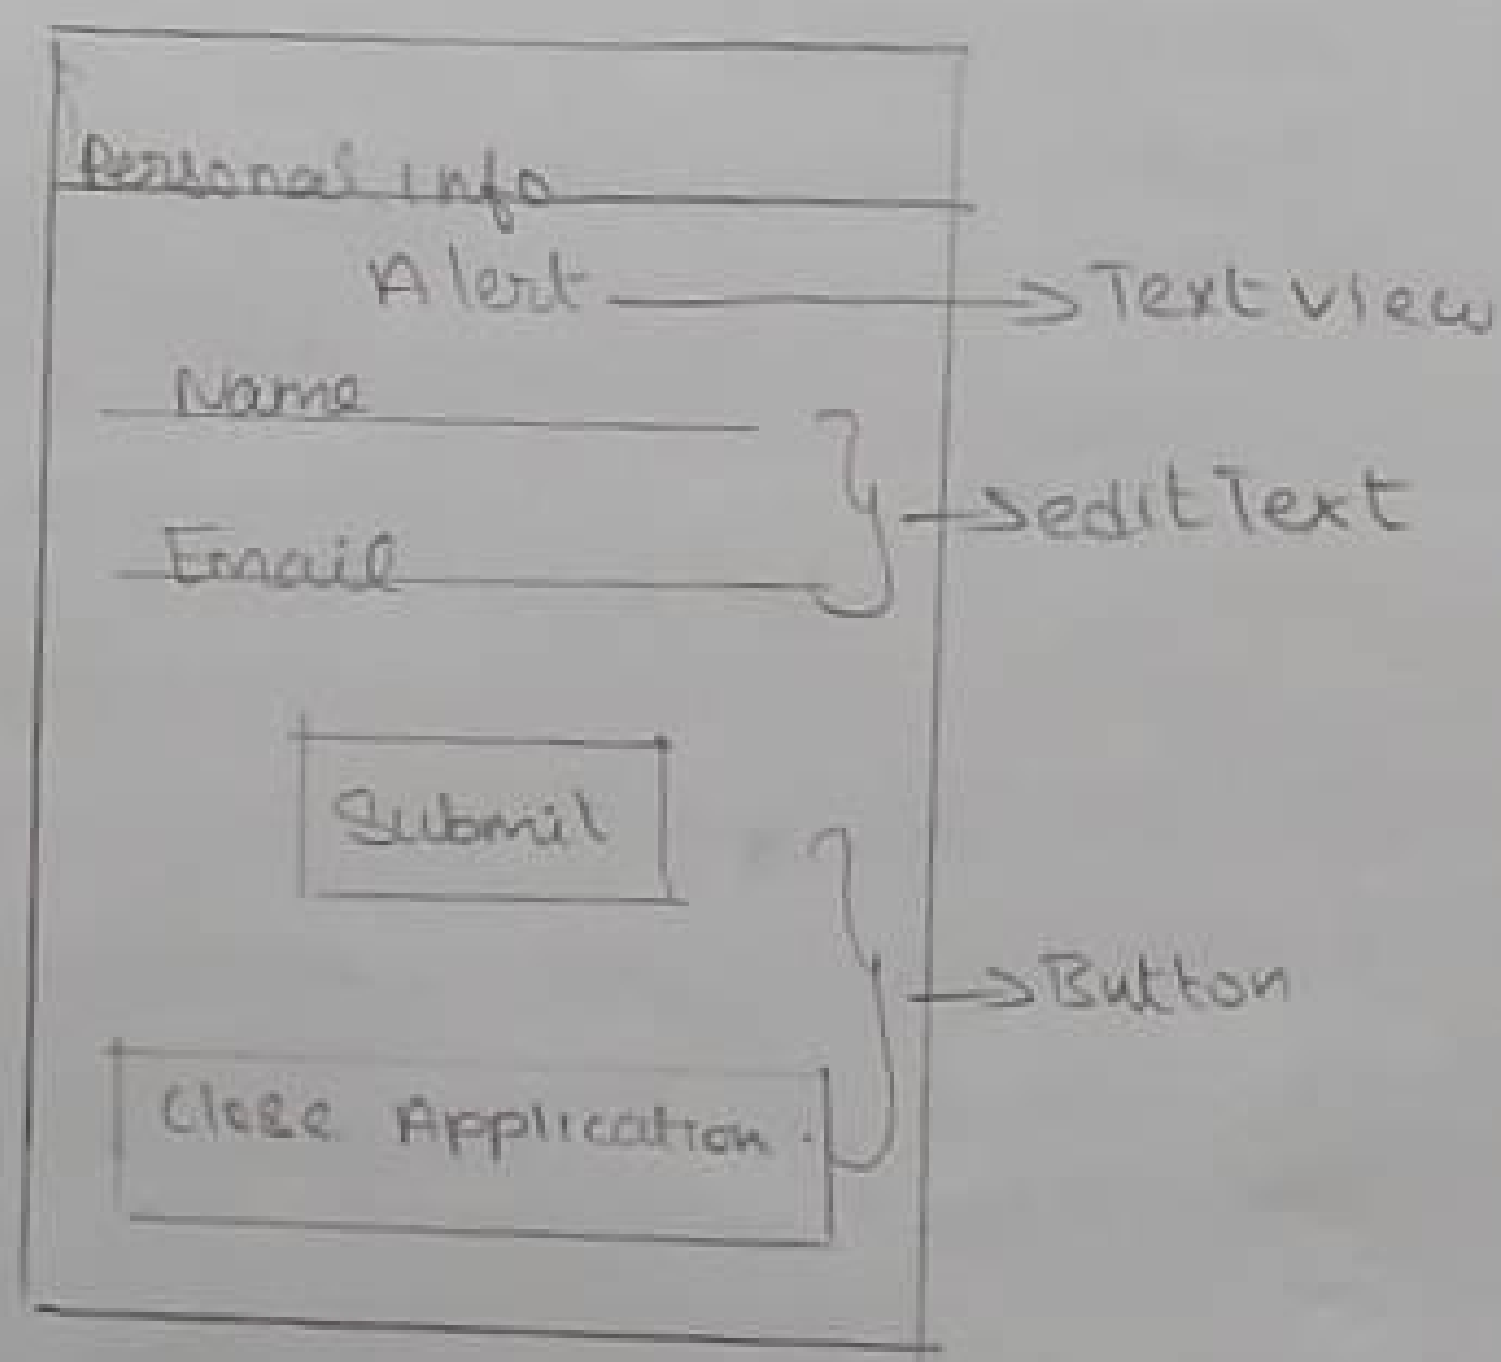

Activity main.xml

```
<?xml version="1.0" encoding="utf-8"?>
```

```
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
```

```
xmlns:app="http://schemas.android.com/apk/res-auto"
```

```
xmlns:tools="http://schemas.android.com/tools"
```

```
android:layout_width="match-parent"
```

```
android:layout_height="match-parent"
```

```
android:orientation="vertical">
```

```
<TextView
```

```
android:layout_width="match-parent"
```

```
android:layout_height="wrap-content"
```

```
android:gravity="center"
```

```
android:textStyle="bold"
```

```
android:textSize="30dp"
```

```
android:layout_marginTop="10dp"
```

```
android:textColor="@color/purple_700"
```

```
android:layout_marginBottom="20dp"
```

```
android:text="Alert"/>
```

```
<EditText
```

```
android:id="@+id/name_id"
```

```
android:inputType="text"
```



```
android:maxLength="25"  
android:layout_width="match-parent"  
android:layout_height="wrap-content"  
android:textSize="20sp"  
android:hint="Name"  
android:textStyle="bold" />
```

```
<EditText  
    android:id="@+id/Email-id"  
    android:inputType="textEmailAddress"  
    android:layout_width="match-parent"  
    android:layout_height="wrap-content"  
    android:textSize="20sp"  
    android:hint="Email"  
    android:textStyle="bold"  
    android:layout_marginTop="5dp" />
```

```
<Button  
    android:id="@+id/Button-id"  
    android:layout_width="wrap-content"  
    android:layout_height="wrap-content"  
    android:text="Submit"  
    android:textSize="20sp"  
    android:textAllCaps="false"  
    android:layout_marginTop="15dp"  
    android:background="#E91E63"  
    android:layout_gravity="center" />
```

```
<TextView  
    android:id="@+id/textview-id"  
    android:layout_width="match-parent"  
    android:layout_height="225dp"  
    android:layout_marginTop="05dp"  
    android:layout_marginBottom="05dp"  
    android:gravity="center"  
    android:textSize="20sp" />
```

```
<Button  
    android:id="@+id/Button-id2"  
    android:layout_width="wrap-content"  
    android:layout_height="90dp"
```



```

android:layout_gravity = "center"
android:layout_marginTop = "05dp"
android:layout_marginBottom = "80dp"
android:background = "#E91E63"
android:text = "Close Application"
android:textSize = "20sp"
app:layout_constraintEnd_toEndOf = "parent"
app:layout_constraintStart_toStartOf = "parent"
tools:layout_editor_absoluteY = "418dp" />

```

</LinearLayout>

MainActivity.java

```

package com.example.personalinfo;
import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;

import android.content.DialogInterface;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.TextView;
import android.content.Intent;

public class MainActivity extends AppCompatActivity implements
View.OnClickListener {
    private EditText Name, Email;
    private Button button, button1;
    private TextView textView;
    AlertDialog.Builder builder;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        Name = (EditText) findViewById(R.id.Name_id);

```

```
Email = (EditText) findViewById (R.id.Email_id);
```

```
textView = (TextView) findViewById (R.id.textView_id);
```

```
buttonn = (Button) findViewById (R.id.textView_id);
```

```
button1 = (Button) findViewById (R.id.Button_id);
```

```
builder = new AlertDialog.Builder (this);
```

```
button1.setOnClickListener (new view.OnClickListener() {
```

```
@Override
```

```
public void onClick (View view) {
```

```
builder.setTitle ("Alert!!");
```

```
• setMessage ("Do you want to close Application")
```

```
• setCancelable (true)
```

```
• setPositiveButton ("Yes", new DialogInterface.  
onClickListener() {
```

```
@Override
```

```
public void onClick (DialogInterface dialogInterface,  
int i) {
```

```
finish();
```

```
}  
3)
```

```
• setNegativeButton ("No", new DialogInterface.
```

```
onClickListener() {
```

```
@Override
```

```
public void onClick (DialogInterface dialogInterface,  
int i) {
```

```
dialogInterface.cancel();
```

```
}
```

```
3)
```

```
show();
```

```
3)
```

```
button.setOnClickListener (this);
```

```
}
```

```
@Override
```

```
public void onClick (View v) {
```


Alert

Name

Email

Submit

Name : S.Rejitha
Email : Rejitha@gmail.com

CLOSE APPLICATION

Name

Email

Submit

Alert!!
Do you want to close Application

NO YES

CLOSE APPLICATION

[Handwritten signature]

```
String Name1 = Name.getText().toString();
```

```
String Email1 = Email.getText().toString();
```

```
if (v.getId() == R.id.Button_id)
```

```
{  
    TextView.setText("Name : " + Name1 + "\nEmail: " +  
        Email1);
```

```
}
```

```
Name.getText().clear();
```

```
Email.getText().clear();
```

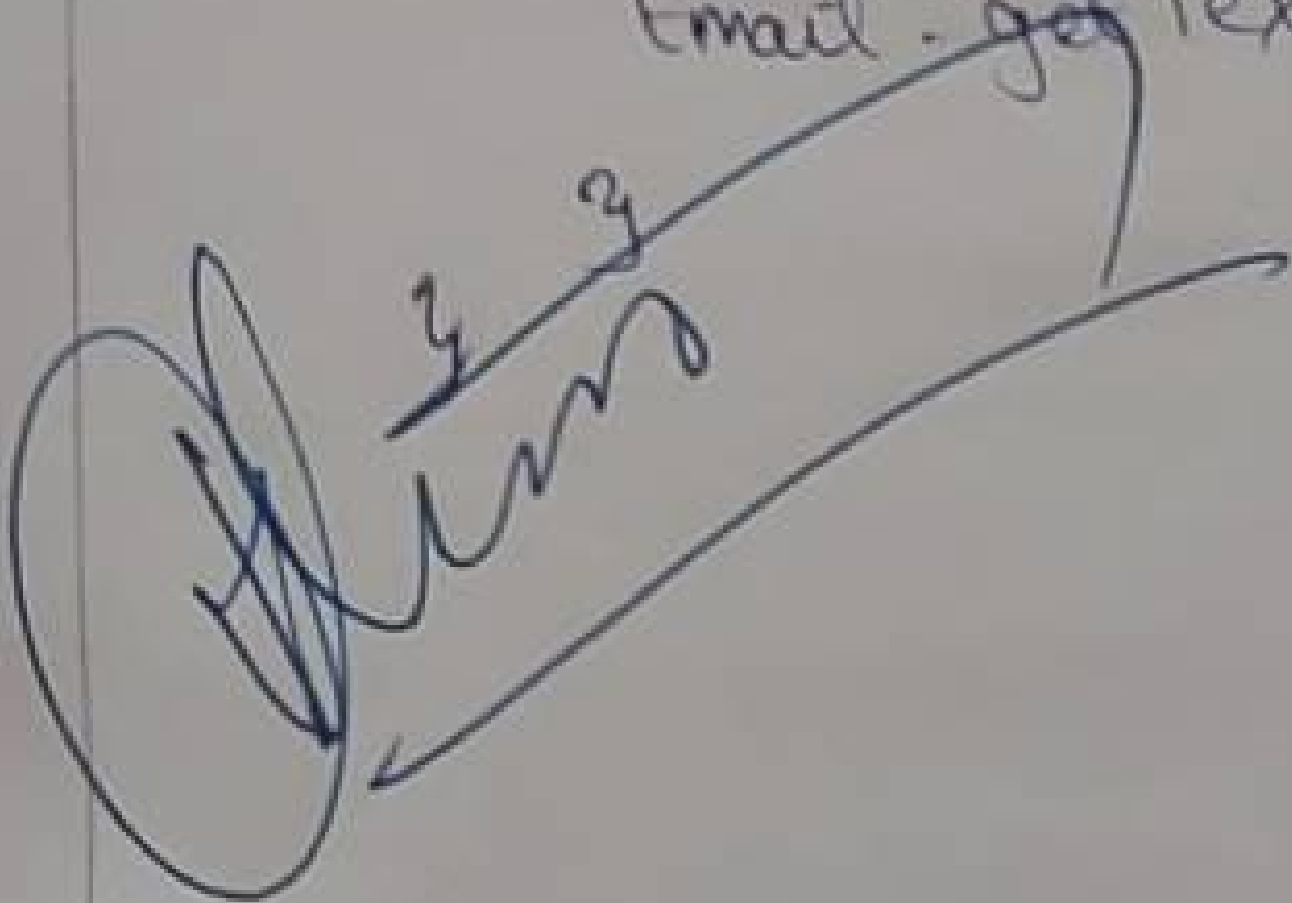


Table Layout-

Aim:

To develop an application that uses table layout

Algorithm:

Step 1 : Create new project

File → new → new project

Step 2 : Design application in activity.xml using components
TextView, Button.

Step 3 : Write java code in MainActivity.java

Step 4 : Initialize components like
Button Btn;

Step 5 : Assigning id to the components with initial
Btn = (Button) findViewById(R.id.Btn);

Step 6 : For button click set set on click listener
Btn.setOnClickListener(new View.OnClickListener() {

Step 7 : Use this condition for the toast
Toast.makeText(MainActivity.this, "Thank you",
Toast.LENGTH_SHORT).show();

Activity_main.xml

<?xml version="1.0" encoding="utf-8"?>

<RelativeLayout

xmlns:android="http://schemas.android.com/apk/res/

xmlns:app="http://schemas.android.com/apk/res-auto"

xmlns:tools="http://schemas.android.com/tools"

android:layout_width="match-parent"

android:layout_height="match-parent"

tools:context=".MainActivity">

<FrameLayout

android:layout_width="match-parent"

android:layout_height="match-parent">

<TextView

android:layout_width="wrap-content"

android:layout_height="wrap-content"

android:text="TableLayout"

android:textSize="20dp"

android:gravity="center"

android:layout_gravity="center-horizontal"

android:layout_marginTop="20dp"/>

</FrameLayout>

<TableLayout

android:layout_width="match-parent"

android:layout_height="wrap-content"

android:text="TableLayout"

android:textSize="20dp"

android:gravity="center"

android:layout_gravity="center"

android:layout_margin="40dp">

<TableRow

android:background="@color/purple_200"

android:layout_marginTop="10dp">

<TextView

android:id="@+id/Name"

android:layout_width="0dp"

android:layout_height="wrap-content"

android:text="Name"


```
android:layout_weight = "2"  
android:inputType = "text"  
android:padding = "10sp"  
android:gravity = "center_horizontal"/>
```

<TextView

```
android:id = "@+id/age"  
android:layout_width = "0dp"  
android:layout_weight = "2"  
android:layout_height = "wrap_content"  
android:text = "Age"  
android:inputType = "number"  
android:padding = "10sp"  
android:gravity = "center_horizontal"/>
```

<TextView

```
android:id = "@+id/surname"  
android:layout_width = "0dp"  
android:layout_weight = "2"  
android:layout_height = "wrap_content"  
android:text = "Surname"  
android:inputType = "text"  
android:padding = "10sp"  
android:gravity = "center_horizontal"/>
```

</TableRow>

<TableRow

```
android:background = "@color/design_default_color_background"
```

<TextView

```
android:id = "@+id/t1"  
android:layout_width = "0dp"  
android:layout_weight = "2"  
android:layout_height = "wrap_content"  
android:text = "Rejitha"  
android:inputType = "text"  
android:padding = "10sp"  
android:gravity = "center_horizontal"/>
```

<TextView

```
android:id = "@+id/t2"  
android:layout_width = "0dp"  
android:layout_weight = "2"  
android:layout_height = "wrap_content"  
android:text = "20"  
android:padding = "10sp"  
android:gravity = "center_horizontal"/>
```


<TableRow>

<TableRow

android:background="@color/design_default_color_background"

<TextView

android:id="@+id/t4"

android:layout_width="0dp"

android:layout_weight="2"

android:layout_height="wrap_content"

android:text="Teja" 21 "Teja"

android:padding="10sp"

android:gravity="center_horizontal"/>

<TextView

android:id="@+id/t5"

android:layout_width="0dp"

android:layout_weight="2"

android:layout_height="wrap_content"

android:layout_text="Pradeep" "Anne" 21

android:padding="10sp"

android:gravity="center_horizontal"/>

<TableRow>

<TextView

android:id="@+id/t6"

android:layout_width="0dp"

android:layout_weight="2"

android:layout_height="wrap_content"

android:text="Anne"

android:padding="10sp"

android:gravity="center_horizontal"/>

</TableRow>

</TableLayout>

<LinearLayout

android:layout_width="match_parent"

android:layout_height="wrap_content"

android:layout_marginTop="300dp"

android:layout_marginEnd="10dp"

android:gravity="center">

Table Layout

Name	Age	Surname
Rajitha	20	Anne
Teja	21	Anne

click

thankyou

<Button

android:id="@+id/btn"

android:layout_width="wrap_content"

android:layout_height="wrap_content"

android:text="click"

android:textStyle="bold"

android:textSize="30dp"/>

</LinearLayout>

</RelativeLayout>

MainActivity.java

Package com.example.tablelayout

import androidx.appcompat.app.AppCompatActivity;

import android.os.Bundle;

import android.view.View;

import android.widget.Button;

import android.widget.Toast;

public class MainActivity extends AppCompatActivity {

Button btn;

@Override

protected void onCreate(Bundle savedInstanceState)

super.onCreate(savedInstanceState);

setContentView(R.layout.activity_main);

btn = (Button) findViewById(R.id.btn);

btn.setOnClickListener(new View.OnClickListener() {

@Override

public void onClick(View view) {

Toast.makeText(MainActivity.this, "Thank you",
Toast.LENGTH_SHORT).show();

}

});

}

ScrollView, GridLayout.

AIM:

To develop an application that uses table layout
ScrollView GridLayout.

Algorithm:

Step 1: Create new project

file → new → new project

Step 2: Design application in activity.xml using components
TextView, Button.

Step 3: write java code in MainActivity.java.

: Initialize components like
Button Btn;


: Assigning id to the components with initial
Btn = (Button) findViewById(R.id.Btn);

: For button click set onClickListener
Btn.setOnClickListener(new View.OnClickListener() {

: use this condition for the toast
Toast.makeText(MainActivity.this, "Thank you",
Toast.LENGTH_SHORT).show();

Step 4: Create a Buttons for the scroll view.

Step 5: Using this components we can use the
ScrollView, GridLayout application.

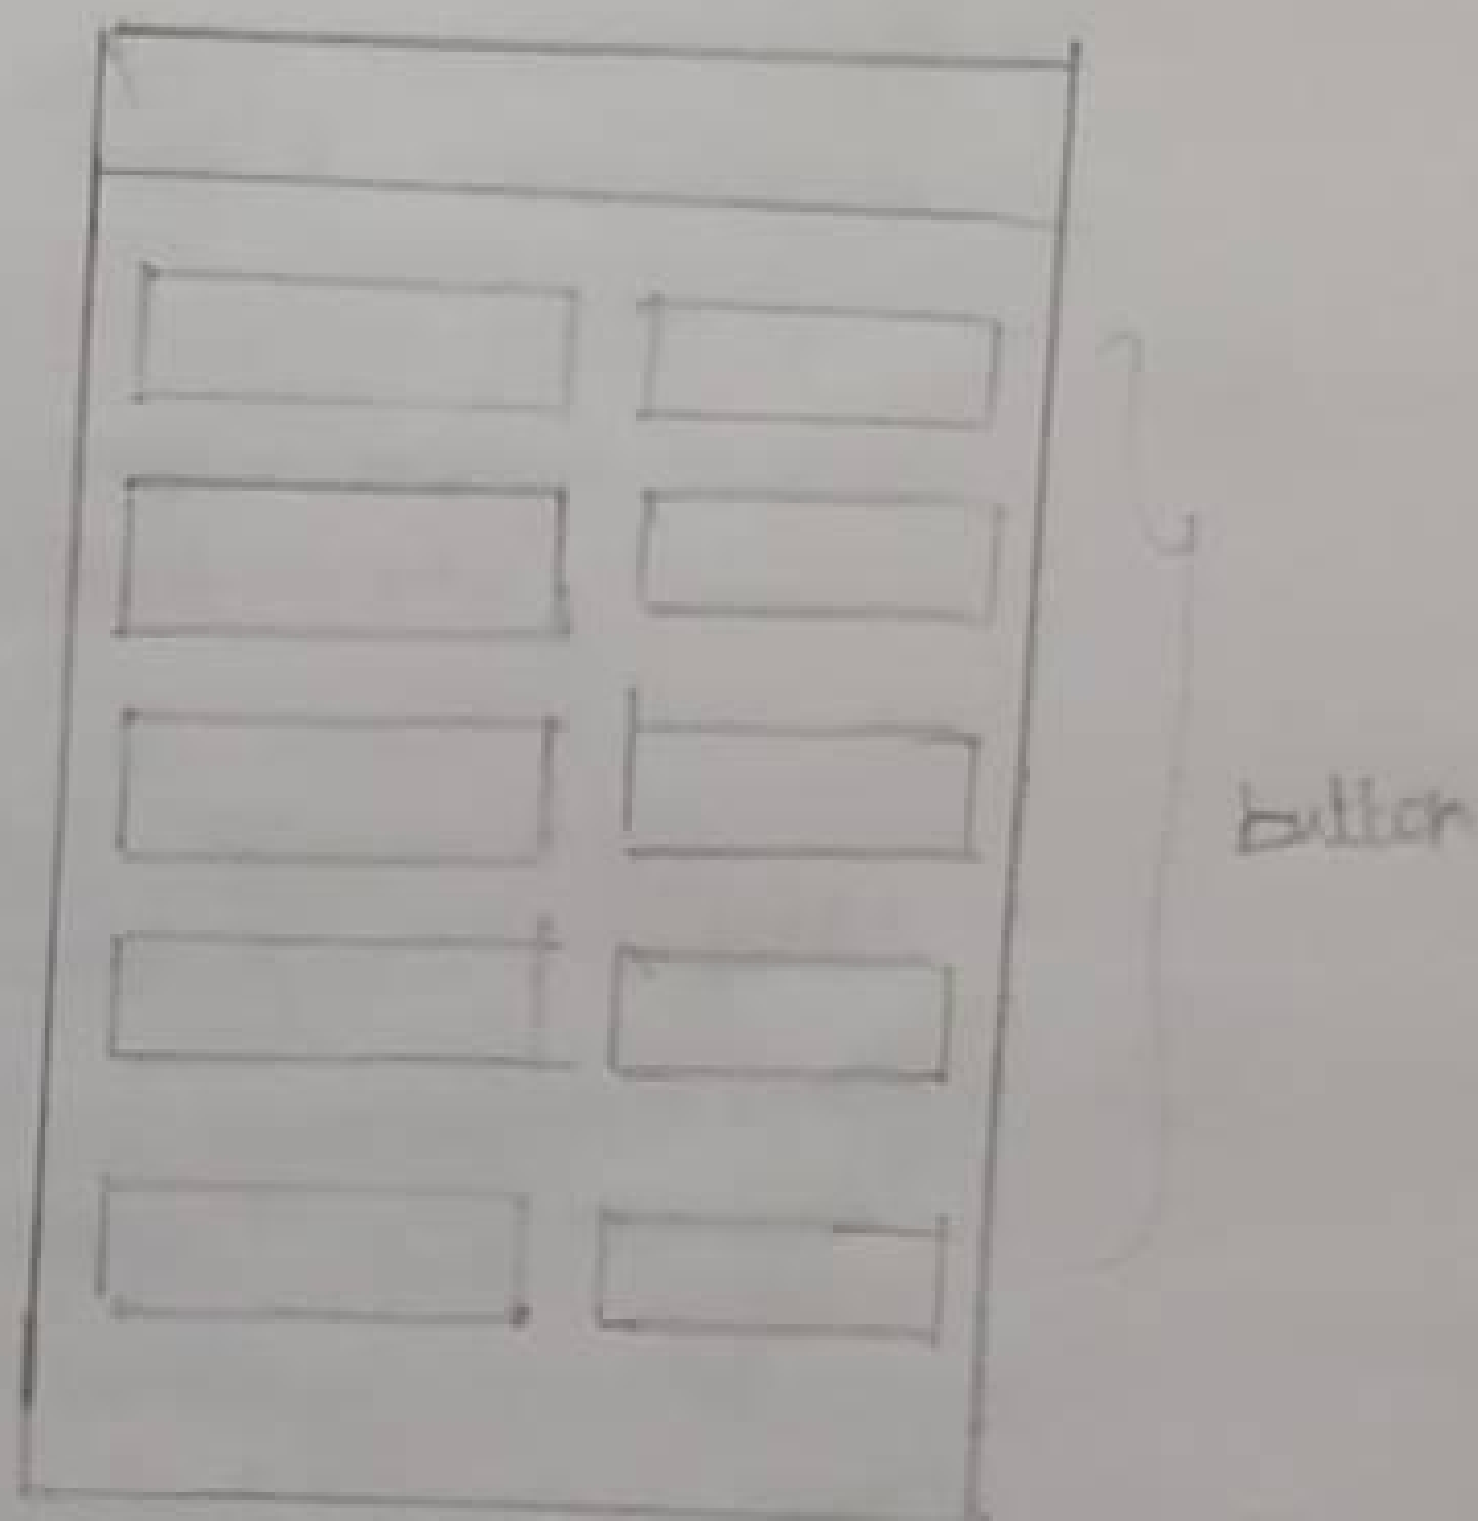

```
<?xml version="1.0" encoding="utf-8"?>
```

```
<ScrollView xmlns:android="http://schemas.android.com/apk/res/android"
```

```
xmlns:app="http://schemas.android.com/apk/res-auto"
```

```
xmlns:app="http://schemas.android.com/apk/res-auto"
```

```
android:layout_width="match-parent"
```

```
android:layout_height="match-parent"
```

```
android:background="@color/black"
```

```
tools:context="MainActivity">
```

```
<GridLayout
```

```
android:layout_width="match-parent"
```

```
android:layout_height="match-parent"
```

```
android:layout_margin="10sp"
```

```
android:rowCount="5"
```

```
android:columnCount="2">
```


<Button

```
android:id="@+id/b1"
android:layout_gravity="fill"
android:layout_columnWeight="1"
android:layout_rowWeight="1"
android:textSize="18sp"
android:layout_margin="5sp"
android:text="1"/>
```

<Button

```
android:id="@+id/b2"
android:layout_gravity="fill"
android:layout_columnWeight="1"
android:layout_rowWeight="1"
android:textSize="18sp"
android:layout_margin="5sp"
android:text="2"/>
```

<Button

```
android:id="@+id/b3"
android:layout_gravity="fill"
android:layout_columnWeight="1"
android:layout_rowWeight="1"
android:textSize="18sp"
android:layout_margin="5sp"
android:text="3"/>
```

<Button

```
android:id="@+id/b4"
android:layout_gravity="fill"
android:layout_columnWeight="1"
android:layout_rowWeight="1"
android:textSize="18sp"
android:layout_margin="5sp"
android:text="4"/>
```

<Button

```
android:id="@+id/b5"
android:layout_gravity="fill"
android:layout_rowWeight="1"
android:textSize="18sp"
android:layout_margin="5sp"
android:text="5"/>
```


<button

android:id="@+id/b8"
android:layout_gravity="fill"
android:layout_columnWeight=1
android:layout_rowWeight="1"
android:textSize="18sp"
android:layout_margin="5sp"
android:text="8"/>

<Button

android:id="@+id/b9"
android:layout_gravity="fill"
android:layout_columnWeight=1
android:textSize="18sp"
android:layout_margin="5sp"
android:text="9"/>

<Button

android:id="@+id/b10"
android:layout_gravity="fill"
android:layout_columnWeight=1
android:textSize="18sp"
android:layout_margin="5sp"
android:text="10"/>

<Button

android:id="@+id/b12"
android:layout_gravity="fill"
android:layout_columnWeight=1
android:textSize="18sp"
android:layout_margin="5sp"
android:text="12"/>

<Button

android:id="@+id/b13"
android:layout_gravity="fill"
android:layout_columnWeight=1
android:textSize="18sp"
android:layout_margin="5sp"
android:text="13"/>

<Button

```
android: id="@+id/b16"  
android: layout_gravity = fill  
android: layout_columnWeight = 1  
android: layout_rowWeight = 1  
android: textSize = 180p  
android: layout_margin = 5sp  
android: text = "16"/>
```

<Button

```
android: id="@+id/b17"  
android: layout_gravity = fill  
android: layout_rowWeight = 1  
android: textSize = 180p  
android: layout_margin = 5sp  
android: text = "16"/>
```

<Button

```
android: id="@+id/b18"  
android: layout_gravity = fill  
android: layout_columnWeight = 1  
android: text = "16"  
android: textSize = 180sp  
android: layout_margin = 5sp
```

<Button

```
android: id="@+id/b19"  
android: layout_gravity = fill  
android: layout_rowColumnWeight = 1  
android: text = 16  
android: textSize = 18sp  
android: layout_margin = 5sp
```

<Button

```
android: id="@+id/b21"  
android: layout_gravity = fill  
android: layout_columnWeight = 1  
android: text = 16
```


android:textSize = 18sp
android:text = 22

<Button

android:textSize = 18sp
android:id = @+id/b23
android:layout_margin = 5sp
android:layout_columnWeight = 1
android:layout_rowWeight = 1
android:layout_gravity = fill
android:text = 23

<Button

android:id = @+id/b24
android:layout_margin = 5sp
android:layout_gravity = fill
android:layout_rowWeight = 1
android:text = 24

<Button

android:id = @+id/b25
android:layout_margin = 5sp
android:layout_columnWeight = 1
android:layout_gravity = fill
android:text = 25
android:layout_rowWeight = 1

</GridLayout>

</ScrollView>

```
package com.example.scrollview;  
import androidx.appcompat.app.AppCompatActivity;  
import android.os.Bundle;  
  
public class MainActivity extends AppCompatActivity {  
    @Override  
    protected void onCreate(Bundle savedInstanceState) {  
        super.onCreate(savedInstanceState);  
        setContentView(R.layout.activity_main);  
    }  
}
```

3

3

