

Lines

9

unique line contexts

Bottlenecks

21

priority rows

Scheduled

0

below 50%

Operators

15

training candidates


Avg Eff.

55.38%

priority operators

Priority Mix

Bottleneck count by urgency

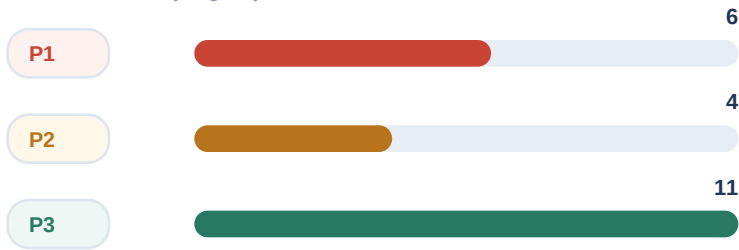

Line Coverage

Snapshot groups included in this report

Line 1 Layout mll-4280 Zone 1.0	23 groups 8 priority 0 scheduled
Line 1 Layout mll-4440	7 groups 6 priority 0 scheduled
Line 1 Layout mll-4397 Zone 1.0	15 groups 3 priority 0 scheduled
Line 1 Layout mll-4329 Zone 1.0 + 5 more line context(s) on detail pages.	16 groups 2 priority 0 scheduled

Immediate Training Actions

Top priority operators from the bottleneck recommendation summary

Priority	Line	Skill	Operator	Current Eff.	Capacity	Action
P1	1	Trim Attach SN	Asini Kandai Buru	50%	166.67	Train Operator to 70%
P1	1	Collar Tack SN	Asini Kandai Buru	30%	57.35	Train Operator to 50% + Add 2 Workstations
P1	1	Sideseam OL	Jeeva Annadurai	30%	66.67	Train Operator to 50% + Add 1 Workstation
P1	1	Blanket Around OL	-	85%	50	Add 3 Workstations

+ 17 more priority row(s) on line detail pages.



Production Training Capacity Report

Bottleneck line snapshot and training prioritization
File: sapna line1 shift102

layout_id = mll-4280

line = 1

zone = 1.0

groups = 23

C line eff=20.53% | P line eff=64.45%

current capacity = 57.35 pcs/hour

projected line capacity = 180 pcs/hour


target = 167.57 pcs/hour

Line 1 Grouped skill-capacity chart

Context: layout_id=mll-4280 | zone=1.0 | Current bottleneck: Collar Tack SN

Target: 167.57 pcs/hour | Projected bottleneck: Sleeve Attach OL

Current line efficiency: 20.53% | Projected line efficiency: 64.45%

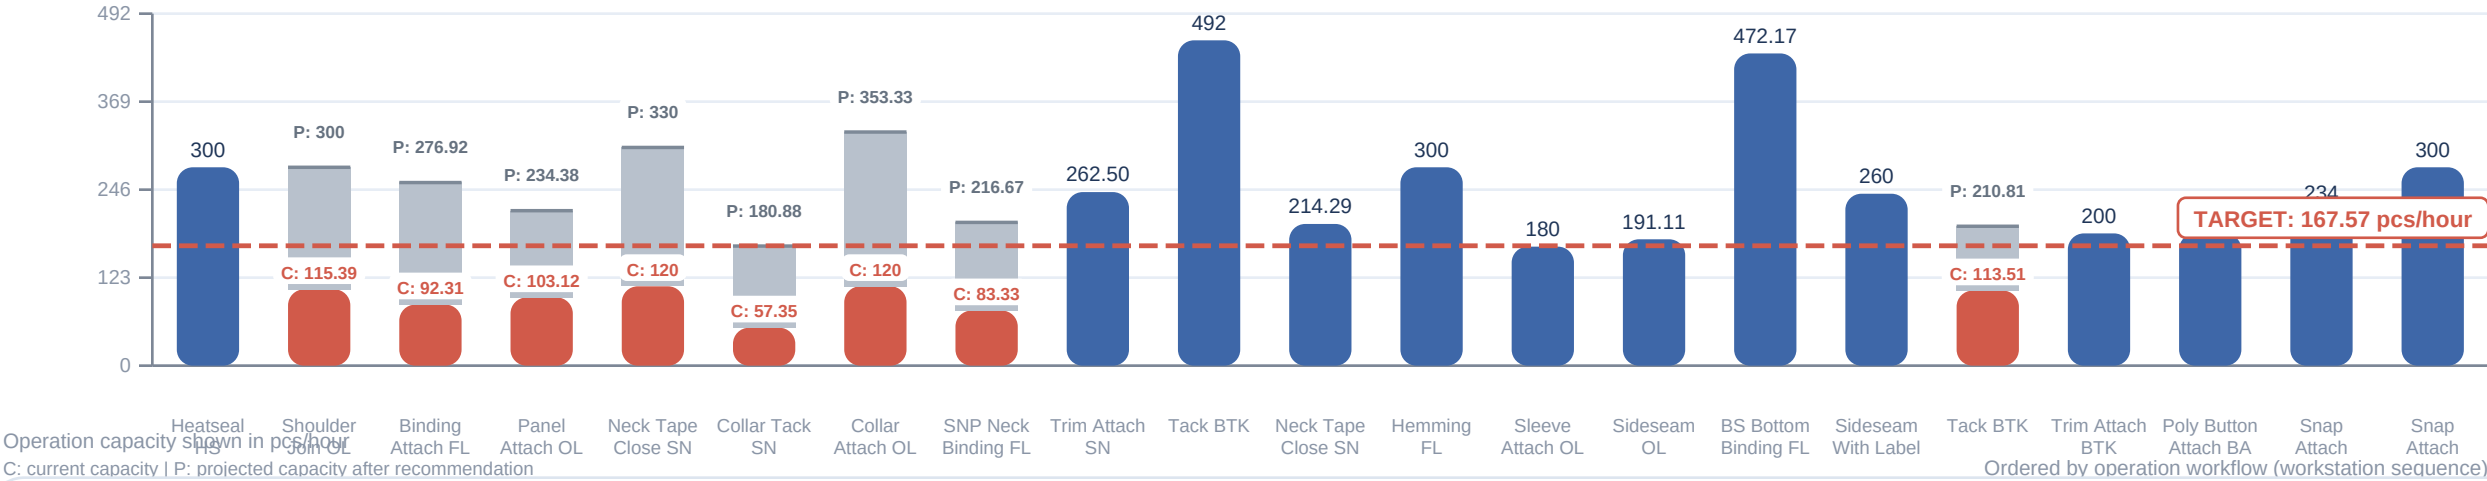

Priority Training Operators

P1 / P2 / P3 bottleneck rows | Capacity values: pcs/hour

Priority	WS#	Operator ID	Operator	Operation	Skill	Eff%	SMV	Current	Projected	Recommendation
P1	9	24600	Asini Kandai Buru	Mark & Tack Collar To Body	Collar Tack SN	30%	0.68	57.35	180.88	Train to 50% + Add 2 WS
P2	12	23504	Manumoti Chetia	Neck Binding	SNP Neck Binding FL	50%	0.36	83.33	216.67	Train to 70% + Add 1 WS
P3	3	14910	Bhabanti Khodal	Sew Key Hole Binding	Binding Attach FL	40%	0.26	92.31	276.92	Train to 60% + Add 1 WS
P3	4	23994	Lakshmi Kumari	Collar Panal Attach Together with Interlining *2	Panel Attach OL	40%	0.64	103.12	234.38	Train to 60% + Add 2 WS



Production Training Capacity Report

Embedded layout details and operation capacity
File: sapna line1 shift102

Line 1 layout details

Layout mll-4280 | Zone 1.0 | Capacity unit: pcs/hour | Current versus projected

Calculation details

100% line capacity = (480 / line GMV) x staffed operators = (480 / 6.66) x 31 = 279.28 pcs/hour
Current line capacity = minimum operation capacity = 57.35 pcs/hour
Projected line capacity = minimum projected operation capacity = 180 pcs/hour
Current line efficiency = current capacity / 100% capacity x 100 = 20.53%
Projected line efficiency = projected capacity / 100% capacity x 100 = 64.45%
Target capacity = 167.57 pcs/hour

WS#	Operation	Skill	SMV	Current pcs/hour	Projected pcs/hour	Status
1	Back Label HS	Heatseal HS	0.17	300	300	No change
2	Shoulder Join	Shoulder Join OL	0.26	115.39	300	Improves
3	Sew Key Hole Binding	Binding Attach FL	0.26	92.31	276.92	Improves
4	Collar Panal Attach Together with Interlining *2	Panel Attach OL	0.64	103.12	234.38	Improves
6	Turn & Topstitch on Collar *2	Neck Tape Close SN	0.40	120	330	Improves
8	Mark & Tack Collar To Body	Collar Tack SN	0.68	57.35	180.88	Improves
10	Collar Attach	Collar Attach OL	0.36	120	353.33	Improves
12	Neck Binding	SNP Neck Binding FL	0.36	83.33	216.67	Improves
13	Loop Tack To Body	Trim Attach SN	0.24	262.50	262.50	No change



Production Training Capacity Report

Bottleneck line snapshot and training prioritization
File: sapna line1 shift102

layout_id = mll-4303

line = 1

zone = 1.0

groups = 15

C line eff=44.00% | P line eff=67.16%

current capacity = 152 pcs/hour

projected line capacity = 232 pcs/hour


target = 207.27 pcs/hour

Line 1 Grouped skill-capacity chart

Context: layout_id=mll-4303 | zone=1.0 | Current bottleneck: Trim Attach SN

Target: 207.27 pcs/hour | Projected bottleneck: Trim Attach SN

Current line efficiency: 44.00% | Projected line efficiency: 67.16%

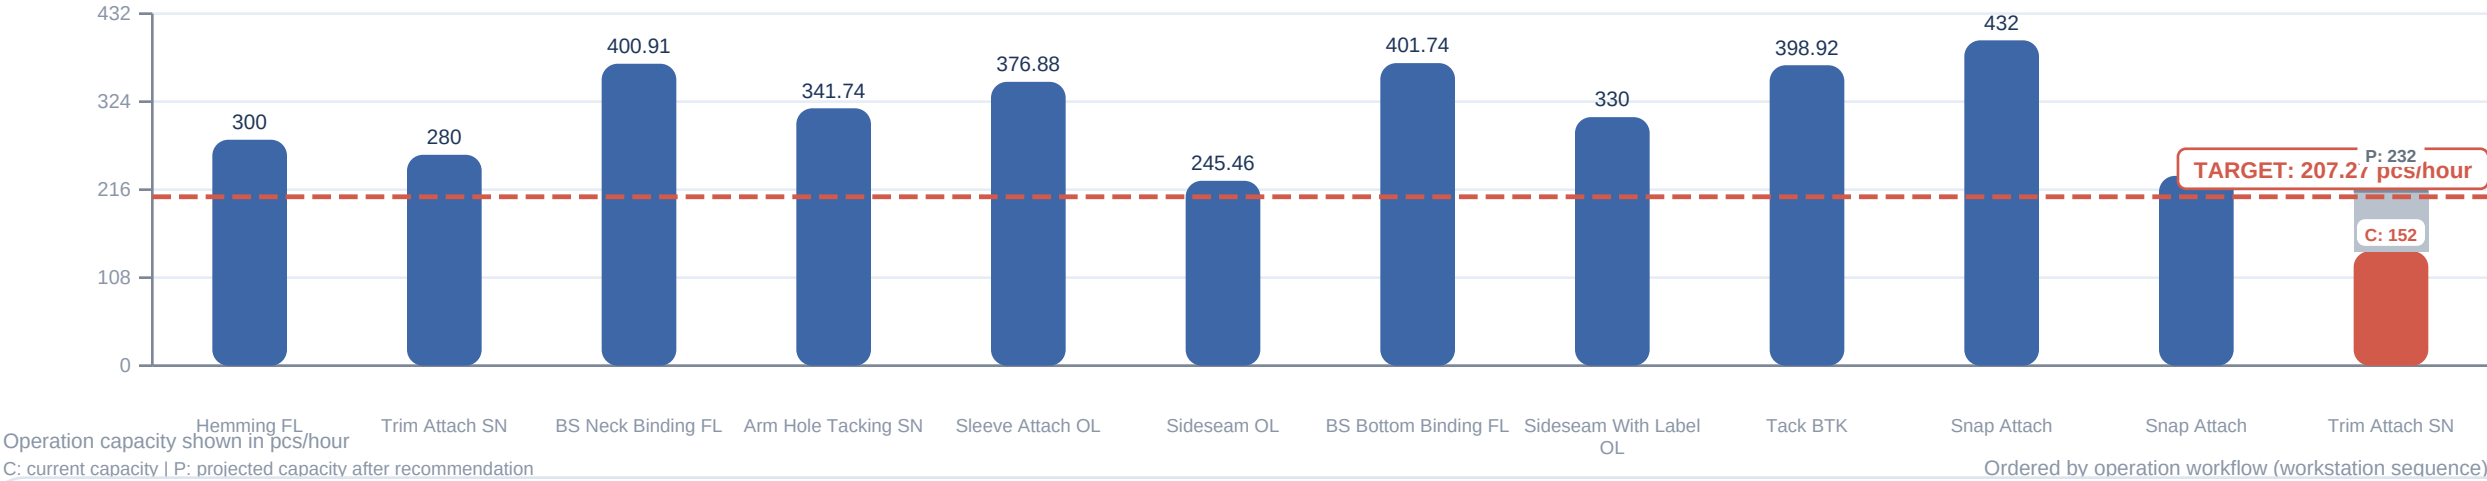

Priority Training Operators

P1 / P2 / P3 bottleneck rows | Capacity values: pcs/hour

Priority	WS#	Operator ID	Operator	Operation	Skill	Eff%	SMV	Current	Projected	Recommendation
P1	31	14428	Sumita Roy	Label Tack	Trim Attach SN	38%	0.15	152	232	Train to 58%



Production Training Capacity Report

Embedded layout details and operation capacity
File: sapna line1 shift102

Line 1 layout details

Layout mll-4303 | Zone 1.0 | Capacity unit: pcs/hour | Current versus projected

Calculation details

100% line capacity = (480 / line GMV) x staffed operators = (480 / 3.30) x 19 = 345.45 pcs/hour
Current line capacity = minimum operation capacity = 152 pcs/hour
Projected line capacity = minimum projected operation capacity = 232 pcs/hour
Current line efficiency = current capacity / 100% capacity x 100 = 44.00%
Projected line efficiency = projected capacity / 100% capacity x 100 = 67.16%
Target capacity = 207.27 pcs/hour

WS#	Operation	Skill	SMV	Current pcs/hour	Projected pcs/hour	Status
1	Sleeve Hemming	Hemming FL	0.17	300	300	No change
2	Label Tack	Trim Attach SN	0.15	280	280	No change
3	Front & Back Neck Binding	BS Neck Binding FL	0.22	400.91	400.91	No change
5	Arm Hole Tacking	Arm Hole Tacking SN	0.23	341.74	341.74	No change
7	Sew Sleeve To Body	Sleeve Attach OL	0.32	376.88	376.88	No change
10	Side Seam One Side	Sideseam OL	0.22	245.46	245.46	No change
11	Bottom Binding	BS Bottom Binding FL	0.23	401.74	401.74	No change
13	2ND Side Seam With Lable	Sideseam With Label OL	0.28	330	330	No change
15	Bottom & Sleeve End Tack	Tack BTK	0.37	398.92	398.92	No change



Production Training Capacity Report

Bottleneck line snapshot and training prioritization
File: sapna line1 shift102

layout_id = mll-4329

line = 1

zone = 1.0

groups = 16

C line eff=51.41% | P line eff=73.76%

current capacity = 162.35 pcs/hour

projected line capacity = 232.94 pcs/hour


target = 189.47 pcs/hour

Line 1 Grouped skill-capacity chart

Context: layout_id=mll-4329 | zone=1.0 | Current bottleneck: Heatseal HS

Target: 189.47 pcs/hour | Projected bottleneck: Heatseal HS

Current line efficiency: 51.41% | Projected line efficiency: 73.76%

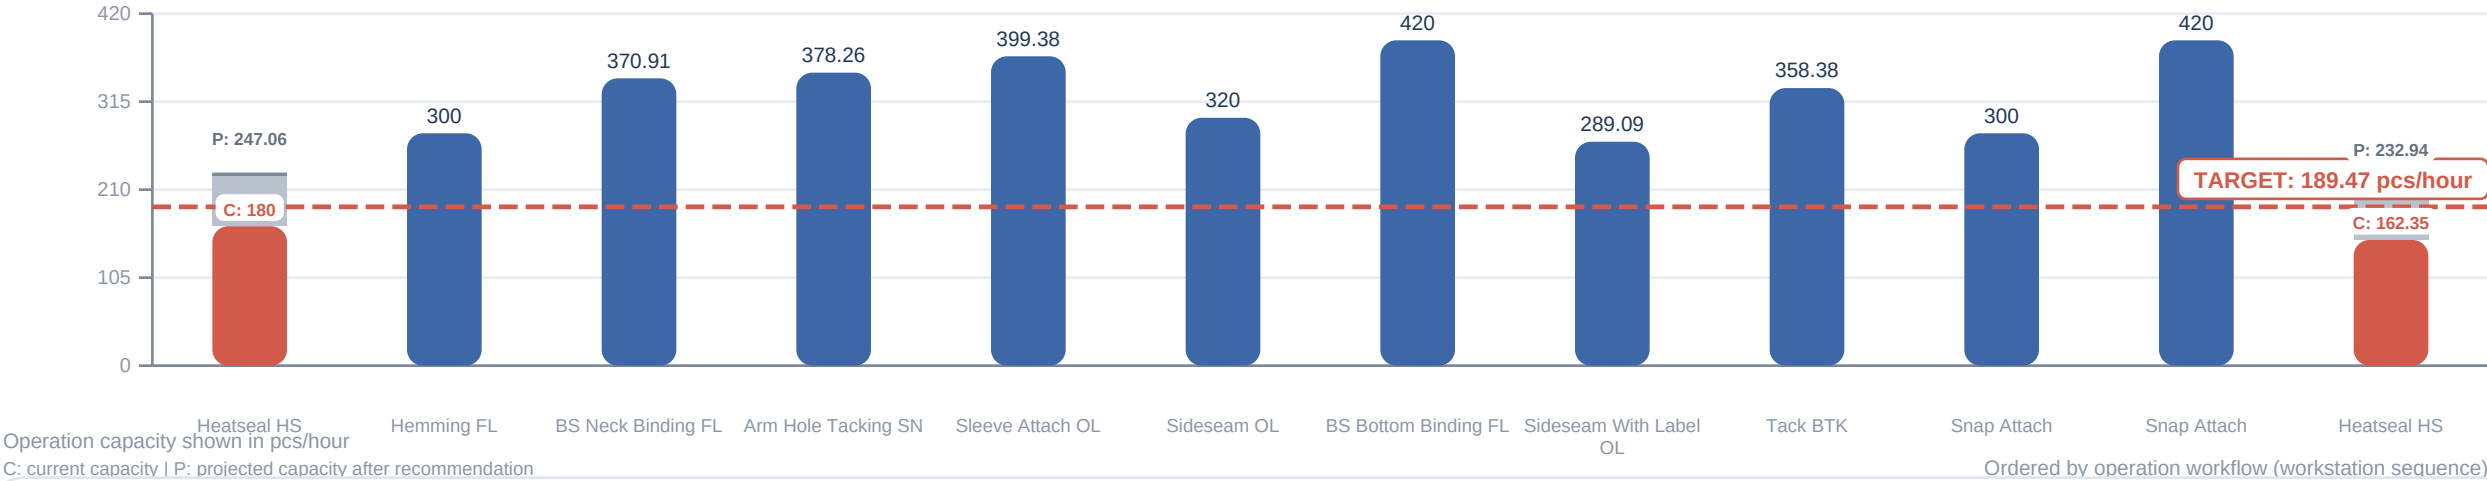

Priority Training Operators

P1 / P2 / P3 bottleneck rows | Capacity values: pcs/hour

Priority	WS#	Operator ID	Operator	Operation	Skill	Eff%	SMV	Current	Projected	Recommendation
P1	33	18247	Sowmiya	Back Label HS	Heatseal HS	46%	0.17	162.35	232.94	Train to 66%
P2	1	16099	Jyoti Kumari	Back Label HS	Heatseal HS	51%	0.17	180	247.06	Train to 70%

Line 1 layout details

Layout mll-4329 | Zone 1.0 | Capacity unit: pcs/hour | Current versus projected

Calculation details

100% line capacity = (480 / line GMV) x staffed operators = (480 / 3.61) x 19 = 315.79 pcs/hour
Current line capacity = minimum operation capacity = 162.35 pcs/hour
Projected line capacity = minimum projected operation capacity = 232.94 pcs/hour
Current line efficiency = current capacity / 100% capacity x 100 = 51.41%
Projected line efficiency = projected capacity / 100% capacity x 100 = 73.76%
Target capacity = 189.47 pcs/hour

WS#	Operation	Skill	SMV	Current pcs/hour	Projected pcs/hour	Status
1	Back Label HS	Heatseal HS	0.17	180	247.06	Improves
3	Sleeve Hemming	Hemming FL	0.17	300	300	No change
4	Front & Back Neck Binding	BS Neck Binding FL	0.22	370.91	370.91	No change
6	Arm Hole Tacking	Arm Hole Tacking SN	0.23	378.26	378.26	No change
8	Sew Sleeve To Body	Sleeve Attach OL	0.32	399.38	399.38	No change
11	First Side Seam	Sideseam OL	0.27	320	320	No change
12	Bottom Binding	BS Bottom Binding FL	0.23	420	420	No change
14	2ND Side Seam With Lable	Sideseam With Label OL	0.33	289.09	289.09	No change
16	Bottom & Sleeve End Tack	Tack BTK	0.37	358.38	358.38	No change



Production Training Capacity Report

Bottleneck line snapshot and training prioritization
File: sapna line1 shift102

layout_id = mll-4331

line = 1

zone = 1.0

groups = 14

C line eff=86.51% | P line eff=86.51%

current capacity = 244.44 pcs/hour

projected line capacity = 244.44 pcs/hour


target = 169.53 pcs/hour

Line 1 Grouped skill-capacity chart

Context: layout_id=mll-4331 | zone=1.0 | Current bottleneck: Sideseam OL

Target: 169.53 pcs/hour | Projected bottleneck: Sideseam OL

Current line efficiency: 86.51% | Projected line efficiency: 86.51%

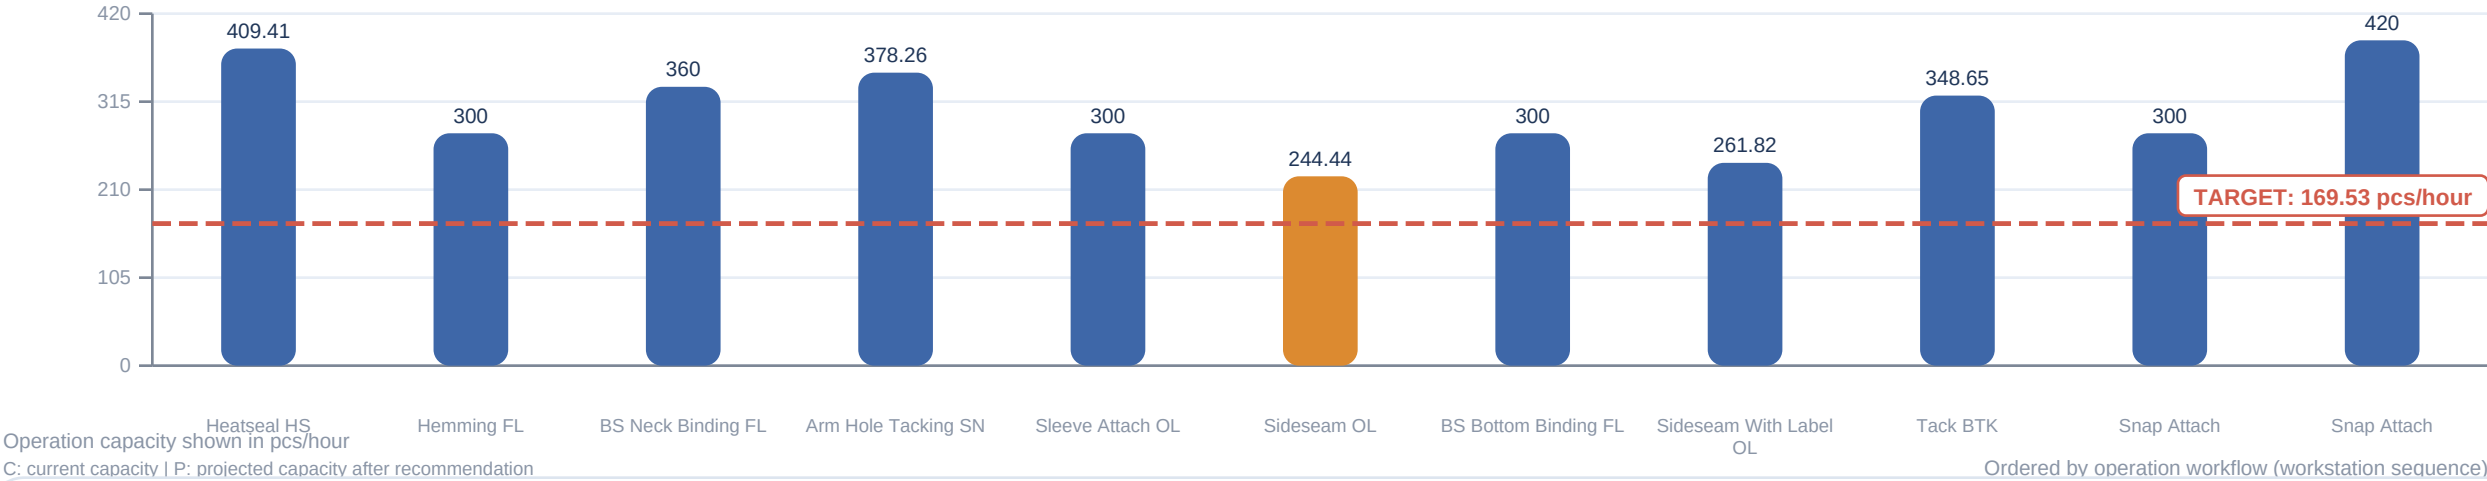

Priority Training Operators

P1 / P2 / P3 bottleneck rows | Capacity values: pcs/hour

Priority	WS#	Operator ID	Operator	Operation	Skill	Eff%	SMV	Current	Projected	Recommendation
----------	-----	-------------	----------	-----------	-------	------	-----	---------	-----------	----------------

No priority training operators found.



Production Training Capacity Report

Embedded layout details and operation capacity
File: sapna line1 shift102

Line 1 layout details

Layout mll-4331 | Zone 1.0 | Capacity unit: pcs/hour | Current versus projected

Calculation details

100% line capacity = (480 / line GMV) x staffed operators = (480 / 0) x 17 = 282.55 pcs/hour
Current line capacity = minimum operation capacity = 244.44 pcs/hour
Projected line capacity = minimum projected operation capacity = 244.44 pcs/hour
Current line efficiency = current capacity / 100% capacity x 100 = 86.51%
Projected line efficiency = projected capacity / 100% capacity x 100 = 86.51%
Target capacity = 169.53 pcs/hour

WS#	Operation	Skill	SMV	Current pcs/hour	Projected pcs/hour	Status
1	Back Label HS	Heatseal HS	0.17	409.41	409.41	No change
3	Sleeve Hemming	Hemming FL	0.17	300	300	No change
4	Front & Back Neck Binding	BS Neck Binding FL	0.22	360	360	No change
6	Arm Hole Tacking	Arm Hole Tacking SN	0.23	378.26	378.26	No change
8	Sew Sleeve To Body	Sleeve Attach OL	0.32	300	300	No change
10	First Side Seam	Sideseam OL	0.27	244.44	244.44	No change
11	Bottom Binding	BS Bottom Binding FL	0.23	300	300	No change
12	2ND Side Seam With Lable	Sideseam With Label OL	0.33	261.82	261.82	No change
14	Bottom & Sleeve End Tack	Tack BTK	0.37	348.65	348.65	No change

layout_id = mll-4357

line = 1

zone = 1.0

groups = 15

C line eff=81.06% | P line eff=81.06%

current capacity = 153.70 pcs/hour

projected line capacity = 153.70 pcs/hour

target = 113.77 pcs/hour


Line 1

Grouped skill-capacity chart

Context: layout_id=mll-4357 | zone=1.0 | Current bottleneck: Circular Sleeve Hemming FL

Target: 113.77 pcs/hour | Projected bottleneck: Circular Sleeve Hemming FL

Current line efficiency: 81.06% | Projected line efficiency: 81.06%

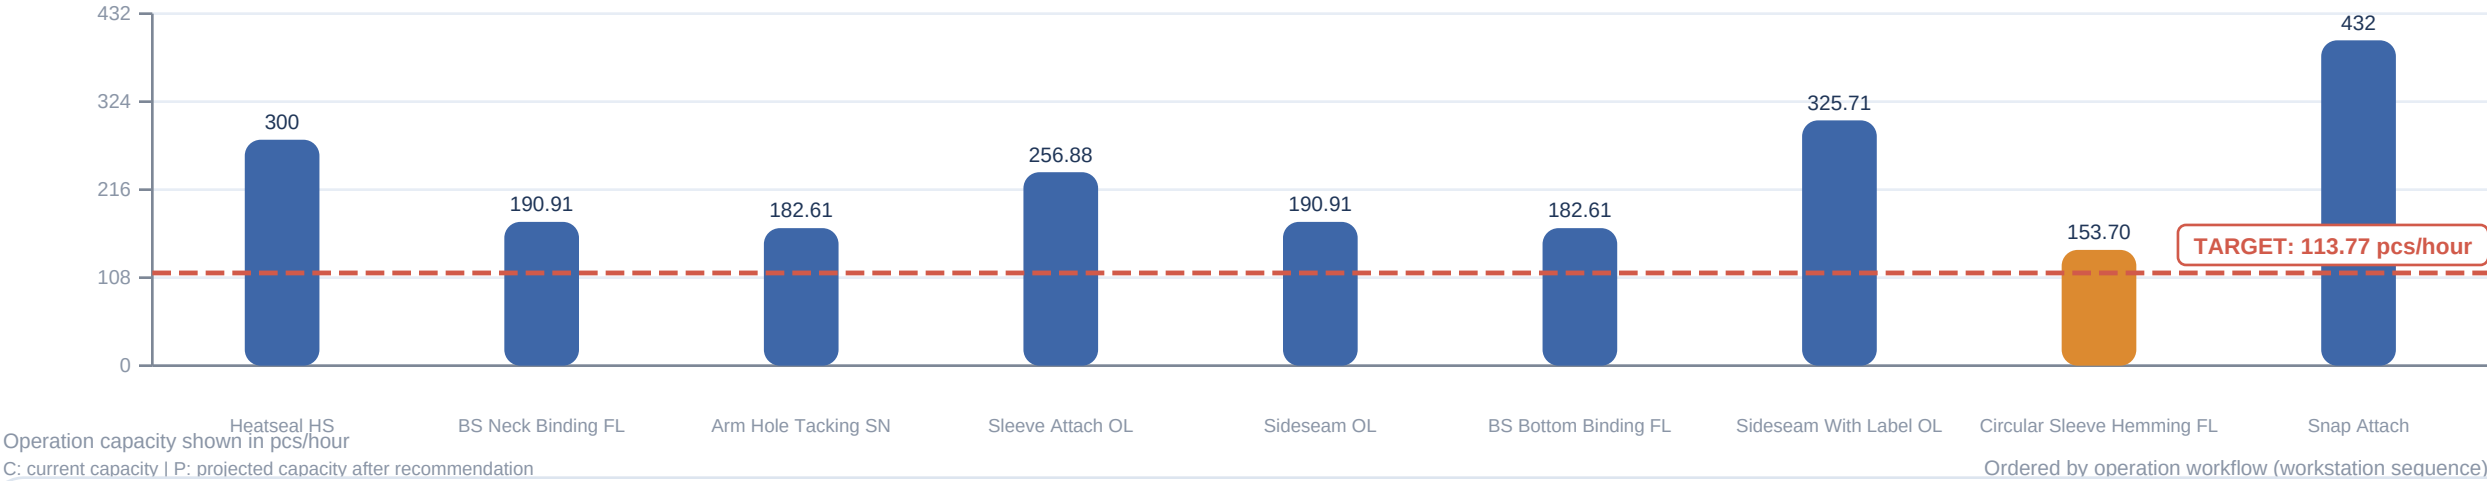

Priority Training Operators

P1 / P2 / P3 bottleneck rows | Capacity values: pcs/hour

Priority	WS#	Operator ID	Operator	Operation	Skill	Eff%	SMV	Current	Projected	Recommendation
No priority training operators found.										

Line 1 layout details

Layout mll-4357 | Zone 1.0 | Capacity unit: pcs/hour | Current versus projected

Calculation details

100% line capacity = (480 / line GMV) x staffed operators = (480 / 0) x 14 = 189.62 pcs/hour
Current line capacity = minimum operation capacity = 153.70 pcs/hour
Projected line capacity = minimum projected operation capacity = 153.70 pcs/hour
Current line efficiency = current capacity / 100% capacity x 100 = 81.06%
Projected line efficiency = projected capacity / 100% capacity x 100 = 81.06%
Target capacity = 113.77 pcs/hour

WS#	Operation	Skill	SMV	Current pcs/hour	Projected pcs/hour	Status
1	Back Label HS	Heatseal HS	0.17	300	300	No change
2	BS Neck Binding FL	BS Neck Binding FL	0.22	190.91	190.91	No change
3	Arm Hole Tacking	Arm Hole Tacking SN	0.23	182.61	182.61	No change
4	Sleeve Attach	Sleeve Attach OL	0.32	256.88	256.88	No change
6	First Side Seam	Sideseam OL	0.22	190.91	190.91	No change
7	Bottom Binding	BS Bottom Binding FL	0.23	182.61	182.61	No change
8	Second Side Seam with Label	Sideseam With Label OL	0.28	325.71	325.71	No change
10	Circular Sleeve Hem	Circular Sleeve Hemming FL	1.46	153.70	153.70	No change
14	Bottom Tack	Tack BTK	0.15	0	0	Unstaffed / no capacity

layout_id = mll-4372

line = 1

zone = 1.0

groups = 15

C line eff=59.17% | P line eff=63.90%

current capacity = 166.67 pcs/hour

projected line capacity = 180 pcs/hour

target = 169.01 pcs/hour


Line 1

Grouped skill-capacity chart

Context: layout_id=mll-4372 | zone=1.0 | Current bottleneck: Trim Attach SN

Current line efficiency: 59.17% | Projected line efficiency: 63.90%

Target: 169.01 pcs/hour | Projected bottleneck: Sideseam OL

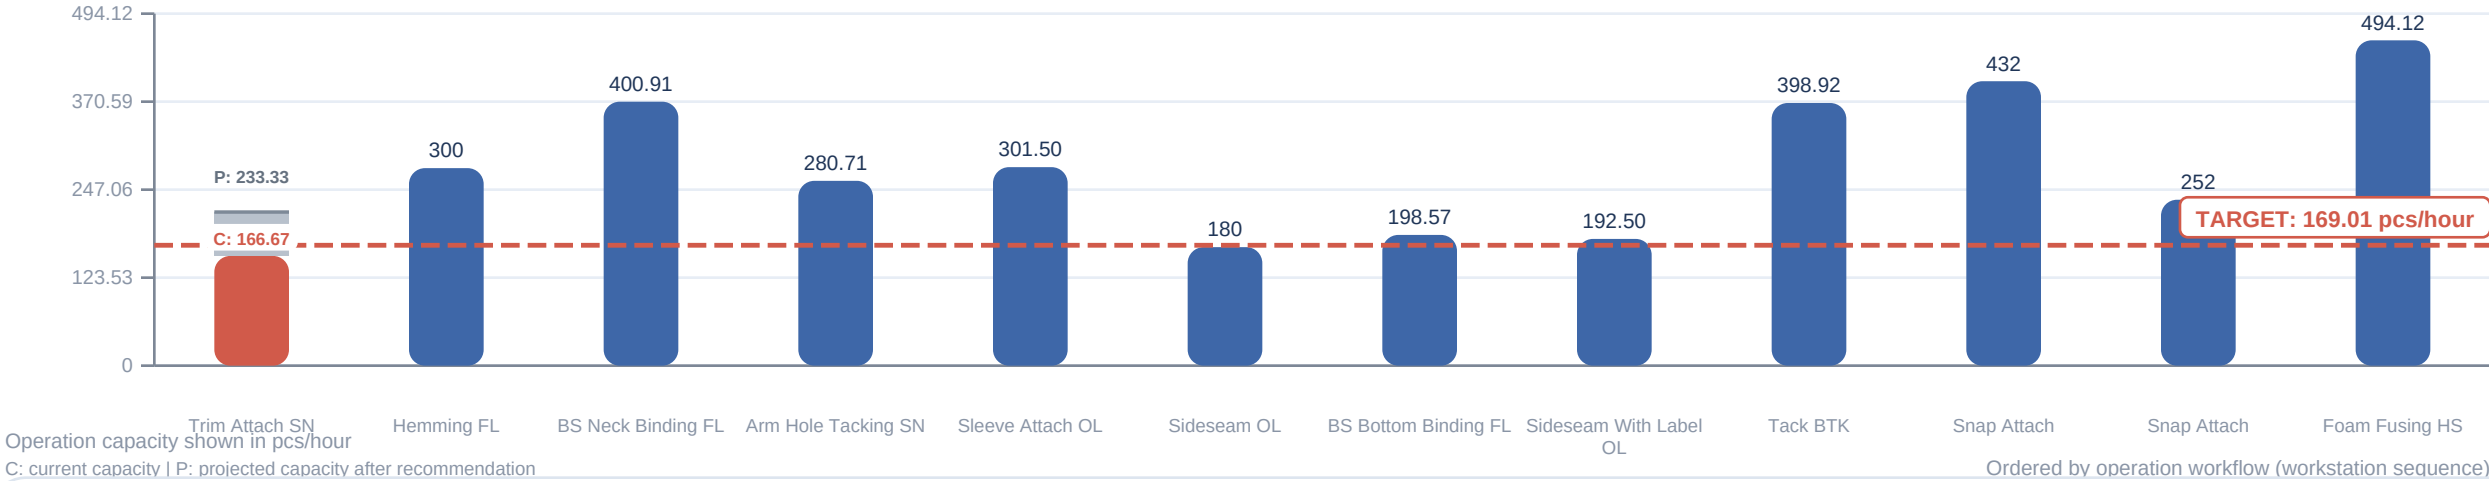

Priority Training Operators

P1 / P2 / P3 bottleneck rows | Capacity values: pcs/hour

Priority	WS#	Operator ID	Operator	Operation	Skill	Eff%	SMV	Current	Projected	Recommendation
P1	1	24600	Asini Kandai Buru	Label Tack To Neck	Trim Attach SN	50%	0.18	166.67	233.33	Train to 70%



Production Training Capacity Report

Embedded layout details and operation capacity
File: sapna line1 shift102

Line 1 layout details

Layout mll-4372 | Zone 1.0 | Capacity unit: pcs/hour | Current versus projected

Calculation details

100% line capacity = (480 / line GMV) x staffed operators = (480 / 4.26) x 20 = 281.69 pcs/hour
Current line capacity = minimum operation capacity = 166.67 pcs/hour
Projected line capacity = minimum projected operation capacity = 180 pcs/hour
Current line efficiency = current capacity / 100% capacity x 100 = 59.17%
Projected line efficiency = projected capacity / 100% capacity x 100 = 63.90%
Target capacity = 169.01 pcs/hour

WS#	Operation	Skill	SMV	Current pcs/hour	Projected pcs/hour	Status
1	Label Tack To Neck	Trim Attach SN	0.18	166.67	233.33	Improves
2	Sleeve Hemming	Hemming FL	0.17	300	300	No change
3	Front & Back Neck Binding	BS Neck Binding FL	0.22	400.91	400.91	No change
5	Arm Hole Tacking	Arm Hole Tacking SN	0.28	280.71	280.71	No change
7	Sleeve Attach	Sleeve Attach OL	0.40	301.50	301.50	No change
10	Side Seam One Side	Sideseam OL	0.27	180	180	No change
11	Bottom Binding	BS Bottom Binding FL	0.42	198.57	198.57	No change
13	Side Seam Another Side With Lable	Sideseam With Label OL	0.48	192.50	192.50	No change
15	Bottom & Sleeve End Tack	Tack BTK	0.37	398.92	398.92	No change

layout_id = mll-4397

line = 1

zone = 1.0

groups = 15

C line eff=23.67% | P line eff=64.79%

current capacity = 66.67 pcs/hour

projected line capacity = 182.50 pcs/hour

target = 169.01 pcs/hour


Line 1

Grouped skill-capacity chart

Context: layout_id=mll-4397 | zone=1.0 | Current bottleneck: Sideseam OL

Target: 169.01 pcs/hour | Projected bottleneck: Sideseam With Label OL

Current line efficiency: 23.67% | Projected line efficiency: 64.79%

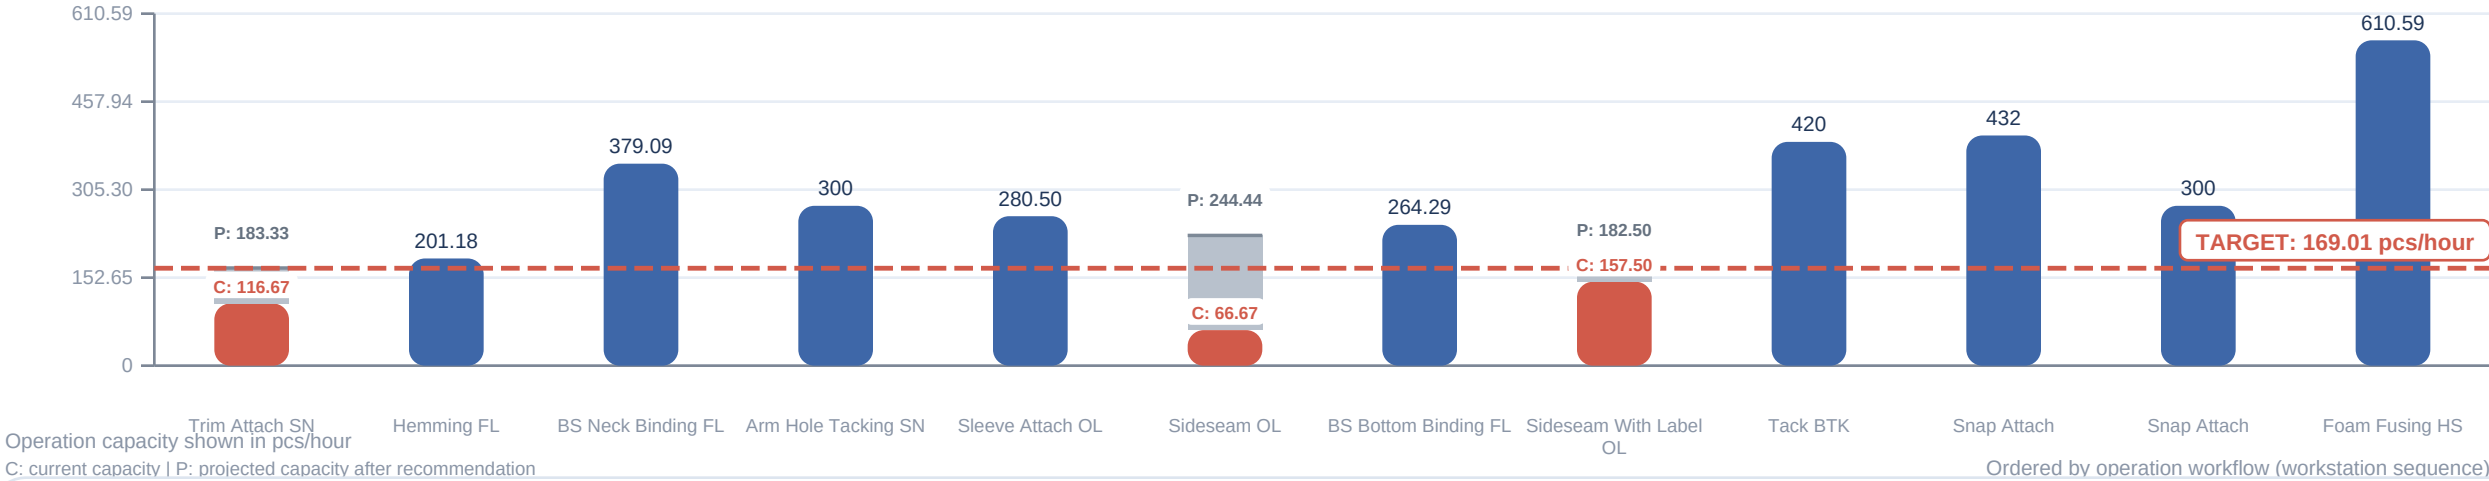

Priority Training Operators

P1 / P2 / P3 bottleneck rows Capacity values: pcs/hour										
Priority	WS#	Operator ID	Operator	Operation	Skill	Eff%	SMV	Current	Projected	Recommendation
P1	10	13490	Jeeva Annadurai	Side Seam One Side	Sideseam OL	30%	0.27	66.67	244.44	Train to 50% + Add 1 WS
P2	1	17935	Amisha Kumari	Label Tack To Neck	Trim Attach SN	35%	0.18	116.67	183.33	Train to 55%
P3	13	10011	Anita Tirkey	Side Seam Another Side With Lable	Sideseam With Label OL	44%	0.48	157.50	182.50	Train to 64%

Line 1 layout details

Layout mll-4397 | Zone 1.0 | Capacity unit: pcs/hour | Current versus projected

Calculation details

100% line capacity = (480 / line GMV) x staffed operators = (480 / 4.26) x 20 = 281.69 pcs/hour
Current line capacity = minimum operation capacity = 66.67 pcs/hour
Projected line capacity = minimum projected operation capacity = 182.50 pcs/hour
Current line efficiency = current capacity / 100% capacity x 100 = 23.67%
Projected line efficiency = projected capacity / 100% capacity x 100 = 64.79%
Target capacity = 169.01 pcs/hour

WS#	Operation	Skill	SMV	Current pcs/hour	Projected pcs/hour	Status
1	Label Tack To Neck	Trim Attach SN	0.18	116.67	183.33	Improves
2	Sleeve Hemming	Hemming FL	0.17	201.18	201.18	No change
3	Front & Back Neck Binding	BS Neck Binding FL	0.22	379.09	379.09	No change
5	Arm Hole Tacking	Arm Hole Tacking SN	0.28	300	300	No change
7	Sleeve Attach	Sleeve Attach OL	0.40	280.50	280.50	No change
10	Side Seam One Side	Sideseam OL	0.27	66.67	244.44	Improves
11	Bottom Binding	BS Bottom Binding FL	0.42	264.29	264.29	No change
13	Side Seam Another Side With Lable	Sideseam With Label OL	0.48	157.50	182.50	Improves
15	Bottom & Sleeve End Tack	Tack BTK	0.37	420	420	No change



Production Training Capacity Report

Bottleneck line snapshot and training prioritization
File: sapna line1 shift102

layout_id = mll-4435

line = 1

zone = 1.0

groups = 15

C line eff=62.33% | P line eff=62.33%

current capacity = 200 pcs/hour

projected line capacity = 200 pcs/hour


target = 192.51 pcs/hour

Line 1 Grouped skill-capacity chart

Context: layout_id=mll-4435 | zone=1.0 | Current bottleneck: Sideseam OL

Target: 192.51 pcs/hour | Projected bottleneck: Sideseam OL

Current line efficiency: 62.33% | Projected line efficiency: 62.33%

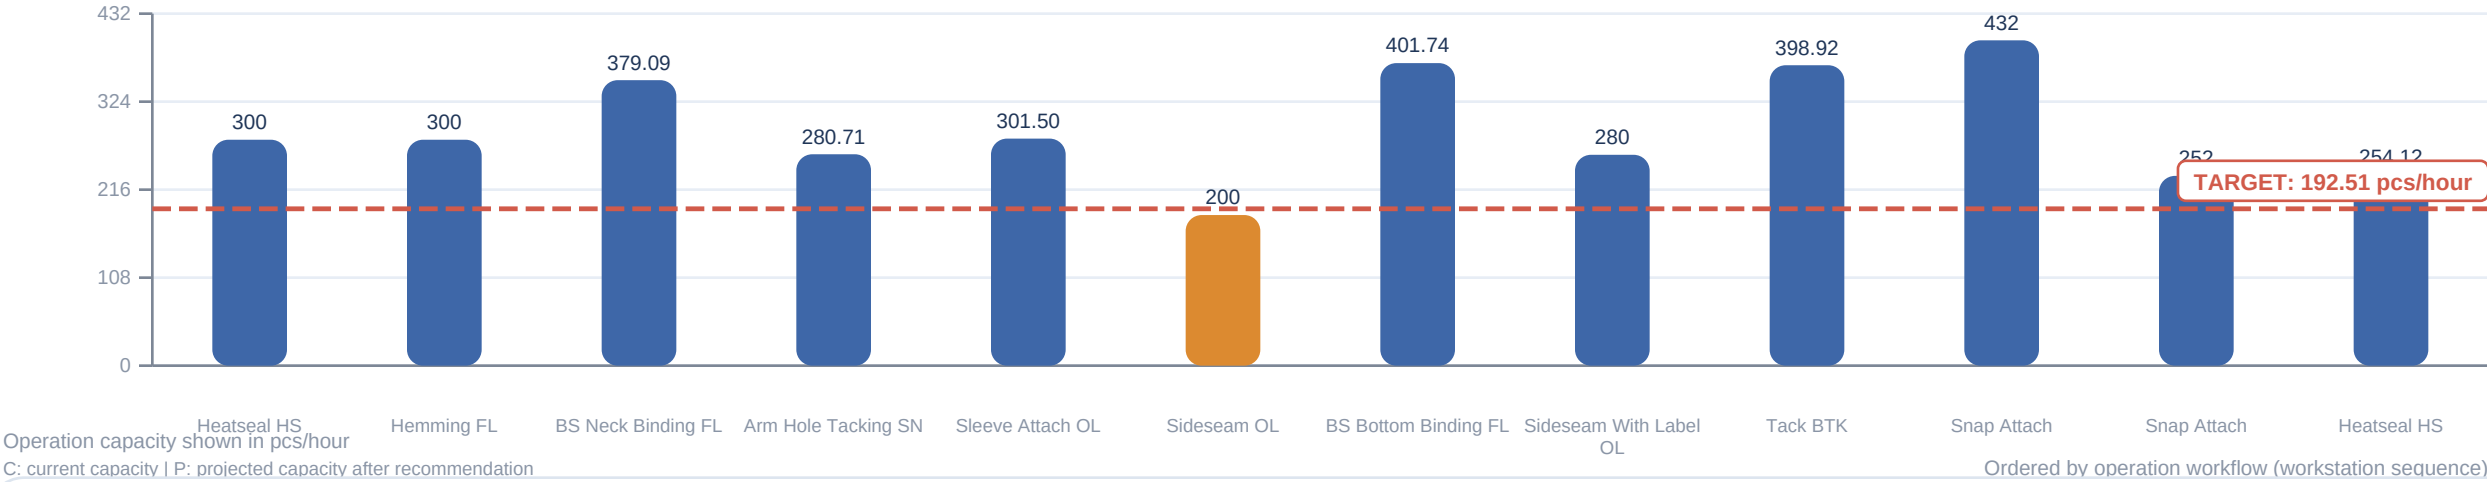

Priority Training Operators

P1 / P2 / P3 bottleneck rows | Capacity values: pcs/hour

Priority	WS#	Operator ID	Operator	Operation	Skill	Eff%	SMV	Current	Projected	Recommendation
No priority training operators found.										

Line 1 layout details

Layout mll-4435 | Zone 1.0 | Capacity unit: pcs/hour | Current versus projected

Calculation details

100% line capacity = (480 / line GMV) x staffed operators = (480 / 0) x 20 = 320.86 pcs/hour
Current line capacity = minimum operation capacity = 200 pcs/hour
Projected line capacity = minimum projected operation capacity = 200 pcs/hour
Current line efficiency = current capacity / 100% capacity x 100 = 62.33%
Projected line efficiency = projected capacity / 100% capacity x 100 = 62.33%
Target capacity = 192.51 pcs/hour

WS#	Operation	Skill	SMV	Current pcs/hour	Projected pcs/hour	Status
1	Back Label HS	Heatseal HS	0.17	300	300	No change
2	Sleeve Hemming	Hemming FL	0.17	300	300	No change
3	Front & Back Neck Binding	BS Neck Binding FL	0.22	379.09	379.09	No change
5	Arm Hole Tacking	Arm Hole Tacking SN	0.28	280.71	280.71	No change
7	Sleeve Attach	Sleeve Attach OL	0.40	301.50	301.50	No change
10	Side Seam One Side	Sideseam OL	0.27	200	200	No change
11	Bottom Binding	BS Bottom Binding FL	0.23	401.74	401.74	No change
13	Side Seam Another Side With Lable	Sideseam With Label OL	0.33	280	280	No change
15	Bottom & Sleeve End Tack	Tack BTK	0.37	398.92	398.92	No change



Production Training Capacity Report

Bottleneck line snapshot and training prioritization
File: sapna line1 shift102

layout_id = mll-4440

line = 1

zone = -

groups = 7

C line eff=25.89% | P line eff=65.68%

current capacity = 50 pcs/hour

projected line capacity = 126.86 pcs/hour


target = 115.89 pcs/hour

Line 1 Grouped skill-capacity chart

Context: layout_id=mll-4440 | zone=- | Current bottleneck: Blanket Around OL

Target: 115.89 pcs/hour | Projected bottleneck: Blanket Hem Around SN

Current line efficiency: 25.89% | Projected line efficiency: 65.68%

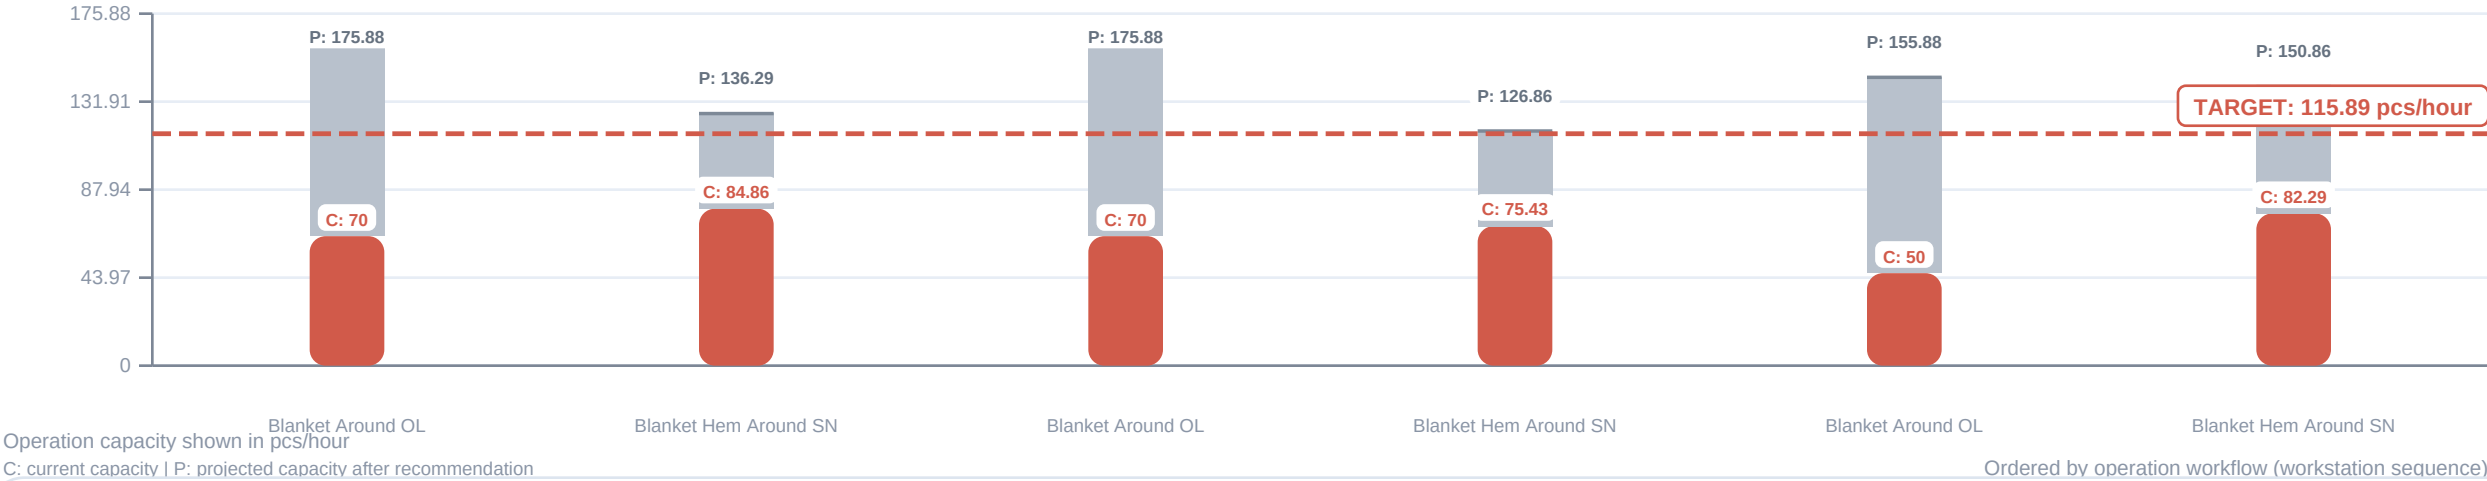

Priority Training Operators

P1 / P2 / P3 bottleneck rows | Capacity values: pcs/hour

Priority	WS#	Operator ID	Operator	Operation	Skill	Eff%	SMV	Current	Projected	Recommendation
P1	13	-	-	Pre OL Hem	Blanket Around OL	85%	1.02	50	155.88	Add 3 WS
P2	1	-	-	Pre OL Hem	Blanket Around OL	119%	1.02	70	175.88	Add 3 WS
P3	7	-	-	Pre OL Hem	Blanket Around OL	119%	1.02	70	175.88	Add 3 WS
P3	8	-	-	Sew Hem Around	Blanket Hem Around SN	75%	2.80	75.43	126.86	Add 4 WS



Production Training Capacity Report

Embedded layout details and operation capacity
File: sapna line1 shift102

Line 1 layout details

Layout mll-4440 | Zone - | Capacity unit: pcs/hour | Current versus projected

Calculation details

100% line capacity = (480 / line GMV) x staffed operators = (480 / 4.97) x 16 = 193.16 pcs/hour
Current line capacity = minimum operation capacity = 50 pcs/hour
Projected line capacity = minimum projected operation capacity = 126.86 pcs/hour
Current line efficiency = current capacity / 100% capacity x 100 = 25.89%
Projected line efficiency = projected capacity / 100% capacity x 100 = 65.68%
Target capacity = 115.89 pcs/hour

WS#	Operation	Skill	SMV	Current pcs/hour	Projected pcs/hour	Status
1	Pre OL Hem	Blanket Around OL	1.02	70	175.88	Improves
2	Sew Hem Around	Blanket Hem Around SN	2.80	84.86	136.29	Improves
7	Pre OL Hem	Blanket Around OL	1.02	70	175.88	Improves
8	Sew Hem Around	Blanket Hem Around SN	2.80	75.43	126.86	Improves
13	Pre OL Hem	Blanket Around OL	1.02	50	155.88	Improves
14	Sew Hem Around	Blanket Hem Around SN	2.80	82.29	150.86	Improves
21	Packing With Hanger Poly Bag	Packing PKG	1.15	0	0	Unstaffed / no capacity