

ACM Deployment In OCP 4.21

Objective:


We will be deploying Redhat Advance Cluster Management In OCP 4.21 and then load the local cluster in Multiclusterhub.

Prerequisite:

- Admin access to cluster ui
- If disconnected setup, RHACM images should be mirrored and it's imagecontentsource and calalogcourse yamls should be applied

Procedure:

- Navigate to ecosystem → Software Catalog in left side of the OCP console

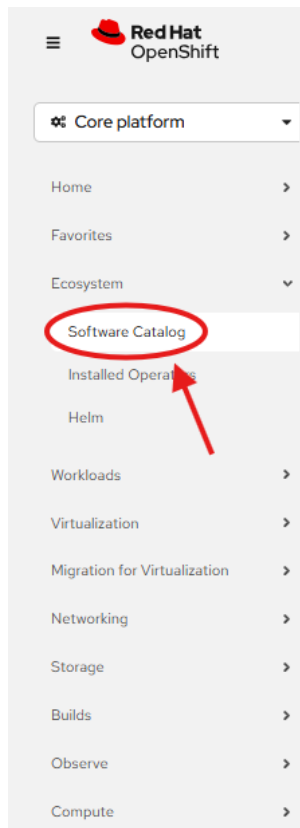

- In search option search Advanced cluster management and open the same

Project: default ▾

Software Catalog

Add shared applications, services, event sources, or source-to-image builders to your Project from the software catalog. Cluster administrators can customize the content made available in the catalog. ★

All items

- AI/Machine Learning
- Application Runtime
- Big Data
- CI/CD
- Cloud Provider
- Database
- Databases
- Developer Tools
- Drivers and plugins
- Integration & Delivery
- Languages
- Logging & Tracing
- Middleware
- Modernization & Migration
- Monitoring
- Networking
- Observability

All items

Q Advanced cluster ma... x Relevance ▾

5 items



Red Hat

Advanced Cluster Management for Kubernetes
Provided by Red Hat

Advanced provisioning and management of OpenShift and Kubernetes clusters



Red Hat

ODF Multicloud Orchestrator
Provided by Red Hat

Orchestrator for OpenShift Data Foundation clusters running across multiple OpenShift...



Red Hat

OpenShift DR Cluster Operator
Provided by Red Hat, Inc.

OpenShift DR Cluster is a disaster-recovery orchestrator for stateful applications, that...



Red Hat

OpenShift DR Hub Operator
Provided by Red Hat, Inc.



Red Hat

VolSync
Provided by Red Hat

- Proceed with installation with no changes in configuration



Advanced Cluster Management for Kubernetes

Provided by Red Hat

×

Install

Channel

release-2.16

Version

2.16.2

Capability level

☒ Basic Install
 ☐ Seamless Upgrades
 ☐ Full Lifecycle
 ☐ Deep Insights
 ☐ Auto Pilot

Source

Red Hat

Provider

Red Hat

Infrastructure features

~

Red Hat Advanced Cluster Management for Kubernetes provides the multicloud hub, a central management console for managing multiple Kubernetes-based clusters across data centers, public clouds, and private clouds. You can use the hub to create Red Hat OpenShift Container Platform clusters on selected providers, or import existing Kubernetes-based clusters. After the clusters are managed, you can set compliance requirements to ensure that the clusters maintain the specified security requirements. You can also deploy business applications across your clusters.

How to install

Use of this Red Hat product requires a licensing and subscription agreement.

Install the Red Hat Advanced Cluster Management for Kubernetes operator by following instructions presented when you click the [Install](#) button. After installing the operator, create an instance of the [MultiClusterHub](#) resource to install the hub.

Note that if you will be using the hub to manage non-OpenShift 4.x clusters, you will need to create a Kubernetes [Secret](#) resource containing your OpenShift pull secret and specify this [Secret](#) in the [MultiClusterHub](#) resource, as described in the install documentation.

Special considerations for disconnected network environments

If you are installing Red Hat Advanced Cluster Management for Kubernetes in a disconnected network environment, there are some special install and upgrade requirements.

Include multicloud engine for Kubernetes in mirrored catalog

Installing an OLM operator in a disconnected network environment involves the use of a local mirrored

Update channel *

release-2.16

Version *

2.16.2

Installation mode *

☐ All namespaces on the cluster (default)
This mode is not supported by this Operator
☒ A specific namespace on the cluster
Operator will be available in a single namespace only.

Installed Namespace *

☒ Operator recommended Namespace: [open-cluster-management](#)
☐ Select a Namespace

Namespace already exists

Namespace [open-cluster-management](#) already exists and will be used. Other users can already have access to this namespace.

Update approval *

☒ Automatic
 ☐ Manual

A Subscription for this Operator already exists in Namespace "open-cluster-management"

Remove the [existing Subscription](#) in order to install this Operator in Namespace "open-cluster-management"

Install

Cancel

Advanced Cluster Management for Kubernetes

provided by Red Hat

Provided APIs

MCH MultiClusterHub

Required

MultiClusterHub defines the configuration for an instance of a multicloud hub, a central point for managing multiple Kubernetes-based clusters. The deployment of multicloud hub components is determined based on the configuration that is defined in...

- Once the operator is installed navigate to Installed operator → Advanced Cluster Management for Kubernetes. Create a MultiClusterHub instance

Project: open-cluster-management

Installed Operators

Operator details



Advanced Cluster Management for Kubernetes

2.16.2 provided by Red Hat

Details

YAML

Subscription

Events

MultiClusterHub

Provided APIs

MCH MultiClusterHub

MultiClusterHub defines the configuration for an instance of a multicloud hub, a central point for managing multiple Kubernetes-based clusters. The deployment of multicloud hub components is determined based on the configuration that is defined in...

Create instance

Description

Red Hat Advanced Cluster Management for Kubernetes provides the multicloud hub, a central management console for managing multiple Kubernetes-based clusters across data centers, public clouds, and private clouds. You can use the hub to create Red Hat OpenShift Container Platform clusters on selected providers, or import existing Kubernetes-based clusters. After the clusters are managed, you can set compliance requirements to ensure that the clusters maintain the specified security requirements. You can also deploy business applications across your clusters.

How to install

- Keep the default yaml/configuration and click create

Project: open-cluster-management ▾

Create MultiClusterHub

Create by completing the form. Default values may be provided by the Operator authors.

Configure via: ☒ Form view ☐ YAML view

i Note: Some fields may not be represented in this form view. Please select "YAML view" for full control.

Name *

multiclusterhub

Labels

app=frontend

tolerations >

Tolerations causes all components to tolerate any taints.

> [Advanced configuration](#)

Create

Cancel

- Once the status of the instance is in running phase, it should automatically deduct the local cluster.

Project: open-cluster-management ▾

[Installed Operators](#) > [Operator details](#)



Advanced Cluster Management for Kubernetes
2.36.2 provided by Red Hat

★ [Actions](#) ▾

[Details](#) [YAML](#) [Subscription](#) [Events](#) [MultiClusterHub](#)


MultiClusterHubs

[Create MultiClusterHub](#)

Name ▾ Search by name... [?](#)

Name ▾	Kind ▾	Status ▾	Labels ▾	Last updated ▾	
 multiclusterhub	MultiClusterHub	Phase:  Running	No labels	 Jun 15, 2026, 12:59 PM	⋮

- You can access the ACM UI by selecting below shown option from top left of OCP UI

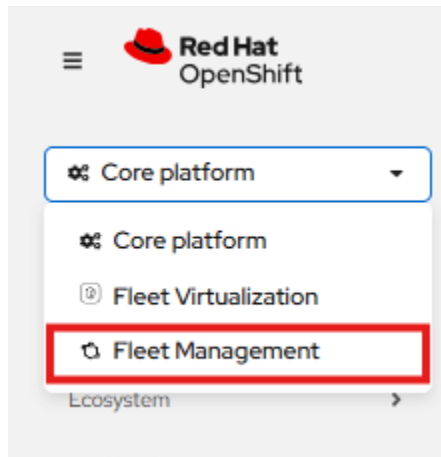

- You can view the status and details of local cluster in ACM web ui

