



Elasticsearch to Loki migration


Step1: Login to Openshift-console

Navigate to Operator hub → Loki → Install (All default settings) [Download under openshift-logging namespace]

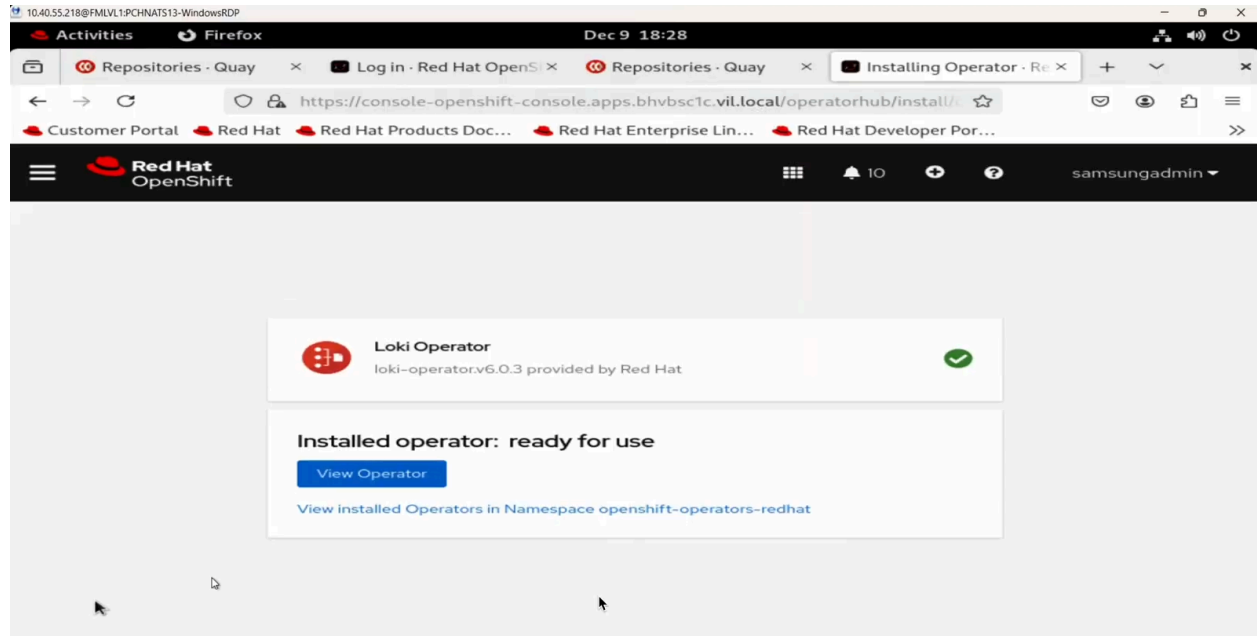

Step2: In console navigate to Storage → ObjectStorage → objectButtonClaim → Createobjectbucketclaim [get name of bucket by running oc get obc openshift-logging (in ocpstd cluster)] this should be in openshift-logging namespace

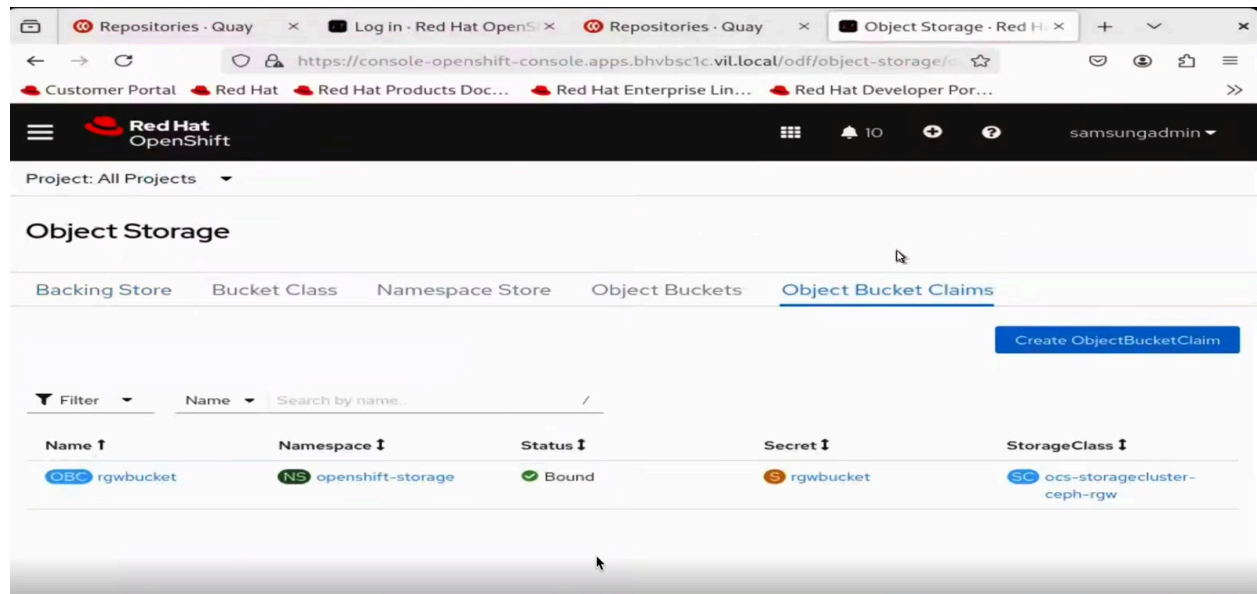

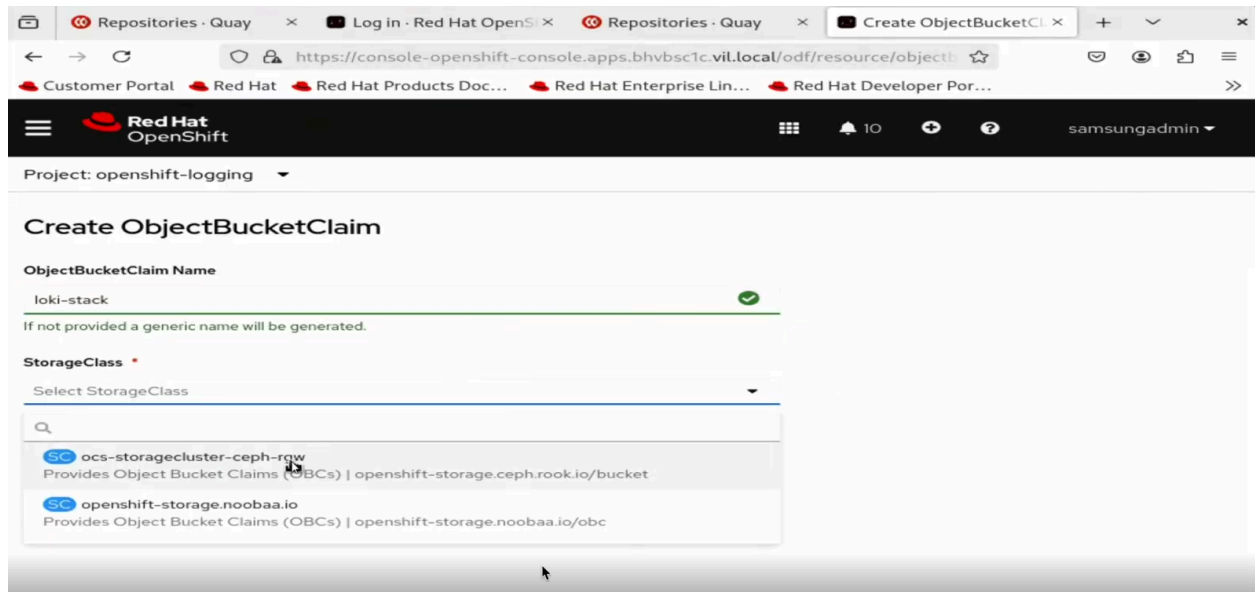

Step3: In cli go to openshift-logging project and get the following

- oc get obc -oyaml
- oc get secrets
- oc get secret loki-stack -oyaml

```
[ocpvbsci@invibh19ptnibastism ~]$ oc get obc
NAME                STORAGE-CLASS          PHASE    AGE
loki-stack          ocs-storagecluster-ceph-rgw  Bound    7s
[ocpvbsci@invibh19ptnibastism ~]$ oc get obc -oyaml
apiVersion: v1
items:
- apiVersion: objectbucket.io/v1alpha1
  kind: ObjectBucketClaim
  metadata:
    creationTimestamp: "2025-12-09T13:05:06Z"
    finalizers:
    - objectbucket.io/finalizer
    generation: 4
    labels:
      bucket-provisioner: openshift-storage.ceph.rook.io-bucket
    name: loki-stack
    namespace: openshift-logging
    resourceVersion: "286608734"
    uid: 2f2edc6b-fc09-462f-b8cf-7d402a734882
  spec:
    bucketName: loki-stack-ea4585d5-d8e2-4ee3-8caa-18903fc9ce1e
    generateBucketName: loki-stack
    objectBucketName: obc-openshift-logging-loki-stack
    storageClassName: ocs-storagecluster-ceph-rgw
  status:
    phase: Bound
kind: List
metadata:
  resourceVersion: ""
```

```
[ocpvbsci@invibh19ptn1bastism ~]$ oc get secret loki-stack -oyaml
apiVersion: v1
data:
  AWS_ACCESS_KEY_ID: WkdSVDU10FNXTTRLSjBCVlBYRzQ=
  AWS_SECRET_ACCESS_KEY: YmVaNHhVQnZMS0puY25YTHFDTLASZlVTRLJFek1tbUdkNGTjb0s3bw==
kind: Secret
metadata:
  creationTimestamp: "2025-12-09T13:05:07Z"
  finalizers:
  - objectbucket.io/finalizer
  labels:
    bucket-provisioner: openshift-storage.ceph.rook.io-bucket
  name: loki-stack
  namespace: openshift-logging
  ownerReferences:
  - apiVersion: objectbucket.io/v1alpha1
    blockOwnerDeletion: true
    controller: true
    kind: ObjectBucketClaim
    name: loki-stack
    uid: 2f2edc6b-fc09-462f-b8cf-7d402a734882
  resourceVersion: "286608729"
  uid: 4a853b60-70f2-4f01-b66e-311c589c0a50
type: Opaque
[ocpvbsci@invibh19ptn1bastism ~]$
```


Step4: export the following and get the values directly from console or from the above yamls

```
export ACCESS_KEY_ID=BM8J72FFH4GYF2NBBWJ0
export ACCESS_KEY_SECRET=CowWqehrxyQTg2fCXmgjgmeEo8qNGBQ5WrKABvTCp
export BUCKET_NAME=loki-stack-78a435d4-6d4e-4752-8ece-7a2bf7fc4308
export ENDPOINT="https://rook-ceph-rgw-ocs-storagecluster-cephobjectstore.openshift-storage.svc:443"
```

The screenshot shows the Red Hat OpenShift console interface. The breadcrumb navigation at the top indicates the path: Object Storage > ObjectBucketClaims > ObjectBucketClaim details. The main header shows the ObjectBucketClaim 'loki-stack' with a 'Bound' status. Below this, there are tabs for 'Details', 'YAML', and 'Events', with 'Details' currently selected. The 'Object Bucket Claim Details' section is displayed, showing the following information:

- Name:** loki-stack
- Namespace:** openshift-logging
- Labels:** bucket-provisioner=openshift-storage.ceph.rook.io-bucket
- Annotations:** 0 annotation
- Secret:** loki-stack
- Status:** Bound
- StorageClass:** ocs-storagecluster-ceph-rgw
- Object Bucket:** obc-openshift-logging-loki-stack

An 'Edit' link is visible next to the labels section.

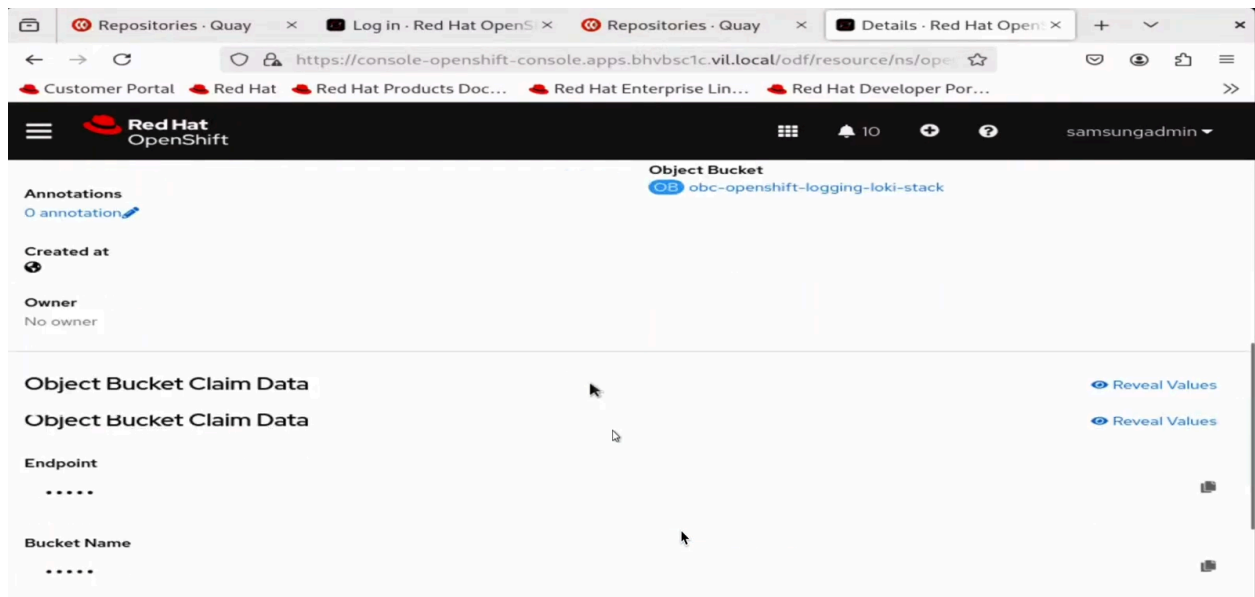

Step5: create secret

```
[ocpbvc@unvibh19ptnibastism ~]$ export ACCESS_KEY_ID=20RT5509MMKJ0BVPXG4
export ACCESS_KEY_SECRET=be24xUBvLKcnXlqCNP9FUSPREzHmgd4kck7o
export BUCKET_NAME=loki-stack-ea4585d5-dbe2-4ae3-8caa-10903f9c0e1e
export ENDPOINT=https://rook-ceph-rows-ocs-storagecluster-cephobjectstore.openshift-storage.svc:443
[ocpbvc@unvibh19ptnibastism ~]$ oc create secret generic loki-stack-s3 --from-literal=bucketnames="${BUCKET_NAME}" --from-literal=endpoint="${ENDPOINT}" --from-literal=access_key_id="${ACCESS_KEY_ID}" --from-literal=access_key_secret="${ACCESS_KEY_SECRET}" --from-literal=insecure=true
secret/loki-stack-s3 created
[ocpbvc@unvibh19ptnibastism ~]$
```

```
oc create secret generic loki-stack-s3 --from-literal=bucketnames="${BUCKET_NAME}"
-- from-literal=endpoint="${ENDPOINT}"
--from-literal=access_key_id="${ACCESS_KEY_ID}"
--from-literal=access_key_secret="${ACCESS_KEY_SECRET}"
--from-literal=insecure="true"
```

Step6: Navigate to Installed Operator in Webui → loki → lokistake → yaml view

Change : metadata remove sample from the name
and go to storage and make sure it is as follows

```
16 - effectiveDate: '2024-01-01'
17   version: v13
18   secret:
19     name: loki-stack-s3
20     type: s3
21     tls:
22       caName: loki-ca-s3
23   hashRing:
24     type: memberlist
25     size: 1x.extra-small
26     storageClassName: ocs-storagecluster-ceph-rbd
27
```

(Changes in effectiveDate, version, name of secret, type, tls name, hashRing size, storageclass)

You have to create new .crt for this the process is as follows

```
[ocpvbsci@unvibh19ptn1bastism ~]$ oc -n openshift-config get cm openshift-service-ca.crt -o json | jq -r '.data["service-ca.crt"] > service-ca.crt'
[ocpvbsci@unvibh19ptn1bastism ~]$ cat service-ca.crt
-----BEGIN CERTIFICATE-----
MIIDUTCAMgAwIBAgIIHJfjZG2oC7wwDQYJKoZIhvcNAQELBQAwNjE0MDIGA1UE
Awrb3BlbnNoawZ0LXNlcnZpY2Utc2VydmluZy1zaWduZXJAMTczOTIwMDEwNzAe
Fw0yNTAyMTA4MjdaFw0yNTA4MjdaFw0yNTA4MjdaFw0yNTA4MjdaFw0yNTA4Mjda
aGlmdC1zZXJ2aWNLXNlcnZpbmctc2lnbmVYQDE3MzkyMDAxMDcwggE1MA0GC3Qg
SIB3DQEBAAUAA4IBDwAwggEKAAIBAQCoJBcYSp0h+u/ecUHfmxvKwMKYX1eB50RI
lPb9noG74vnuS1cBN1LaJkM3vxJXIItICyxCbafSrqqekwJMbFVmjAMsMyvdu
tw/a86fKxdyKNNgV153zAkI8dkTQFKpkcozLx3uuceUIv53uHkmyMwHgXp5PuyMR
3zme5KEUq93DtGgmwe51jtydn0mTBE4i0as6trZeITXMNJq9ucenSpyD1PyrF+ar
TWPRR0jUqKv8JgYF75R5DaTPn0qFYR0KJNLwLDH1Uo9tjCsjJ1v6Udptvu25Kaz
U6Yo4E1lCgf4vFoncbbebbpZ3ie0zDV1BTPk4Qf+qJa80z3QCZgXpAgMBAAEYzBh
MA4GA1UdDwEB/wQEAwICpDAPBgNVHRMBAf8EBTADAQH/MB0GA1UdDgQWB8BRqVaJg
4+fH6KFg4JtZrsh0LU64GzAfBgNVHSMEGDAwGBRqVaJg4+fH6KFg4JtZrsh0LU64
GzANBgkqhkiG9w0BAQsFAA0CAQEAbh64tzwmYAFjPqGSKqXqTv5g7EIMOEDSU7y
5PEzrjoAoHFFf4Qxk0nC4p9mGisc+ZTzLh8lvUj29IKGSN6kpuD9geoyLLJICjYy
qkRuEg8sXc0TLfAD0E/IhvN2ka1BV+4/4LI2+I1WlhqkFPM0LS0s+8PLQQFWuGl
oec/DvIW7bSweyDQM+p6+HnLb0wmaQS91+HeCoaYw26thu9Zq4dPVx7U9Ns7mB
VRTjh5tjvHedpbCwvuI4kx0j3Tzz8Bl5e8K0w/4ePjHUf+z3euZkVogUJ07j+4Jl
Qa0GZA33p4c9cz/IXrI5e0PT6m7u2Cfadp6MCzu/nBF0DTS3A==
-----END CERTIFICATE-----
```

```
[ocpvbsci@unvibh19ptn1bastism ~]$ oc -n openshift-logging create configmap loki-s3-ca --from-file=service-ca.crt=service-ca.crt
configmap/loki-s3-ca created
[ocpvbsci@unvibh19ptn1bastism ~]$
```

Step7: go to <https://access.redhat.com/articles/6991632>

And run the following command

```
oc -n openshift-logging patch clusterlogging/instance -p
'{"spec":{"managementState": "Unmanaged"}}' --type=merge
```

```
oc -n openshift-logging patch elasticsearch/elasticsearch -p
'{"metadata":{"ownerReferences": []}}' --type=merge
```

```
oc -n openshift-logging patch kibana/kibana -p
'{"metadata":{"ownerReferences": []}}' --type=merge
```

```
oc -n openshift-logging get elasticsearch elasticsearch -o yaml
> elasticsearch.yaml
```

```
oc -n openshift-logging get kibana kibana -o yaml > kibana.yaml
```

Create a new yaml > logging.yaml

```
[ocpvb3c1@invibh19ptn1bast1sm ~]$ oc -n openshift-logging get elasticsearch elasticsearch -o yaml > elasticsearch.yaml
[ocpvb3c1@invibh19ptn1bast1sm ~]$ oc -n openshift-logging get kibana kibana -o yaml > kibana.yaml
[ocpvb3c1@invibh19ptn1bast1sm ~]$ vi kibana.yaml
[ocpvb3c1@invibh19ptn1bast1sm ~]$ vi logging.yaml
[ocpvb3c1@invibh19ptn1bast1sm ~]$ oc get lokistack
NAME      AGE
lokistack 11m
[ocpvb3c1@invibh19ptn1bast1sm ~]$ vi logging.yaml
[ocpvb3c1@invibh19ptn1bast1sm ~]$ cat logging.yaml
apiVersion: "logging.openshift.io/v1"
kind: "ClusterLogging"
metadata:
  name: "instance"
  namespace: "openshift-logging"
spec:
  managementState: "Managed"
  logStore:
    type: "lokistack"
    lokistack:
      name: lokistack
  collection:
    logs:
      type: "vector"
      fluentd: {}
  visualization:
    kibana:
      replicas: 1
      type: kibana
[ocpvb3c1@invibh19ptn1bast1sm ~]$
```

Apply the logging.yaml and kibana.yaml

oc apply -f logging.yaml kibana.yaml

Execute the following command

```
oc -n openshift-logging apply -f /tmp/cr-kibana.yaml
```

```
oc patch consoles.operator.openshift.io cluster --type=merge
--patch '{ "spec": { "plugins": ["logging-view-plugin"] } }'
```