

Quay Installation using Mirror-Registry

Download the Mirror Registry version 1.3.9 installation package from the official Red Hat developer repository to your local system.

```
wget
https://developers.redhat.com/content-gateway/file/pub/openshift-v4/clients
/mirror-registry/1.3.9/mirror-registry.tar.gz
```

Untar the file

```
tar xvf mirror-registry.tar.gz
```

Generates a new 2048-bit RSA private key and saves it as a file named redhat.key, which is typically used for creating SSL/TLS certificates or securing communications.

```
openssl genrsa -out redhat.key 2048
```

Generate a CSR file (redhat.csr) using the private key redhat.key for SSL certificate creation.

```
openssl req -key redhat.key -new -out redhat.csr
```

```
[root@grafana quay_1ns]# openssl genrsa -des3 -out redhat.key 2048
Enter PEM pass phrase:
Verifying - Enter PEM pass phrase:
[root@grafana quay_1ns]# ls
execution-environment.tar image-archive.tar mirror-registry mirror-registry.tar.gz redhat.key
[root@grafana quay_1ns]# openssl req -key redhat.key -new -out redhat.csr
Enter pass phrase for redhat.key:
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank.
For some fields there will be a default value,
if you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [XX]:IN
State or Province Name (full name) []:karnataka
Locality Name (eg, city) [Default City]:bengaluru
Organization Name (eg, company) [Default Company Ltd]:example
Organizational Unit Name (eg, section) []:testing
Common Name (eg, your name or your server's hostname) []:redhat
Email Address []:jayarajvp2005@gmail.com

Please enter the following 'extra' attributes
to be sent with your certificate request
A challenge password []:Redhat123
An optional company name []:non
[root@grafana quay_1ns]#
```

```
openssl x509 -req -in redhat.csr -signkey redhat.key -out redhat.crt -days 90 -extensions req_ext -extfile openssl-san.cnf
```

```
./mirror-registry install --quayHostname grafana.example.lab --initPassword
Redhat@123 --sslCert /root/quay_ins/cert/redhat.crt --sslKey
/root/quay_ins/cert/redhat.key
```

Currently logged in as superadmin

Certificate Viewer: grafana.example.lab

General

Details

Issued To

Common Name (CN)

Organization (O)

Organizational Unit (OU)

grafana.example.lab

ExampleLab

<Not Part Of Certificate>

Issued By

Common Name (CN)

Organization (O)

Organizational Unit (OU)

grafana.example.lab

ExampleLab

<Not Part Of Certificate>

Validity Period

Issued On

Expires On

Monday, November 10, 2025 at 11:52:16 AM

Sunday, February 8, 2026 at 11:52:16 AM


SHA-256 Fingerprints

Certificate

Public Key

a31448f50d311348bce9848132528d54f10a241145f9ba522e8257c61c5f61b7

c08996b563b443ed08b51813803c16d9e3c7e3bca4e2e80ce34311e5be8fe420

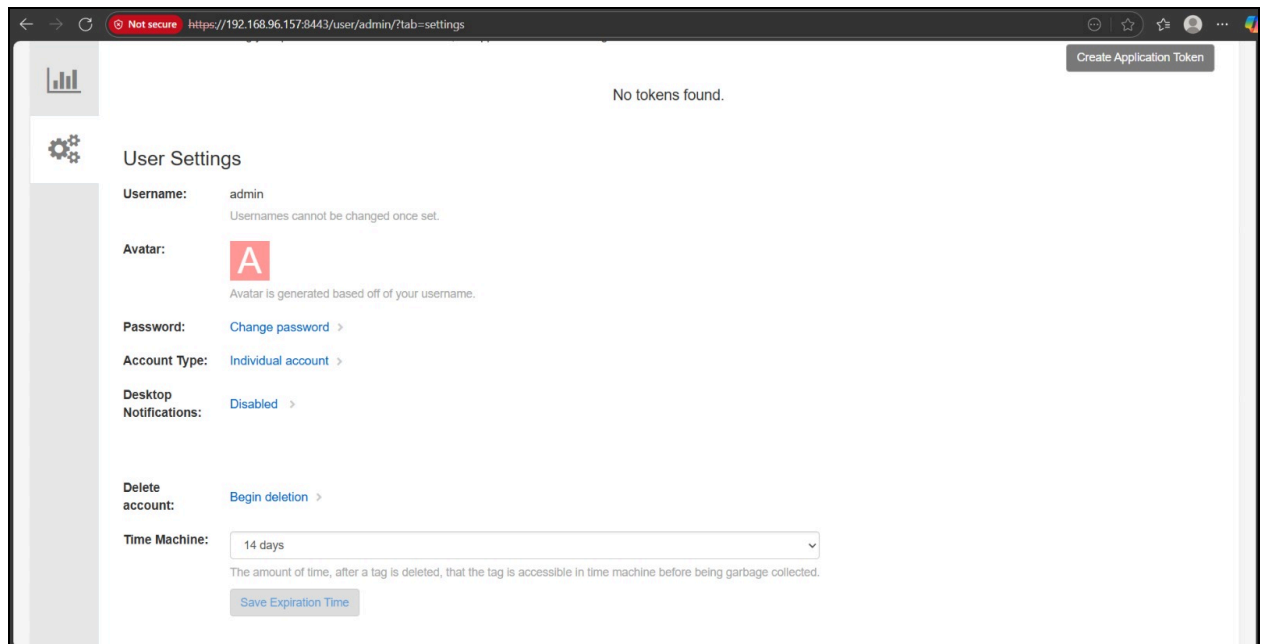

Changing the password for superadmin

Method 1

A 'Change Password' dialog box with a close button (X) in the top right. It contains the instruction 'Enter a new password. Passwords must be at least 8 characters in length.' Below this are two password input fields, both masked with dots. The second field has a toggle icon (an eye) on its right side. At the bottom right are two buttons: 'Change Password' and 'Cancel'.

Method 2

Using CLI

```
pip3 install passlib #password libraries installing
pip3 install bcrypt
```

```
python3 - <<'PY'
import bcrypt
pw = b"NewStrongP@ssw0rd!"      # keep <72 bytes
print(bcrypt.hashpw(pw, bcrypt.gensalt(rounds=12)).decode())
PY
```

```
UPDATE public."user"
SET password_hash =
'$2b$12$S8nKySgR6h1Ejr1Kgqe9Y.MHCJFn/fdEGuS1n8yeHQ.wWYtTDbZjW'
WHERE username = 'admin';
```

Replacing SSL Certificate

Creates a self-signed SSL certificate (redhat.crt) valid for 91 days using the CSR, private key, and SAN config.

```
openssl x509 -req -in redhat.csr -signkey redhat.key -out redhat.crt -days
91 -extensions req_ext -extfile openssl-san.cnf
```

Navigates to the Quay configuration directory.

```
cd /root/quay-install/quay-config
```

Removes the old SSL certificate and key files.

```
rm ssl.cert ssl.key
```

Moves the newly created key and CSR files to the current directory.

```
mv redhat.key redhat.csr .
```

Renames redhat.key to ssl.key for Quay to use as its SSL private key.

```
mv redhat.key ssl.key
```

Renames redhat.csr to ssl.cert so Quay uses it as the SSL certificate file.

```
mv redhat.csr ssl.cert
```