TASK 1

Task 1.1 Creating reposerver using ISO file
Objective: The goal is to set up Repo server in a network so we can use

prerequisites

- VMware
- VMware Vnet
- Rhel VM
- Rhel iso file

1. Configure server to use repos from ISO files

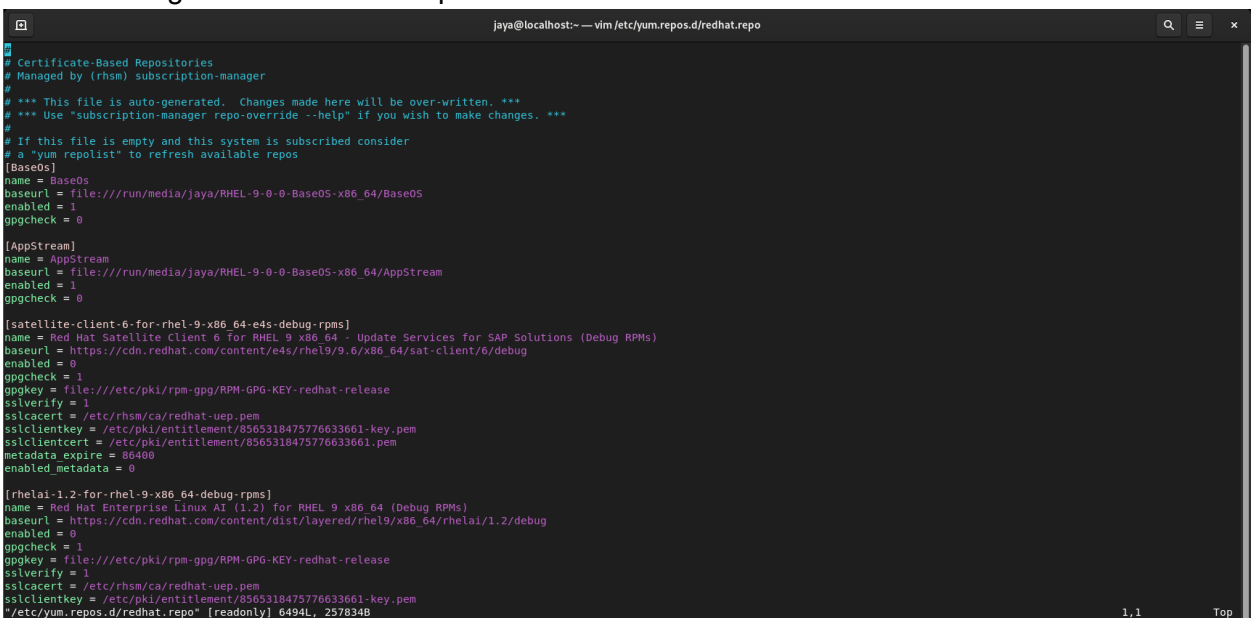

2. Copy the repos which you want to host in network to /var/www/html/server
   2.1 mkdir /var/www/html/server
   2.2 lsblk
   2.3 copy mount location of sr0
   2.4 cd /run/media/jaya and ls REDHAT
   2.5 cp BaseOS and AppStream to /var/www/html/server

```
Activities   Terminal                                   Sep 23  10:18
                                          jaya@localhost:/var/www/html/server
[jaya@localhost server]$ cd /var/www/html/server/
[jaya@localhost server]$ ls
AppStream  BaseOS
[jaya@localhost server]$
```

3. On Clint side configure

In /etc/yum.repos
Create repo
[BaseOs]
name= BaseOs
Baseurl = http://192.168.233.130/server/BaseOS
Enabled = 1
Gpgcheck = 0

[AppStream]
name= AppStream
Baseurl = http://192.168.233.130/server/AppStream
Enabled = 1
Gpgcheck = 0

```
[BaseOS]
name = BaseOs
baseurl = http://192.168.233.130/server/BaseOS
enabled = 1
gpgcheck = 0

[AppStream]
name = AppStream
baseurl = http://192.168.233.130/server/AppStream
enabled = 1
gpgcheck = 0
```

(Disable enabled repos before adding new repos)
Restart Httpd and try installing something using dnf

```
Updating Subscription Management repositories.
Last metadata expiration check: 16:03:46 ago on Mon 22 Sep 2025 06:22:21 PM IST.
Dependencies resolved.
================================================================================================================
 Package                        Architecture        Version                     Repository                Size
================================================================================================================
Installing:
 httpd                          x86_64              2.4.51-7.el9_0              AppStream                 1.5 M
Installing dependencies:
 apr                            x86_64              1.7.0-11.el9                AppStream                 127 k
 apr-util                       x86_64              1.6.1-20.el9                AppStream                  98 k
 apr-util-bdb                   x86_64              1.6.1-20.el9                AppStream                  15 k
 httpd-filesystem               noarch              2.4.51-7.el9_0              AppStream                  17 k
 httpd-tools                    x86_64              2.4.51-7.el9_0              AppStream                  88 k
 mailcap                        noarch              2.1.49-5.el9                BaseOS                     35 k
 redhat-logos-httpd             noarch              90.4-1.el9                  AppStream                  18 k
Installing weak dependencies:
 apr-util-openssl               x86_64              1.6.1-20.el9                AppStream                  17 k
 mod_http2                      x86_64              1.15.19-2.el9               AppStream                 153 k
 mod_lua                        x86_64              2.4.51-7.el9_0              AppStream                  63 k

Transaction Summary
================================================================================================================
Install  11 Packages

Total download size: 2.1 M
Installed size: 6.0 M
Is this ok [y/N]: y
Downloading Packages:
[MIRROR] mailcap-2.1.49-5.el9.noarch.rpm: Status code: 404 for http://192.168.233.130/server/BaseOS/Packages/mailcap-2.1.49-5.el
9.noarch.rpm (IP: 192.168.233.130)
[MIRROR] apr-1.7.0-11.el9.x86_64.rpm: Status code: 404 for http://192.168.233.130/server/AppStream/Packages/apr-1.7.0-11.el9.x86
_64.rpm (IP: 192.168.233.130)
[MIRROR] apr-util-1.6.1-20.el9.x86_64.rpm: Status code: 404 for http://192.168.233.130/server/AppStream/Packages/apr-util-1.6.1-
20.el9.x86_64.rpm (IP: 192.168.233.130)
[MIRROR] mailcap-2.1.49-5.el9.noarch.rpm: Status code: 404 for http://192.168.233.130/server/BaseOS/Packages/mailcap-2.1.49-5.el
9.noarch.rpm (IP: 192.168.233.130)
[MIRROR] apr-1.7.0-11.el9.x86_64.rpm: Status code: 404 for http://192.168.233.130/server/AppStream/Packages/apr-1.7.0-11.el9.x86
_64.rpm (IP: 192.168.233.130)
[MIRROR] apr-util-1.6.1-20.el9.x86_64.rpm: Status code: 404 for http://192.168.233.130/server/AppStream/Packages/apr-util-1.6.1-
20.el9.x86_64.rpm (IP: 192.168.233.130)
[FAILED] apr-1.7.0-11.el9.x86_64.rpm: No more mirrors to try - All mirrors were already tried without success
(2-3/11): apr-util-1.6.1-20.el9.x86_64.rpm    5% [===-                                   ] 656 kB/s | 131 kB     00:03 ETA
The downloaded packages were saved in cache until the next successful transaction.
You can remove cached packages by executing 'dnf clean packages'.
Error: Error downloading packages:
  apr-1.7.0-11.el9.x86_64: Cannot download, all mirrors were already tried without success
[root@localhost ~]# _
```

Task 1.2 Creating Reposerver using redhat CDN

prerequisites

- VMware
- VMware Vnet
- Rhel VM
- Redhat subscription on repos-server

1. Download the required repo by using reposync and you can get repo id from /yum.repo.d/redhat.repo

```
Activities   Terminal                    Sep 24 16:33
root@localhost:/var/www/html
[root@localhost html]# yum reposync -p server --repo=satellite-utils-6.17-for-rhel-9-x86_64-debug-rpms --download-metadata
```

2. Once downloaded it in server folder client can access the repo after the configuration is completed in client machin

```
[satellite]
name=satellite
baseurl=http://192.168.233.130/server/satellite/
enabled=1
gpgcheck=0
~
~
~
~
~
~
~
~
```

Task 2 (Additional) Automating client configuration

The script below retrieves the list of repos inside reposerver (/server) and creates repo_name.repo folder inside /etc/yum.repos.d/

```
#!/bin/bash
SERVER_IP="192.168.233.130"
REPO_DIR_URL="http://$SERVER_IP/server"
repos=$(curl -s $REPO_DIR_URL/ | grep -oP '(?<=href=")[^"]+/' | grep -vE '^(\.\./)$' | sed 's:/$::')
for repo in $repos; do
    cat <<EOF | sudo tee /etc/yum.repos.d/$repo.repo
[$repo]
name=$repo
baseurl=$REPO_DIR_URL/$repo/
enabled=1
gpgcheck=0
EOF
done

~
~
```

This script will be present in server and client will download it and run and automatically all the repos inside server will be configured in client machine and same script can be used to update packages