Elasticsearch to Loki migration

Step1: Login to Openshift-console

Navigate to Operator hub → Loki → Install (All default settings) [Download under openshift-logging namespace]

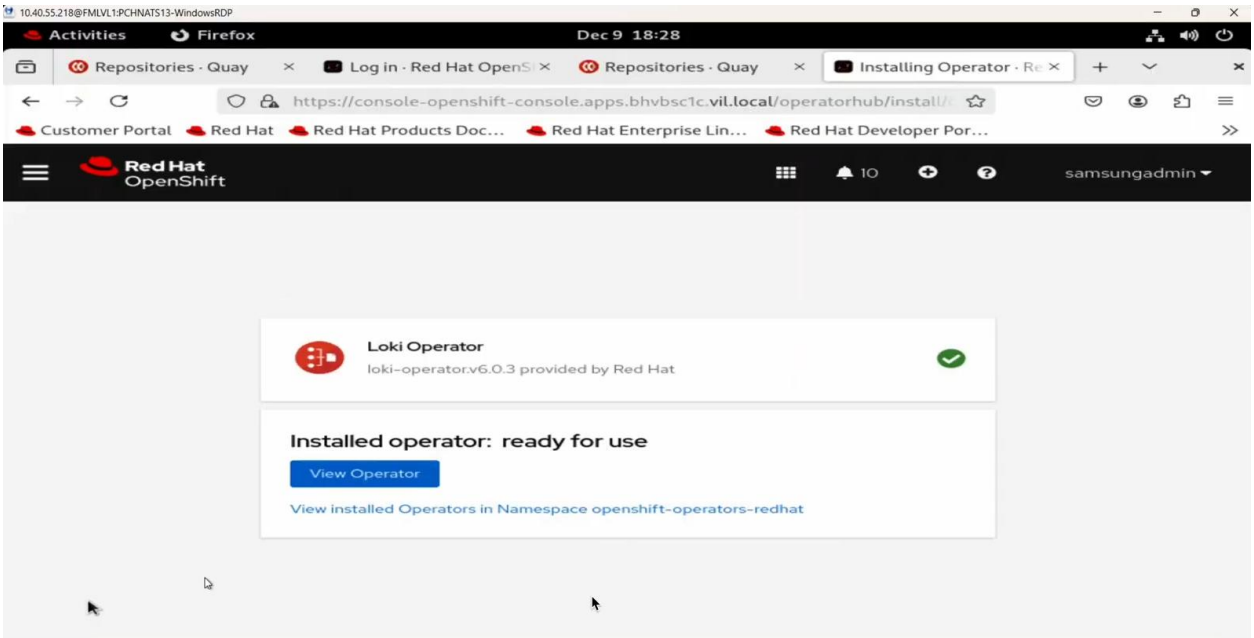

Step2: In console navigate to Storage → ObjectStorage → objectButtonClaim → Createobjectbucketclaim [get name of bucket by running oc get obc openshift-logging (in ocpstd cluster)] this should be in openshift-logging namespace

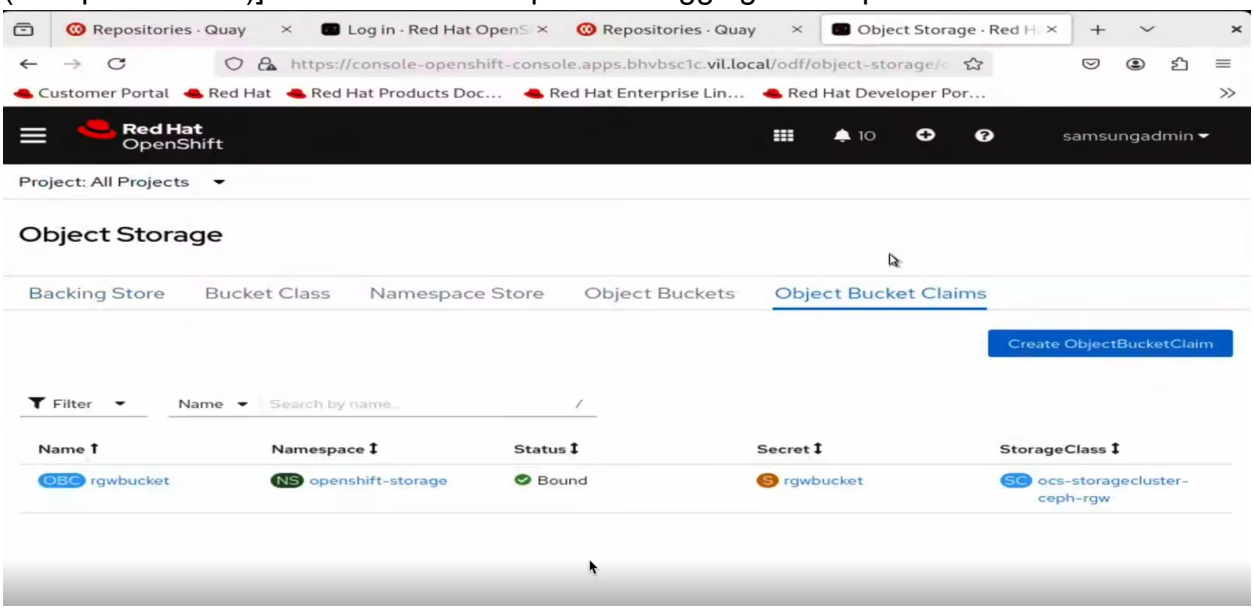

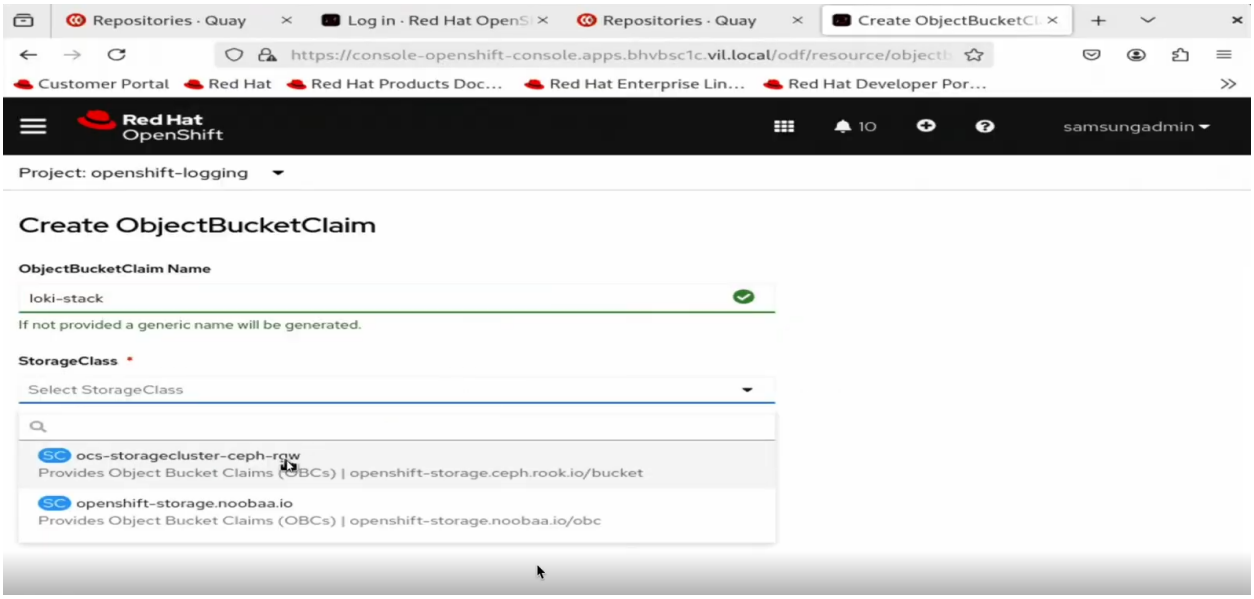

Step3: In cli go to openshift-logging project and get the following

→ oc get obc -oyaml

→ oc get secrets

→ oc get secret loki-stack -oyaml

```
[ocpvbsc1@invibh19ptn1bast1sm ~]$ oc get obc
NAME          STORAGE-CLASS                  PHASE    AGE
loki-stack    ocs-storagecluster-ceph-rgw    Bound    7s
[ocpvbsc1@invibh19ptn1bast1sm ~]$ oc get obc -oyaml
apiVersion: v1
items:
- apiVersion: objectbucket.io/v1alpha1
  kind: ObjectBucketClaim
  metadata:
    creationTimestamp: "2025-12-09T13:05:06Z"
    finalizers:
    - objectbucket.io/finalizer
    generation: 4
    labels:
      bucket-provisioner: openshift-storage.ceph.rook.io-bucket
    name: loki-stack
    namespace: openshift-logging
    resourceVersion: "286608734"
    uid: 2f2edc6b-fc09-462f-b8cf-7d402a734882
  spec:
    bucketName: loki-stack-ea4585d5-d8e2-4ee3-8caa-18903fc9ce1e
    generateBucketName: loki-stack
    objectBucketName: obc-openshift-logging-loki-stack
    storageClassName: ocs-storagecluster-ceph-rgw
  status:
    phase: Bound
kind: List
metadata:
  resourceVersion: ""
```

```
[ocpvbsc1@invibh19ptn1bast1sm ~]$ oc get secret loki-stack -oyaml
apiVersion: v1
data:
  AWS_ACCESS_KEY_ID: WkdSVDU1OFNXTTRLSjBCVlBYRzQ=
  AWS_SECRET_ACCESS_KEY: YmVaNHhVQnZMS0puY25YTHFDTlA5ZlVTRlJFek1tbUdkNGtjb0s3bw==
kind: Secret
metadata:
  creationTimestamp: "2025-12-09T13:05:07Z"
  finalizers:
  - objectbucket.io/finalizer
  labels:
    bucket-provisioner: openshift-storage.ceph.rook.io-bucket
  name: loki-stack
  namespace: openshift-logging
  ownerReferences:
  - apiVersion: objectbucket.io/v1alpha1
    blockOwnerDeletion: true
    controller: true
    kind: ObjectBucketClaim
    name: loki-stack
    uid: 2f2edc6b-fc09-462f-b8cf-7d402a734882
  resourceVersion: "286608729"
  uid: 4a853b60-70f2-4f01-b66e-311c589c0a50
type: Opaque
[ocpvbsc1@invibh19ptn1bast1sm ~]$
```

Step4: export the following and get the values directly from console or from the above yamls

```
export ACCESS_KEY_ID=BM8J72FFH4GYF2NBBWJ0
export ACCESS_KEY_SECRET=COwWqehrxyQTg2fCXmgjgmeEo8qNGBQ5WrKABvTCp
export BUCKET_NAME=loki-stack-78a435d4-6d4e-4752-8ece-7a2bf7fc4308
export ENDPOINT="https://rook-ceph-rgw-ocs-storagecluster-cephobjectstore.openshift-storage.svc:443"
```

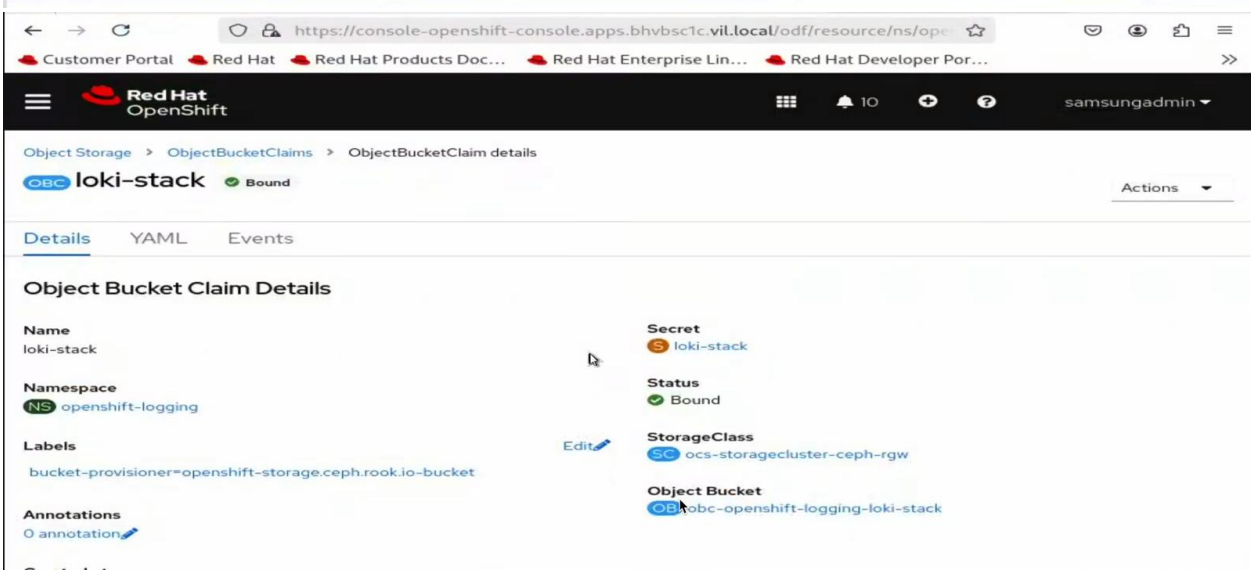

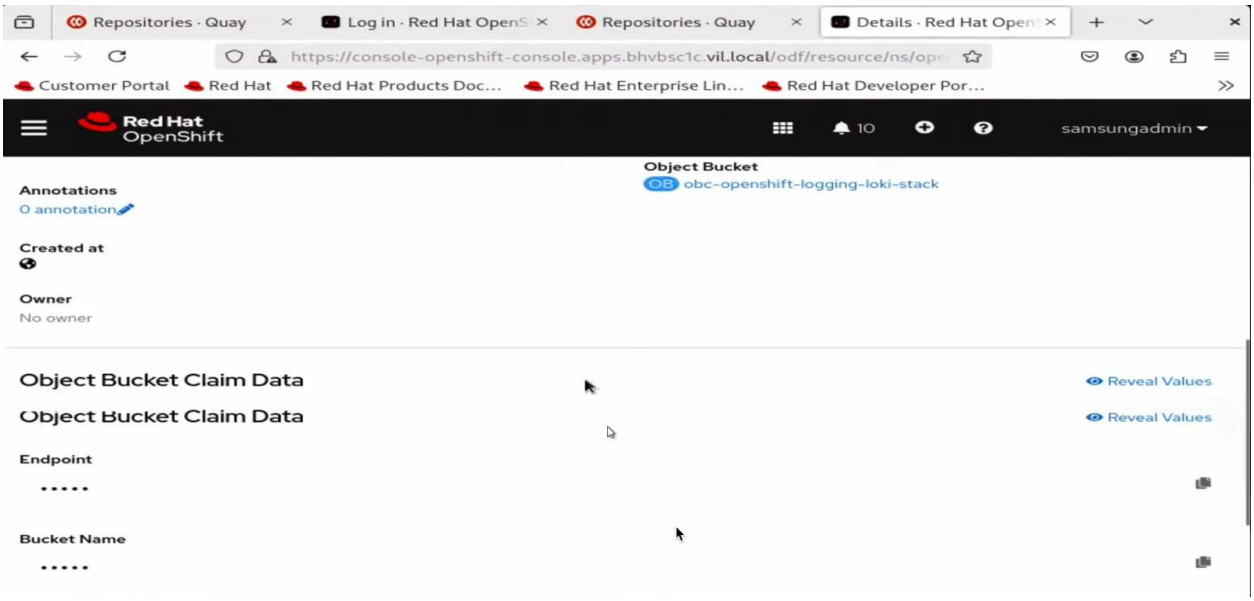

Step5: create secret

oc create secret generic loki-stack-s3 --from-literal=bucketnames="${BUCKET_NAME}" -- from-literal=endpoint="${ENDPOINT}" --from-literal=access_key_id="${ACCESS_KEY_ID}" --from-literal=access_key_secret="${ACCESS_KEY_SECRET}" --from-literal=insecure="true"

Step6: Navigate to Installed Operator in Webui → loki → lokistake → yaml view

Change : metadata remove sample from the name
and go to storage and make sure it is as follows

(Changes in effectibedate, version, name of secret, type, tls name, hashRing size, storageclass)
You have to create new .crt for this the process is as follows

```
[ocpvbsc1@invibh19ptn1bast1sm ~]$ oc -n openshift-config get cm openshift-service-ca.crt -o json | jq -r '.data."service-ca.crt"' > service-ca.crt
[ocpvbsc1@invibh19ptn1bast1sm ~]$ cat service-ca.crt
-----BEGIN CERTIFICATE-----
MIIDUTCCAjmgAwIBAgIIHJfjZG2oC7wwDQYJKoZIhvcNAQELBQAwNjE0MDIGA1UE
Awwrb3BlbnNoaWZ0LXNlcnZpY2Utc2VydmluZy1zaWduZXJAMTczOTIwMDEwNzAe
Fw0yNTAyMTAxNTA4MjdaFw0yNzA0MTExNTA4MjhaMDYxNDAyBgNVBAMMK29wZW5z
aGlmdC1zZXJ2aWNlLXNlcnZpbmctc2lnbmVyQDE3MzkyMDAxMDcwggEiMA0GCSqG
SIb3DQEBAQUAA4IBDwAwggEKAoIBAQCoJBcYSp0h+u/ecUHfmxvKwMKYX1eB50RI
lPb9noG74vnUsSIcbN1LaJkM3vxJXItICYxCbalFsrqqekWJMbrVmjAMssMyvdnu
iw/a86fKxdyKNNgV153zAkI8dkTQFKpkcozLx3uuceUIv53uHkmymWHgxP5PuymR
3zme5KEUq93DtGgmwe51jiydn0mTBE4i0as6trZeITXMNJq9ucenSpyD1Pyrf+ar
TWPRROjUqKvBJgYF7SR5DaTPn0qFYR0kJNLwLDHiUo9ijjCsjJ1v6Udptvu25kaz
U6Yo4Ellcgf4vFoncbebbpZ3ie0zDV1BTPk4Qf+qJa8Oz3qCZgXpAgMBAAGjYzBh
MA4GA1UdDwEB/wQEAwICpDAPBgNVHRMBAf8EBTADAQH/MB0GA1UdDgQWBBRqVaJg
4+fH6KfG4JtZrshOlU64GzAfBgNVHSMEGDAWgBRqVaJg4+fH6KfG4JtZrshOlU64
GzANBgkqhkiG9w0BAQsFAAOCAQEAbh64tzwmKYAFJpGSKqXqTv5g7eIMOEKD5U7y
5PEzrjoAoHFf4QxkOnC4p9mGisc+ZTzLh8lVjUj29IKG5N6kpuD9geoYlLJICJyY
qkRuEg8sXcOTlfADoE/IhvN2kaiBV+4/4LI2+I1WlhQqkFPMOl50s+8PLQQFWUgl
oec/OvIW7bSweyDQM+p6+HnLbOwmaQS91+HeCoaaYw26thu9Zq4dPVx7u9sNs7mB
VRTjh5tjvhEdpbCwvuI4kxOj3Tzz8bl5e8KoW/4ePjHUf+z3euZkVogUJO7j+4Jl
QaDGZA33p4c9cz/IXrI5eOPaT6m7u2Cfadp6MCzu/nBFoDTS3A==
-----END CERTIFICATE-----
```

```
[ocpvbsc1@invibh19ptn1bast1sm ~]$ oc -n openshift-logging create configmap loki-s3-ca --from-file=service-ca.crt=service-ca.crt
configmap/loki-s3-ca created
[ocpvbsc1@invibh19ptn1bast1sm ~]$
```

Step7: go to https://access.redhat.com/articles/6991632

And run the following command

```
oc -n openshift-logging patch clusterlogging/instance -p
'{"spec":{"managementState": "Unmanaged"}}' --type=merge

oc -n openshift-logging patch elasticsearch/elasticsearch -p
'{"metadata":{"ownerReferences": []}}' --type=merge

oc -n openshift-logging patch kibana/kibana -p
'{"metadata":{"ownerReferences": []}}' --type=merge

oc -n openshift-logging get elasticsearch elasticsearch -o yaml
> elasticsearch.yaml

oc -n openshift-logging get kibana kibana -o yaml > kibana.yaml
```

Create a new yaml > logging.yaml

```
[ocpvbsc1@invibh19ptn1bast1sm ~]$ oc -n openshift-logging get elasticsearch elasticsearch -o yaml > elasticsearch.yaml
[ocpvbsc1@invibh19ptn1bast1sm ~]$  oc -n openshift-logging get kibana kibana -o yaml > kibana.yaml
[ocpvbsc1@invibh19ptn1bast1sm ~]$ vi kibana.yaml
[ocpvbsc1@invibh19ptn1bast1sm ~]$ vi logging.yaml
[ocpvbsc1@invibh19ptn1bast1sm ~]$ oc get lokistack
NAME        AGE
lokistack   11m
[ocpvbsc1@invibh19ptn1bast1sm ~]$ vi logging.yaml
[ocpvbsc1@invibh19ptn1bast1sm ~]$ cat logging.yaml
apiVersion: "logging.openshift.io/v1"
kind: "ClusterLogging"
metadata:
  name: "instance"
  namespace: "openshift-logging"
spec:
  managementState: "Managed"
  logStore:
    type: "lokistack"
    lokistack:
      name: lokistack
  collection:
    logs:
      type: "vector"
      fluentd: {}
  visualization:
    kibana:
      replicas: 1
    type: kibana
[ocpvbsc1@invibh19ptn1bast1sm ~]$
```

Apply the logging.yaml and kibana.yaml

oc apply -f logging.yaml kibana.yaml

Execute the following command

```
oc -n openshift-logging apply -f /tmp/cr-kibana.yaml
```

```
oc patch consoles.operator.openshift.io cluster --type=merge --patch '{ "spec": { "plugins": ["logging-view-plugin"] } }'
```