


| Feature | | Scenario | | | | Step | | | |
|--------------------------|----------|----------|---|---|---|------|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| Login to HRM Application | 9.876 s | 3 | 0 | 3 | 0 | 9 | 1 | 3 | 5 |


| Tag | Scenario | | | Feature | | | | |
|---------------------|----------|---|---|---------|---|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @InvalidCredentials | 3 | 0 | 3 | 0 | 1 | 0 | 1 | 0 |
| @TestRun | 3 | 0 | 3 | 0 | 1 | 0 | 1 | 0 |

FEATURES SUMMARY -- 4

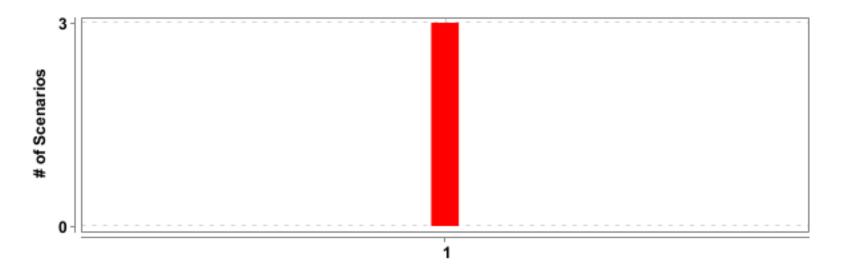

| # | Feature Name | T | P | F | S | Duration |
|---|--------------------------|---|---|---|---|----------|
| 1 | Login to HRM Application | 3 | 0 | 3 | 0 | 9.876 s |

SCENARIOS SUMMARY -- 5 --

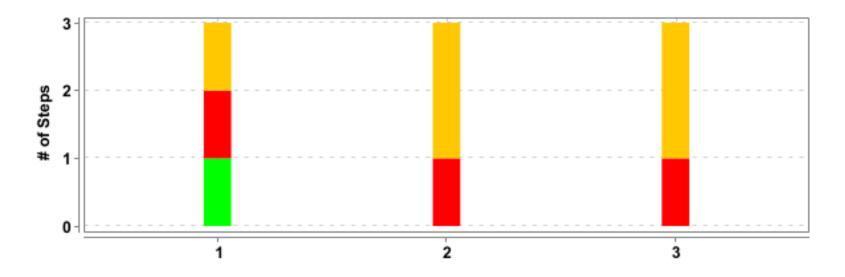


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|--------------------------|--------------------------------|---|---|---|---|----------|
| 1 | Login to HRM Application | Login with invalid credentials | 3 | 1 | 1 | 1 | 9.682 s |
| 2 | Login to HRM Application | Login with invalid credentials | 3 | 0 | 1 | 2 | 0.049 s |
| 3 | Login to HRM Application | Login with invalid credentials | 3 | 0 | 1 | 2 | 0.027 s |

DETAILED SECTION -- 6 --

Login to HRM Application

| FAILED | DURATION - 9.876 s | Scenarios | | Steps | |
|---------------------|--------------------|-----------|---------------------------------------|-----------|-------|
| | | Total - 3 | | Total - 9 | |
| / 7:19:18.222 pm // | 7:19:28.098 pm / | Pass - 0 | 3 | Pass - 1 | 🧧 g 📕 |
| | | Fail - 3 | , , , , , , , , , , , , , , , , , , , | Fail - 3 | |
| | | Skip - 0 | | Skip - 5 | |
| | | | | | |

Login with invalid credentials

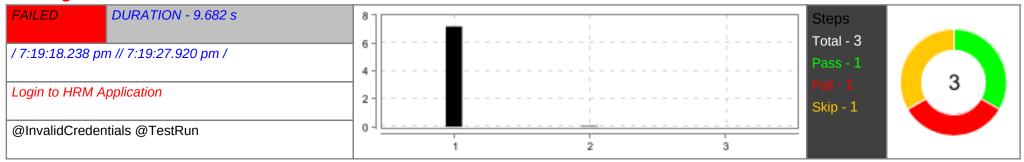


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/" | PASSED | 7.184 s |
| 2 | When User enters username as "Admin" and password as "admin12\$\$" | FAILED | 0.050 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.127) Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'N-5CG0511FVF', ip: '192.168.1.17', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [f0cb04edf9be7cb522c031dfdefbbeae, findElement {using=name, value=username}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.127, chrome: {chromedriverVersion: 126.0.6478.126 (d36ace6122e, userDataDir: C:\Users\KALAIMAN\AppData\L}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:63805}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63805/devtoo, se:cdpVersion: 126.0.6478.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: f0cb04edf9be7cb522c031dfdefbbeae at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.ColegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.ElementLocation.\$IndElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(RemoteWebDriver.java:387) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:379) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:379) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy30.sendKeys(Unknown Source) at com.example.actions.LoginPageActions.setUserName(LoginPageActions.java:26) at com.example.actions.LoginPageActions.setUserName(LoginPageActions.java:38) at com.example.actions.LoginPageActions.setUserName(LoginPageActions.java:38) at com.example.actions.LoginPageActions.setUserName(LoginPageActions.java:38) at com.example.actions.actions.actions.actions.gorToHomePage(LoginPageDefinitions.java:38) at com.example.definitions.LoginPageDefinitions.gorToHomePage(LoginPageDefinitions.java:38) at com.example.definitions.LoginPageDefinitions.gorToHomePage(LoginPageDefinitions.java:38) at com.example.definitions.LoginPageActions.ioginCloginPageActions.gorToHomePage(LoginPageDefinitions.java:38) at com.example.definitions.LoginPageActions.gorToHomePage(LoginPageDefinitions.java:38) at com.example.definitions.LoginPageActions.gorToHomePage(LoginPageDefin | | |
| 3 | Then User should be able to see error message "Invalid credentials" | SKIPPED | 0.001 s |
| | AFTER - com.example.definitions.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.014 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.127) Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'N-5CG0511FVF', ip: '192.168.1.17', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [f0cb04edf9be7cb52c031dfdefbbeae, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.127, chrome: {chromedriverVersion: 126.0.6478.126 (d36ace6122e, userDataDir: C:Users\KalaMAN\AppData\L), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:63805}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63805/devtoo, se:cdpVersion: 126.0.6478.127, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:imPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: f0cb04edf9be7cb522c031dfdefbbeae at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:624) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:628) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:353) at com.example.definitions.Hooks.tearDown(Hooks.java:38) | | |

Login with invalid credentials

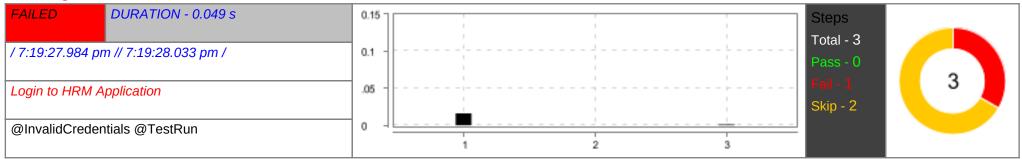


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/" | FAILED | 0.016 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.127) Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'N-5CG0511FVF', ip: '192.168.1.17', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [f0cb04edf9be7cb522c031dfdefbbeae, get {url=https://opensource-demo.orangehrmlive.com/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.127, chrome: {chromedriverVersion: 126.0.6478.126 (d36ace6122e, userDataDir: C:\Users\KALAIMAN\AppData\L}}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:63805}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63805/devtoo, se:cdpVersion: 126.0.6478.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:redBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: f0cb04edf9be7cb522c031dfdefbbeae at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) | | 0.010 3 |

| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:569) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:332) at com.example.utils.HelperClass.openPage(HelperClass.java:33) at com.example.definitions.LoginPageDefinitions.loginTest(LoginPageDefinitions.java:27) at ?.User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/"(file:///C:/Users/KALAIMAN/EclipseWorkspace/POCucumberJunit/src/test/resources/features/LoginPage.feature:6) * Not displayable characters are replaced by '?'. | | |
|--|---|---------|---------|
| 2 \ | When User enters username as "admin\$\$" and password as "admin123" | SKIPPED | 0.000 s |
| 3 | Then User should be able to see error message "Invalid credentials" | SKIPPED | 0.001 s |
| _ | AFTER - com.example.definitions.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.021 s |
| () () () () () () () | org openga.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.127) Build info: version: '4.3.0', revision: 'a4995e2c09" System info: host: 'N-5CG0511FVF', ip: 192.168.1.17', os.name: Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openga.selenium.chrome. ChromeDriver Command: [f0cb04edf9be7cb522c031dfdefbbeae, screenshot {}] Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.127, chrome: (chromedriverVersion: 126.0.6478.126, (d36ace6122e, userDatabir: CXUsersIKALAIMANNAppDataL), fedcm:accounts: true, goog:chromeOptions: (debuggerAddress: localhost-63805), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost-63805/devtoo, se:cdpVersion: 126.0.6478.127, settVindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:redBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:pf: true, webauthn:virtualAuthenticators: true} Session ID: (locb04edf9be7cb522c031dfdeftbbeae at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:47) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openga.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openga.selenium.remote.Remote | | |

DETAILED SECTION -- 10 --

Login with invalid credentials

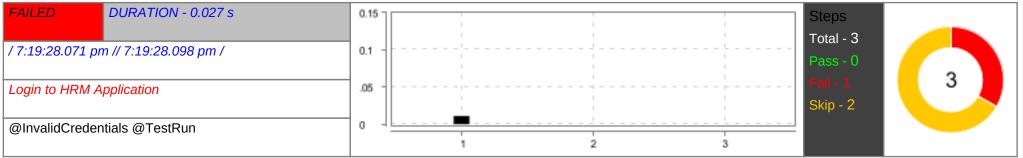

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/" | FAILED | 0.011 s |
| _ | · | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:332) | | |
| | at com.example.utils.HelperClass.openPage(HelperClass.java:33) at com.example.definitions.LoginPageDefinitions.loginTest(LoginPageDefinitions.java:27) | | |
| | at ?.User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/"(file:///C:/Users/KALAIMAN/EclipseWorkspace/ | | |
| | POCucumberJunit/src/test/resources/features/LoginPage.feature:6) | | |
| | * Not displayable characters are replaced by '?'. | | |

DETAILED SECTION -- 11 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 2 | When User enters username as "abc123" and password as "xyz\$\$" | SKIPPED | 0.000 s |
| 3 | Then User should be able to see error message "Invalid credentials" | SKIPPED | 0.000 s |
| | AFTER - com.example.definitions.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.006 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=126.0.6478.127) Build info: version: '4.3.0', revision: 'a4995e2c09*' System info: host: 'N-5CG0511FVF', ip: '192.168.1.17', os.name: Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [f0cb04edf9be7cb522c031dfdefbbeae, screenshot {]} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 126.0.6478.127, chrome: {chromedriverVersion: 126.0.6478.126, (d36ace6122e, userDataDir: C:USersikALAIMANIAppDatatL), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost.63805}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost.63805/devtoo, se:cdpVersion: 126.0.6478.127, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:margeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:minPinLength: true, webauthn:extension:minPinLength: true, webauthn:extension:minPinLength: true, webauthn:extension:prf. true, webauthn:extension:prf. true, webauthn:extensions.deflowers. at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWinCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWinCaller(Constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.service.DriverCommandExecutor.invo | | |