DRAFT, INDICATIVE

12 OCTOBER 2026

REV A

JCE Infrastructure

Civil engineering and land development

jceinfrastructure.com.au

SITE ASSESSMENT AND PLANNING CONSTRAINTS

Site Assessment and Planning Constraints Report

Lot 2 DP 227508, Gunnedah



Figure 1. Lot 2 DP 227508: site context. Lot boundary from NSW cadastre (indicative, not a survey). Aerial: Imagery: NSW Spatial Services © Department of Customer Service 2020 (includes third-party imagery: AAM, Jacobs Group Ausimage, LANDSAT). Imagery date: 18 Oct 2011.

PROJECT **Test run: 2//DP227508**	LOT / PLAN **Lot 2 DP 227508**	COUNCIL (LGA) **Gunnedah**
ZONE **R2 Low Density Residential**	SITE AREA **956 m²**	DEVELOPMENT **Dwelling house**
REPORT DATE **12 October 2026**	STATUS **DRAFT, indicative**	PREPARED BY **JCE Infrastructure**

Draft for discussion. Mapping data is indicative and unverified; this is not a section 10.7 planning certificate or a council property report. See the legal statement and limits in the appendix.

02 / SECTION

What matters for this site

0	1	12	2	5
AFFECTED	NEARBY	NOT AFFECTED	NOT CHECKED	TO BE CONFIRMED

18 planning and hazard layers were screened for Lot 2 DP 227508 (Gunnedah) for a proposed dwelling house.

TOP FINDINGS, RANKED

01 **Bush fire prone land** — NEARBY
The lot is 84 m from the nearest bush fire prone vegetation (Vegetation Category 3). It is not inside the mapped area, but it is within the 100 m buffer used to screen this constraint, so the buffer applies. A habitable building here will need a Bushfire Attack Level (BAL) assessment (AS 3959) and compliance with Planning for Bush Fire Protection.

02 **Zoning and planning controls** — CONTROLS
The lot is zoned R2 Low Density Residential; minimum lot size 650 m² (99% of the lot); 200-399.9 ha class (1% of the lot); floor space ratio 0.5:1; no mapped maximum building height control. Two lot size classes are mapped over the lot; confirm which applies with council.

03 **Flood: not mapped, but check** — NEARBY
No flood planning area is mapped on the lot or within about 150 m of it. The lot is not within the mapped flood planning area, but council may still apply flood controls from its flood studies. Ask council for flood information (or a flood certificate) before design. If council gives a flood level, the minimum floor level is that level plus 0.5 m freeboard (Gunnedah Development Control Plan 2025, p.22).

04 **2 layers not checked** — NOT CHECKED
These could not be queried and must be checked manually: contaminated land; road and rail corridors. Not checked is not clear.

LIKELY APPROVAL PATHWAY (INDICATIVE)

Pathway analysis not run for this report. Ask council or an accredited certifier whether exempt development, complying development or a development application applies.

NEXT ACTIONS

- [ ] Obtain the s10.7 planning certificate for Lot 2 DP 227508 from council and confirm every layer below against it.
- [ ] Commission a BAL assessment (AS 3959) by an accredited practitioner.
- [ ] NSW: check Planning for Bushfire Protection (habitable buildings).
- [ ] Ask council for flood information for the lot (flood planning level or flood certificate), even though no flood planning area is mapped.
- [ ] Check the layers marked 'Not checked' directly with council: contaminated land; road and rail corridors.
- [ ] Confirm the flagged council requirements (low confidence or not found) with council planning staff.
- [ ] Engage a registered surveyor for an identification and detail survey before design is finalised.

Not checked is not clear. A layer marked 'Not checked' could not be queried, so the site may well be affected. It must be checked with the council before design or purchase decisions are made.

03 / SECTION

Site and zoning

LOT / PLAN	Lot 2 DP 227508 (2//DP227508)
COUNCIL (LGA)	Gunnedah
ZONE	R2 Low Density Residential (from the NSW LEP zoning layer)
SITE AREA	956 m² calculated from the boundary; registered area not available
FRONTAGE	20.2 m to Little Bloomfield Street
DEVELOPMENT	Dwelling house
MINIMUM LOT SIZE	650 m² (99% of the lot); 200-399.9 ha class (1% of the lot) (mapping current to 13 dec 2024; retrieved 12 oct 2026)
FLOOR SPACE RATIO	0.5:1 (mapping current to 21 oct 2022; retrieved 12 oct 2026)
MAXIMUM HEIGHT	No control mapped on this lot in the LEP layer (mapping date not published by the service; retrieved 12 oct 2026)
ZONE OBJECTIVES	Not loaded: the LEP land use table and zone objectives have not been ingested for this council. Read them in the LEP.
NOTE	The lot touches more than one zone or map class. Confirm which controls apply.

PLANNING INSTRUMENTS THAT APPLY

State Environmental Planning Policy (Resilience and Hazards) 2021. Other policies (for example Housing, Transport and Infrastructure) apply by their own rules and are not mapped here.

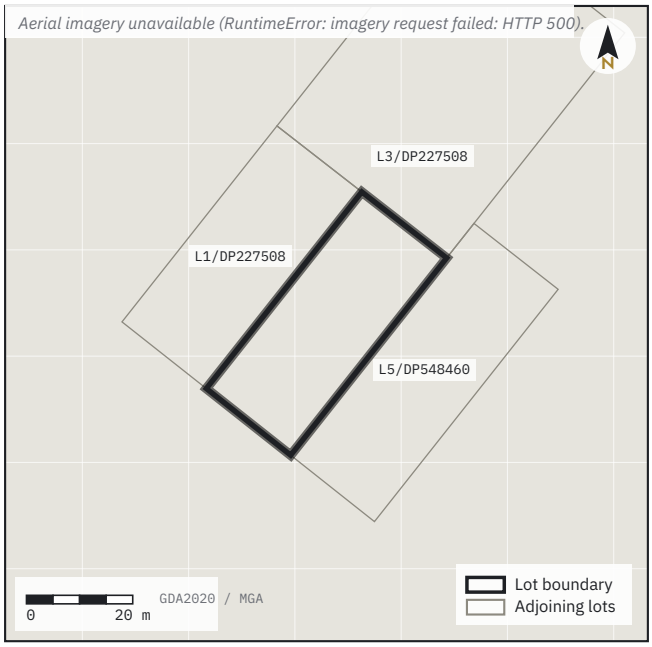


Figure 2. Lot detail (about 35 m context) with adjoining lots.



Figure 3. Neighbourhood (about 280 m context).

No aerial imagery available for this figure; vector overlay only. Lot boundaries are from the NSW cadastre and are indicative, not a survey.

ADJOINING PARCELS

LOT 1 DP227508, LOT 3 DP227508, LOT 5 DP548460.

04 / SECTION

Constraint summary

Every layer screened for this lot, with what was found, how far away it is and where the data came from.

STATUS	LAYER AND RESULT	DISTANCE / OVERLAP	SOURCE AND DATA CURRENCY
NEARBY	**Bush fire prone land** The lot is 84 m from the nearest bush fire prone vegetation (Vegetation Category 3). It is not inside the mapped area, but it is within the 100 m buffer used to screen this constraint, so the buffer applies.	84 m away; 100 m buffer applies	NSW planning: Fire/BFPL / NSW Bush Fire Prone Lands Mapping current to 3 Oct 2026; retrieved 12 Oct 2026
NOT CHECKED	**Contaminated land** No public data service for this layer is connected to the platform yet. To do: Check the NSW EPA contaminated land record and the council's s10.7 certificate.	-	NSW Government planning spatial services Not queried
NOT CHECKED	**Road and rail corridors** No public data service for this layer is connected to the platform yet. To do: Check classified road and rail corridor controls with council and Transport for NSW.	-	NSW Government planning spatial services Not queried
NOT AFFECTED	**Flood planning area** No flood planning area is mapped on the lot or within about 150 m of it. The lot is not within the mapped flood planning area, but council may still apply flood controls from its flood studies. Ask council for flood information (or a flood certificate) before design. Note: This layer only covers LEP flood planning maps. Council flood studies, overland-flow mapping and local flood-prone areas are not included, so 'not mapped' does not mean flood-free.	None within about 150 m	NSW planning: Planning/Hazard / Flood Planning Mapping date not published by the service; retrieved 12 Oct 2026
NOT AFFECTED	**Heritage conservation area** No heritage conservation area is mapped on the lot or within about 150 m of it. Note: Only LEP conservation-area mapping is checked.	None within about 150 m	NSW planning: Planning/EPI_Primary_Planning_Layers / Heritage Mapping date not published by the service; retrieved 12 Oct 2026
NOT AFFECTED	**Heritage item** The lot is not within a mapped heritage item; the nearest mapped feature is 133 m away. Note: Only LEP heritage mapping is checked. The State Heritage Register and unlisted Aboriginal heritage are not covered.	Nearest 133 m away	NSW planning: Planning/EPI_Primary_Planning_Layers / Heritage Mapping current to 29 Jun 2012; retrieved 12 Oct 2026
NOT AFFECTED	**Acid sulfate soils** No acid sulfate soils is mapped on the lot or within about 150 m of it. Note: Class 5 land only matters if works could lower the water table on adjacent higher-class land.	None within about 150 m	NSW planning: Planning/Protection / Acid Sulfate Soils Mapping date not published by the service; retrieved 12 Oct 2026
NOT AFFECTED	**Land reservation acquisition** No land reservation acquisition is mapped on the lot or within about 150 m of it.	None within about 150 m	NSW planning: Planning/EPI_Primary_Planning_Layers / Land Reservation Acquisition Mapping date not published by the service; retrieved 12 Oct 2026
NOT AFFECTED	**Airport noise and obstacles** No airport noise and obstacles is mapped on the lot or within about 150 m of it. Note: Only LEP airport noise mapping is queried. The obstacle limitation surface layer is not yet connected.	None within about 150 m	NSW planning: Planning/Protection / Airport Noise Mapping date not published by the service; retrieved 12 Oct 2026
NOT AFFECTED	**Biodiversity values** No biodiversity values is mapped on the lot or within about 150 m of it. Note: The map is a trigger only: clearing outside mapped land can still need approval under other rules.	None within about 150 m	NSW planning: ePlanning/BiodiversityValuesMap / Biodiversity Values Mapping date not published by the service; retrieved 12 Oct 2026
NOT AFFECTED	**Coastal wetlands** No coastal wetlands is mapped on the lot or within about 150 m of it. Note: Only coastal wetlands are queried. Coastal environment and coastal use areas are not checked.	None within about 150 m	NSW planning: Planning/SEPP_Resilience_and_Hazards_2021 / Coastal Wetlands Mapping date not published by the service; retrieved 12 Oct 2026

STATUS	LAYER AND RESULT	DISTANCE / OVERLAP	SOURCE AND DATA CURRENCY
NOT AFFECTED	**Mine subsidence district** No mine subsidence district is mapped on the lot or within about 150 m of it.	None within about 150 m	NSW planning: ePlanning/Planning_Portal_Subsidence_Advisory / Mine Subsidence District Mapping date not published by the service; retrieved 12 Oct 2026
NOT AFFECTED	**Riparian land and watercourses** No riparian land and watercourses is mapped on the lot or within about 150 m of it. Note: Only LEP riparian and watercourse mapping is queried; unmapped creeks and drainage lines are not covered.	None within about 150 m	NSW planning: Planning/Protection / Riparian Lands and Watercourses Mapping date not published by the service; retrieved 12 Oct 2026
NOT MAPPED	**Maximum building height** No maximum building height control is mapped on the lot in the LEP map layer.	None within about 150 m	NSW planning: Planning/EPI_Primary_Planning_Layers / Height of Building Mapping date not published by the service; retrieved 12 Oct 2026
NOT AFFECTED	**Urban release area** No urban release area is mapped on the lot or within about 150 m of it.	None within about 150 m	NSW planning: Planning/Development_Control / Urban Release Area Mapping date not published by the service; retrieved 12 Oct 2026
MAPPED	**Floor space ratio** 0.5:1	99% of lot	NSW planning: Planning/EPI_Primary_Planning_Layers / Floor Space Ratio Mapping current to 21 Oct 2022; retrieved 12 Oct 2026
MAPPED	**Minimum lot size** 650 m² (99% of the lot); 200-399.9 ha class (1% of the lot)	Whole lot	NSW planning: Planning/EPI_Primary_Planning_Layers / Lot Size Mapping current to 13 Dec 2024; retrieved 12 Oct 2026
MAPPED	**State policy land application** The lot is inside the land application area of: State Environmental Planning Policy (Resilience and Hazards) 2021.	Whole lot	NSW planning: Planning/SEPP_Resilience_and_Hazards_2021 / Land Application Map Mapping current to 1 Mar 2022; retrieved 12 Oct 2026

Not checked is not clear. A layer marked 'Not checked' could not be queried, so the site may well be affected. It must be checked with the council before design or purchase decisions are made.

CONSTRAINT 1 OF 1

Bush fire prone land

NEARBY

The lot is 84 m from the nearest bush fire prone vegetation (Vegetation Category 3). It is not inside the mapped area, but it is within the 100 m buffer used to screen this constraint, so the buffer applies.



Figure 4. Bush fire prone land near Lot 2 DP 227508, clipped to a 145 m window around the lot. Source: NSW Government planning spatial services: Fire/BFPL / NSW Bush Fire Prone Lands; mapping current to 3 oct 2026; retrieved 12 oct 2026. Aerial: Imagery: NSW Spatial Services © Department of Customer Service 2020 (includes third-party imagery: AAM, Jacobs Group Ausimage, LANDSAT). Imagery date: 18 Oct 2011.

MAPPED FEATURE	DISTANCE FROM LOT	OVERLAP WITH LOT	OTHER ATTRIBUTES
Vegetation Buffer	54 m	None	-
Vegetation Category 3	84 m	None	-

WHAT IT IS

Bush fire prone land (BFPL) maps are prepared by councils and certified by the NSW Rural Fire Service. They show vegetation Category 1, 2 and 3 (higher to lower fire risk) and a buffer around that vegetation. When land is bush fire prone, new habitable buildings must be designed and built for the assessed Bushfire Attack Level (BAL) and Planning for Bush Fire Protection applies.

Limit of this check: This report screens the lot against mapped vegetation out to 100 m. Whether the land is formally designated bush fire prone is confirmed on the s10.7 planning certificate.
Source: NSW Government planning spatial services: Fire/BFPL / NSW Bush Fire Prone Lands, mapping current to 3 oct 2026; retrieved 12 oct 2026.

WHAT IT MAY TRIGGER

MAY BE REQUIRED	STATUS	WHO TO ASK
Bushfire Attack Level (BAL) assessment to AS 3959	**To be confirmed**	Accredited bushfire consultant
Compliance with Planning for Bush Fire Protection	**To be confirmed**	Bushfire consultant / council
State planning policy bushfire hazard assessment	**To be confirmed**	Council
Asset protection zone width around the building	**To be confirmed**	Bushfire consultant / NSW RFS
Referral to the NSW Rural Fire Service (bush fire safety authority)	**To be confirmed**	Council / NSW RFS

Platform hint (not a finding): may apply: BAL construction requirements for a habitable building; verify with council / certifier.
No cited rule loaded for this constraint yet: the items above are the checks this platform raises, not a statement of what is required.

COUNCIL REQUIREMENTS ON FILE

REQUIREMENT	VALUE	SOURCE
Bushfire: exempt clearing trees within	**10 m**	NSW Planning: Bushfires (10/50 vegetation clearing), p.1, Bushfires: 10/50 vegetation clearing entitlement “trees and vegetation within 10 m of specified bushfire-prone buildings”
Bushfire: exempt clearing undergrowth within	**50 m**	NSW Planning: Bushfires (10/50 vegetation clearing), p.1, Bushfires: 10/50 vegetation clearing entitlement “undergrowth within 50 m of specified bushfire-prone buildings.”

WHAT TO DO NEXT

- Commission a BAL assessment (AS 3959) by an accredited practitioner.
- NSW: check Planning for Bushfire Protection (habitable buildings).
- Check the s10.7 planning certificate or the RFS Check and Plan map for bush fire prone land status.
- Confirm against the s10.7 planning certificate for the lot.

06 / SECTION

Council requirements

Requirements loaded for R2 and a dwelling house, each cited to the council document.

> These values were extracted automatically from council documents and may be wrong, incomplete or superseded. Items flagged 'Low confidence' or 'Not found' need confirming with council before they are relied on.

REQUIREMENT	VALUE	SOURCE (DOCUMENT, PAGE, QUOTE)	FLAG
SETBACKS			
Setback: dwelling house, articulation encroachment	**0.5 m**	GSC Development Control Plan 2025, p.38, C.1.1 Setbacks, Table 2 - Building Setbacks “Articulation 0.5m for up to 10% of the building frontage”	
Setback: dwelling house, front	**6.5 m** 6.5 m or the average of the adjoining dwellings, whichever is less	GSC Development Control Plan 2025, p.37, C.1.1 Setbacks, Table 2 - Building Setbacks “Primary Frontage 6.5m or the average of the adjoining dwellings whichever is less”	
Setback: dwelling house, garage behind front building line	**1 m**	GSC Development Control Plan 2025, p.37, C.1.1 Setbacks, Table 2 - Building Setbacks “Garage Min. 1m behind the front building line”	
Setback: dwelling house, rear	**0.9 m** 0.9 m or compliance with the BCA	GSC Development Control Plan 2025, p.37, C.1.1 Setbacks, Table 2 - Building Setbacks “Side and rear 0.9m or compliance with the BCA^”	
Setback: dwelling house, secondary frontage garage	**5.5 m**	GSC Development Control Plan 2025, p.37, C.1.1 Setbacks, Table 2 - Building Setbacks “3m for a building wall and 5.5m for a garage or carport that is attached to the building wall”	
Setback: dwelling house, secondary frontage	**3 m**	GSC Development Control Plan 2025, p.37, C.1.1 Setbacks, Table 2 - Building Setbacks “3m for a building wall and 5.5m for a garage or carport that is attached to the building wall”	
Setback: dwelling house, side	**0.9 m** 0.9 m or compliance with the BCA (less than 900 mm considered where BCA fire rating satisfied)	GSC Development Control Plan 2025, p.37, C.1.1 Setbacks, Table 2 - Building Setbacks “Side and rear 0.9m or compliance with the BCA^”	
PARKING, ACCESS AND DRIVEWAY			
Access: crossing standard	**Council standard access drawings + AS2890 series**	GSC Development Control Plan 2025, p.39, C.1.4 Internal driveway, access and parking “Access from the public road to the property boundary to comply with Council's standard access drawings (relevant to the type of development) and th...”	
Access: internal surface	**concrete, bitumen, interlocking pavers or asphalt**	GSC Development Control Plan 2025, p.39, C.1.4 Internal driveway, access and parking “All internal vehicle access, and manoeuvring areas to the designated parking area (including the designated parking area), are to be concrete, bitu...”	
Access: multiple access points	**not permitted unless lot has two road frontages**	GSC Development Control Plan 2025, p.39, C.1.4 Internal driveway, access and parking “Multiple vehicle access points and laybacks are not permitted, will generally only be considered in circumstances where the lot has two road fronta...”	
Driveway: maximum crossings per frontage	**2**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.44, 2.8.7 Vehicular crossings and accesses, Table 2-H “Maximum number of crossings per street frontage 2”	
Driveway: maximum width	**4.5 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.44, 2.8.7 Vehicular crossings and accesses, Table 2-H “Width of access (excluding layback splays) 3.0 - 4.5m”	

REQUIREMENT	VALUE	SOURCE (DOCUMENT, PAGE, QUOTE)	FLAG
Driveway: minimum crossing kerb separation	**2 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.44, 2.8.7 Vehicular crossings and accesses, Table 2-H “Minimum kerb separation distance between crossings 2m”	
Driveway: minimum culvert diameter mm, rural	**450 mm**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.45, 2.8.7 Vehicular crossings and accesses “The minimum size for piped culverts is to be 450mm diameter in rural areas and 375mm diameter in rural residential areas.”	
Driveway: minimum culvert width	**4.5 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.45, 2.8.7 Vehicular crossings and accesses “The minimum width of culverts shall be 4.5 metres.”	
Driveway: minimum separation from common boundary	**0.5 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.44, 2.8.7 Vehicular crossings and accesses, Table 2-H “between crossings and common property boundary 0.5m”	
Driveway: minimum separation	**6 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.44, 2.8.7 Vehicular crossings and accesses, Table 2-H “Minimum distance from crossing to corner allotment boundary 6m”	
Driveway: minimum width	**3 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.44, 2.8.7 Vehicular crossings and accesses, Table 2-H “Width of access (excluding layback splays) 3.0 - 4.5m”	
Driveway: rural gate recessed	**Yes / required**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.45, 2.8.7 Vehicular crossings and accesses “Gated accesses in rural areas or areas where the posted speed limit for the road is greater than 80km/h shall have the gate recessed into the prope...”	
Parking: dwelling house, r2 one space behind front building line	**Yes / required**	GSC Development Control Plan 2025, p.16, B.1.2 Parking provision requirements, Table 1 “Development in R2 and R3 zones must locate at least one car parking space behind the front building line.”	
Parking: dwelling house, spaces	**2**	GSC Development Control Plan 2025, p.16, B.1.2 Parking provision requirements, Table 1 “Dwelling House 2 spaces per dwelling”	
FLOOD			
Flood: freeboard	**0.5 m**	GSC Development Control Plan 2025, p.22, B.5 Flooding (introduction) “Council has adopted the 1% Annual Exceedance Probability (AEP) plus 0.5m freeboard, as its Flood Planning Level (FPL).”	
Flood: habitable floor at or above fpl	**Yes / required**	GSC Development Control Plan 2025, p.24, B.5.2 Residential - new development, control b “Floor levels of habitable rooms are to be at or above the Flood Planning Level.”	
Flood: onsite sewage no discharge to floodwater	**Yes / required**	GSC Development Control Plan 2025, p.23, B.5.1 General, control d “On-site sewage management systems located within a flood planning area shall be designed to ensure that effluent cannot be discharged into flood wa...”	
Flood: outbuilding flood compatible materials	**Yes / required**	GSC Development Control Plan 2025, p.24, B.5.4 Non habitable extensions or alterations, outbuildings and swimming pools, control a “Any portion of a building that may be subject to inundation is to be built from flood compatible materials.”	
Flood: outbuilding sensitive equipment above 1pct aep	**Yes / required**	GSC Development Control Plan 2025, p.24, B.5.4 Non habitable extensions or alterations, outbuildings and swimming pools, control c “All flood sensitive equipment shall be located above the 1% AEP flood level.”	

REQUIREMENT	VALUE	SOURCE (DOCUMENT, PAGE, QUOTE)	FLAG
Flood: planning level aep	**1%**	GSC Development Control Plan 2025, p.22, B.5 Flooding (introduction) “Council has adopted the 1% Annual Exceedance Probability (AEP) plus 0.5m freeboard, as its Flood Planning Level (FPL).”	
Flood: residential garage at or above 1pct aep	**Yes / required**	GSC Development Control Plan 2025, p.24, B.5.2 Residential - new development, control d “Residential garages are to be at or above the 1% AEP level.”	
Flood: safe access freeboard	**0.5 m**	GSC Development Control Plan 2025, p.24, B.5.2 Residential - new development, control c “Flood safe access and emergency egress for all flood events up to the 1% AEP event plus 500mm freeboard is to be provided.”	
BUSHFIRE			
Bushfire: exempt clearing trees within	**10 m**	NSW Planning: Bushfires (10/50 vegetation clearing), p.1, Bushfires: 10/50 vegetation clearing entitlement “trees and vegetation within 10 m of specified bushfire-prone buildings”	
Bushfire: exempt clearing undergrowth within	**50 m**	NSW Planning: Bushfires (10/50 vegetation clearing), p.1, Bushfires: 10/50 vegetation clearing entitlement “undergrowth within 50 m of specified bushfire-prone buildings.”	
WATER, SEWER, STORMWATER AND RAINWATER TANKS			
Rainwater tank: exempt, maximum capacity	**10000 L**	NSW fact sheet: Hot water systems and rainwater tanks - rules for exempt and complying development, p.2, Rainwater tanks (above ground): exempt development, Codes SEPP cl 2.63 (via fact sheet) “10,000 L, when the development is on land zoned rather than RU1, RU2, RU3, RU4, RU6,”	LOW CONFIDENCE
Rainwater tank: exempt, minimum boundary setback m, tank over 1 8m high	**0.45 m**	NSW fact sheet: Hot water systems and rainwater tanks - rules for exempt and complying development, p.2, Rainwater tanks (above ground): exempt development (via fact sheet) “450 mm from any lot boundary”	
Rainwater tank: location behind street setback	**Yes / required**	GSC Development Control Plan 2025, p.27, B.7 Utilities and services, control e “Water tanks are to be located behind the street setback of the existing or proposed dwelling (unless placed below the ground).”	
Rainwater tank: maximum height m, urban zones	**3.2 m**	GSC Development Control Plan 2025, p.27, B.7 Utilities and services, control e “The maximum height of a water tank is 3.2 metres in urban zones.”	
Rainwater tank: underground tank minimum clearance	**1 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.97, 3.11 Underground storage tanks “Underground storage tanks must not be installed over or within 1.0m of a water main, sewer main, on-site wastewater system or on-site wastewater di...”	
Sewer: house connection minimum cover	**0.3 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.130, 5.5.10 Design criteria (sewer) “minimum 300 millimetres of cover laid at a minimum grade of 1 in 60.”	
Sewer: house connection minimum grade 1 in	**60 (1 in N)**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.130, 5.5.10 Design criteria (sewer) “minimum 300 millimetres of cover laid at a minimum grade of 1 in 60.”	
Sewer: junction minimum diameter	**150 mm**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.130, 5.5.10 Design criteria (sewer) “A 150 millimetre diameter sewer junction is to be provided within each lot.”	
Stormwater: designed per eng standards	**GSC Engineering Design Minimum Standards**	GSC Development Control Plan 2025, p.43, C.5 Stormwater, control a “All stormwater systems shall be designed and constructed in accordance with Council's Engineering Design Minimum Standards.”	

REQUIREMENT	VALUE	SOURCE (DOCUMENT, PAGE, QUOTE)	FLAG
Stormwater: on-site detention roof plumbing design aep	**5%**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.96, 3.10.4.2-3.10.4.3 On-site detention systems in small developments “All roof water plumbing including tank connections shall cater for the 5% AEP year, to AS 3500.”	
Stormwater: on-site detention roof water to BASIX tank	**Yes / required**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.96, 3.10.4.2 On-site detention systems in small developments “All roof water shall be directed to the proposed (BASIX) water storage tank.”	
Stormwater: rainwater tank excluded from detention volume	**Yes / required**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.96, 3.10.4.2 On-site detention systems in small developments “Rainwater tanks shall not be included in detention volume calculations.”	
Util: build over sewer policy	**Council Building over Sewer Policy (policy document not obtained)**	GSC Development Control Plan 2025, p.26, B.7 Utilities and services, control c “Where a structure is proposed in proximity to a Council sewer main or other infrastructure, all design and construction shall be in accordance with...”	
Utilities: servicing strategy required	**Yes / required**	GSC Development Control Plan 2025, p.26, B.7 Utilities and services, control a “A servicing strategy is required with all development applications to demonstrate that availability and feasibility of providing water, sewer and s...”	
Water: minimum cover	**0.5 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.119, 4.7.7.4 Service connections - locations (water) “The services are to have a minimum cover of 500mm under carriageways and 300mm in footway reserves.”	
Water: minimum cover m, footway reserve	**0.3 m**	GSC Engineering Design Minimum Standards for Subdivisions and Developments, p.119, 4.7.7.4 Service connections - locations (water) “The services are to have a minimum cover of 500mm under carriageways and 300mm in footway reserves.”	
Water: potable connection required if available	**Yes / required**	GSC Development Control Plan 2025, p.26, B.7 Utilities and services, control d “If available, connection to potable water supply is required.”	
Water: unserviced minimum tank storage	**60000 L**	GSC Development Control Plan 2025, p.26, B.7 Utilities and services, control d “Where no potable water supply is available, minimum tank storage of 60,000 litres is required, excluding any water required for firefighting purposes.”	
BASIX			
Basix: certificate required new dwelling	**Yes / required**	NSW Planning Portal: BASIX, p.1, BASIX overview “you will need a BASIX certificate.”	
Basix: pool spa threshold	**40000 L**	NSW Planning Portal: BASIX, p.1, BASIX overview “installing a pool or spa of more than 40,000 litres”	
Basix: renovation threshold aud	**50000 AUD**	NSW Planning Portal: BASIX, p.1, BASIX overview “undertaking renovations of $50,000 or more”	
Basix: water, benchmark l per person per year	**90340 L**	NSW Planning Portal: BASIX Water section, p.1, BASIX Water section “The benchmark is 90,340 litres of water per person per year”	
Basix: water, maximum reduction target	**40%**	NSW Planning Portal: BASIX Water section, p.1, BASIX Water section “The 40% reduction standard applies to 90% of new residential development and 98% of high-growth areas.”	LOW CONFIDENCE
SITE			
Site: slope geotech threshold	**15%**	GSC Development Control Plan 2025, p.21, B.3 Slope and land stability “Development on slopes greater than 15% require a detailed geotechnical investigation”	

NOT FOUND, TO BE CONFIRMED

ITEM	WHY IT IS NOT SHOWN
landuse.permissibility.*	Gunnedah LEP 2012 land use tables and zone objectives not obtained (legislation.nsw.gov.au and AustLII are behind a Cloudflare bot challenge).
lot.min_lot_size_m2	LEP cl 4.1 / Lot Size Map not obtained. The 650 m2 figure was supplied in the task, not from a cited document.
building.max_height_m	LEP cl 4.3 / Height of Buildings Map not obtained. DCP 2025 only caps outbuildings (4.8 m in R2) and farm buildings on sites < 10 ha (7 m).
site_coverage / landscaped_area / floor_space_ratio	DCP 2025 contains no site coverage, landscaped-area or FSR control for dwelling houses or secondary dwellings (text searched for 'site cover', 'coverage', 'landscaped area', 'floor space').
setback.outbuilding.side_m / rear_m	DCP 2025 C.4 states only front/secondary-frontage setbacks for outbuildings in R2; Table 2 'Side and rear 0.9m or compliance with the BCA' is not expressly extended to outbuildings.
exempt.shed.*	Codes SEPP 2008 cl 2.17-2.18 not obtained (Cloudflare 403). The NSW fact sheet for sheds contains no numeric standards. Carport exempt numbers were captured instead (carport.exempt.*) and are NOT shed numbers.
complying.outbuilding.* / complying.secondary_dwelling.* / complying.dwelling.*	Codes SEPP and SEPP (Housing) 2021 Sch 1 not obtained. Only the 450 m2 minimum lot area for secondary dwelling CDC was found (NSW FAQ). The Inland Code LGA list is an image map.
driveway.max_grade_pct / driveway.max_grade_change_pct / rural driveway width	Engineering Design Minimum Standards give crossing width/spacing (residential allotments), culvert and gate rules but no driveway grade limits, and no width figure for rural accesses. Council standard drawings (RD0010, RD011, RD012) and AS 2890.1 were not obtained.
sewer.min_grade_pct (mains)	Minimum grade per diameter sits in Eng Standards Part 5 Table B; not extracted (subdivision main design, not needed for a single-lot house/granny flat). House connection grade 1 in 60 was captured.
sewer.connection_availability	Site-specific: needs Council's sewer/water network maps. DCP B.7(d) only requires connection to potable water if available.

07 / SECTION

Civil summary

Indicative civil quantities and levels. Everything on this page is unverified.

UNVERIFIED Based on public data and defaults. Not survey, engineering design or certification.

Terrain

SOURCE	NSW_5M_Elevation ImageServer exportImage
POINTS SAMPLED	144
GROUND RANGE	RL 264.1 to 265.9 m AHD (1.8 m relief across the lot)
VERTICAL ACCURACY	5 m (unknown (placeholder))

> The 5 m DEM is derived from stereo imagery and is too coarse for detailed cut and fill on a residential lot. Commission a detail survey before relying on levels or earthworks quantities.

Floor level

MINIMUM FLOOR LEVEL	Not set: no flood level has been supplied. Minimum floor level = flood level + freeboard.
FREEBOARD	0.5 m (Gunnedah Development Control Plan 2025, p.22)
TO DO	Ask council for the design flood level (1% AEP) for this lot.

Earthworks

Not calculated: no pad design was supplied and the terrain model is a coarse 5 m DEM.

Driveway and crossover

DESIGN WIDTH	3.0 m
DESIGN VEHICLE	B85
MAXIMUM GRADE	Not computed (no survey levels along the route)
STANDARD	default (AS/NZS 2890.1) used
COUNCIL WIDTH RANGE	3 to 4.5 m (Gunnedah Engineering Design Minimum Standards for Subdivisions and Developments, p.44): design width is within the range

The driveway check is preliminary screening, not certified compliance with AS/NZS 2890.1.

Services and rainwater tank

EXISTING SERVICES	0 service assets entered; no BYDA plans were supplied, so existing underground services are unknown
PROPOSED CONNECTIONS	0
RAINWATER TANK	Not sized in this run

Service positions and depths are indicative. Obtain current BYDA plans and physically locate services (potholing) before any excavation.

08 / SECTION

Appendix

Data sources, method, limits and acknowledgements.

A. Data sources

SERVICE / LAYER	USED FOR	MAPPING DATE	RETRIEVED	COPYRIGHT / NOTES
Planning/Hazard / Flood Planning	Flood planning area	not published	12 Oct 2026	Not stated by the service.
Fire/BFPL / NSW Bush Fire Prone Lands	Bush fire prone land	3 Oct 2026	12 Oct 2026	The NSW BFPL Map is collated and merged together from individual NSW local council maps which are submitted by the local council for certification. The maps are often a product of or derived from local and state vegetation mapping with input from Local Council and RFS staff. In some cases the maps are produced under contract for local council by various companies. Please refer to the individual metadata statements for each LGA BFPL Map. (text from ePlanning/Planning_Portal_Hazard layer 229, same dataset)
Planning/EPI_Primary_Planning_Layers / Heritage	Heritage item	29 Jun 2012	12 Oct 2026	Not stated by the service.
Planning/EPI_Primary_Planning_Layers / Heritage	Heritage conservation area	not published	12 Oct 2026	Not stated by the service.
Planning/Protection / Acid Sulfate Soils	Acid sulfate soils	not published	12 Oct 2026	Not stated by the service.
ePlanning/BiodiversityValuesMap / Biodiversity Values	Biodiversity values	not published	12 Oct 2026	Not stated by the service.
Planning/SEPP_Resilience_and_Hazards_2021 / Coastal Wetlands	Coastal wetlands	not published	12 Oct 2026	Not stated by the service.
Planning/Protection / Riparian Lands and Watercourses	Riparian land and watercourses	not published	12 Oct 2026	Not stated by the service.
Planning/EPI_Primary_Planning_Layers / Land Reservation Acquisition	Land reservation acquisition	not published	12 Oct 2026	Not stated by the service.
Planning/Protection / Airport Noise	Airport noise and obstacles	not published	12 Oct 2026	Not stated by the service.
ePlanning/Planning_Portal_Subsidence_Advisory / Mine Subsidence District	Mine subsidence district	not published	12 Oct 2026	Not stated by the service.
Planning/SEPP_Resilience_and_Hazards_2021 / Land Application Map	State policy land application	1 Mar 2022	12 Oct 2026	Not stated by the service.
Planning/Development_Control / Urban Release Area	Urban release area	not published	12 Oct 2026	Not stated by the service.
Planning/EPI_Primary_Planning_Layers / Lot Size	Minimum lot size	13 Dec 2024	12 Oct 2026	Not stated by the service.
Planning/EPI_Primary_Planning_Layers / Height of Building	Maximum building height	not published	12 Oct 2026	Not stated by the service.
Planning/EPI_Primary_Planning_Layers / Floor Space Ratio	Floor space ratio	21 Oct 2022	12 Oct 2026	Not stated by the service.

OTHER SOURCES	ATTRIBUTION	DATE	LICENCE NOTE
Aerial imagery (NSW Imagery)	Imagery: NSW Spatial Services © Department of Customer Service 2020 (includes third-party imagery: AAM, Jacobs Group Ausimage, LANDSAT)	18 Oct 2011	Licence terms not stated in service metadata: verify terms before commercial use.
Lot boundaries (NSW Cadastre)	NSW Spatial Services (Department of Customer Service). Indicative, not a survey.	-	

OTHER SOURCES	ATTRIBUTION	DATE	LICENCE NOTE
Ground levels (NSW 5 m DEM)	NSW_5M_Elevation ImageServer exportImage. DFSI 2019 (as stated by service copyrightText; no licence text published in service metadata)	-	
Council requirements	Council planning and engineering documents cited line by line in section 6; extracted automatically.	-	

B. Method

- The lot boundary from the NSW cadastre is intersected with each mapped layer (metric MGA coordinates). 'Affected' means the mapped area overlaps the lot.
- 'Nearby' means there is no overlap, but a mapped feature lies within the layer's screening distance (for example 100 m for bush fire prone vegetation); the distance is measured from the lot boundary.
- 'Not affected' means no mapped feature was found on or within the screening distance of the lot, in that layer only. 'Not checked' means the layer could not be queried.
- Trigger rules list what a mapped constraint may require. Values appear only when cited to a document; otherwise the item is shown as 'To be confirmed'.
- Figures show the lot over NSW aerial imagery with mapped polygons clipped to the figure window. Mapping and imagery dates are shown on each figure.

C. Limits of this report

- Not checked: contaminated land; road and rail corridors. Not checked is not clear.
- Only layers listed in section 4 were screened. Local council overlays, DCP maps, flood studies, easements, covenants and underground services are not covered unless stated.
- Boundaries are from the cadastre and are not a survey. Aerial imagery may be years old and does not show current buildings or vegetation reliably.
- Flood planning area: This layer only covers LEP flood planning maps. Council flood studies, overland-flow mapping and local flood-prone areas are not included, so 'not mapped' does not mean flood-free.
- Bush fire prone land: This report screens the lot against mapped vegetation out to 100 m. Whether the land is formally designated bush fire prone is confirmed on the s10.7 planning certificate.
- Heritage item: Only LEP heritage mapping is checked. The State Heritage Register and unlisted Aboriginal heritage are not covered.
- Heritage conservation area: Only LEP conservation-area mapping is checked.
- Acid sulfate soils: Class 5 land only matters if works could lower the water table on adjacent higher-class land.
- Biodiversity values: The map is a trigger only: clearing outside mapped land can still need approval under other rules.
- Coastal wetlands: Only coastal wetlands are queried. Coastal environment and coastal use areas are not checked.
- Riparian land and watercourses: Only LEP riparian and watercourse mapping is queried; unmapped creeks and drainage lines are not covered.
- Airport noise and obstacles: Only LEP airport noise mapping is queried. The obstacle limitation surface layer is not yet connected.
- State policy land application: Other SEPPs (for example Housing, Transport and Infrastructure) apply by their own rules and are not mapped here.

> Not checked is not clear. A layer marked 'Not checked' could not be queried, so the site may well be affected. It must be checked with the council before design or purchase decisions are made.

D. Acknowledgements

The user gave the following acknowledgements (Terms and Conditions, Schedule A) before this report was produced.

REF	ACKNOWLEDGEMENT
A1	I acknowledge that the underground service information shown is indicative only and that, before any excavation, I must obtain current BYDA plans from the asset owners and have all services physically located (for example by potholing or other non-destructive methods), with all work health and safety responsibility remaining with me.
A2	I acknowledge that the setbacks and planning controls shown were extracted automatically from council documents, may be wrong or out of date, and that I must verify them against the current LEP, DCP or planning scheme (including overlays and performance-based provisions) and with the relevant council before relying on them.
A3	I acknowledge that cut and fill volumes are indicative estimates based on third-party terrain data and assumptions, and are not to be used for pricing, ordering or earthworks without independent verification by a qualified surveyor or engineer.

REF	ACKNOWLEDGEMENT
A4	I acknowledge that retaining wall outputs are indicative only, are not structural or geotechnical design, rely on assumed soil and loading conditions, and that any wall over 1.0 m (and any other wall as required) must be designed by a suitably qualified engineer.
A5	I acknowledge that the driveway crossover check is a preliminary screening only, is not certified compliance with AS/NZS 2890.1, and that council engineering standards and approval requirements govern.
A6	I acknowledge that the cadastral boundaries shown are indicative and are not a survey, and that I must obtain an identification survey from a registered surveyor before relying on boundary positions.
A7	I acknowledge that the alignment of my uploaded plans is only as accurate as the plans I provided, may be affected by scale, print-to-fit or mirroring errors, is not a survey set-out, and that the architect or designer remains responsible for the plans and their current revision.
A8	I warrant that I have all rights, licences and consents (including client and confidentiality consents) to upload this material and to allow the Operator and its service providers, including AI providers that may be located overseas, to process it.
A9	I acknowledge that the rainwater tank and hydrology outputs are indicative only, are not engineering design or certification, and that BASIX or Queensland Development Code compliance certificates and any stormwater approvals remain my responsibility.

E. Legal statement

This report is informational and indicative only. It is not a planning certificate under section 10.7 of the NSW Environmental Planning and Assessment Act 1979, and it is not a council property or planning report. Mapping data may be out of date, incomplete or inaccurate, and cadastral boundaries are not a survey. Verify every matter with the relevant council and authority, and use a registered surveyor, a qualified engineer and an accredited certifier where their sign-off is needed.