

Object Oriented Programming

Everything in python is an object

```
In [3]: 1 l=["a","b","c"]
        2 l.upper()
```

```
-----
AttributeError                                Traceback (most recent call last)
<ipython-input-3-cfff6596d849> in <module>
      1 l=["a","b","c"]
----> 2 l.upper()


AttributeError: 'list' object has no attribute 'upper'
```

```
In [4]: 1 s="vishal"
        2 s.append("x")
```

```
-----
AttributeError                                Traceback (most recent call last)
<ipython-input-4-a1b61ecaba3e> in <module>
      1 s="vishal"
----> 2 s.append("x")

AttributeError: 'str' object has no attribute 'append'
```

oop is gives power of programer to create own datatype

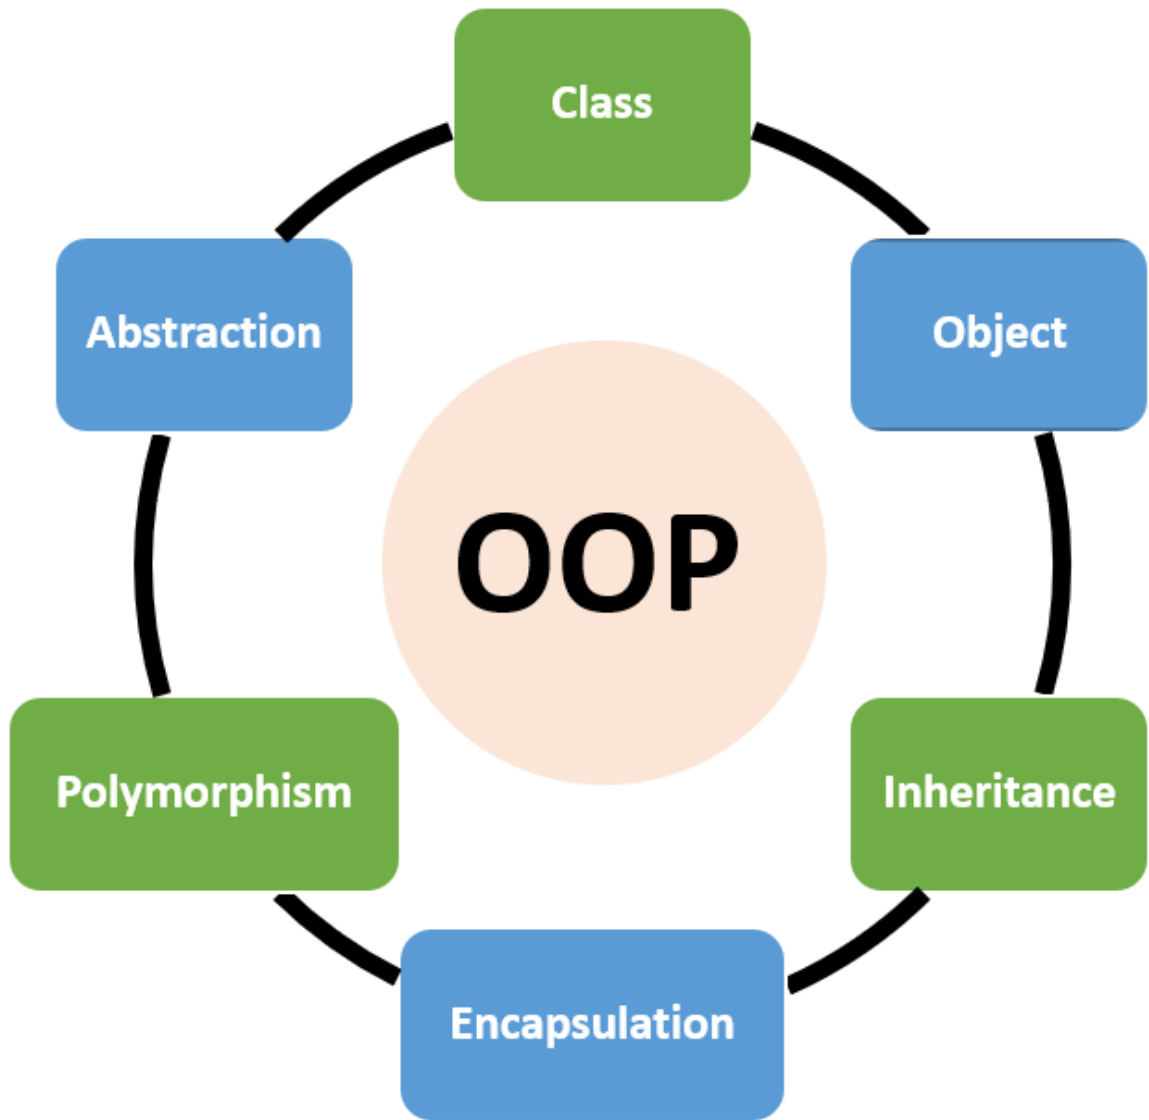

Difference between oop and pop(Procedure-oriented programming)

BASIS FOR COMPARISON	POP	OOP
Basic	Procedure/Structure oriented.	Object-oriented.
Approach	Top-down.	Bottom-up.
Basis	Main focus is on "how to get the task done" i.e. on the procedure or structure of a <u>program</u> .	Main focus is on 'data security'. Hence, only objects are permitted to access the entities of a class.
Division	Large program is divided into units called functions.	Entire program is divided into objects.
Entity accessing mode	No access specifier observed.	Access specifier are "public", "private", "protected".
Overloading or Polymorphism	Neither it <u>overload</u> functions nor operators.	It overloads functions, constructors, and operators.
Inheritance	<u>Their</u> is no provision of inheritance.	Inheritance achieved in three modes public private and protected.

class : class is blueprint

A Python class is a group of attributes and methods.

```
[2]: 1 L = [1,2,3]
      2 print(type(L))
```

```
<class 'list'>
```

```
In [3]: 1 l=[1,2,3]
        2 l.isdigit()
        3 #here list is class,l is our object
        4 #all data type are class.and fuctions are method of this class
```

```
-----
AttributeError                                Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_18208\30446165.py in <module>
      1 l=[1,2,3]
----> 2 l.isdigit()
      3 #here list is class,l is our object
      4 #all data type are class.and fuctions are method of this class

AttributeError: 'list' object has no attribute 'isdigit'
```

class

What is Attribute ?

- Attributes are represented by variable that contains data.

What is Method?

- Method performs an action or task. It is similar to function.

1. data or attribute or property
2. fuction or method or behavior

How to Create Class

```
class Classname(object) :  
    def __init__(self):  
        self.variable_name = value  
        self.variable_name = 'value'  
    def method_name(self):  
        Body of Method
```

Method

Attributes

```
class Classname :  
    def __init__(self):  
        self.variable_name = value  
        self.variable_name = 'value'  
    def method_name(self):  
        Body of Method
```


class - class keyword is used to create a class

object - object represents the base class name from where all classes in Python are derived. This class is also derived from object class. This is optional.

- **init()** – This method is used to initialize the variables. This is a special method. We do not call this method explicitly.
- **self** – self is a variable which refers to current class instance/object.

Rule

- The class name can be any valid identifier.
- It can't be Python reserved word.
- A valid class name starts with a letter, followed by any number of letter, numbers or underscores.
- A class name generally starts with Capital Letter.

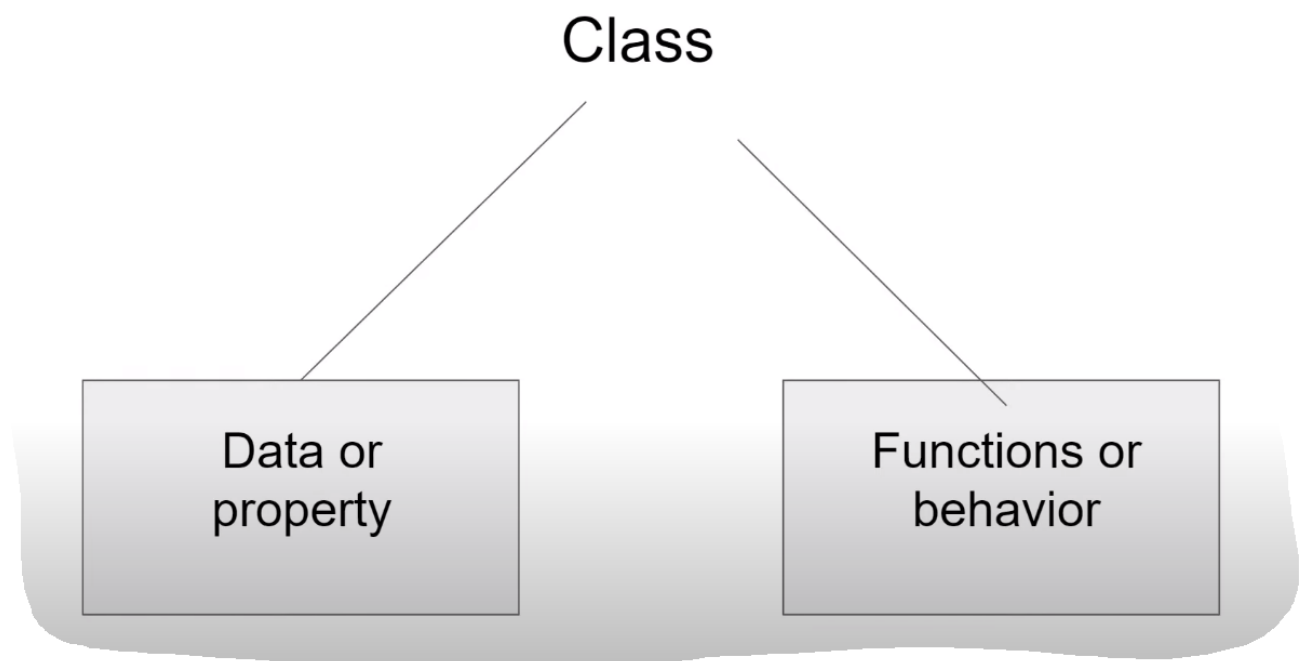

object: object is an instance of the class

The object is a class type variable or class instance. To use a class, we should create an object to the class. Instance creation represents allotting memory necessary to store the actual data of the variables. Each time you create an object of a class a copy of each variable defined in the class is created. In other words, you can say that each object of a class has its own copy of data members defined in the class.

Example:

1. Bike Honda // Honda=Bike()
2. Sport cricket// cricket=sport()
3. Animal Dog// Dog=Animal()

syntax to create an object

object_name = class_name()

object_name = class_name(arg)

```
In [4]: 1 class Mobile:
2         def __init__(self):
3             self.model = "RealMe X"
4         def show_model (self):
5             print("Model:", self.model)
```

```
In [5]: 1 realme = Mobile()
```

```
In [6]: 1 class Mobile:
2         def __init__(self, m):
3             self.model = m
4         def show_model (self, p):
5             price = p# Local Variable
6             print('Model:', self.model, 'Price:', price)
```

```
In [7]: 1 realme = Mobile('RealMe X')
```

realme = Mobile()

- A block of memory is allocated on heap. The size of allocated memory is to be decided from the attributes and methods available in the class (Mobile).
- After allocating memory block, the special method **init()** is called internally. This method stores the initial data into the variables.
- The allocated memory location address of the instance is returned into object (realme).
- The memory location is passed to self.

We can access variable and method of a class using class object or instance of class.

```
In [8]: 1
2 #object_name.variable_name
3 realme.model
4
5 #object_name.method_name ( )
6 realme.show_model (500 );
7
8 #object_name.method_name (parameter_list)
9 realme.show_model(1000);
```

Model: RealMe X Price: 500
Model: RealMe X Price: 1000

```
In [9]: 1 # object literal so we don't follow above syntax
2 L = [1,2,3]
```

```
In [10]: 1 L = list()
2 L
```

Out[10]: []

```
In [11]: 1 s = str()
2 s
```

Out[11]: ''

class name always in Pascal Case

HelloWorld

```
In [17]: 1 class Atm:
2
3     # constructor(special function)->superpower ->
4     def __init__(self):
5         print(id(self))
6         self.pin = ''
7         self.balance = 0
8         print("always come")
```

```
In [18]: 1 obj=Atm()
```

2442232255296
always come

```
In [21]: 1 vis=Atm()
```

2442232256256
always come

```
In [19]: 1 print(type(obj))
```

<class '__main__.Atm'>

In [20]: 1 print(obj.pin)

In [16]: 1 print(obj.balance)

0

VISHAL ACHARYA

VISHAL ACHARYA

In [33]:

```
1 class Atm:
2
3     # constructor
4     def __init__(self):
5         # print(id(self))
6         self.pin = ''
7         self.balance = 0
8         self.menu()
9
10    def menu(self):
11        user_input = input("""
12        Hi how can I help you?
13        1. Press 1 to create pin
14        2. Press 2 to change pin
15        3. Press 3 to check balance
16        4. Press 4 to withdraw
17        5. Anything else to exit
18        """)
19
20        if user_input == '1':
21            self.create_pin()
22        elif user_input == '2':
23            self.change_pin()
24        elif user_input == '3':
25            self.check_balance()
26        elif user_input == '4':
27            self.withdraw()
28        else:
29            exit()
30
31    def create_pin(self):
32        user_pin = input('enter your pin')
33        self.pin = user_pin
34
35        user_balance = int(input('enter balance'))
36        self.balance = user_balance
37
38        print('pin created successfully')
39        self.menu()
40
41    def change_pin(self):
42        old_pin = input('enter old pin')
43
44        if old_pin == self.pin:
45            # let him change the pin
46            new_pin = input('enter new pin')
47            self.pin = new_pin
48            print('pin change successful')
49            self.menu()
50        else:
51            print('enter correct pin')
52            self.menu()
53
54    def check_balance(self):
55        user_pin = input('enter your pin')
56        if user_pin == self.pin:
57            print('your balance is ', self.balance)
58        else:
59            print('enter correct pin')
60        self.menu()
61
62    def withdraw(self):
63        user_pin = input('enter the pin')
```

```
64     if user_pin == self.pin:
65         # allow to withdraw
66         amount = int(input('enter the amount'))
67         if amount <= self.balance:
68             self.balance = self.balance - amount
69             print('withdrawl successful.balance is',self.balance)
70         else:
71             print('increase your balance')
72     else:
73         print('enter correct pin')
74     self.menu()
```

In [34]:

```
1 sbi=Atm()
```

```
Hi how can I help you?
1. Press 1 to create pin
2. Press 2 to change pin
3. Press 3 to check balance
4. Press 4 to withdraw
5. Anything else to exit
1
```

```
enter your pin4555
enter balance100000000000
pin created successfully
```

```
Hi how can I help you?
1. Press 1 to create pin
2. Press 2 to change pin
3. Press 3 to check balance
4. Press 4 to withdraw
5. Anything else to exit
2
```

```
enter old pin4555
enter new pin1212
pin change successful
```

```
Hi how can I help you?
1. Press 1 to create pin
2. Press 2 to change pin
3. Press 3 to check balance
4. Press 4 to withdraw
5. Anything else to exit
3
```

```
enter your pin1212
your balance is 100000000000
```

```
Hi how can I help you?
1. Press 1 to create pin
2. Press 2 to change pin
3. Press 3 to check balance
4. Press 4 to withdraw
5. Anything else to exit
4
```


```
enter the pin1212
enter the amount5000
withdrawl successful.balance is 9999995000
```

```
Hi how can I help you?
1. Press 1 to create pin
2. Press 2 to change pin
3. Press 3 to check balance
4. Press 4 to withdraw
5. Anything else to exit
5
```

Class Diagram

"+" sign mean public

"-" sign mean private

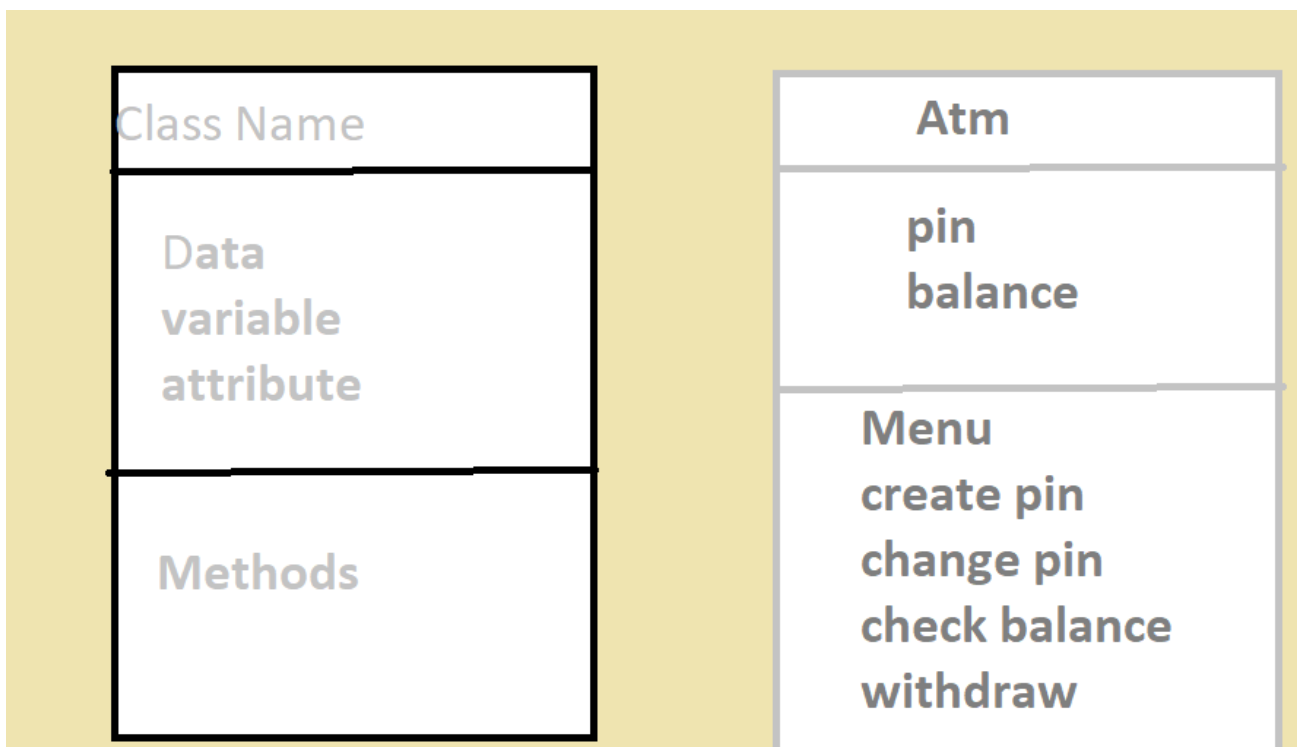


Method VS Function

Function: A function is a block of code to carry out a specific task, will contain its own scope and is called by name. All functions may contain zero(no) arguments or more than one arguments. On exit, a function can or can not return one or more values.

Method: A method in python is somewhat similar to a function, except it is associated with object/classes. Methods in python are very similar to functions except for two major differences.

- The method is implicitly used for an object for which it is called.
- The method is accessible to data that is contained within the class.

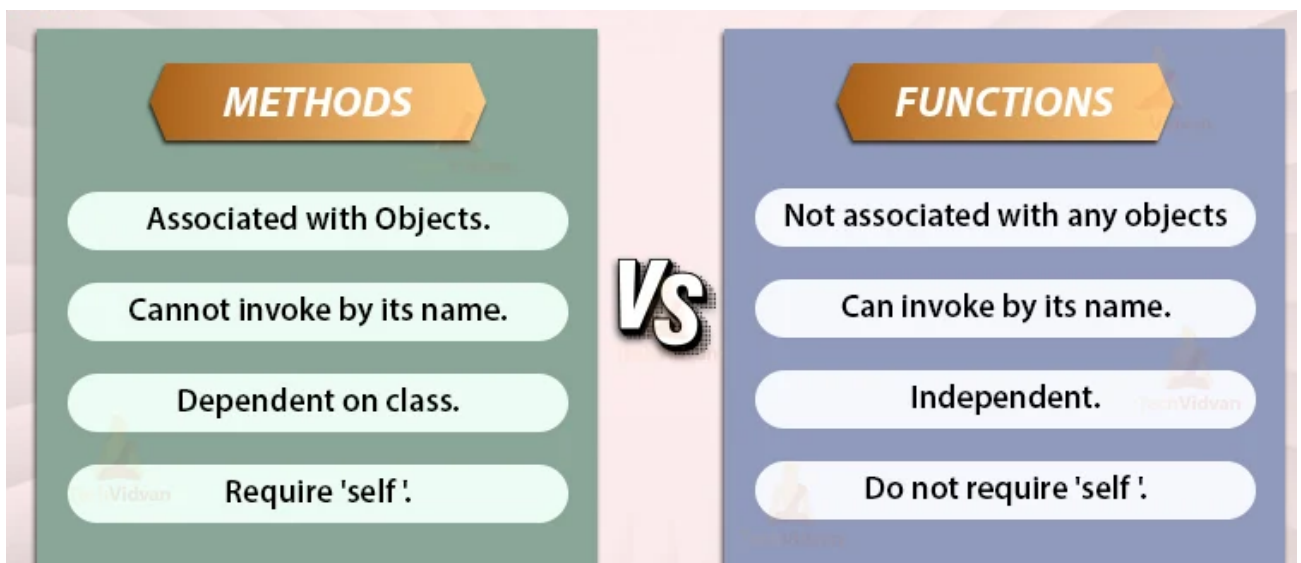

In [1]:

```

1 #example
2 s="hello"
3 print(len(s))#function bcz it is outside string class
4 print(s.upper())#method bcz it is inside string class

```

```

5
HELLO

```

Magic Methods (Dunder Methods)

Initialization and Construction	Description
<code>__new__(cls, other)</code>	To get called in an object's instantiation.
<code>__init__(self, other)</code>	To get called by the <code>__new__</code> method.
<code>__del__(self)</code>	Destructor method.

Operator Magic Methods	Description
<code>__add__(self, other)</code>	To get called on add operation using + operator
<code>__sub__(self, other)</code>	To get called on subtraction operation using - operator.
<code>__mul__(self, other)</code>	To get called on multiplication operation using * operator.
<code>__floordiv__(self, other)</code>	To get called on floor division operation using // operator.
<code>__truediv__(self, other)</code>	To get called on division operation using / operator.
<code>__mod__(self, other)</code>	To get called on modulo operation using % operator.
<code>__pow__(self, other[, modulo])</code>	To get called on calculating the power using ** operator.
<code>__lt__(self, other)</code>	To get called on comparison using < operator.
<code>__le__(self, other)</code>	To get called on comparison using <= operator.
<code>__eq__(self, other)</code>	To get called on comparison using == operator.
<code>__ne__(self, other)</code>	To get called on comparison using != operator.
<code>__ge__(self, other)</code>	To get called on comparison using >= operator.

What is a Constructor?

A constructor is a unique function that gets called automatically when an object is created of a class. The main purpose of a constructor is to initialize or assign values to the data members of that class. It cannot return any value other than none.

- main application: if your app connect to net connection, database connect or any other function which not depended on user
- Syntax of Python Constructor

```
"def init(self):
```

```
    # initializations"
```

- init is one of the reserved functions in Python. In Object Oriented Programming, it is known as a constructor.

Rules of Python Constructor

- It starts with the def keyword, like all other functions in Python.
- It is followed by the word init, which is prefixed and suffixed with double underscores with a pair of brackets, i.e., `__init__()`.

- It takes an argument called self, assigning values to the variables.
- Self is a reference to the current instance of the class. It is created and passed automatically/implicitly to the `__init__()` when the constructor is called.

Types of Constructors in Python

n

- Parameterized Constructor
- Non-Parameterized Constructor
- Default Constructor

1. Parameterized Constructor in Python

When the constructor accepts arguments along with self, it is known as parameterized constructor.

These arguments can be used inside the class to assign the values to the data members. Let's see an example:

In [2]:

```
1 class Family:
2     # Constructor - parameterized
3     members=5
4     def __init__(self, count):
5         print("This is parametrized constructor")
6         self.members = count
7     def show(self):
8         print("No. of members is", self.members)
9
10 object = Family(10)
11 object.show()
```

This is parametrized constructor
No. of members is 10

2. Non-Parameterized Constructor in Python

When the constructor doesn't accept any arguments from the object and has only one argument, self, in the constructor, it is known as a non-parameterized constructor.

This can be used to re-assign a value inside the constructor. Let's see an example:

In [3]:

```
1 class Fruits:
2     favourite = "Apple"
3
4     # non-parameterized constructor
5     def __init__(self):
6         self.favourite = "Orange"
7
8     # a method
9     def show(self):
10        print(self.favourite)
11
12
13 # creating an object of the class
14 obj = Fruits()
15
16 # calling the instance method using the object obj
17 obj.show()
18
```

Orange

3. Default Constructor in Python

When you do not write the constructor in the class created, Python itself creates a constructor during the compilation of the program.

It generates an empty constructor that has no code in it. Let's see an example:

In [4]:

```
1 class Assignments:
2     check= "not done"
3     # a method
4     def is_done(self):
5         print(self.check)
6
7     # creating an object of the class
8     obj = Assignments()
9
10    # calling the instance method using the object obj
11    obj.is_done()
12
```

not done

- The constructor is a method that is called when an object is created of a class.
- The creation of the constructor depends on the programmer, or else Python will automatically generate the default constructor.
- It can be used in three types - Parameterized Constructor, Non-Parameterized Constructor, Default Constructor.

What is Destructor in Python?

When an object is erased or destroyed in object-oriented programming, a destructor is invoked. Before deleting an object, the destructor in python executes clean-up operations such as memory management. Destructor and constructor in python are quite diametric in nature. Constructor is automatically called when an object is created, whereas destructor is called when an object is destroyed.

- Syntax of destructor in Python

```
"""def del(self):""" #body of destructor
```

Here,

- def is a keyword used to define a method in python.
- """__del__() Method: In Python, the __del__() is referred to as a destructor method. When all references to an object have been erased, i.e., once an object's garbage is collected, this method is invoked."""
- self: The self-argument reflects one of the given class's instances (objects).

Example 1: Using Destructor

Destructor was automatically invoked because we used the del keyword to delete all references to the object.

In [8]:

```
1  # Create a Class Computer
2  class Computer:
3
4      # initialize the class
5      def __init__(self):
6          print('Class Computer is created.')
7
8      def __del__(self):
9          print('Computer is deleted.')
10
11 # this is where the object is created and the constructor is called
12 object = Computer()
13
14 # here the destructor function gets called
15 del object
```

Class Computer is created.

Computer is deleted.

Example 2: Invoking destructor at the end of the program

The destructor is invoked when the program is finished or when all references to the object are erased, not when the object is removed from scope. This is demonstrated in the following example

In [14]:

```

1  # Create Class Computer
2  class Computer:
3
4      # Initialize the class
5      def __init__(self):
6          print('Class Computer is created.')
7      def show(self):
8          print("hi")
9
10     # Call the destructor
11     def __del__(self):
12         print('The destructor is called.')
13
14 def Create_obj(object):
15     print('The object is created.')
16     object = Computer()
17     object.show()
18     print('Function ends here.')
19     return object
20
21 print('Call the Create_obj() function.')
22 h = Create_obj("o")
23 print('The Program ends here.')
24 o.show()

```

Call the Create_obj() function.

The object is created.

Class Computer is created.

hi

Function ends here.

The destructor is called.

The Program ends here.

```

-----
NameError                                Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_18208\3606683550.py in <module>
      22 h = Create_obj("o")
      23 print('The Program ends here.')
----> 24 o.show()

```

NameError: name 'o' is not defined

In [11]:

```
1 # destructor
2 class Example:
3
4     def __init__(self):
5         print('constructor called')
6
7     # destructor
8     def __del__(self):
9         print('destructor called')
10
11     def show(self):
12         print("vishal")
13
14 obj = Example()
15 a = obj
16 del obj
17 del a
18 a.show()
```

constructor called
destructor called

NameError Traceback (most recent call last)
<ipython-input-11-8d75fa3e4e5d> in <module>
16 del obj
17 del a
----> 18 a.show()

NameError: name 'a' is not defined

Self

only object access of all class methods and data.

In [14]:

```
1 class Vishal():
2     def __init__(self):
3         self.value=50
4         show()
5     def show(self):
6         print(self.value)
7
```

In [16]: 1 hi=Vishal()

```
-----
NameError                                Traceback (most recent call last)
<ipython-input-16-686c8ca82a6b> in <module>
----> 1 hi=Vishal()

<ipython-input-14-3362008cce12> in __init__(self)
      2     def __init__(self):
      3         self.value=50
----> 4         show()
      5     def show(self):
      6         print(self.value)

NameError: name 'show' is not defined
```

In [17]: 1 class Vishal():
2 def __init__(self):
3 self.value=50
4 self.show()
5 def show(self):
6 print(self.value)

In [18]: 1 hi=Vishal()

50

In [19]: 1 class Vishal():
2 def __init__(self):
3 print(id(self))
4 self.value=50
5 self.show()
6 def show(self):
7 print(self.value)
8

In [20]: 1 obj1=Vishal()

2104985141696
50

In [22]: 1 print(id(obj1))

2104985141696

Introduction to Python self

- Suppose you have a class named as a student with three instance variables student_name, age, and marks. Now you want to access these members in a class function. What should you do? You cannot call these members directly. This will cause an error because python will search these variables outside the class instead of the class. Now how can we solve this problem? The answer is using a self word (a reference to class). We pass the self as an argument in the method and access these members, or also we can manipulate the state of these members. Let's dive deep and understand some characteristics or properties of the self.

What is self in python?

- The self is an instance of the class; by using the self, we can access or manipulate the state of the instance members of the class. Also, we can create new instance members with the help of self. The self is mostly used for initializing the instance members of the class.
- Syntax

The self is passed as an argument in the method of the class, and by default, it is compulsory to pass the reference of the class in all the methods of the class.

```
In [23]: 1 class A():
2         a = 3
3         # Passing the self in the method
4         def hello(self):
5             print(self.a)
6
7 a = A()
8 a.hello()
9
```

3

```
In [24]: 1 class A():
2         a = 3
3         def hello(self):
4             # This is the valid way to access the instance variable
5             print(self.a)
6         def printa():
7             # This line will cause an error
8             # we cannot access the variable directly
9             print(a)
10 a = A()
11 a.hello()
12 a.printa()
```

3

```
-----
TypeError                                Traceback (most recent call last)
<ipython-input-24-e7955a2bf07f> in <module>
      10 a = A()
      11 a.hello()
----> 12 a.printa()
```

TypeError: printa() takes 0 positional arguments but 1 was given

Why self is defined explicitly in Python

- According to the zen of the python "Explicit is better than implicit". Because explicitly writing the code (clearly defining the state of something even if it is obvious) helps to increase the readability of the code. In a python programming language, we have to pass the reference of the class (using the self word) as an argument in every method of the class

In [25]:

```
1 class Scaler():
2     # Defining the method in the class
3     # object.hello(number) is converted to class.hello(object,number) internally
4     # That's why the self is passed in this method
5     def hello(self, number):
6         print("This is the number", number)
7
8
9 a = Scaler()
10 a.hello(1)
```

This is the number 1

Is the self a keyword in python?

The self word is not a keyword in python. For the sake easiest naming convention, we often use the self word in the place of the other word, and it is advisable to use the self word instead of the other word because one of the major reasons for this is most of the internal python libraries used word self to represent the reference of the object. So to reduce the conflict between the programmers and the inbuilt libraries, we often use the self word.

In [26]:

```
1 class human():
2     def __init__(self, age, sex="?"):
3         self.age = age
4         self.sex = sex
5
6     # Passing hello word in the place of the self word
7     def speak(hello):
8         print(hello.age)
9
10
11 man = human(12, 'M')
12 man.speak()
13
```

12

How can we skip self in python?

- Now, Suppose you want to skip the self word as a parameter in the class methods.

What should you do?

- We can skip self as an argument in the method by adding the @staticmethod decorator on the method, which makes the method static. The static methods don't need the reference of the class. A static method cannot access or modify the class members. We generally use static methods when we write some operations that are not supposed to be changed in the future, like some fixed arithmetic calculations. Code:

```
In [27]: 1 class Scaler():
2         @staticmethod
3         # Method is not containing self parameter
4         def hello():
5             print("This is the method")
6
7
8 a = Scaler()
9 a.hello()
10
```

This is the method

Self is used for accessing the instance members of the class.

Self is not a keyword in python.

We have to pass self as a parameter in every class method by default.

We can skip the self as a parameter in a method by using the @staticmethod decorator on the method of the class.

Self is always defined explicitly.

How objects access attributes

```
In [16]: 1 class Person:
2
3         def __init__(self,name_input,country_input):
4             self.name = name_input
5             self.country = country_input
6
7         def greet(self):
8             if self.country == 'india':
9                 print('Namaste',self.name)
10            else:
11                print('Hello',self.name)
12
```

```
In [17]: 1 # how to access attributes
2 p = Person('vishal','india')
```

```
In [18]: 1 p.country
```

```
Out[18]: 'india'
```

```
In [19]: 1 p.greet()
```

Namaste vishal

In [25]: 1 print(p.gender)

```
-----
AttributeError                                Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_20248\269207858.py in <module>
----> 1 print(p.gender)

AttributeError: 'Person' object has no attribute 'gender'
```

Attribute creation from outside of the class

In [27]: 1 p.gender = 'male'

In [28]: 1 print(p.gender)

male

In [29]:

```
1 # Python code for accessing attributes of class
2 class emp:
3     name='Harsh'
4     salary='25000'
5     def show(self):
6         print (self.name)
7         print (self.salary)
8 e1 = emp()
9 # Use getattr instead of e1.name
10 print (getattr(e1, 'name'))
11
12 # returns true if object has attribute
13 print (hasattr(e1, 'name'))
14
15 # sets an attribute
16 setattr(e1, 'height', 152)
17
18 # returns the value of attribute name height
19 print (getattr(e1, 'height'))
20
21 # delete the attribute
22 delattr(emp, 'salary')
```

Harsh
True
152

Reference Variables

- Reference variables hold the objects
- We can create objects without reference variable as well
- An object can have multiple reference variables
- Assigning a new reference variable to an existing object does not create a new object

In [38]:

```
1 # object without a reference
2 class Person:
3
4     def __init__(self):
5         self.name = 'vishal'
6         self.gender = 'male'
7
8 Person()
```

Out[38]: <__main__.Person at 0x2a23e996c40>

In [39]:

```
1 # object without a reference
2 class Person:
3
4     def __init__(self):
5         self.name = 'vishal'
6         self.gender = 'male'
7
8 p = Person()
9 q = p
```

In [40]:

```
1 # Multiple ref
2 print(id(p))
3 print(id(q))
```

2895857778304

2895857778304

change attribute value with the help of 2nd object

In [41]:

```
1 print(p.name)
2 print(q.name)
3 q.name = 'kavit'
4 print(q.name)
5 print(p.name)
```

vishal

vishal

kavit

kavit

Pass by reference

In [42]:

```
1 class Person:
2
3     def __init__(self,name,gender):
4         self.name = name
5         self.gender = gender
6
7 # outside the class -> function
8 def greet(person):
9     print('Hi my name is',person.name,'and I am a',person.gender)
10    p1 = Person('kavit','male')
11    return p1
12
13 p = Person('vishal','male')
14 x = greet(p)
15 print(x.name)
16 print(x.gender)
```

Hi my name is vishal and I am a male
kavit
male

In [43]:

```
1 class Person:
2
3     def __init__(self,name,gender):
4         self.name = name
5         self.gender = gender
6
7 # outside the class -> function
8 def greet(person):
9     print(id(person))
10    person.name = 'kavit'
11    print(person.name)
12
13 p = Person('vishal','male')
14 print(id(p))
15 greet(p)
16 print(p.name)
```

2895858209456
2895858209456
kavit
kavit

object is mutable

In []:

```
1 class Person:
2
3     def __init__(self, name, gender):
4         self.name = name
5         self.gender = gender
6
7 # outside the class -> function
8 def greet(person):
9     person.name = 'ankit'
10    return person
11
12 p = Person('nitish', 'male')
13 print(id(p))
14 p1 = greet(p)
15 print(id(p1))
```

Class Variables

Declared inside the class definition (but outside any of the instance methods). They are not tied to any particular object of the class, hence shared across all the objects of the class. Modifying a class variable affects all objects instance at the same time. or

Class variables are the variables whose single copy is available to all the instance of the class. If we modify the copy of class variable in an instance, it will effect all the copies in the other instance.

To access class variable, we need class methods with cls as first parameter then we can access class variable using cls.variable_name

fp = 'Yes'

Class Variable

@classmethod

Class Method

def show(cls):

cls.fp

Accessing Class Variable inside Class Method

realme = Mobile()

Mobile.fp

Accessing Class Variable outside class

In [33]:

```

1 class Fruit:
2     name = 'Fruitas'
3
4     @classmethod
5     def printName(cls):
6         print('The name is:', cls.name)
7
8 Fruit.printName()
9 apple = Fruit()
10 berry = Fruit()
11
12 Fruit.printName()
13 Fruit.name="banana"
14 apple.printName()
15 apple.name="mango"
16 berry.printName()

```

The name is: Fruitas
The name is: Fruitas
The name is: banana
The name is: banana

Instance Variable

Declared inside the constructor method of class (the **init** method). They are tied to the particular object instance of the class, hence the contents of an instance variable are completely independent from one object instance to the other.

```

def __init__(self):
    self.model = 'RealMe X'
def show_model(self):
    self.model

realme = Mobile()
realme.model

```

Annotations:

- `self.model = 'RealMe X'`: Instance Variable
- `def show_model(self):`: Instance Method
- `self.model`: Accessing Instance Variable
- `realme.model`: Accessing Instance Variable from outside Class

In [44]:

```

1 class Car:
2     wheels = 4      # <- Class variable
3     def __init__(self, name):
4         self.name = name    # <- Instance variable

```

In [47]:

```
1 jag = Car('jaguar')
2 fer = Car('ferrari')
3 print(jag.name, fer.name)
4 print(jag.wheels, fer.wheels)
5 print(Car.wheels)
6 car.name
```

jaguar ferrari

4 4

4

```
-----
NameError                                Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_20248\670756080.py in <module>
      4 print(jag.wheels, fer.wheels)
      5 print(Car.wheels)
----> 6 car.name
```

NameError: name 'car' is not defined

In [48]:

```
1 # instance var -> python tutor
2 class Person:
3
4     def __init__(self, name_input, country_input):
5         self.name = name_input
6         self.country = country_input
7
8 p1 = Person('vishal', 'india')
9 p2 = Person('kavit', 'australia')
```

In [49]:

```
1 print(id(p1.name))
2 print(p1.name)
3 print(id(p1))
4 print(id(p2.name))
5 print(p2.name)
6 print(id(p2))
```

2895858912560

vishal

2895858212672

2895858075376


kavit

2895858211952

Encapsulation


Encapsulation is one of the critical features of object-oriented programming, which involves the bundling of data members and functions inside a single class. Bundling similar data members and functions inside a class also helps in data hiding. Encapsulation also ensures that objects are self-sufficient functioning pieces and can work independently.

Encapsulation

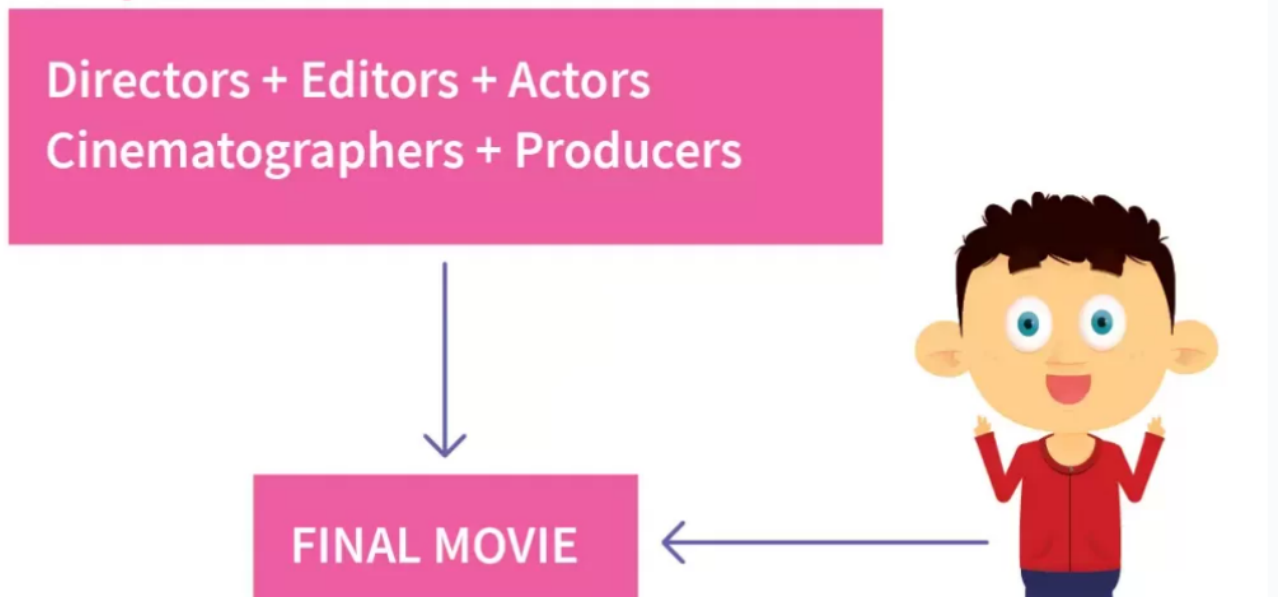

What is Encapsulation in Python?

Encapsulation is one of the cornerstone concepts of OOP. The basic idea of Encapsulation is to wrap up both data and methods into one single unit. The way that data and methods are organized does not matter to the end-user. The user is only concerned about the right way to provide input and expects a correct output on the basis of the inputs provided.

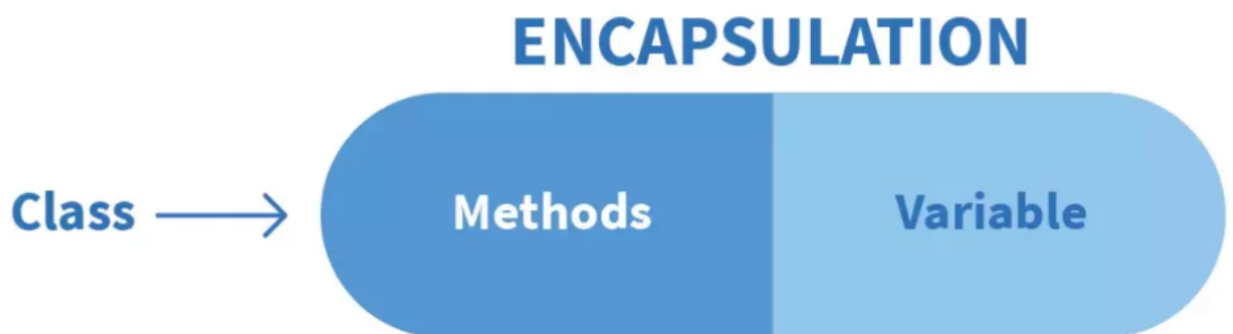

Why do we need Encapsulation in Python?

The advantages of Encapsulation in Python can be summed up as follows –

1. Encapsulation provides well-defined, readable code

- The primary advantage of using Encapsulation in Python is that as a user, we do not need to know the architecture of the methods and the data and can just focus on making use of these functional, encapsulated units for our applications. This results in a more organized and clean code. The user experience also improves greatly and makes it easier to understand applications as a whole.

2. Prevents Accidental Modification or Deletion

- Another advantage of encapsulation is that it prevents the accidental modification of the data and methods. Let's consider the example of NumPy again, if I had access to edit the library, then I might make a mistake in the implementation of the mean function and then because of that mistake, thousands of projects using NumPy would become inaccurate.

3. Encapsulation provides security

- Encapsulation in Python is achieved through the access modifiers. These access modifiers ensure that access conditions are not breached and thus provide a great user experience in terms of security.

Access Modifiers in Python encapsulation

- Sometimes there might be a need to restrict or limit access to certain variables or functions while programming. That is where access modifiers come into the picture.
- Now when we are talking about access, 3 kinds of access specifiers can be used while performing Encapsulation in Python. They are as follows :

Access Modifier: Public

- The members declared as Public are accessible from outside the Class through an object of the class.

Access Modifier: Protected

- The members declared as Protected are accessible from outside the class but only in a class

Public Members

Public members (generally methods declared in a class) are accessible from outside the class. The object of the same class is required to invoke a public method. This arrangement of private instance variables and public methods ensures the principle of data encapsulation.

All members in a Python class are public by default. Any member can be accessed from outside the class environment.

In [20]:

```
1 class Student:
2     schoolName = 'XYZ School' # class attribute
3
4     def __init__(self, name, age):
5         self.name=name # instance attribute
6         self.age=age # instance attribute
7 std = Student("Steve", 25)
8 print(std.schoolName)
9 print(std.name)
10 print(std.age)
11
```

```
XYZ School
Steve
25
```

In [21]:

```
1 std.age=20
2 print(std.age)
```

```
20
```

Protected Members

Protected members of a class are accessible from within the class and are also available to its sub-classes. No other environment is permitted access to it. This enables specific resources of the parent class to be inherited by the child class.

Python's convention to make an instance variable protected is to add a prefix `_` (single underscore) to it. This effectively prevents it from being accessed unless it is from within a sub-class.

```
In [22]: 1 # illustrating protected members & protected access modifier
2 class details:
3     _name="Jason"
4     _age=35
5     _job="Developer"
6 class pro_mod(details):
7     def __init__(self):
8         print(self._name)
9         print(self._age)
10        print(self._job)
11
12 # creating object of the class
13 obj = pro_mod()
14 # direct access of protected member
15 print("Name:",obj.name)
16 print("Age:",obj.age)
```

Jason
35
Developer

```
-----
AttributeError                                Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_18208\482597799.py in <module>
      13 obj = pro_mod()
      14 # direct access of protected member
----> 15 print("Name:",obj.name)
      16 print("Age:",obj.age)

AttributeError: 'pro_mod' object has no attribute 'name'
```

```
In [23]: 1 class Student:
2         _schoolName = 'XYZ School' # protected class attribute
3
4         def __init__(self, name, age):
5             self._name=name # protected instance attribute
6             self._age=age # protected instance attribute
7 std = Student("Steve", 25)
8 print(std._schoolName)
9 print(std._name)
10 print(std._age)
```

XYZ School
Steve
25

```
In [24]: 1 std._age=20
2         print(std._age)
```

20

In [25]:

```
1 class Student:
2     def __init__(self,name):
3         self._name = name
4     @property
5     def name(self):
6         return self._name
7     @name.setter
8     def name(self,newname):
9         self._name = newname
10 std = Student("Swati")
11 print(std.name)
12 std.name = 'Dipa'
13 print(std.name)
14 print(std._name) # still accessible
```

Swati

Dipa

Dipa

Private Members

Python doesn't have any mechanism that effectively restricts access to any instance variable or method. Python prescribes a convention of prefixing the name of the variable/method with a single or double underscore to emulate the behavior of protected and private access specifiers.

The double underscore `__` prefixed to a variable makes it private. It gives a strong suggestion not to touch it from outside the class. Any attempt to do so will result in an `AttributeError`:

In [26]:

```
1 class Student:
2     __schoolName = 'XYZ School' # private class attribute
3
4     def __init__(self, name, age):
5         self.__name=name # private instance attribute
6         self.__salary=age # private instance attribute
7     def __display(self): # private method
8         print('This is private method.')
```

In [27]:

```
1 std = Student("Bill", 25)
```

In [28]:

```
1 std.__schoolName
```

```
-----
AttributeError                                Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_18208\2535855424.py in <module>
----> 1 std.__schoolName
```

AttributeError: 'Student' object has no attribute '__schoolName'

In [29]:

```
1 std.__name
```

```
-----  
AttributeError                                Traceback (most recent call last)  
~\AppData\Local\Temp\ipykernel_18208\1120992331.py in <module>  
----> 1 std.__name  
  
AttributeError: 'Student' object has no attribute '__name'
```

In [30]:

```
1 std.__display()
```

```
-----  
AttributeError                                Traceback (most recent call last)  
~\AppData\Local\Temp\ipykernel_18208\4181530199.py in <module>  
----> 1 std.__display()  
  
AttributeError: 'Student' object has no attribute '__display'
```

In [31]:

```
1 class Student:  
2     __schoolName = 'XYZ School' # private class attribute  
3  
4     def __init__(self, name, age):  
5         self.__name=name # private instance attribute  
6         self.__salary=age # private instance attribute  
7     def display(self): # private method  
8         print('This is private method.')  
9         print(self.__salary)
```

In [32]:

```
1 std=Student("vishal",25)
```

In [33]:

```
1 std.display()
```

```
This is private method.  
25
```

In [34]:

```
1 std.__salary=70
```

In [35]:

```
1 std.display()
```

```
This is private method.  
25
```

In [36]:

```

1 # illustrating private members & private access modifier
2 class Rectangle:
3     __length = 0 #private variable
4     __breadth = 0#private variable
5     def __init__(self):
6         #constructor
7         self.__length = 5
8         self.__breadth = 3
9         #printing values of the private variable within the class
10        print(self.__length)
11        print(self.__breadth)
12
13 rect = Rectangle() #object created
14 #printing values of the private variable outside the class
15 print(rect.length)
16 print(rect.breadth)

```

5
3

```

-----
AttributeError                                Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_18208\3023363869.py in <module>
      13 rect = Rectangle() #object created
      14 #printing values of the private variable outside the class
----> 15 print(rect.length)
      16 print(rect.breadth)

```

AttributeError: 'Rectangle' object has no attribute 'length'

Python performs name mangling of private variables. Every member with a double underscore will be changed to `_object._class__variable`. So, it can still be accessed from outside the class, but the practice should be refrained.

In [37]:

```

1 std = Student("Bill", 25)
2 print(std._Student__name)
3 std._Student__name = 'Steve'
4 print(std._Student__name)
5 std._Student__display()

```

Bill
Steve

```

-----
AttributeError                                Traceback (most recent call last)
~\AppData\Local\Temp\ipykernel_18208\3630278853.py in <module>
      3 std._Student__name = 'Steve'
      4 print(std._Student__name)
----> 5 std._Student__display()

```

AttributeError: 'Student' object has no attribute '_Student__display'

VISHAL ACHARYA

In [38]:

```
1 class Atm:
2
3     # constructor(special function)->superpower ->
4     def __init__(self):
5         print(id(self))
6         self.pin = ''
7         self.__balance = 0
8         #self.menu()
9
10    def get_balance(self):
11        return self.__balance
12
13    def set_balance(self,new_value):
14        if type(new_value) == int:
15            self.__balance = new_value
16        else:
17            print('enter correct value')
18
19    def __menu(self):
20        user_input = input("""
21        Hi how can I help you?
22        1. Press 1 to create pin
23        2. Press 2 to change pin
24        3. Press 3 to check balance
25        4. Press 4 to withdraw
26        5. Anything else to exit
27        """)
28
29        if user_input == '1':
30            self.create_pin()
31        elif user_input == '2':
32            self.change_pin()
33        elif user_input == '3':
34            self.check_balance()
35        elif user_input == '4':
36            self.withdraw()
37        else:
38            exit()
39
40    def create_pin(self):
41        user_pin = input('enter your pin')
42        self.pin = user_pin
43
44        user_balance = int(input('enter balance'))
45        self.__balance = user_balance
46
47        print('pin created successfully')
48
49    def change_pin(self):
50        old_pin = input('enter old pin')
51
52        if old_pin == self.pin:
53            # Let him change the pin
54            new_pin = input('enter new pin')
55            self.pin = new_pin
56            print('pin change successful')
57        else:
58            print('enter correct process')
59
60    def check_balance(self):
61        user_pin = input('enter your pin')
62        if user_pin == self.pin:
63            print('your balance is ',self.__balance)
```

```

64     else:
65         print('correct pin')
66
67     def withdraw(self):
68         user_pin = input('enter the pin')
69         if user_pin == self.pin:
70             # allow to withdraw
71             amount = int(input('enter the amount'))
72             if amount <= self.__balance:
73                 self.__balance = self.__balance - amount
74                 print('withdrawl successful.balance is',self.__balance)
75             else:
76                 print('increase balance')
77         else:
78             print('correct pin')

```

concept of encapsulation: get and set method

In [39]: 1 obj = Atm()

1714908088784

In [40]: 1 obj.get_balance()

Out[40]: 0

In [41]: 1 obj.set_balance(1000)

In [42]: 1 obj.withdraw()

enter the pin400
correct pin

In [43]:

```

1 class Library:
2     def __init__(self, id, name):
3         self.bookId = id
4         self.bookName = name
5
6     def setBookName(self, newBookName): #setters method to setthe book name
7         self.bookName = newBookName
8
9     def getBookName(self): #getters method to get the bookname
10        print(f"The name of book is {self.bookName}")
11
12 book = Library(101,"The Witches")
13 book.getBookName()
14 book.setBookName("The Witches Returns")
15 book.getBookName()

```

The name of book is The Witches
The name of book is The Witches Returns

Collection of objects

In [44]:

```
1 # List of objects
2 class Person:
3
4     def __init__(self,name,gender):
5         self.name = name
6         self.gender = gender
7
8 p1 = Person('vishal','male')
9 p2 = Person('kavit','male')
10 p3 = Person('deepika','female')
11
12 L = [p1,p2,p3]
13
14 for i in L:
15     print(i.name,i.gender)
```

vishal male
kavit male
deepika female

In [45]:

```
1 # dict of objects
2 # List of objects
3 class Person:
4
5     def __init__(self,name,gender):
6         self.name = name
7         self.gender = gender
8
9 p1 = Person('vishal','male')
10 p2 = Person('kavit','male')
11 p3 = Person('deepika','female')
12
13 d = {'p1':p1,'p2':p2,'p3':p3}
14
15 for i in d:
16     print(d[i].gender)
```

male
male
female

Static Variables(Vs Instance variables)

VISHAL ACHARYA

In [90]:

```

1 class Atm:
2
3     # constructor(special function)->superpower ->
4     def __init__(self):
5         print(id(self))
6         self.pin = ''
7         self.__balance = 0
8         self.id=0
9         self.id+=1
10        #self.menu()
11
12    def get_balance(self):
13        return self.__balance
14
15    def set_balance(self,new_value):
16        if type(new_value) == int:
17            self.__balance = new_value
18        else:
19            print('enter correct value')
20
21    def __menu(self):
22        user_input = input("""
23        Hi how can I help you?
24        1. Press 1 to create pin
25        2. Press 2 to change pin
26        3. Press 3 to check balance
27        4. Press 4 to withdraw
28        5. Anything else to exit
29        """)
30
31        if user_input == '1':
32            self.create_pin()
33        elif user_input == '2':
34            self.change_pin()
35        elif user_input == '3':
36            self.check_balance()
37        elif user_input == '4':
38            self.withdraw()
39        else:
40            exit()
41
42    def create_pin(self):
43        user_pin = input('enter your pin')
44        self.pin = user_pin
45
46        user_balance = int(input('enter balance'))
47        self.__balance = user_balance
48
49        print('pin created successfully')
50
51    def change_pin(self):
52        old_pin = input('enter old pin')
53
54        if old_pin == self.pin:
55            # Let him change the pin
56            new_pin = input('enter new pin')
57            self.pin = new_pin
58            print('pin change successful')
59        else:
60            print('enter correct process')
61
62    def check_balance(self):
63        user_pin = input('enter your pin')

```



```

64     if user_pin == self.pin:
65         print('your balance is ',self.__balance)
66     else:
67         print('correct pin')
68
69     def withdraw(self):
70         user_pin = input('enter the pin')
71         if user_pin == self.pin:
72             # allow to withdraw
73             amount = int(input('enter the amount'))
74             if amount <= self.__balance:
75                 self.__balance = self.__balance - amount
76                 print('withdrawl successful.balance is',self.__balance)
77             else:
78                 print('increase balance')
79         else:
80             print('correct pin')

```

In [92]: 1 sbi=Atm()

2895858209648

In [93]: 1 axis=Atm()

2895858209264

In [94]: 1 sbi.id

Out[94]: 1

In [95]: 1 axis.id

Out[95]: 1

VISHAL ACHARYA

In [103]:

```

1 class Atm:
2     __counter = 1
3
4     # constructor(special function)->superpower ->
5     def __init__(self):
6         print(id(self))
7         self.pin = ''
8         self.__balance = 0
9         self.cid = Atm.__counter
10        Atm.__counter = Atm.__counter + 1
11        #self.menu()
12
13    # utility functions
14    @staticmethod
15    def get_counter():
16        return Atm.__counter
17
18    def get_balance(self):
19        return self.__balance
20
21    def set_balance(self,new_value):
22        if type(new_value) == int:
23            self.__balance = new_value
24        else:
25            print('enter correct value')
26
27    def __menu(self):
28        user_input = input("""
29        Hi how can I help you?
30        1. Press 1 to create pin
31        2. Press 2 to change pin
32        3. Press 3 to check balance
33        4. Press 4 to withdraw
34        5. Anything else to exit
35        """)
36
37        if user_input == '1':
38            self.create_pin()
39        elif user_input == '2':
40            self.change_pin()
41        elif user_input == '3':
42            self.check_balance()
43        elif user_input == '4':
44            self.withdraw()
45        else:
46            exit()
47
48    def create_pin(self):
49        user_pin = input('enter your pin')
50        self.pin = user_pin
51
52        user_balance = int(input('enter balance'))
53        self.__balance = user_balance
54
55        print('pin created successfully')
56
57    def change_pin(self):
58        old_pin = input('enter old pin')
59
60        if old_pin == self.pin:
61            # Let him change the pin
62            new_pin = input('enter new pin')
63            self.pin = new_pin

```

```

64         print('pin change successful')
65     else:
66         print('enter correct process')
67
68     def check_balance(self):
69         user_pin = input('enter your pin')
70         if user_pin == self.pin:
71             print('your balance is ',self.__balance)
72         else:
73             print('correct pin')
74
75     def withdraw(self):
76         user_pin = input('enter the pin')
77         if user_pin == self.pin:
78             # allow to withdraw
79             amount = int(input('enter the amount'))
80             if amount <= self.__balance:
81                 self.__balance = self.__balance - amount
82                 print('withdrawl successful.balance is',self.__balance)
83             else:
84                 print('increase balance')
85         else:
86             print('correct pin')

```

In [104]: 1 sbi=Atm()
2895859067392

In [105]: 1 axis=Atm()
2
2895859065376

In [106]: 1 Atm.get_counter()

Out[106]: 3

In [108]: 1 axis.get_counter()

Out[108]: 3

In [109]: 1 vis=Atm()
2895858198848

In [110]: 1 vis.get_counter()

Out[110]: 4

Points to remember about static

- Static attributes are created at class level.
- Static attributes are accessed using ClassName.
- Static attributes are object independent. We can access them without creating instance (object) of the class in which they are defined.
- The value stored in static attribute is shared between all instances(objects) of the class in which the static attribute is defined.

In [107]:

```
1 class Lion:
2     __water_source="well in the circus"
3
4     def __init__(self,name, gender):
5         self.__name=name
6         self.__gender=gender
7
8     def drinks_water(self):
9         print(self.__name,
10              "drinks water from the",Lion.__water_source)
11
12     @staticmethod
13     def get_water_source():
14         return Lion.__water_source
15
16 simba=Lion("Simba","Male")
17 simba.drinks_water()
18 print( "Water source of lions:",Lion.get_water_source())
```

Simba drinks water from the well in the circus
Water source of lions: well in the circus

What are Python Generators?

Python's generator functions are used to create iterators(which can be traversed like list, tuple) and return a traversal object. It helps to transverse all the items one at a time present in the iterator. Generator functions are defined as the normal function, but to identify the difference between the normal function and generator function is that in the normal function, we use the return keyword to return the values, and in the generator function, instead of using the return, we use yield to execute our iterator.

In [112]:

```
1 def gen_fun():
2     yield 10
3     yield 20
4     yield 30
5 for i in gen_fun():
6     print(i)
```

10
20
30

In [14]:

```
1 class Fib:
2     def __init__(self):
3         self.a, self.b = 0, 1
4
5     def __iter__(self):
6         return self
7
8     def __next__(self):
9         result = self.a
10        self.a, self.b = self.b, self.a + self.b
11        return result
12
13 f = Fib()
14
15 for i in range(3):
16     print(next(f))
```

0
1
1

What is a Generator

- Python generators are a simple way of creating iterators.

In [46]:

```
1 def square(num):
2     for i in range(1,num+1):
3         yield i**2
```

In [48]:

```
1 gen = square(10)
2
3 print(next(gen))
4
5
6 for i in gen:
7     print(i)
```

1
4
9
16
25
36
49
64
81
100

In [3]:

```
1 g=(i for i in range(1,10))
2 print(type(g))
```

<class 'generator'>

In [4]:

```
1 for i in g:  
2     print(i)
```

```
1  
2  
3  
4  
5  
6  
7  
8  
9
```

In []:

```
1
```

VISHAL ACHARYA