



### **Experiment - 5**

**Student Name : Jayesh Saini**

**UID: 23BCS11619**

**Branch: BE-CSE**

**Section/Group: KRG\_2A**

**Semester: 5<sup>th</sup>**

**Date of Performance: 22/9/25**

**Subject Name: Advanced Database and Management System**

**Subject Code: 23CSP-333**

#### **1. Problem Description/Aim:**

**Medium-Problem Title: Generate 1 million records per ID in 'transaction\_data' using generate\_series() and random() ,create a normal view and a materialized view 'sales\_summary' with aggregated metrics (total\_quantity\_sold , total\_sales, total\_orders) , and compare their performance and execution time.**

#### **Procedure (Step-by-Step):**

1. Create a large dataset:
  - Create a table names transaction\_data (id , value) with 1 million records. - take id 1 and 2, and for each id, generate 1 million records in value column
  - Use Generate\_series () and random() to populate the data.
2. Create a normal view and materialized view to for sales\_summary, which includes total\_quantity\_sold, total\_sales, and total\_orders with aggregation.
3. Compare the performance and execution time of both.

#### **Sample Output Description:**

The transaction\_data table has 2 million rows (1 million per ID) with random values. The normal view sales\_summary computes aggregates on the fly, while the materialized view sales\_summary\_mv stores precomputed results. Queries on the materialized view are much faster, but it needs refreshing when data changes, whereas the normal view always shows up-to-date results.

**Hard-Problem Title: Create restricted views in the sales database to provide summarized, non-sensitive data to the reporting team, and control access using DCL commands( GRANT and REVOKE).**

#### **Procedure (Step-by-Step):**

1. Create restricted views-

- Define views that show only **aggregated sales data** (e.g., total\_sales, total\_orders) without exposing sensitive columns like customer details or payment info.
- 2. Assign access to reporting team(or client)-
  - Use “GRANT SELECT ON view\_name TO reporting\_user; “ to give access.
- 3. Revoke access if needed.
  - Use “REVOKE SELECT ON view\_name FROM reporting\_user;” to remove access.
- 4. Verify access
  - Reporting users can query the view but cannot access base tables directly, ensuring security.

#### **Sample Output Description:**

The result shows the restricted view providing summarized sales data only like

- Columns shown are - product\_id, total\_quantity\_sold, total\_sales, total\_orders
- Columns hidden are - Customer names, addresses, payment details

A reporting user querying the view sees something like :

- Product 101 - 5000 units sold, total sales Rs. 12,50,000, 500 orders.
- Product 102 - 3200 units sold, total sales Rs. 8,60,000, 320 orders.

When the user tries to query the base “sales\_transactions” table directly, access is denied, enforcing security.

- 2. Objective:** To design and implement secure, efficient data access mechanisms by creating large-scale transaction datasets, summarizing them through normal and materialized views for performance comparison, and enforcing restricted access to sensitive data using views and DCL commands.

### **3. SQL QUERY AND OUTPUTS -**

#### **-----MEDIUM LEVEL PROBLEM-----**

```
Create table TRANSACTION_DATA(id int, val decimal);  
INSERT INTO TRANSACTION_DATA(ID, VAL)  
SELECT 1, RANDOM()  
FROM GENERATE_SERIES(1, 1000000);
```


```
INSERT INTO TRANSACTION_DATA(ID, VAL)  
SELECT 2, RANDOM()  
FROM GENERATE_SERIES(1, 1000000);  
SELECT * FROM TRANSACTION_DATA;
```

```
CREATE or REPLACE VIEW SALES_SUMMARY AS  
SELECT  
ID,  
COUNT(*) AS total_quantity_sold,  
sum(val) AS total_sales,  
count(distinct id) AS total_orders  
FROM TRANSACTION_DATA  
GROUP BY ID;
```

```
EXPLAIN ANALYZE  
SELECT * FROM SALES_SUMMARY;
```

```
CREATE MATERIALIZED VIEW SALES_SUMM AS  
SELECT  
ID,  
COUNT(*) AS total_quantity_sold,  
sum(val) AS total_sales,  
count(distinct id) AS total_orders  
FROM TRANSACTION_DATA  
GROUP BY ID;
```

```
EXPLAIN ANALYZE  
SELECT * FROM SALES_SUMM;
```

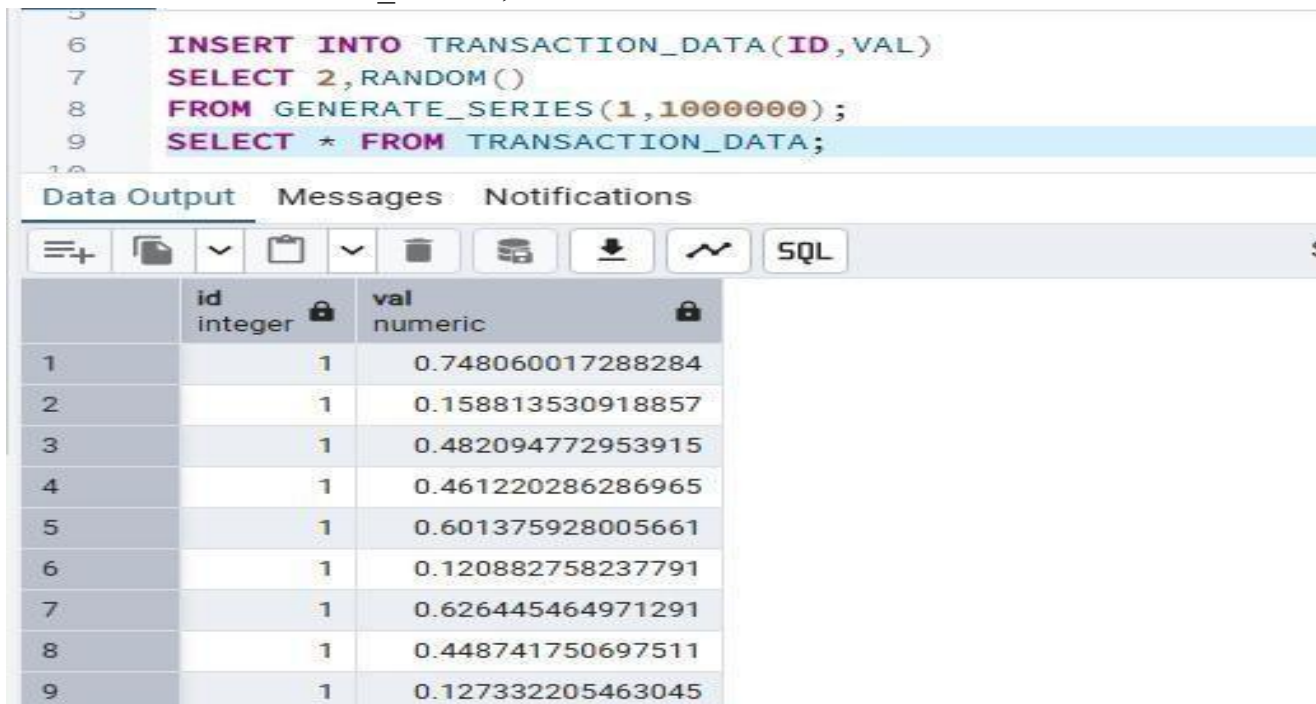

The screenshot shows a SQL IDE interface. The top pane contains a query that inserts random data into a table named TRANSACTION\_DATA. The bottom pane shows the results of a query, which is a table with two columns: 'id' (integer) and 'val' (numeric). The table contains 9 rows of data.

	id integer	val numeric
1	1	0.748060017288284
2	1	0.158813530918857
3	1	0.482094772953915
4	1	0.461220286286965
5	1	0.601375928005661
6	1	0.120882758237791
7	1	0.626445464971291
8	1	0.448741750697511
9	1	0.127332205463045

21 `SELECT * FROM SALES_SUMMARY; /*Simple view */`

Data Output Messages Notifications

	id integer	total_quantity_sold bigint	total_sales numeric	total_orders bigint
1	1	2000000	1000226.201610874170319933640	1
2	2	1000000	499473.47586932728250459408	1

20 `EXPLAIN ANALYZE`

21 `SELECT * FROM SALES_SUMMARY; /*Simple view */`

Data Output Messages Notifications

	QUERY PLAN text
1	GroupAggregate (cost=471514.97..509014.99 rows=2 width=52) (a
2	Group Key: transaction_data.id
3	-> Sort (cost=471514.97..479014.97 rows=3000000 width=15) (ac
4	Sort Key: transaction_data.id
5	Sort Method: external merge Disk: 73504kB
6	-> Seq Scan on transaction_data (cost=0.00..46224.00 rows=3
7	Planning Time: 0.135 ms
8	Execution Time: 4396.880 ms

33 `SELECT * FROM SALES_SUMM; /*Materialized view*/`

Data Output Messages Notifications

	id integer	total_quantity_sold bigint	total_sales numeric	total_orders bigint
1	1	1000000	500106.667545326356598143529	1
2	2	1000000	499473.47586932728250459408	1

```
32 | EXPLAIN ANALYZE
33 | SELECT * FROM SALES_SUMM; /*Materialized view*/
```

Data Output Messages Notifications

Showing rows: 1

	QUERY PLAN	
	text	
1	Seq Scan on sales_summ (cost=0.00..20.20 rows=1020 width=52) (actual time=0.017..0.018 rows=2 loops=...	
2	Planning Time: 0.063 ms	
3	Execution Time: 0.032 ms	

## OUTPUT -

As we can see that the execution time using the materialized view is very less as compared to the simple view's execution time.

## -----HARD PROBLEM -----

```
CREATE TABLE customer_data (
    transaction_id SERIAL PRIMARY KEY,
    customer_name VARCHAR(100), email
    VARCHAR(100), phone VARCHAR(15),
    payment_info VARCHAR(50), -- sensitive
    order_value DECIMAL, order_date DATE
    DEFAULT CURRENT_DATE
);
```


-- Insert sample data

```
INSERT INTO customer_data (customer_name, email, phone, payment_info, order_value)
VALUES
('Akshara Chauhan', 'mandeep@example.com', '9040122324', '1234-5678-9012-3456', 500),
('Akshara Chauhan', 'mandeep@example.com', '9040122324', '1234-5678-9012-3456', 1000),
('Ishika Chauhan', 'jaskaran@example.com', '9876543210', '9876-5432-1098-7654', 700),
('Akshara Chauhan', 'jaskaran@example.com', '9876543210', '9876-5432-1098-7654', 300);
CREATE OR REPLACE VIEW RESTRICTED_SALES_DATA AS
SELECT
```

```
CUSTOMER_NAME,  
COUNT(*) AS total_orders,  
SUM(order_value) as total_sales  
from customer_data group by  
customer_name;
```

```
select * from restricted_sales_data;
```

```
CREATE USER CLIENT1 WITH PASSWORD 'REPORT1234';  
GRANT SELECT ON RESTRICTED_SALES_DATA TO CLIENT1;  
REVOKE SELECT ON RESTRICTED_SALES_DATA FROM CLIENT1;
```

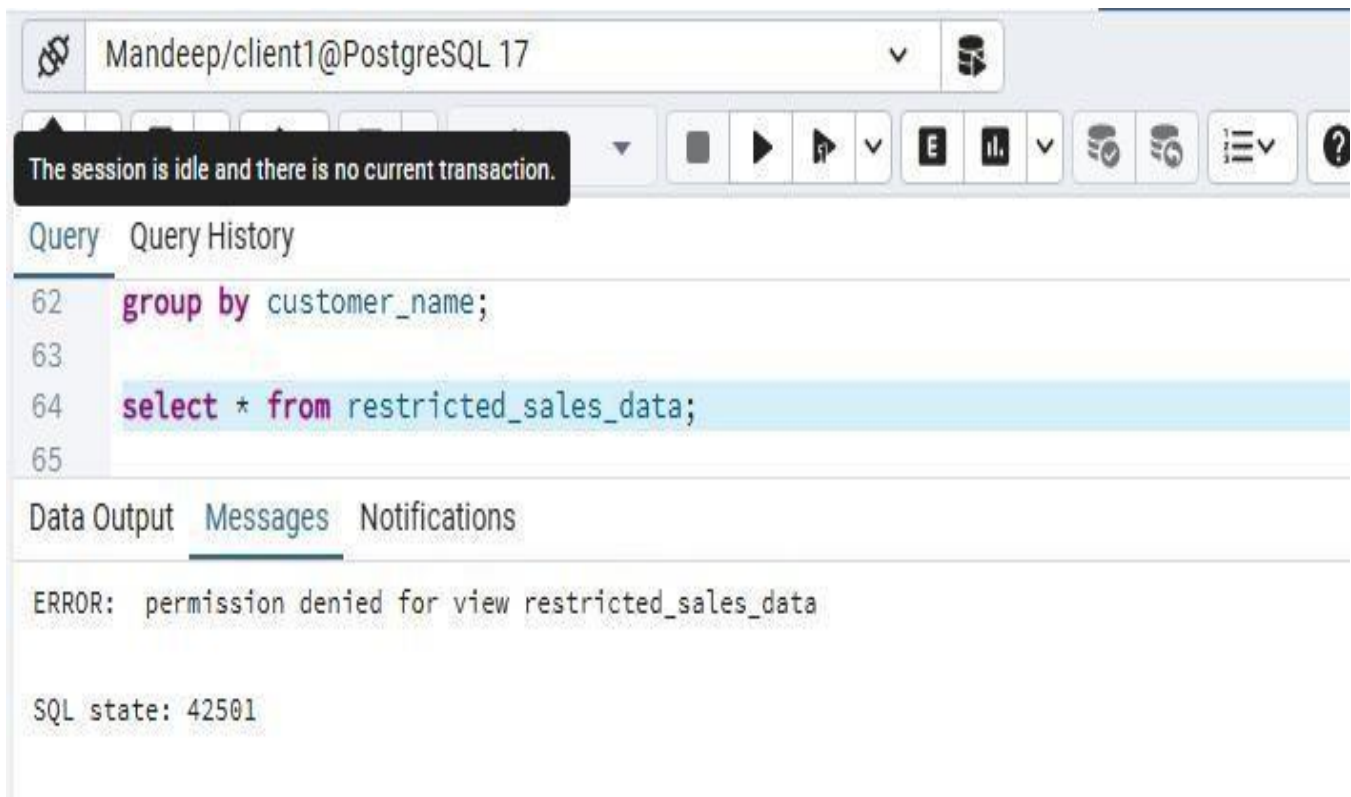

The screenshot shows a PostgreSQL client interface with the connection string 'Mandeep/client1@PostgreSQL 17'. A message box states 'The session is idle and there is no current transaction.' The query editor shows the following SQL code:

```
62 group by customer_name;  
63  
64 select * from restricted_sales_data;  
65
```

The 'Messages' tab is selected, displaying the error:

```
ERROR: permission denied for view restricted_sales_data  
  
SQL state: 42501
```



Mandeep/postgres@PostgreSQL 17

Query Query History

```
65
66 CREATE USER CLIENT1 WITH PASSWORD 'REPORT1234';
67 GRANT SELECT ON RESTRICTED_SALES_DATA TO CLIENT1;
68 REVOKE SELECT ON RESTRICTED_SALES_DATA FROM CLIENT;
```

Data Output Messages Notifications

GRANT

Query returned successfully in 154 msec.


Mandeep/client1@PostgreSQL 17

Query Query History

```
62 group by customer_name;
63
64 select * from restricted_sales_data;
65
```

Data Output Messages Notifications

	customer_name character varying (100)	total_orders bigint	total_sales numeric
1	Jaskaran Singh	2	1000
2	Mandeep Kaur	2	1500

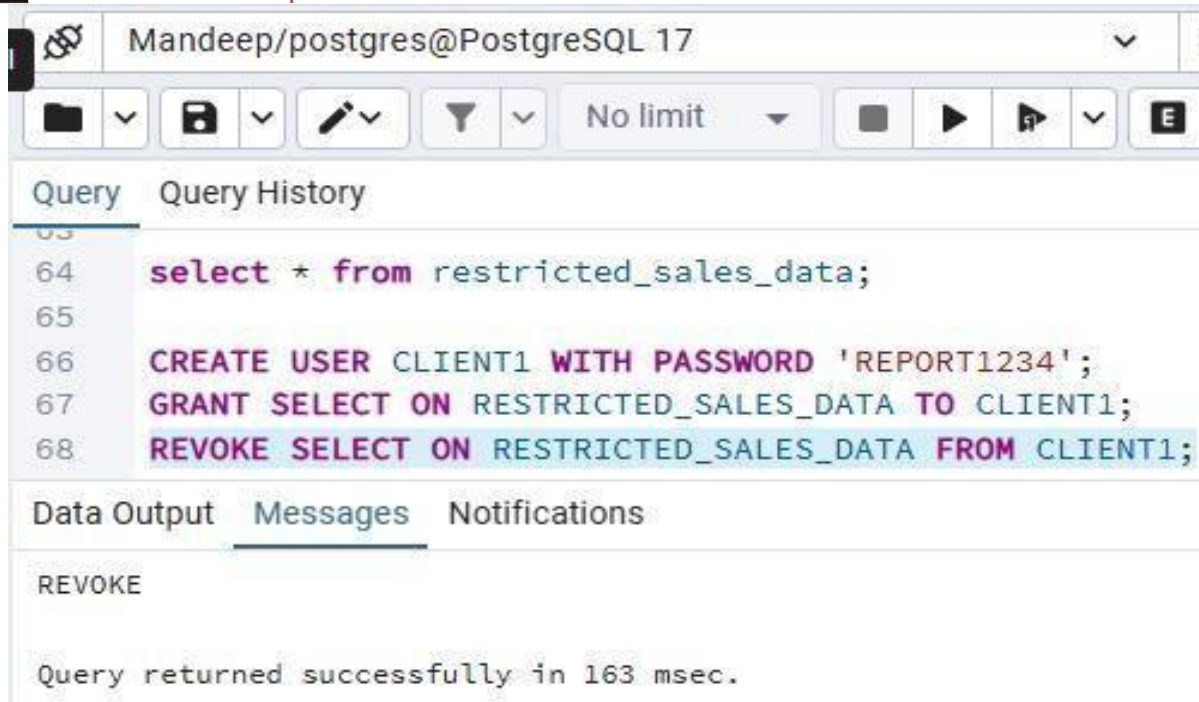

Mandeep/postgres@PostgreSQL 17


Query Query History

```
63  
64 select * from restricted_sales_data;  
65  
66 CREATE USER CLIENT1 WITH PASSWORD 'REPORT1234';  
67 GRANT SELECT ON RESTRICTED_SALES_DATA TO CLIENT1;  
68 REVOKE SELECT ON RESTRICTED_SALES_DATA FROM CLIENT1;
```

Data Output Messages Notifications

REVOKE

Query returned successfully in 163 msec.

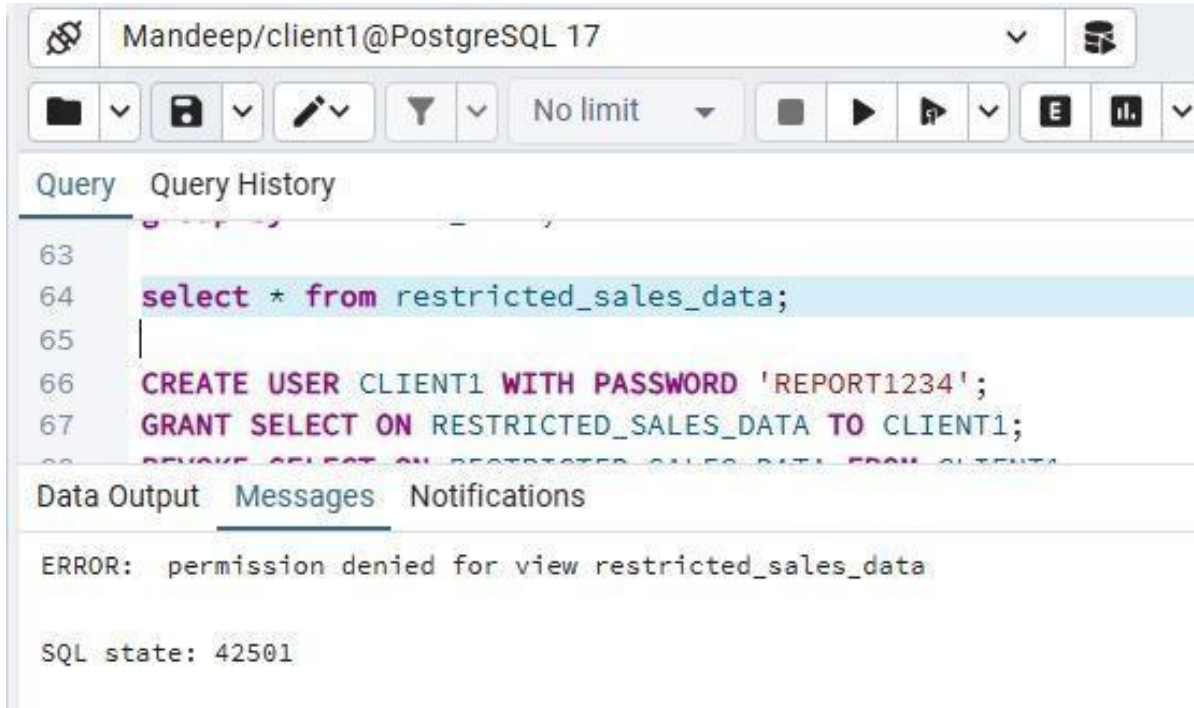

Mandeep/client1@PostgreSQL 17

Query Query History

```
63  
64 select * from restricted_sales_data;  
65  
66 CREATE USER CLIENT1 WITH PASSWORD 'REPORT1234';  
67 GRANT SELECT ON RESTRICTED_SALES_DATA TO CLIENT1;  
68 REVOKE SELECT ON RESTRICTED_SALES_DATA FROM CLIENT1;
```

Data Output Messages Notifications

ERROR: permission denied for view restricted\_sales\_data

SQL state: 42501