Configuration of the end points

Use the following procedure to configure the Net.Pipe bindings in the configuration files.

1. Open **Services.config** in the Workflow Engine bin folder.
2. Make the following changes.
   - Comment out the "HTTP Services" section.
   - Remove the comments from the "NamedPipe Services" section.

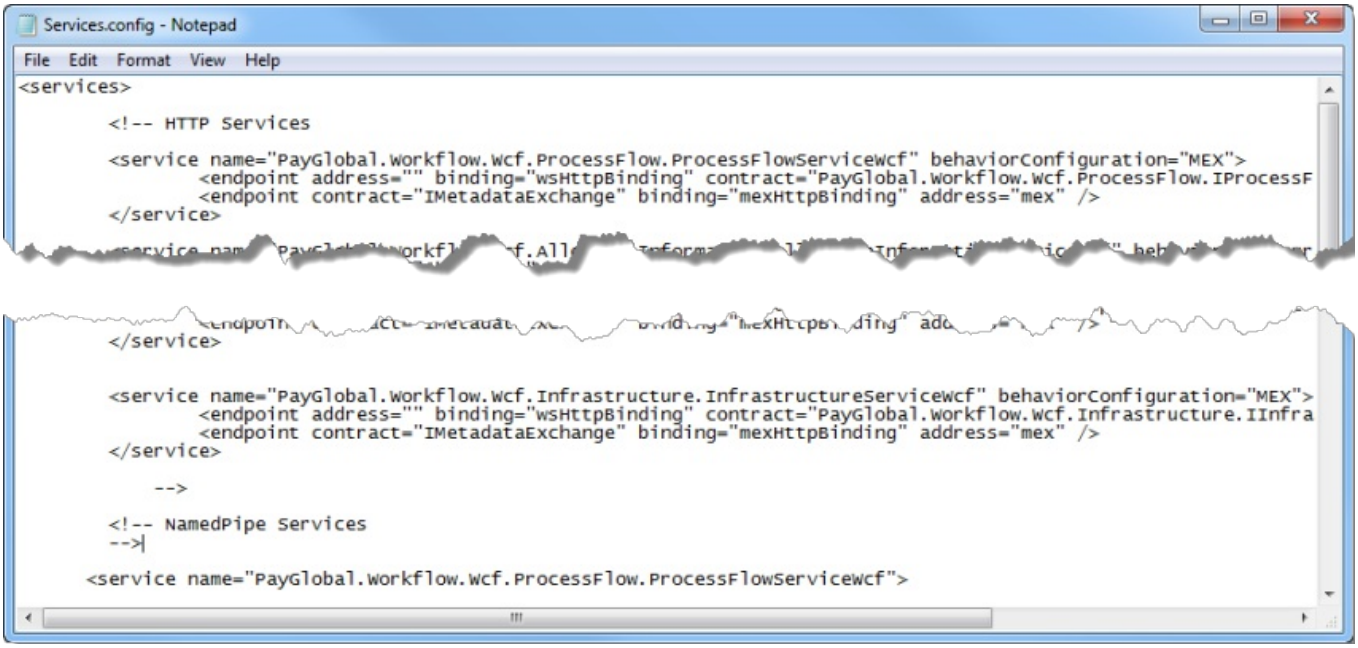

3. Open the Client.config file in the ...\SelfService\Bin\ folder.
   - Comment out the HTTP endpoints.
   - Remove the comments from the NamedPipes endpoints.
   - Configure the addresses for each of the NamedPipes endpoints.

     Addresses use the following format:

     protocol://host/alias (see the underlined address in the image below)

     You **must** use one of the following options for the host:

     - "localhost"

     - 127.0.0.1

     - the name of the server that the engine is hosted on.

     For the alias (EngineName in the image below), replace the application name with the alias name that you used in IIS (for example "WorkflowEngine").

Client.config - Notepad

File Edit Format View Help

```
name="WSHttpBinding_IMessagingServiceWcf" />
  <endpoint address="http://localhost/EngineName/BulkLeave.svc" binding="wsHttpBinding"
bindingConfiguration="WSHttpBinding_PayGlobal_Workflow_Wcf" contract="WorkflowProxy.IBulkLeaveServiceWcf"
name="WSHttpBinding_IBulkLeaveServiceWcf" />
  -->
  <!-- Secure Http endpoints -->
  <!--
  <endpoint address="http://localhost/EngineName/FormFlow.svc"
behaviorConfiguration="SecureHttpEndPointBehavior" binding="wsHttpBinding"
bindingConfiguration="WSHttpBinding_PayGlobal_Workflow_Wcf_Secure_FormFlow"
```

```
  <endpoint address="http://localhost/EngineName/
behaviorConfiguration="SecureHttpEndPointBehavior" binding="wsHttpBinding"
bindingConfiguration="WSHttpBinding_PayGlobal_Workflow_Wcf_Secure"
contract="WorkflowProxy.IBulkLeaveServiceWcf" name="WSHttpBinding_IBulkLeaveServiceWcf" />
  -->

  <!--NamedPipes endpoints-->

  <endpoint address="net.pipe://localhost/EngineName/FormFlow.svc/IPC" binding="netNamedPipeBinding"
bindingConfiguration="IPCWindowsSecurity_PayGlobal_Workflow_Wcf_FormFlow"
contract="WorkflowProxy.IFormFlowServiceWcf" name="NetNamedPipeBinding_IFormFlowServiceWcf" />
  <endpoint address="net.pipe://localhost/EngineName/ProcessFlow.svc/IPC" binding="netNamedPipeBinding"
bindingConfiguration="IPCWindowsSecurity_PayGlobal_Workflow_Wcf"
contract="WorkflowProxy.IProcessFlowServiceWcf" name="NetNamedPipeBinding_IProcessFlowServiceWcf" />
  <endpoint address="net.pipe://localhost/EngineName/ProcessFlowData.svc/IPC" binding="netNamedPipeBinding"
bindingConfiguration="IPCWindowsSecurity_PayGlobal_Workflow_Wcf"
contract="WorkflowProxy.IProcessFlowDataServiceWcf" name="NetNamedPipeBinding_IProcessFlowDataServiceWcf" />
  <endpoint address="net.pipe://localhost/EngineName/LeaveInformation.svc/IPC" binding="netNamedPipeBinding"
bindingConfiguration="IPCWindowsSecurity_PayGlobal_Workflow_Wcf"
contract="WorkflowProxy.ILeaveInformationServiceWcf" name="NetNamedPipeBinding_ILeaveInformationServiceWcf" />
  <endpoint address="net.pipe://localhost/EngineName/EmailConfiguration.svc/IPC" binding="netNamedPipeBinding"
bindingConfiguration="IPCWindowsSecurity_PayGlobal_Workflow_Wcf"
contract="WorkflowProxy.IEmailConfigurationServiceWcf"
name="NetNamedPipeBinding_IEmailConfigurationServiceWcf" />
  <endpoint address="net.pipe://localhost/EngineName/Module.svc/IPC" binding="netNamedPipeBinding"
bindingConfiguration="IPCWindowsSecurity_PayGlobal_Workflow_Wcf" contract="WorkflowProxy.IModuleServiceWcf"
name="NetNamedPipeBinding_IModuleServiceWcf" />
  <endpoint address="net.pipe://localhost/EngineName/AllowanceInformation.svc/IPC"
binding="netNamedPipeBinding" bindingConfiguration="IPCWindowsSecurity_PayGlobal_Workflow_Wcf"
contract="WorkflowProxy.IAllowanceInformationServiceWcf"
name="NetNamedPipeBinding_IAllowanceInformationServiceWcf" />
  <endpoint address="net.pipe://localhost/EngineName/WorkflowRoles.svc/IPC" binding="netNamedPipeBinding"
```

Previous Next