



Baker Atlas

FILE NO:	COMPANY	PEAK PETROLEUM INDUSTRIES NIGERIA LTD
API NO:	WELL	BILABRI D3
SCALE 1:200	FIELD	BILABRI
	RIG NAME	BULFORD DOLPHIN
Ver. 3.87 FIELD PRINT TIGHT HOLE	LOCATION:	NORTH: 515,558.23 M EAST: 731,847.1 M
PERMANENT DATUM LOG MEASURED FROM DRILL MEAS. FROM	MSL DF DF	ELEVATION 25 M ABOVE P.D.
	OTHER SERVICES RCI/SAMPLE/EW/GR HDL/MAC/GR HDL/ZDL/CN/GR SMC	ELEVATIONS: KB DF 25 M GL -145 M

DATE	26-OCT-2006	27-OCT-2006
RUN	1	2
TRIP	1	1
SERVICE ORDER	NG543428	NG543429
DEPTH DRILLER	2555 M	2555 M
DEPTH LOGGER	N/A	2556.3 M
BOTTOM LOGGED INTERVAL	2482.0 M	2522.5 M
TOP LOGGED INTERVAL	829.0 M	2345.0 M
CASING DRILLER	13.375 IN	13.375 IN
CASING LOGGER	829.0 M	829 M
BIT SIZE	12.25 IN	12.25 IN
TYPE OF FLUID IN HOLE	OBM	OBM
DENSITY	10.1 LB/G	10.1 LB/G
VISCOSITY	63 S	63 S
PH	N/A	N/A
FLUID LOSS	23 C3	23 C3
SOURCE OF SAMPLE	N/A	N/A
RM AT MEAS. TEMP.	N/A	N/A
RMF AT MEAS. TEMP.	N/A	N/A
RMC AT MEAS. TEMP.	N/A	N/A
SOURCE OF RMF	RMC	N/A
RM AT BHT	N/A	N/A
TIME SINCE CIRCULATION	46 HOURS	16 HOURS
MAX. RECORDED TEMP.	196.9 DEGF	187.5 DEGF
EQUIP. NO.	HSL-8706	HSL 8706
LOCATION	PH	PH
RECORDED BY	T. OGILVIE / A. GREEFF	T. OGILVIE
WITNESSED BY	CHARLES OGBOR	CHARLES OGBOR

IN MAKING INTERPRETATIONS OF LOGS OUR EMPLOYEES WILL GIVE CUSTOMER THE BENEFIT OF THEIR BEST JUDGEMENT. BUT SINCE ALL INTERPRETATIONS ARE OPINIONS BASED ON INFERENCES FROM ELECTRICAL OR OTHER MEASUREMENTS, WE CANNOT, AND WE DO NOT GUARANTEE THE ACCURACY OR CORRECTNESS OF ANY INTERPRETATION. WE SHALL NOT BE LIABLE OR RESPONSIBLE FOR ANY LOSS, COST, DAMAGES, OR EXPENSES WHATSOEVER INCURRED OR SUSTAINED BY THE CUSTOMER RESULTING FROM ANY INTERPRETATION MADE BY ANY OF OUR EMPLOYEES.

BOREHOLE RECORD

BIT SIZE	FROM	TO
12.25 IN	840 M	2555.0 M

CASING RECORD

SIZE	WEIGHT	GRADE	FROM	TO
13.375 IN	68 LB/F	K-55	0 M	829 M

REMARKS

- RUN 1 TRIP 1 :
- ALL TOOLS WERE CONVEYED ON WIRELINE.
 - DEPTH CORRECTED TO MAGNETIC MARKS AND ADJUSTED FOR STRETCH.
 - TOP OF FISH LOCATED AT APPROXIMATELY 2542M.
 - WASHOUT GREATER THAN MAXIMUM CALIPER READING IMMEDIATELY BELOW CSG SHOE.
- RUN 2 TRIP 1 :
- ALL TOOLS USED WERE THE SAME AS PER RUN 1.
 - LOG TIED INTO RUN 1.
 - DATA FROM RUNS 1 AND 2 SPLICED AT 2465.0M

EQUIPMENT DATA

EQUIPMENT DATA

RUN	TRIP	TOOL	SERIES NO.	SERIAL NO.	POSITION
1	1	SWVL	3944XA	112591	FREE
1	1	DHPA	4430XA	10003917	FREE
1	1	TTRM	3981XA	186331	FREE
1	1	COMR	3514XA	10203475	FREE
1	1	DSL	1329XA	167531	FREE
1	1	CN	2446XA	153117	DECENTRALIZED
1	1	ZDL EA	2228EA	167879	DECENTRALIZED
1	1	ZDL MA	2228MA	114428	PAD DEVICE
1	1	KNJT	3939XA	183765	FREE
1	1	ORIT	4401XA	10089606	FREE
1	1	XMAC EA	1677EA	369972	CENTRALIZED
1	1	XMAC MB	1678MB	189692	CENTRALIZED
1	1	XMAC PA	1678PA	190325	CENTRALIZED
1	1	XMAC BA	1678BA	1179582	CENTRALIZED
1	1	XMAC FA	1678FA	189314	CENTRALIZED
1	1	KNJT	3939XA	176925	FREE
1	1	HDIL EA	1515EA	10179438	1.5" STANDOFF
1	1	HDIL MA	1515MA	179516	1.5" STANDOFF

INSTRUMENT CONFIGURATION

Source File: /dat1a/peak/bilabari_D3/gslam-tdg

CABLEHEAD

Series : CABL338
 Mnemonic : CBLH
 Diameter : 3.38"
 Weight : 10.9 kg
 Length : 167.6 cm
 Measure Point: 83.8 cm: CABLEHEAD TOP

SWIVEL

Series : 3944XA
 Mnemonic : SWVL
 Diameter : 3.38"
 Weight : 29.5 kg
 Length : 91.4 cm

DOWNHOLE POWER ADAPTER

Series : 4430XB
 Mnemonic : DHPA
 Diameter : 3.62"
 Weight : 36.4 kg
 Length : 160.5 cm

TTRM SUB

42.81 m

CABLEHEAD TOP 41.97 m

Series : 3981XA
Mnemonic : TTRM
Diameter : 3.63"
Weight : 36.4 kg
Length : 116.8 cm
Measure Point: 42.2 cm: TEMP MP
Measure Point: 34.5 cm: RM MP

TEMP MP — 37.86 m
RM MP — 37.79 m

WTS COMMON REMOTE

Series : 3514XB
Mnemonic : WTS
Diameter : 3.63"
Weight : 65.5 kg
Length : 189.5 cm

DIGITAL SPECTRALOG

Series : 1329XA
Mnemonic : DSL
Diameter : 3.63"
Weight : 64.5 kg
Length : 222.8 cm
Measure Point: 48.8 cm: GR MP

GR MP — 33.81 m

COMPENSATED NEUTRON

Series : 2446XA
Mnemonic : CN
Diameter : 3.63"
Weight : 68.2 kg
Length : 231.4 cm
Measure Point: 80.3 cm: LSN MP
Measure Point: 68.2 cm: SSN MP

LSN MP — 31.81 m
SSN MP — 31.69 m

Z-DENS LOG

Series : 2228XA
Mnemonic : ZDL
Diameter : 4.88"
Weight : 213.6 kg
Length : 564.6 cm
Measure Point: 107.7 cm: SSD MP
Measure Point: 97.3 cm: CAL / ZSPEC MP

SSD MP — 26.44 m
CAL / ZSPEC MP — 26.33 m

KNUCKLE JOINT (DOUBLE)

Series : 3939XA
Mnemonic : KNJT
Diameter : 3.38"
Weight : 22.7 kg
Length : 141.8 cm

DIGITAL ORIENTATION

Series : 4401XB
Mnemonic : ORIT
Diameter : 3.38"
Weight : 53.6 kg
Length : 329.4 cm
Measure Point: 0.0 cm: ORIENT MP

ORIENT MP 20.65 m

ARRAY ACOUSTILOG ELECTRONICS, 8 CHANNEL

Series : 1677EA
Mnemonic : XMAC
Diameter : 3.38"
Weight : 61.8 kg
Length : 238.3 cm

CROSS MULTIPOLE ARRAY ACOUSTILOG

Series : 1678MB
Mnemonic : XMAC
Diameter : 3.68"
Weight : 68.2 kg
Length : 332.4 cm
Measure Point: 167.6 cm: R8
Measure Point: 152.4 cm: R7
Measure Point: 137.2 cm: R6
Measure Point: 121.9 cm: R5
Measure Point: 106.7 cm: R4
Measure Point: 91.4 cm: R3
Measure Point: 76.2 cm: R2
Measure Point: 61.0 cm: R1

R8 16.62 m
R7 16.46 m
R6 16.31 m
R5 16.16 m
R4 16.01 m
R3 15.85 m
R2 15.70 m
R1 15.55 m

MULTI-POLE ARRAY ACOUSTIC

Series : 1678PA
Mnemonic : MAC
Diameter : 3.63"
Weight : 45.5 kg
Length : 152.4 cm

MULTI-POLE ARRAY ACOUSTIC

Series : 1678BA
Mnemonic : XMAC
Diameter : 3.88"
Weight : 79.5 kg
Length : 241.3 cm
Measure Point: 195.6 cm: QUADRUPOLE T5
Measure Point: 195.6 cm: MONOPOLE T2
Measure Point: 142.2 cm: Y-DIPOLE T4
Measure Point: 142.2 cm: X-DIPOLE T3
Measure Point: 88.9 cm: MONOPOLE T1

MONOPOLE T2 12.96 m
QUADRUPOLE T5 12.96 m

X-DIPOLE T3 12.43 m
Y-DIPOLE T4 12.43 m

MONOPOLE T1 11.89 m

MULTI-POLE ARRAY ACOUSTIC

Series : 1678FA
Mnemonic : MAC
Diameter : 3.38"
Weight : 34.1 kg
Length : 131.6 cm

KNUCKLE JOINT (DOUBLE)

Series : 3939XA
Mnemonic : KNJT
Diameter : 3.38"
Weight : 22.7 kg
Length : 141.8 cm

HIGH DEFINITION INDUCTION TOOL

Series : 1515XA
Mnemonic : HDIL
Diameter : 3.62"
Weight : 200.5 kg
Length : 827.0 cm
Measure Point: 423.9 cm: SP MP
Measure Point: 226.8 cm: XMTR MP

SP MP 4.24 m

XMTR MP 2.27 m

BULL PLUG 3 1/8

0.00 m

TOTAL LENGTH: 42.87 m
TOTAL WEIGHT: 1131.4 kg
MAX DIAMETER: 0'4.88"

MAIN LOG 1:1000 SCALE

ECLIPS 5.1i Sep 16, 2005
Updates: 1,2,37

Sun Oct 29 12:38:24 2006

Perplt /main/61 Cplot 9.18 Pdf_Cpp /main/16 Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

File: /data/peak/bllabar1_D3/1777103.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 807.453 m BOTTOM DEPTH: 2510.028 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER (.h)	medium (1)		TOP	BOTTOM
	FILTER (.i)	medium (1)		"	"
Y AXIS CALIPER	FILTER ()	medium (1)		"	"
SPEED	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
TENSION	FILTER ()	medium (1)		"	"
GR	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
SL-II	FILTER	medium (1)		"	"
X AXIS CALIPER	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
BIT SIZE	BIT SIZE	12.250	in	TOP	BOTTOM

SLII PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
E MATRIX	OPEN/CASED HOLE	OPEN HOLE		TOP	BOTTOM
SLII AUTO GAIN	AUTO GAIN	AUTO GAIN ON		"	"
SLII ENERGY RANGE	ENERGY RANGE	.15-3.0 MeV		"	"

CURVE DESCRIPTION REPORT


CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CAL	CAL	Oct 25 23:01:34 2006	CALIPER
F1:GR	GR	Oct 25 23:01:34 2006	GAMMA RAY
F1:K	K	Oct 25 23:01:34 2006	POTASSIUM CONTENT
F1:KTH	KTH	Oct 25 23:01:34 2006	STRIPPED POTASSIUM-THORIUM
F1:QCAL	QCAL	Oct 25 23:01:34 2006	QUALITY CURVE
F1:SPD	SPD	Oct 25 23:01:34 2006	SPEED
F1:TH	TH	Oct 25 23:01:34 2006	THORIUM CONCENTRATION
F1:TTEN	TTEN	Oct 25 23:01:34 2006	TOTAL TENSION
F1:U	U	Oct 25 23:01:34 2006	URANIUM CONTENT

CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CAL	26.33	KTH	33.83	TH	33.83		
GR	33.83	QCAL	33.83	TTEN	0.00		
K	33.83	SPD	0.00	U	33.83		

Presentation : sys1:/dat1a/peak/bilabar1_D3/sl_main_1000.pdf [1:1000 Scale]
Plot Interval : 769.772 - 2557.88 Meters

Data File 1 : F1 : sys1:/dat1a/peak/bilabar1_D3/slams.xtf
Created On : Oct 25 23:01:34 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 769.772 - 2557.88 Meters
Oct : [777]

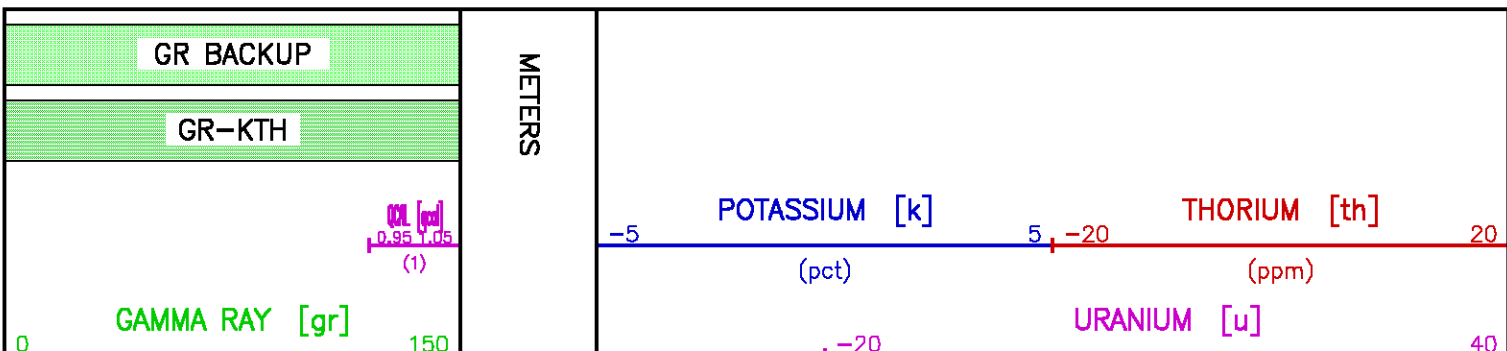

(gAPI)

KTH [kth]

(gAPI)

CALIPER [cal]

(in)


SPEED [spd]

(m/min)

0 150

10 20

0 50

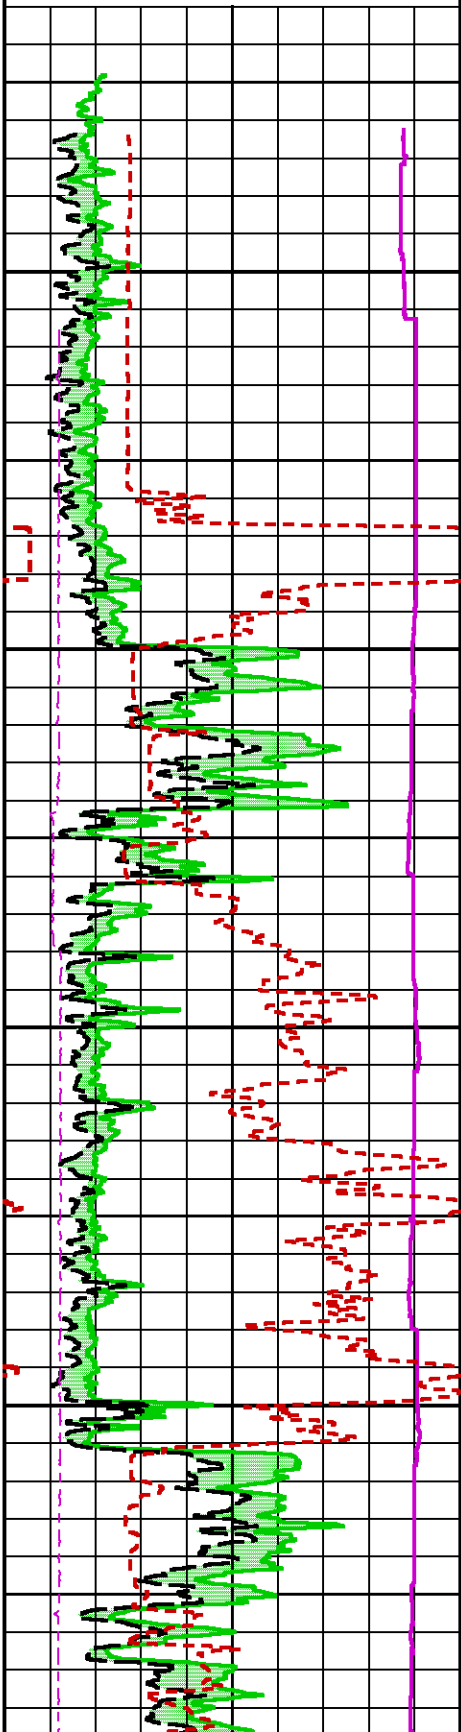

800

850

900


950




(ppm)




TOTAL TENSION [tten]




(lbf)



7000 0


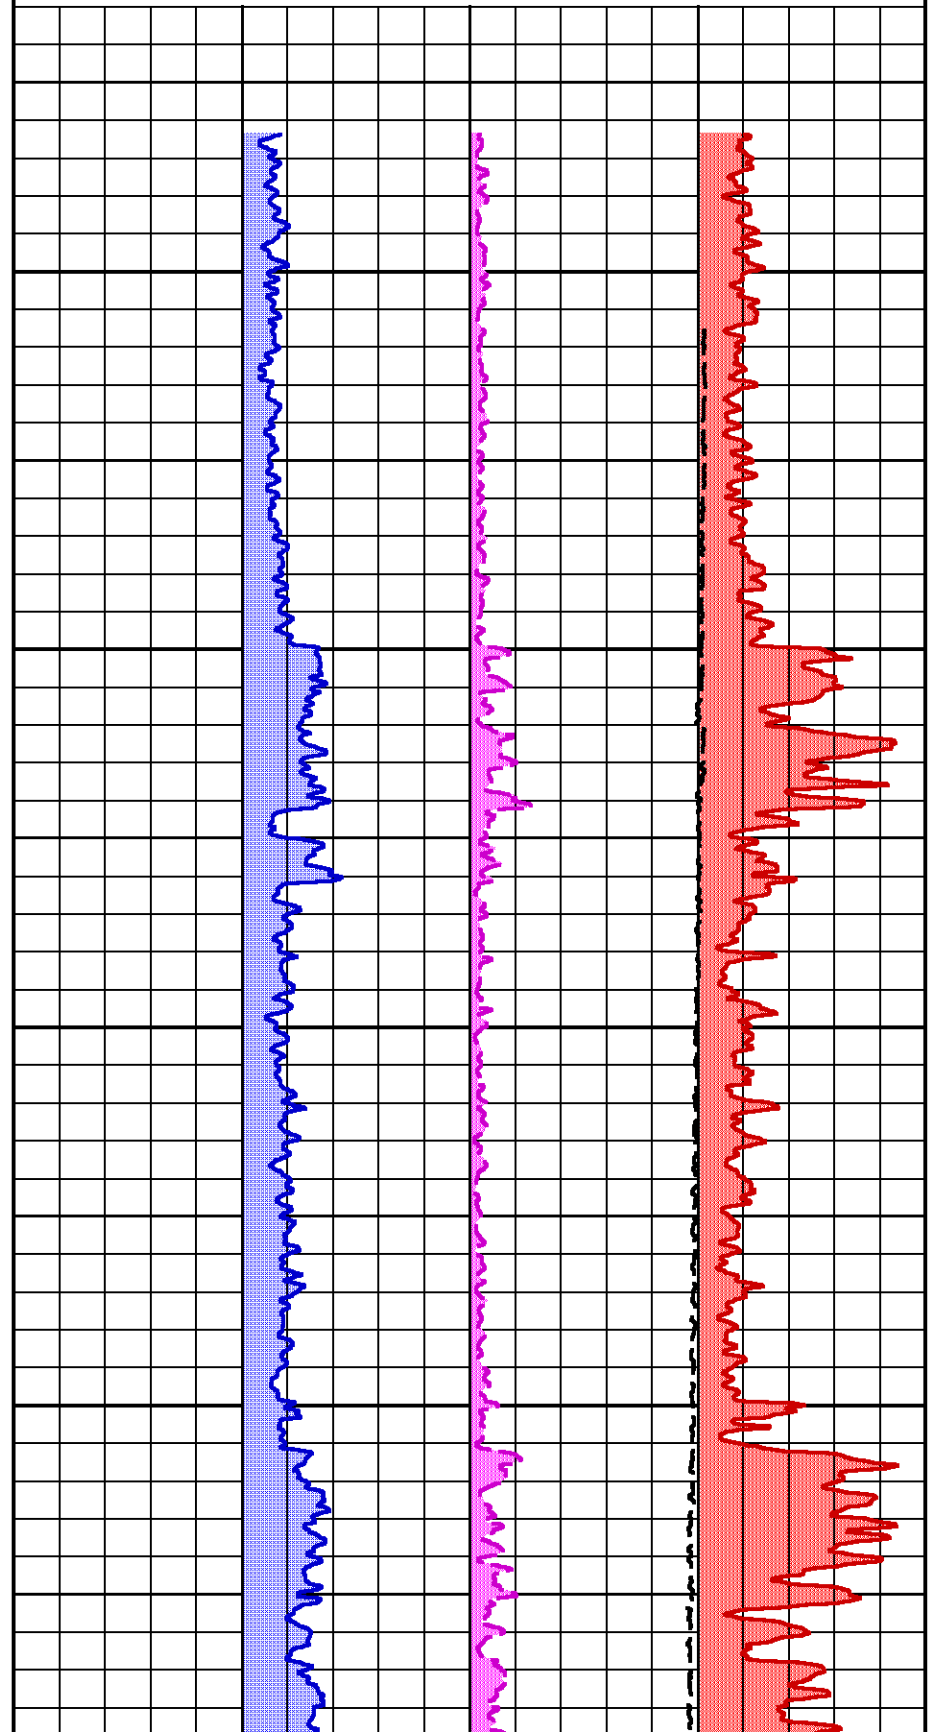


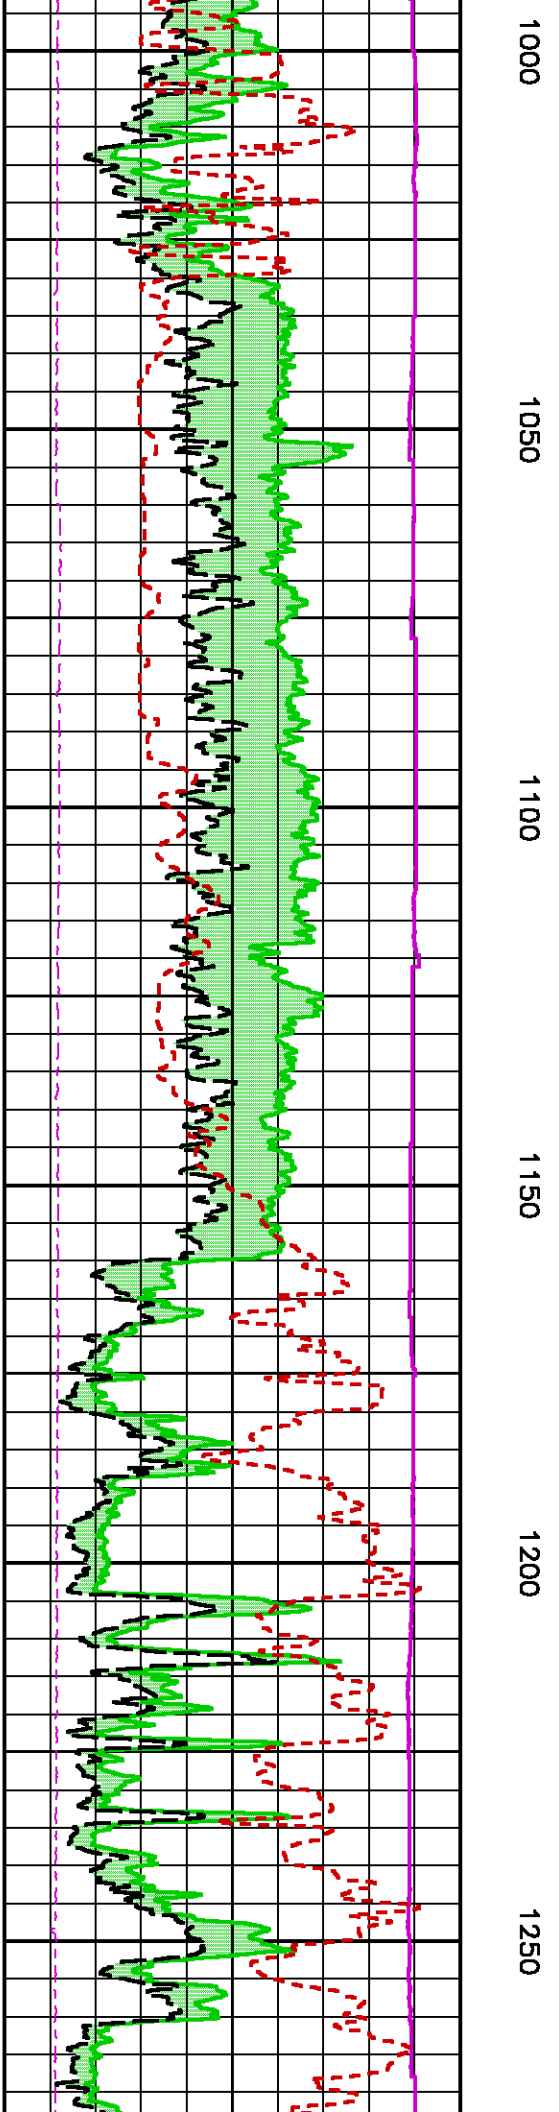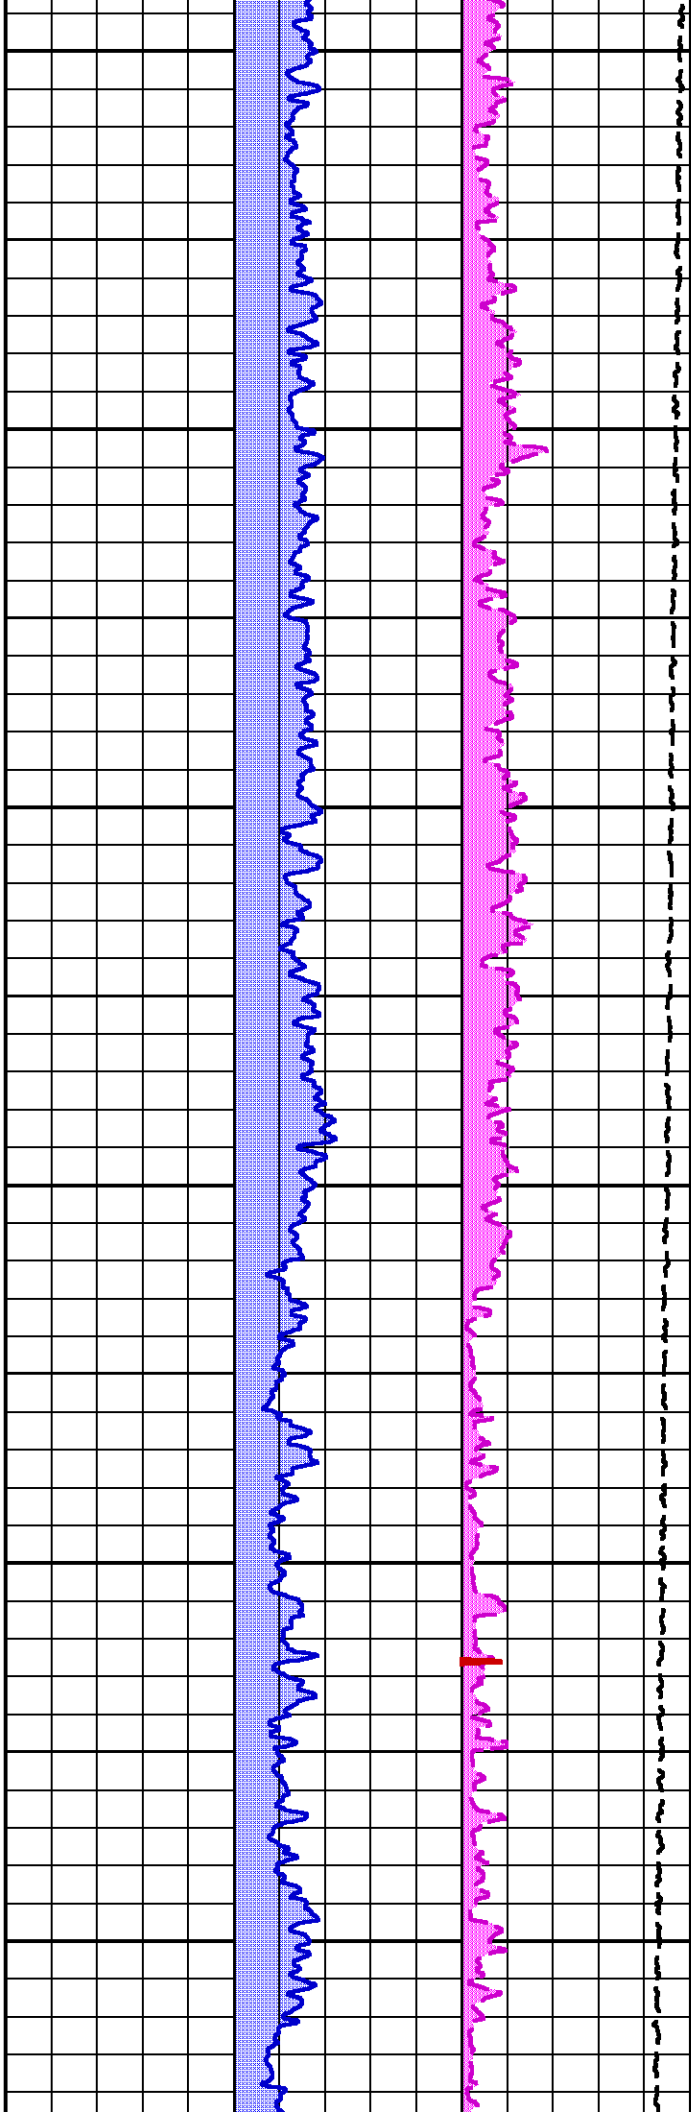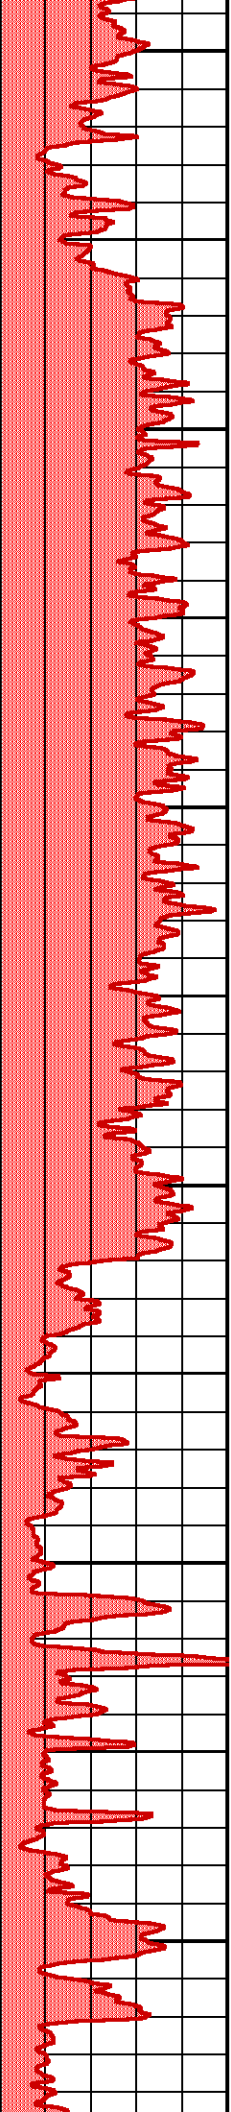

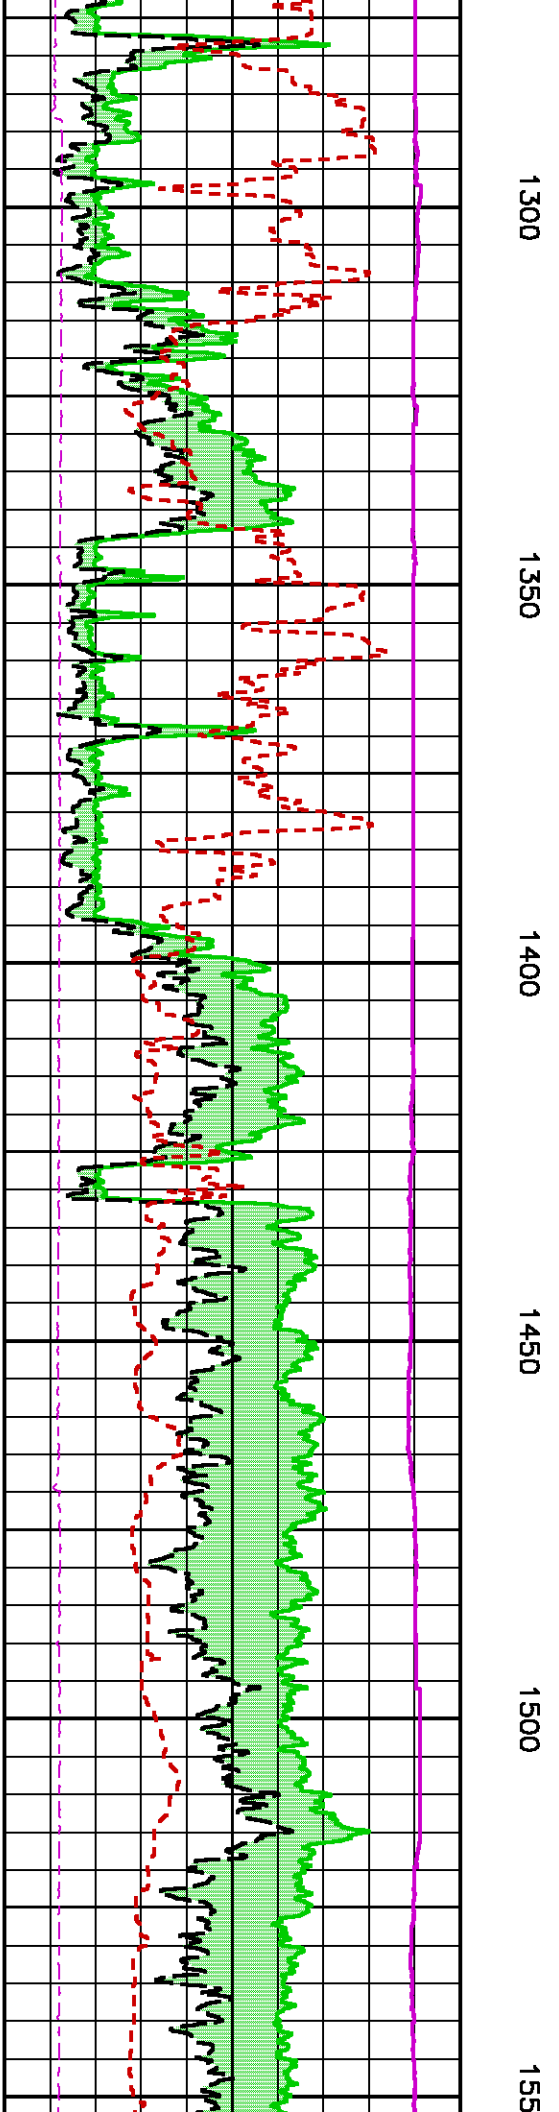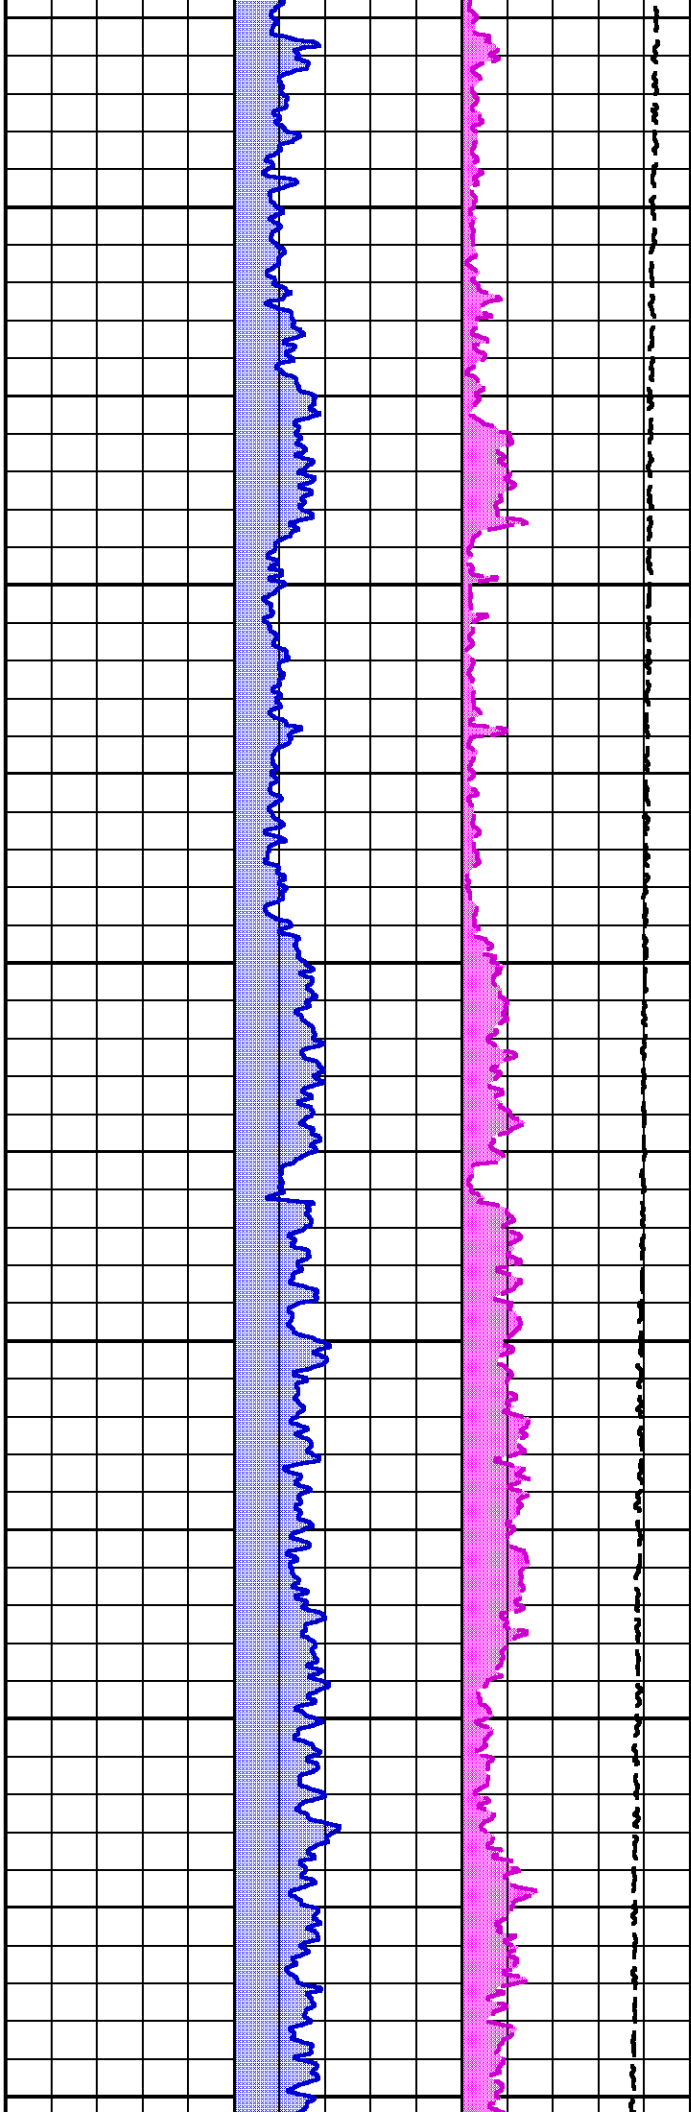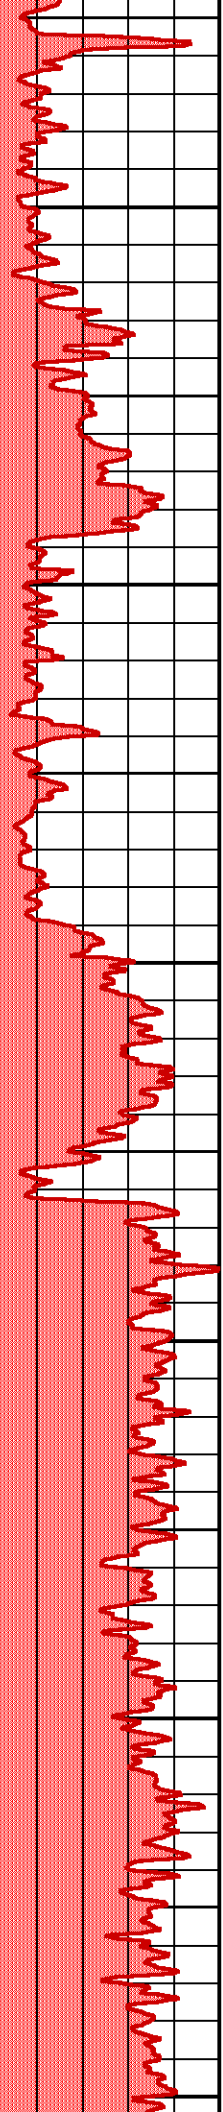

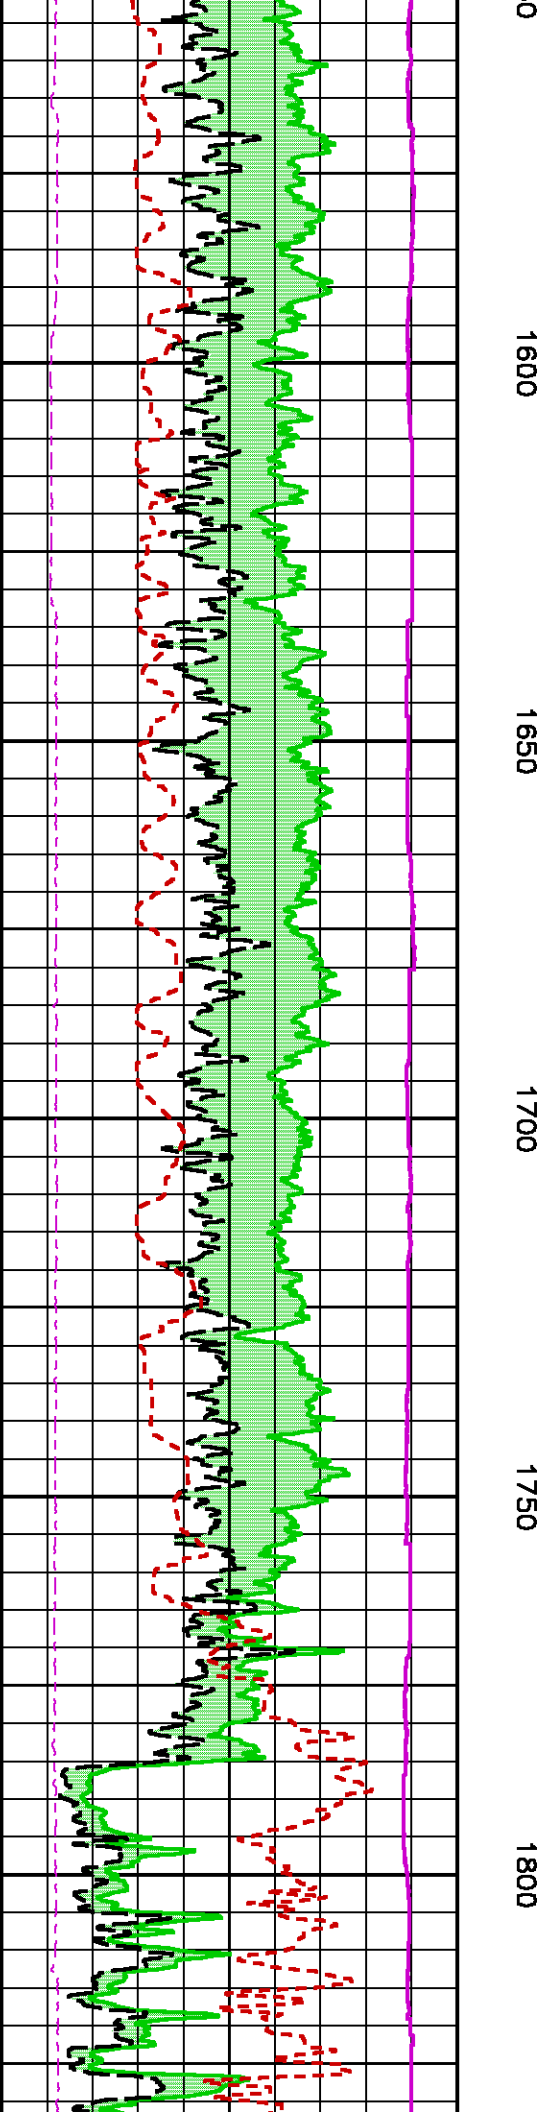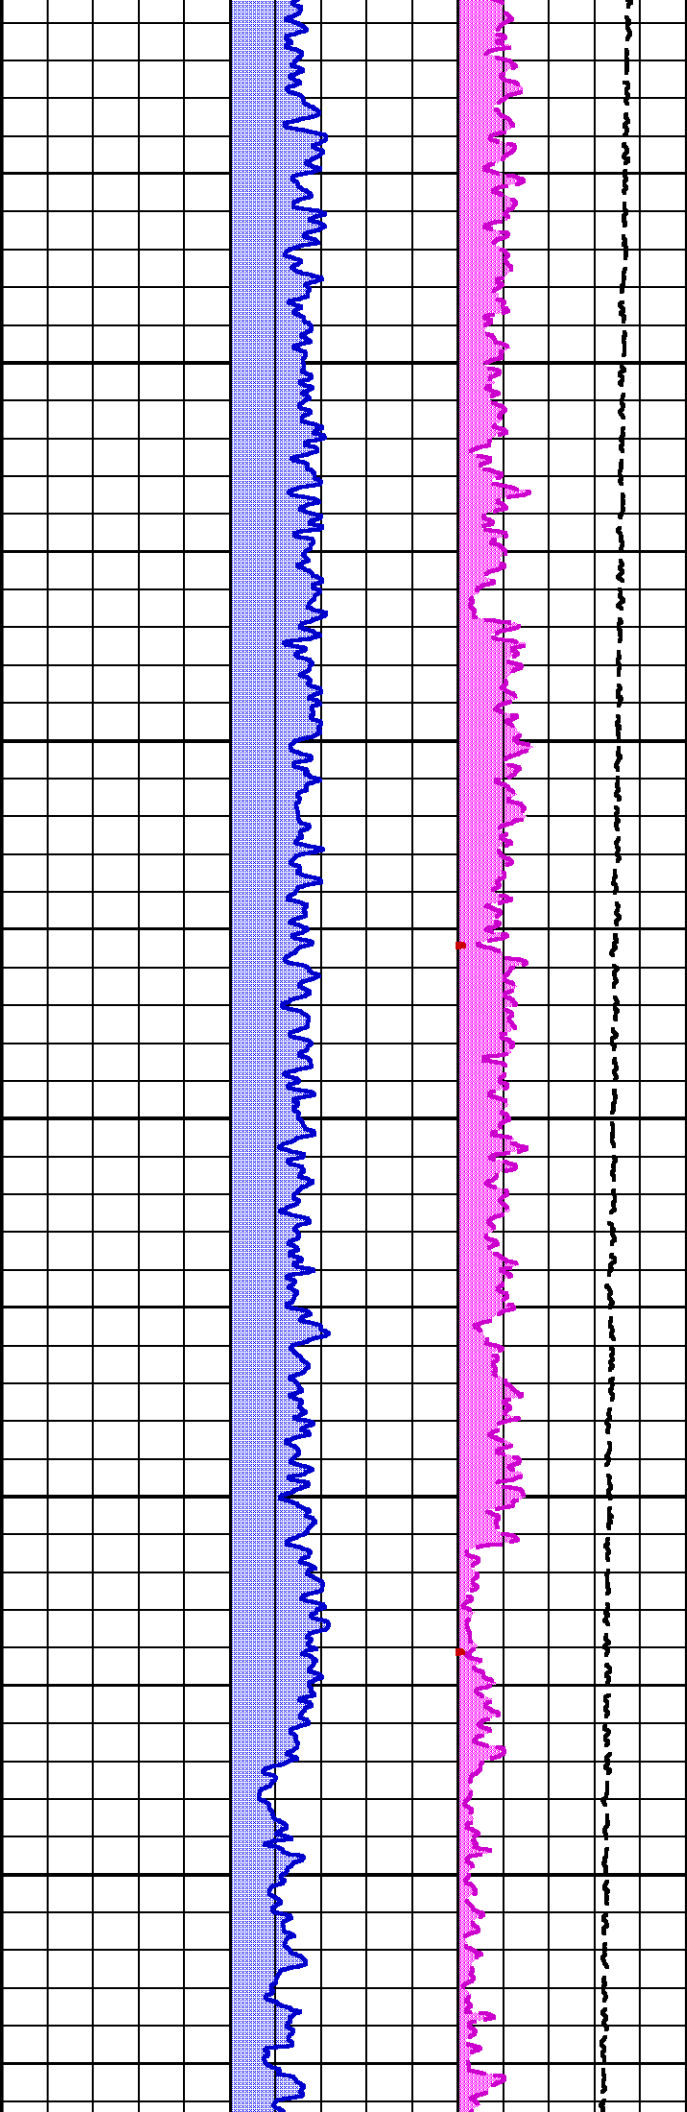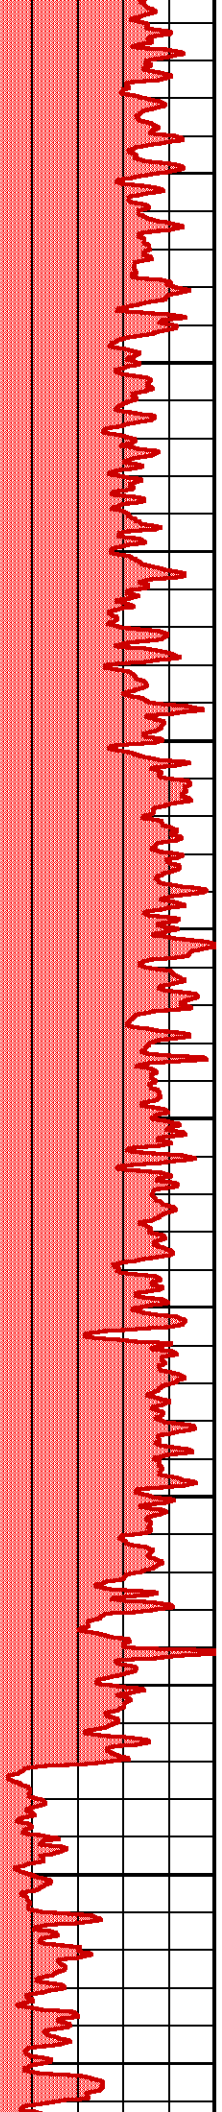

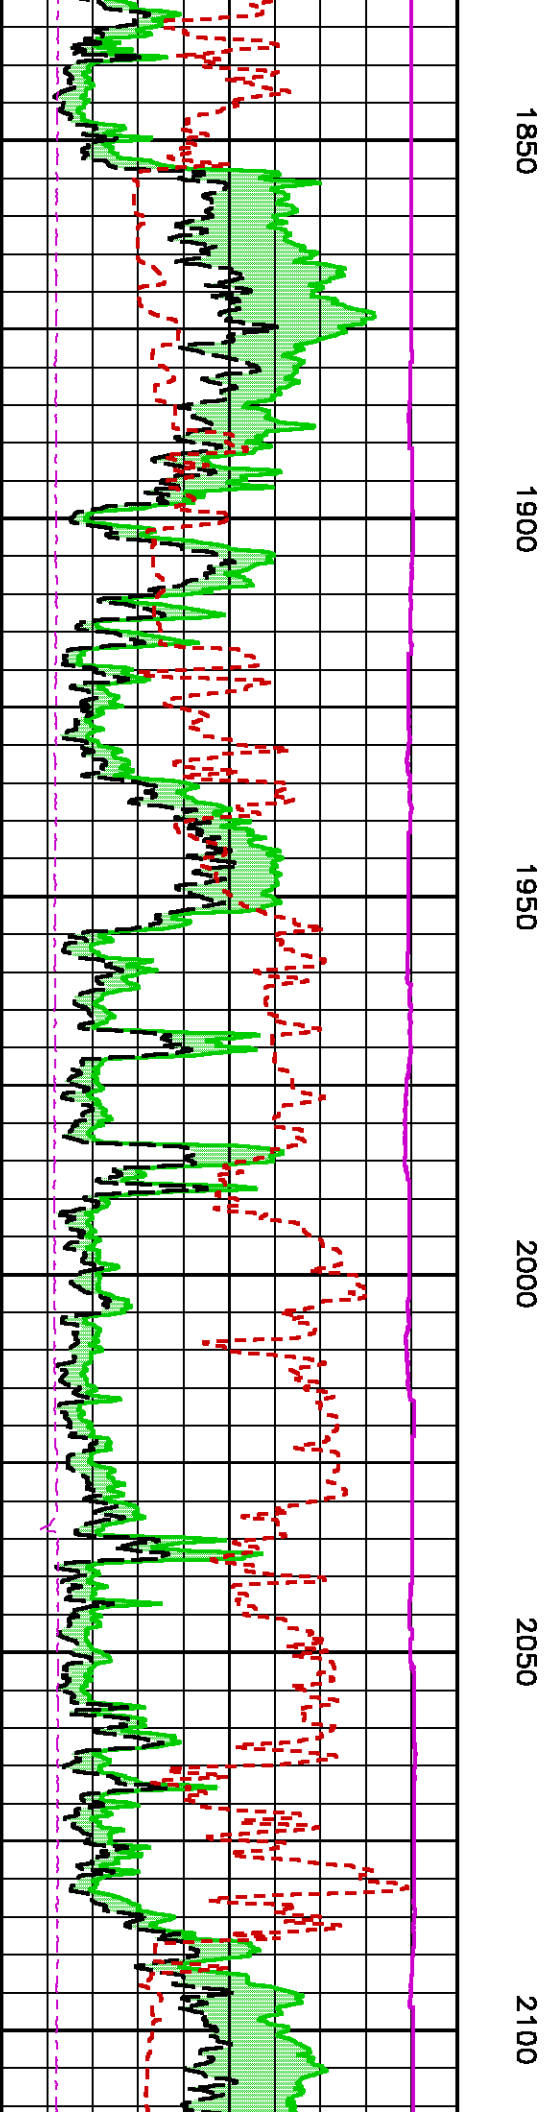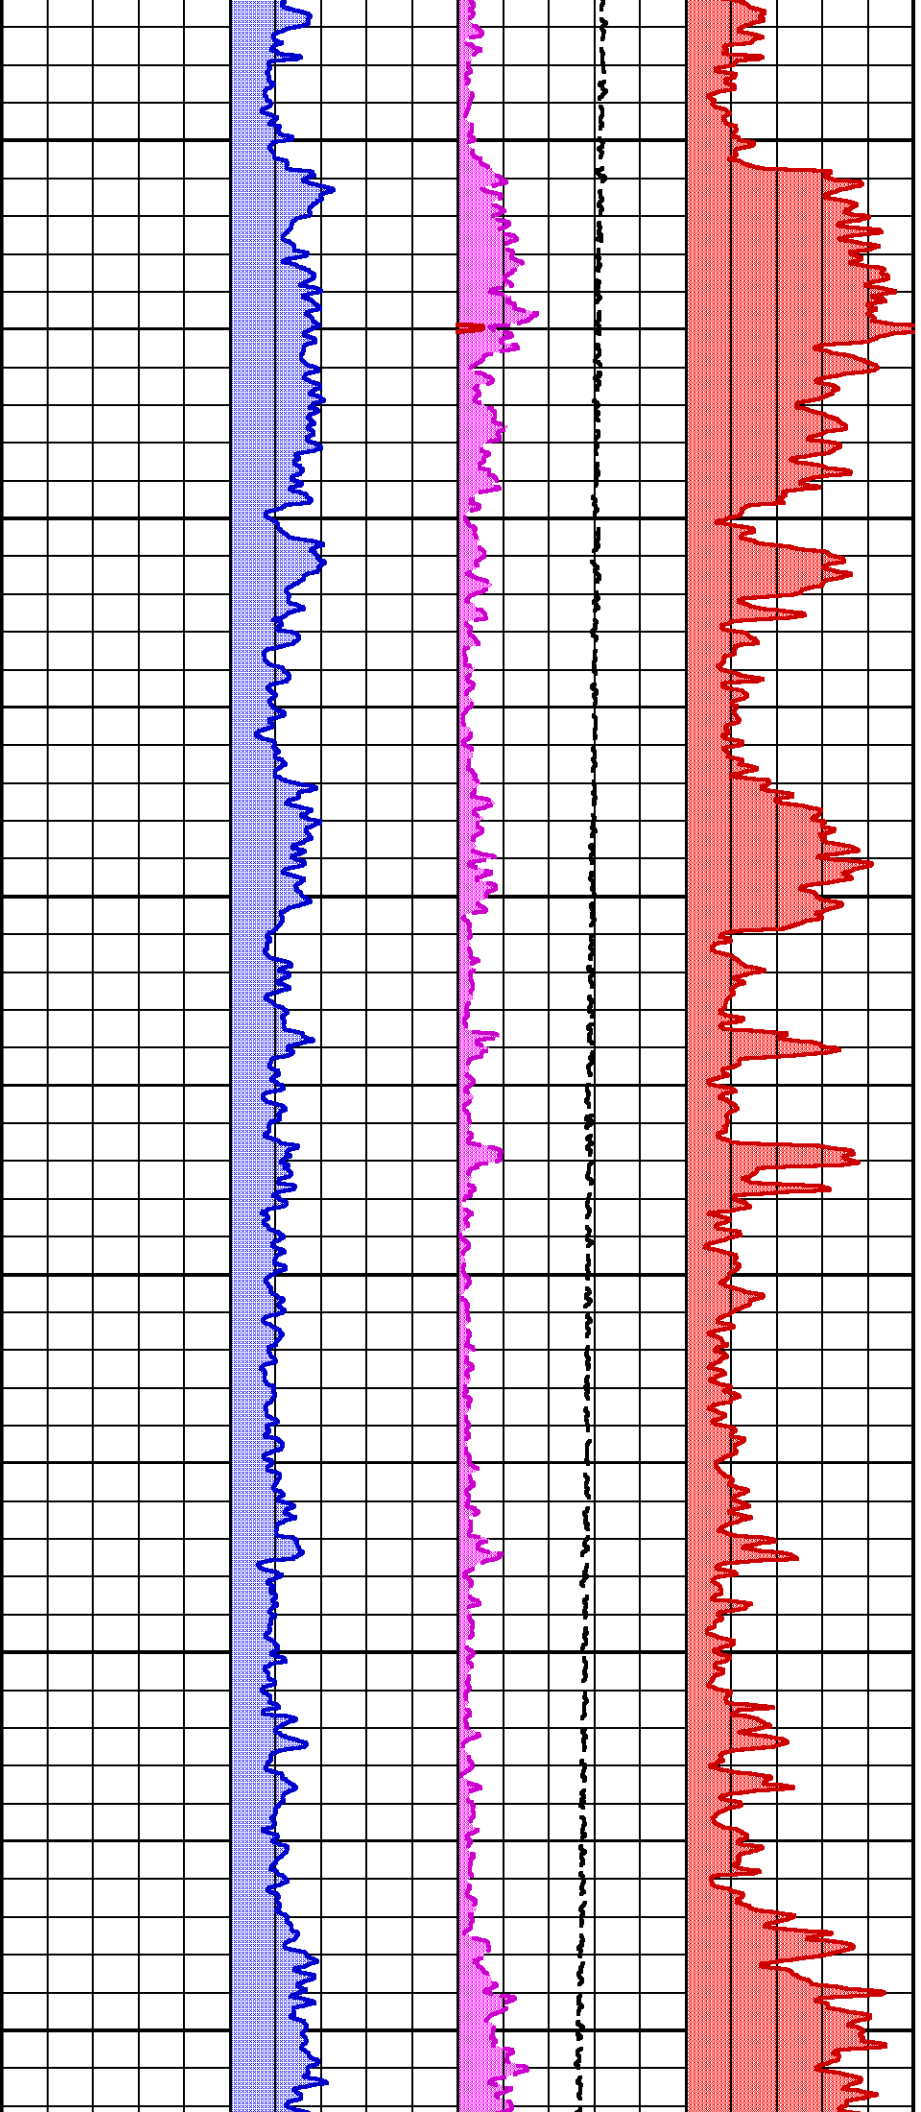

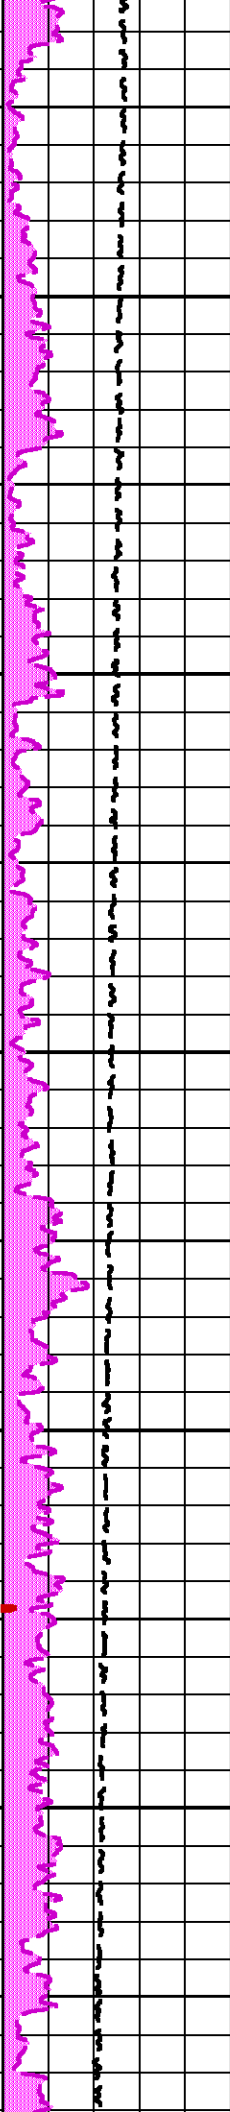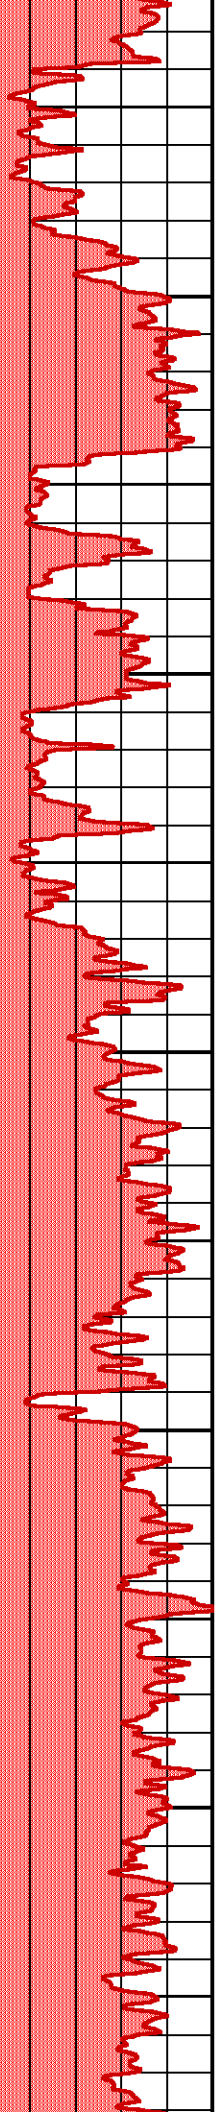


2150



2200

2250

2300

2350

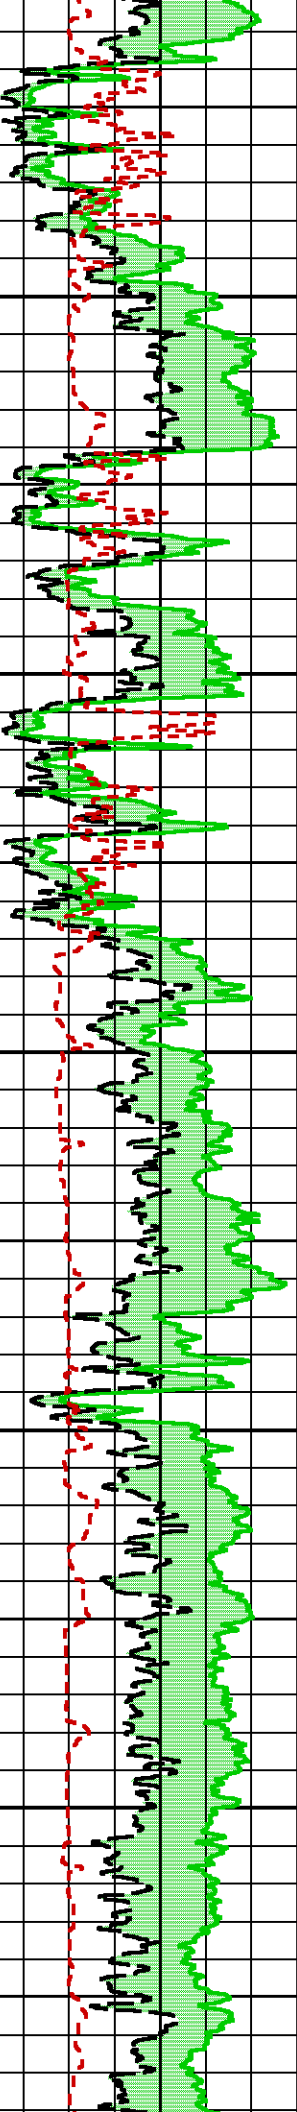

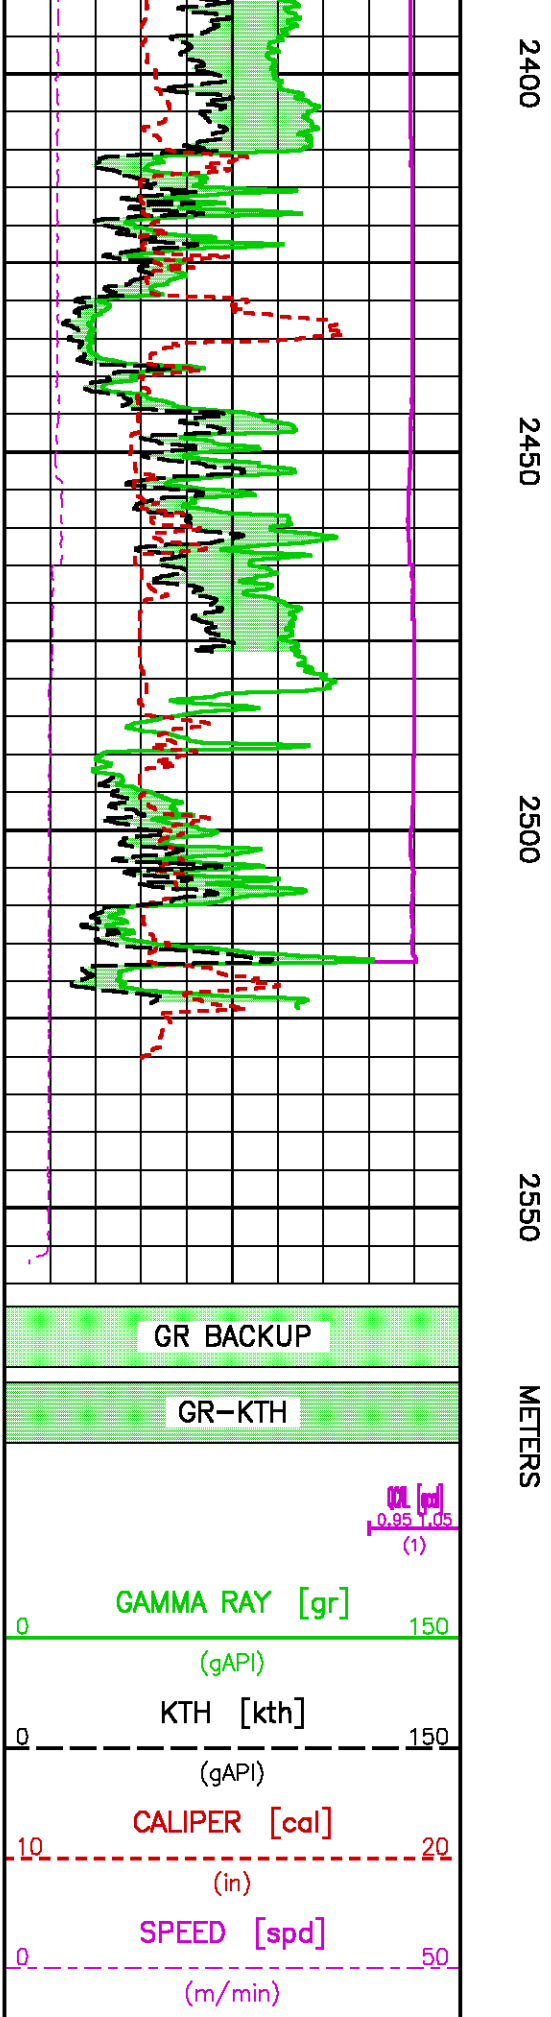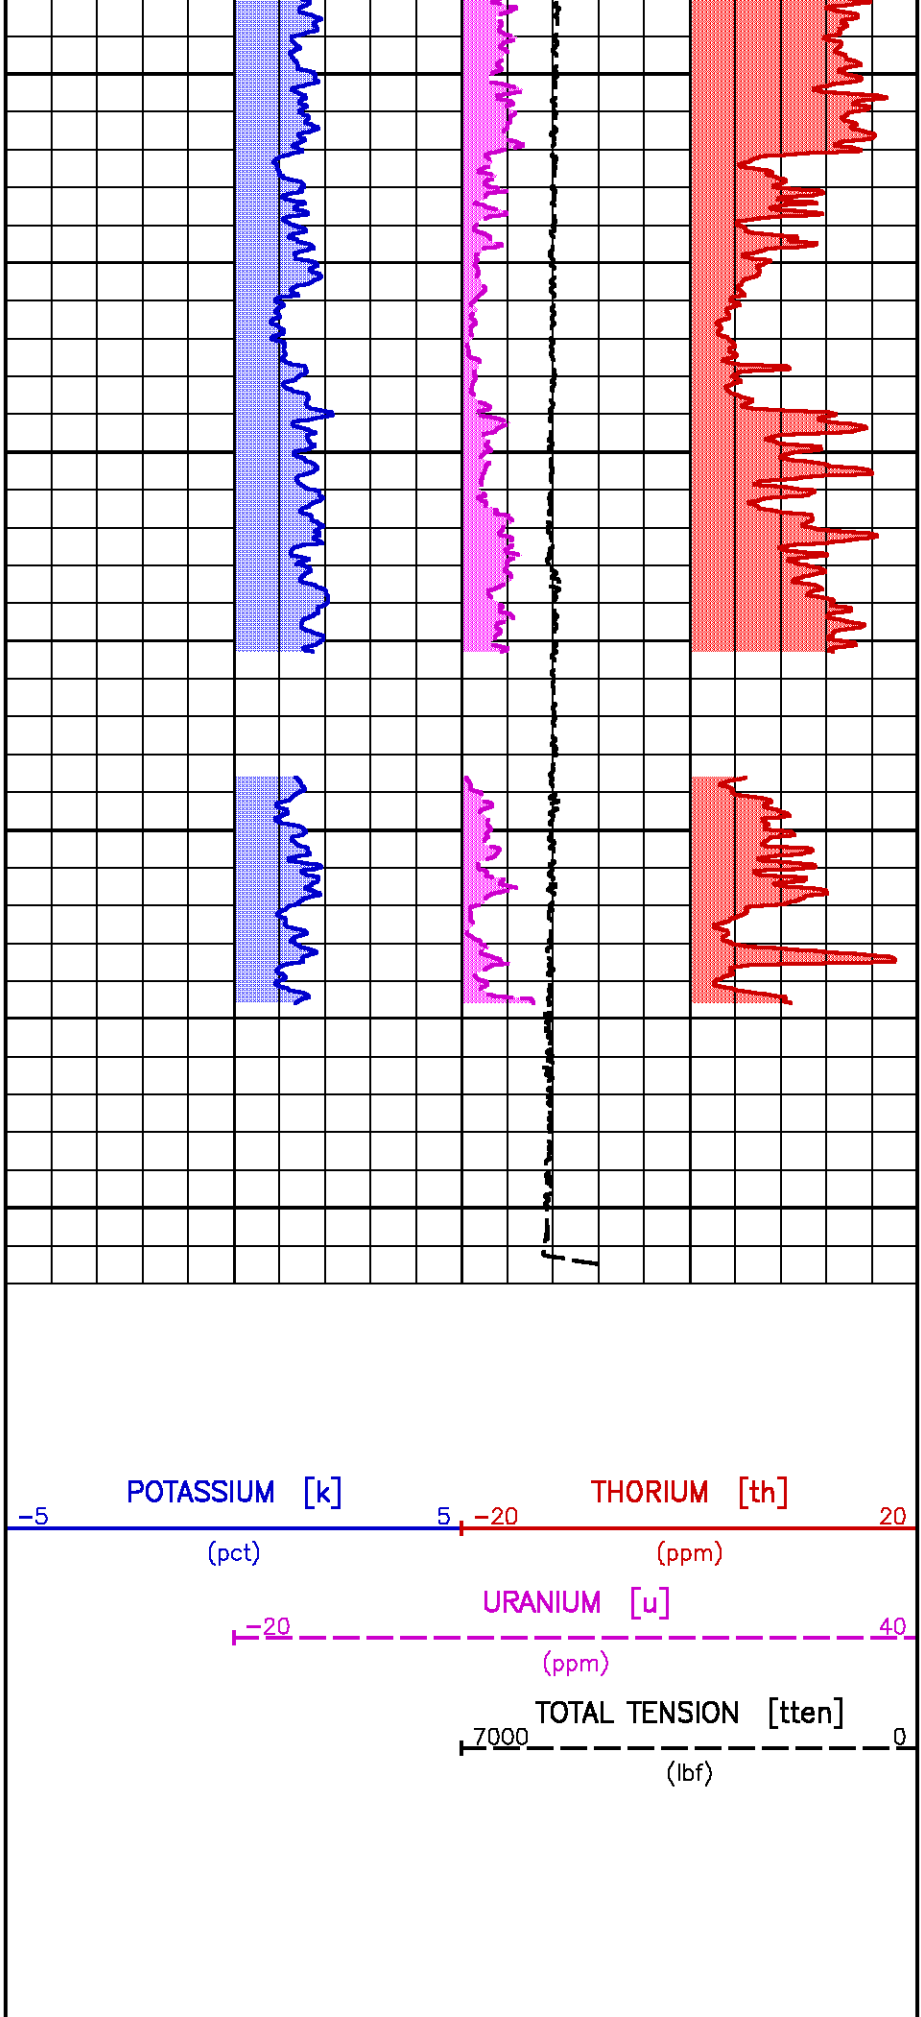

MAIN LOG 1:200 SCALE

ECLIPS 5.1i Sep 16, 2005
Updates: 1,2,37

Sun Oct 29 12:37:38 2006

Perplot /main/61

Cplot 9.18

Pdf_Cpp /main/16

Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

File: /data/peak/bilabar1_D3/177103.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 807.453 m BOTTOM DEPTH: 2510.028 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER (.h)	medium (1)		TOP	BOTTOM
	FILTER (.l)	medium (1)		"	"
Y AXIS CALIPER SPEED	FILTER ()	medium (1)		"	"
	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.l)	medium (1)		"	"
TENSION GR	FILTER ()	medium (1)		"	"
	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.l)	medium (1)		"	"
SL-II X AXIS CALIPER	FILTER	medium (1)		"	"
	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
	FILTER (.l)	medium (1)		"	"

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
BIT SIZE	BIT SIZE	12.250	in	TOP	BOTTOM

SLII PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
E MATRIX	OPEN/CASED HOLE	OPEN HOLE		TOP	BOTTOM
SLII AUTOGAIN	AUTO GAIN	AUTO GAIN ON		"	"
SLII ENERGY RANGE	ENERGY RANGE	.15-3.0 MeV		"	"

CURVE DESCRIPTION REPORT

CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CAL	CAL	Oct 25 23:01:34 2006	CALIPER
F1:GR	GR	Oct 25 23:01:34 2006	GAMMA RAY
F1:K	K	Oct 25 23:01:34 2006	POTASSIUM CONTENT
F1:KTH	KTH	Oct 25 23:01:34 2006	STRIPPED POTASSIUM-THORIUM
F1:QCAL	QCAL	Oct 25 23:01:34 2006	QUALITY CURVE
F1:SPD	SPD	Oct 25 23:01:34 2006	SPEED
F1:TH	TH	Oct 25 23:01:34 2006	THORIUM CONCENTRATION
F1:TEN	TEN	Oct 25 23:01:34 2006	TOTAL TENSION
F1:U	U	Oct 25 23:01:34 2006	URANIUM CONTENT

CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CAL	26.33	KTH	33.83	TH	33.83		
GR	33.83	QCAL	33.83	TEN	0.00		
K	33.83	SPD	0.00	U	33.83		

Plot Interval : 769.772 - 2557.88 Meters

Data File 1 : F1 : sys1:/dat1a/peak/bilabar1_D3/slams.xtf

Created On : Oct 25 23:01:34 2006



Company : PEAK PETROLEUM


Well : BILABRI D3


Field : BILABRI

File Interval : 769.772 - 2557.88 Meters

Oct : [777]

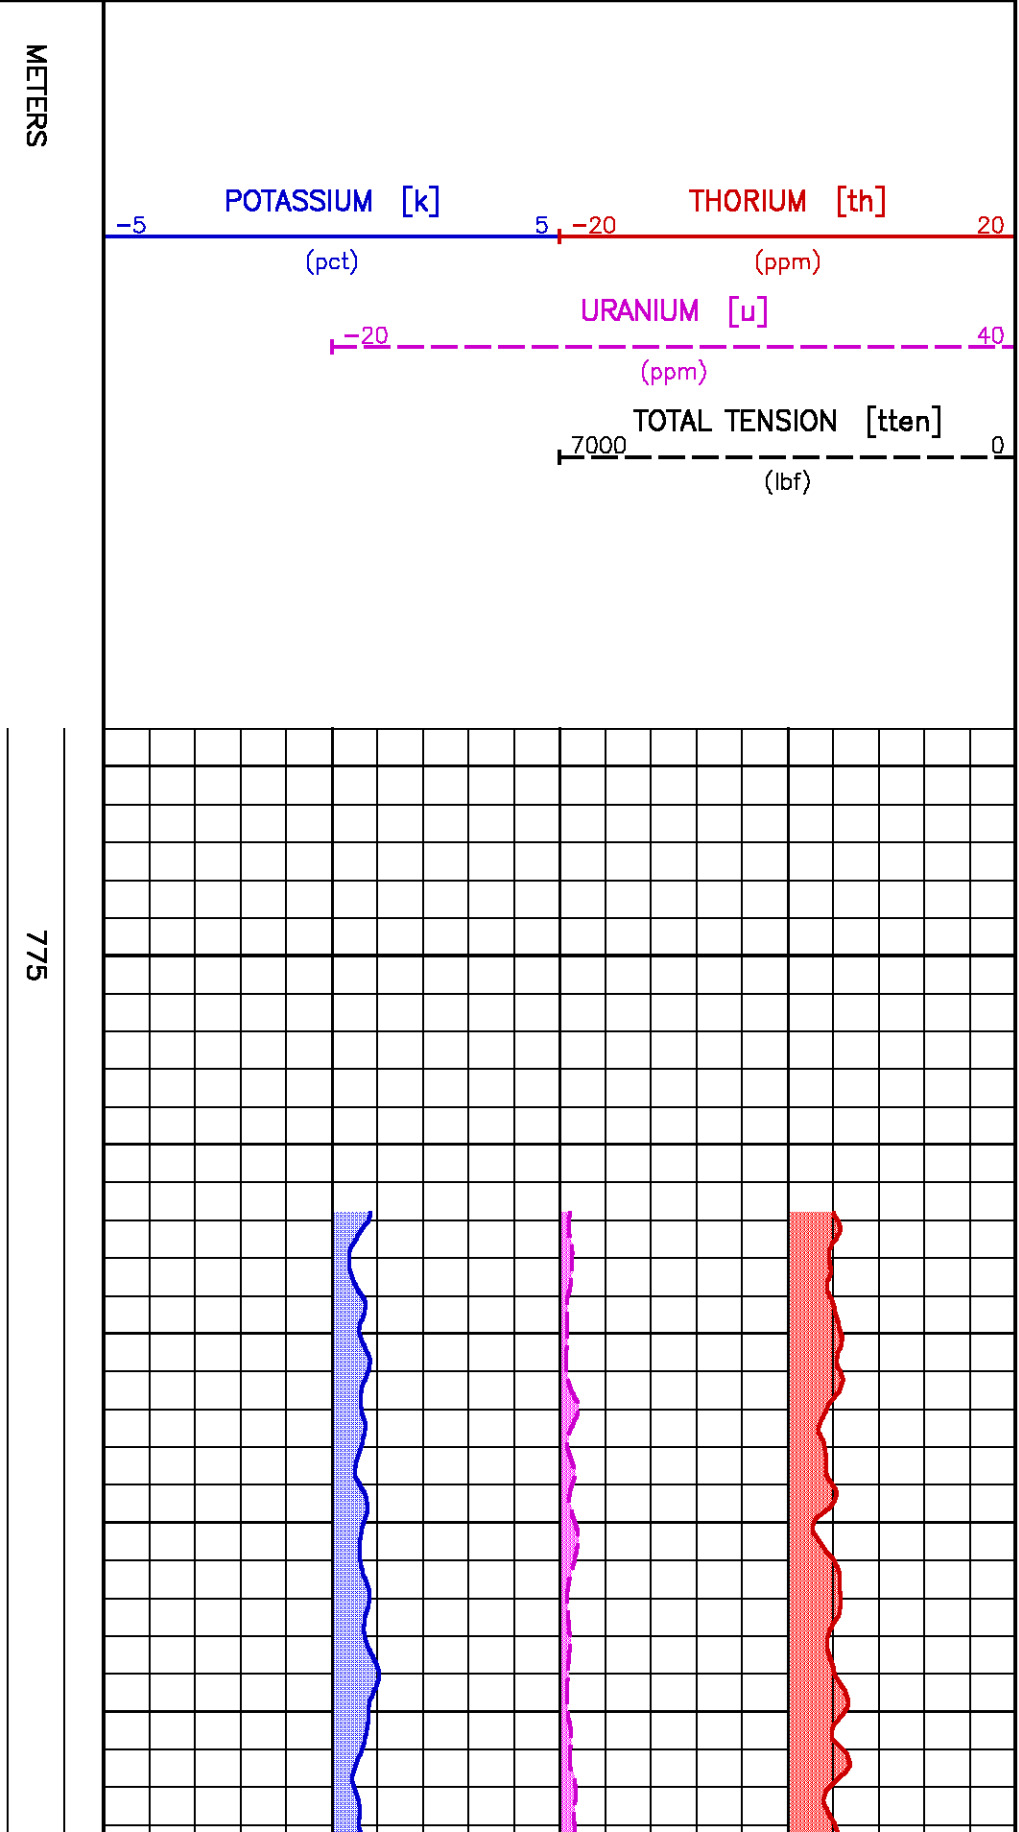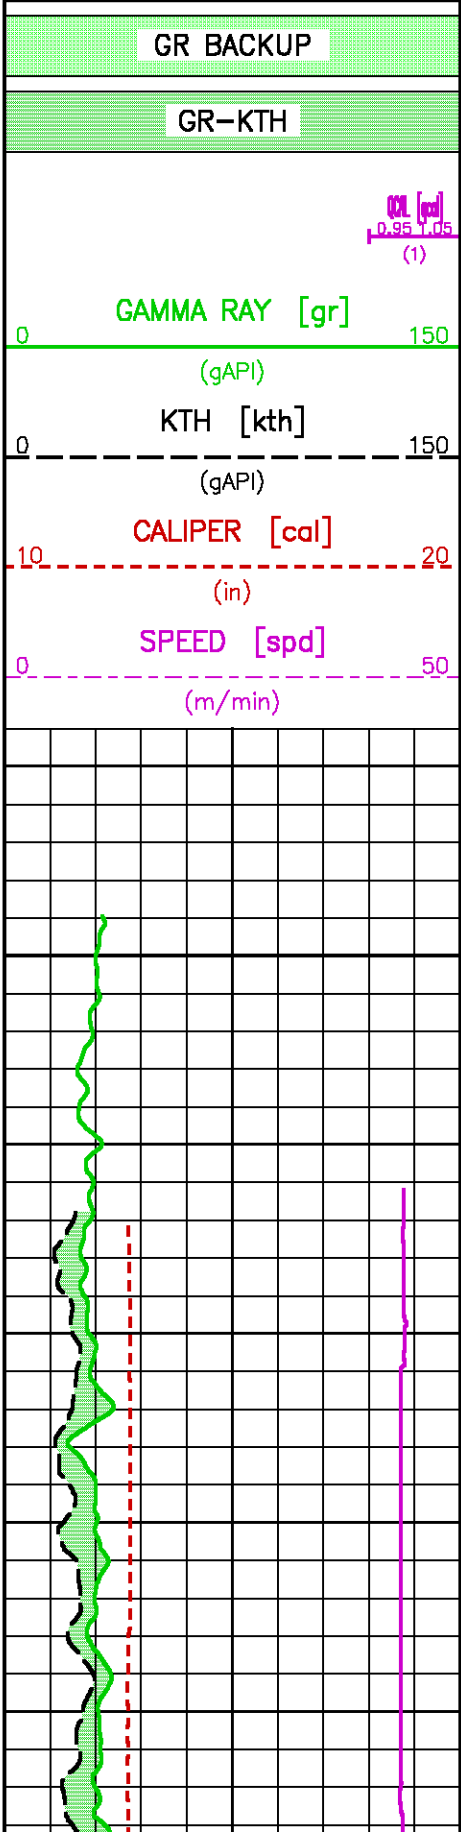


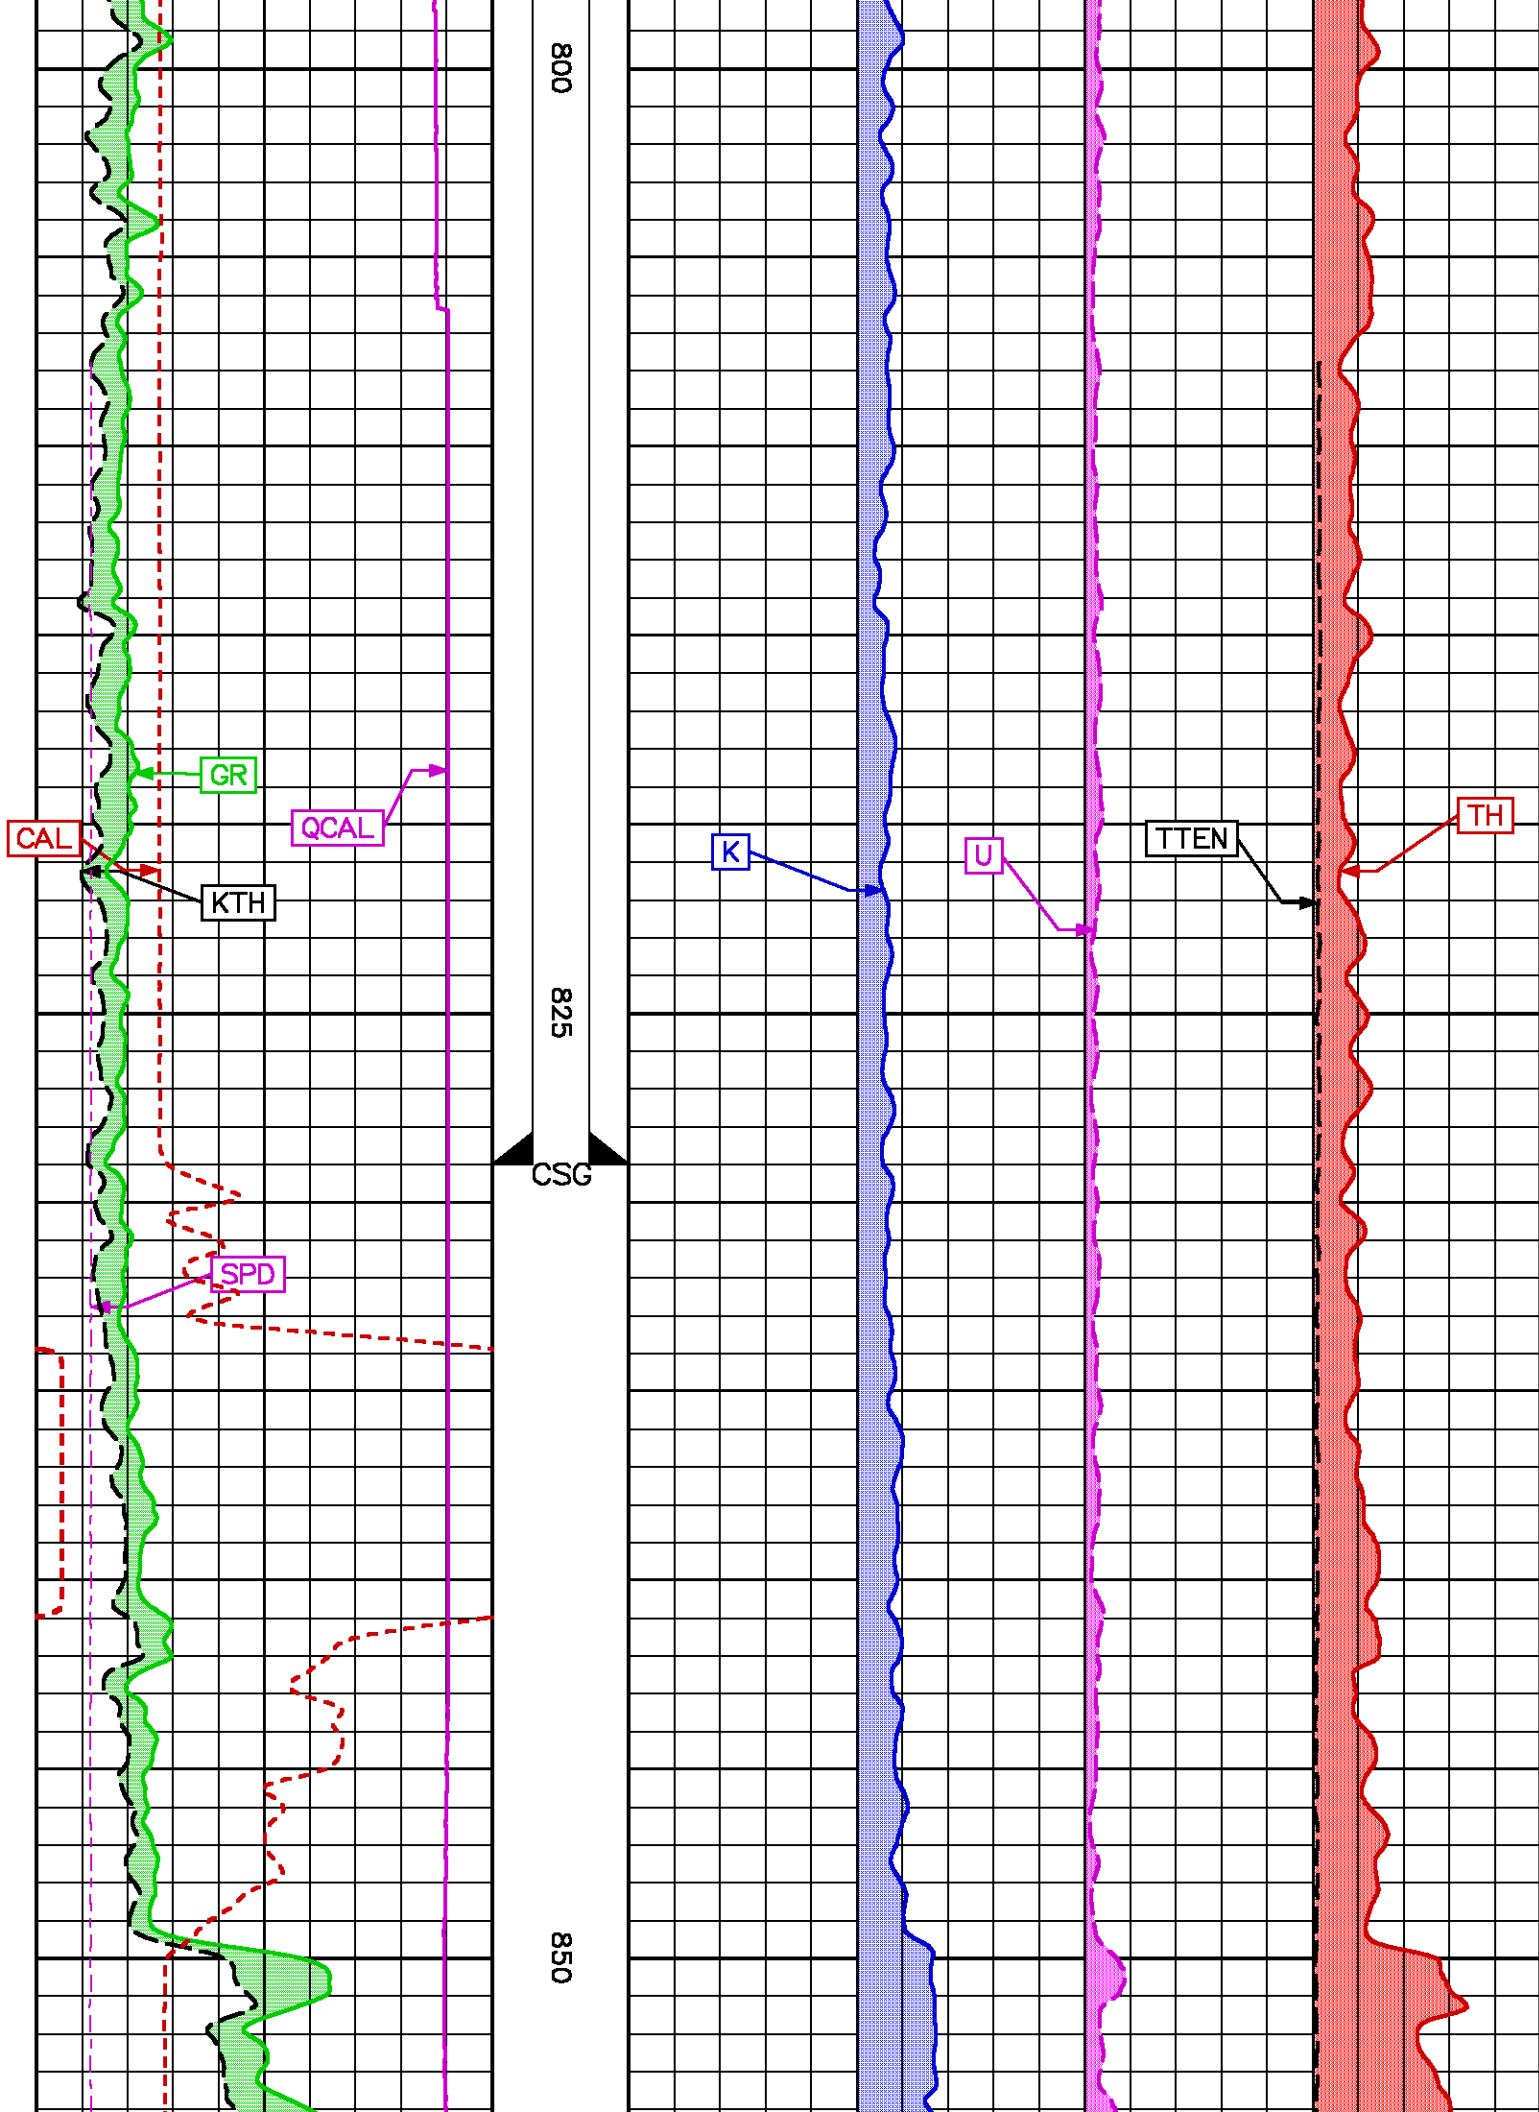


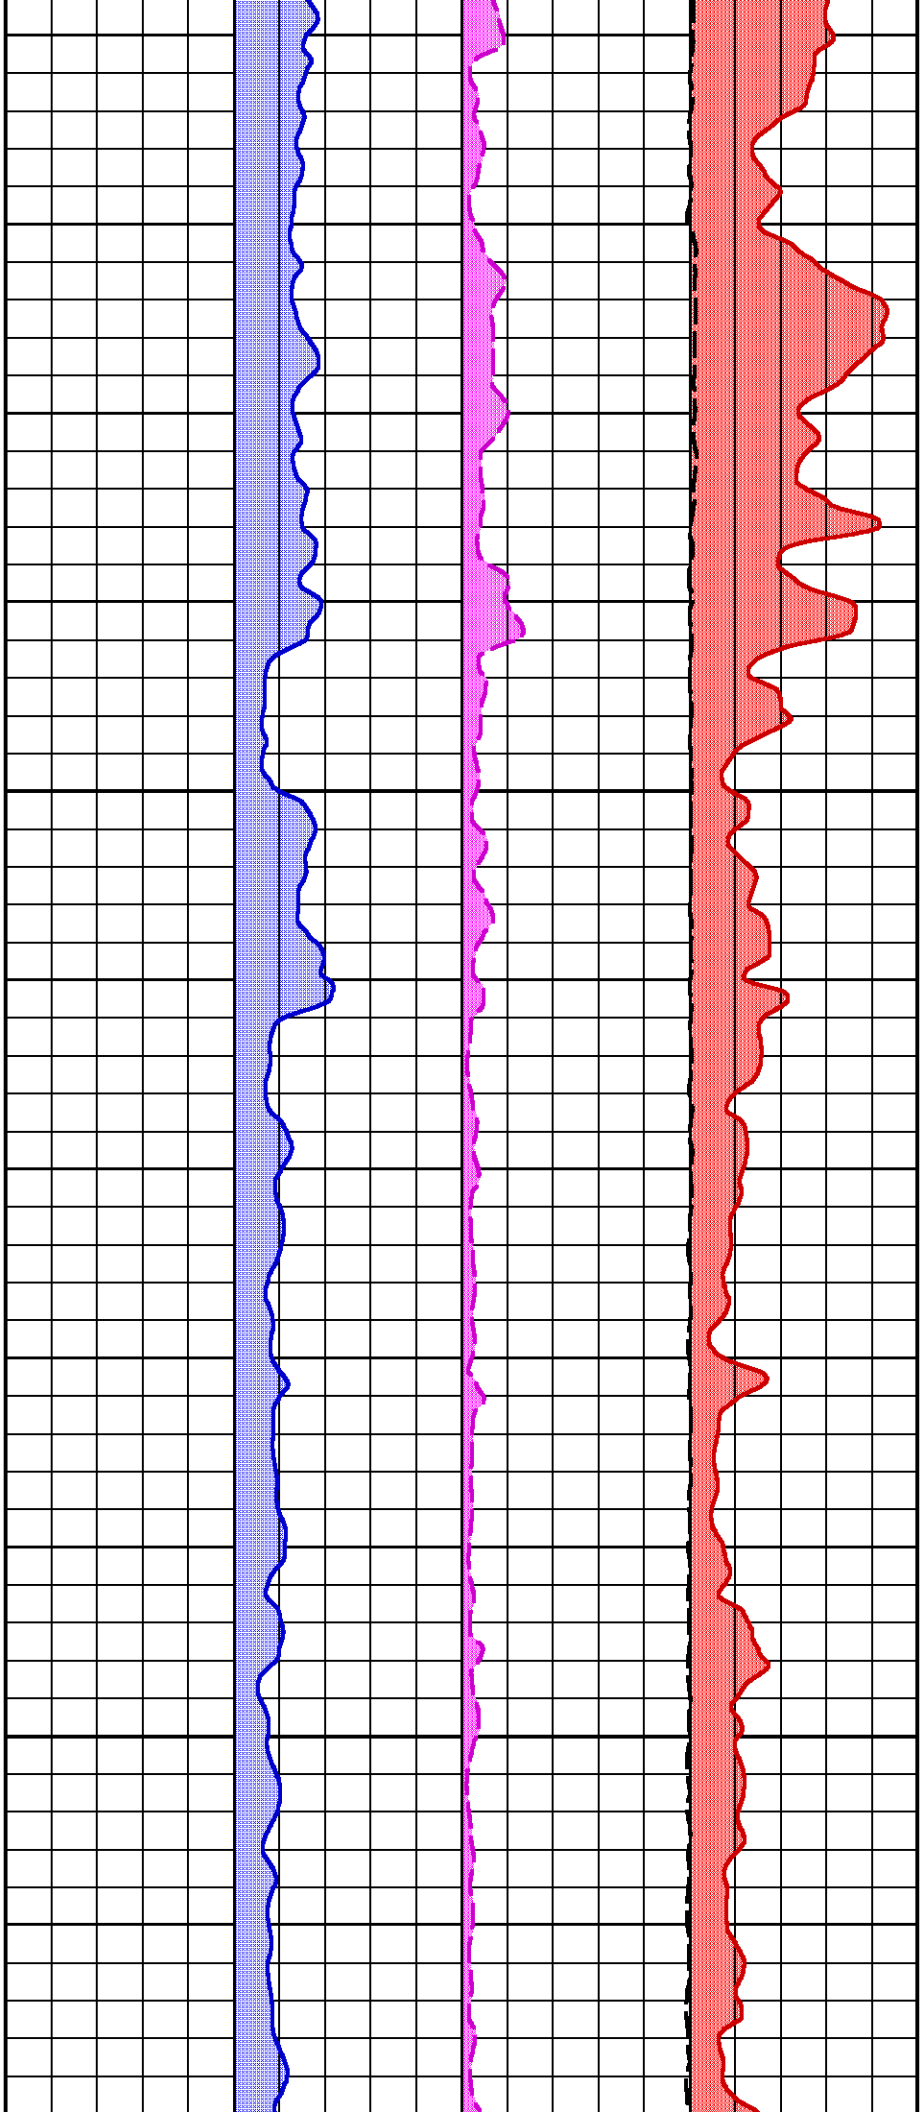

875


900

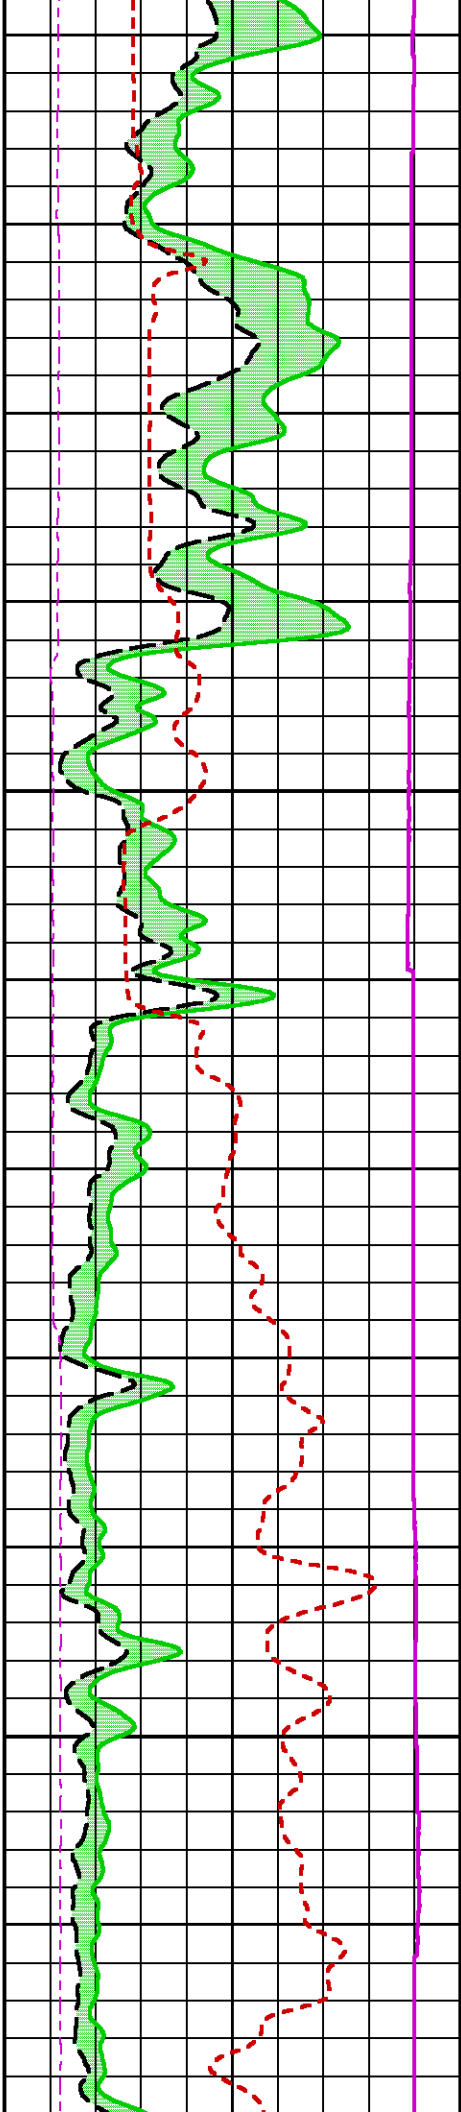


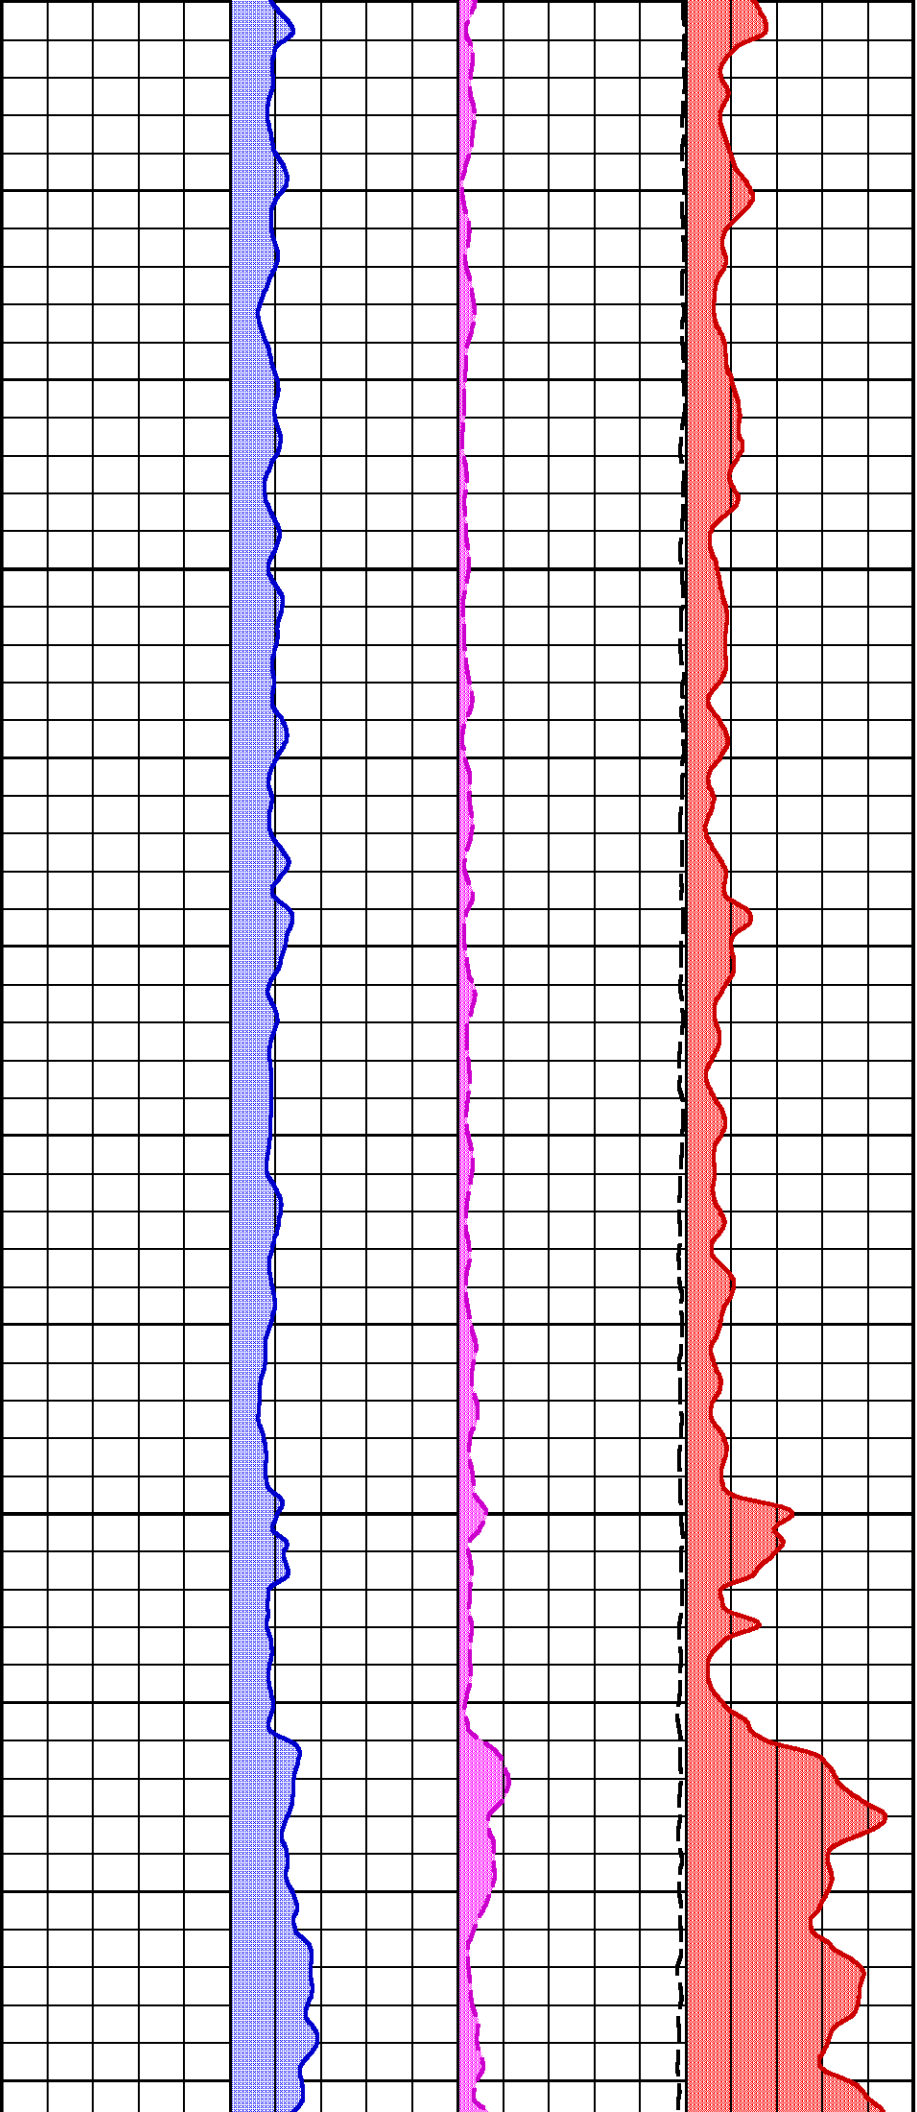

925


950

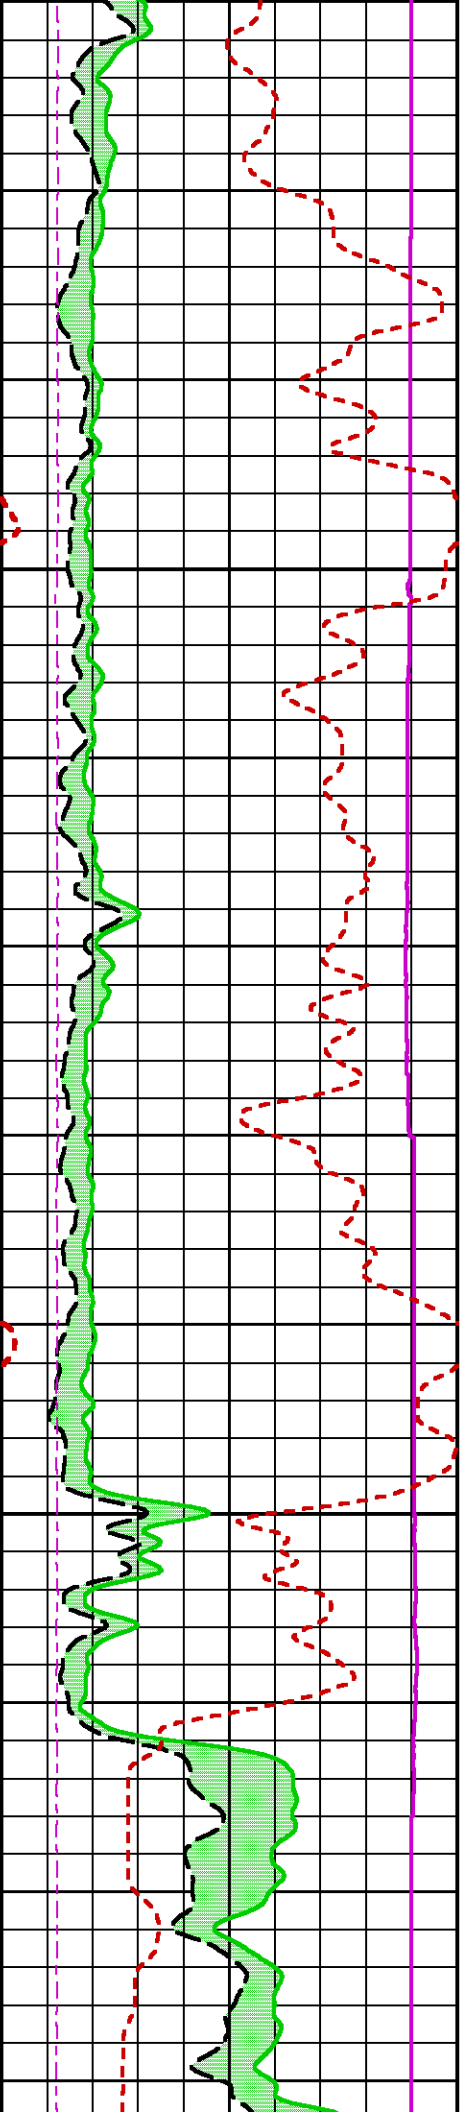


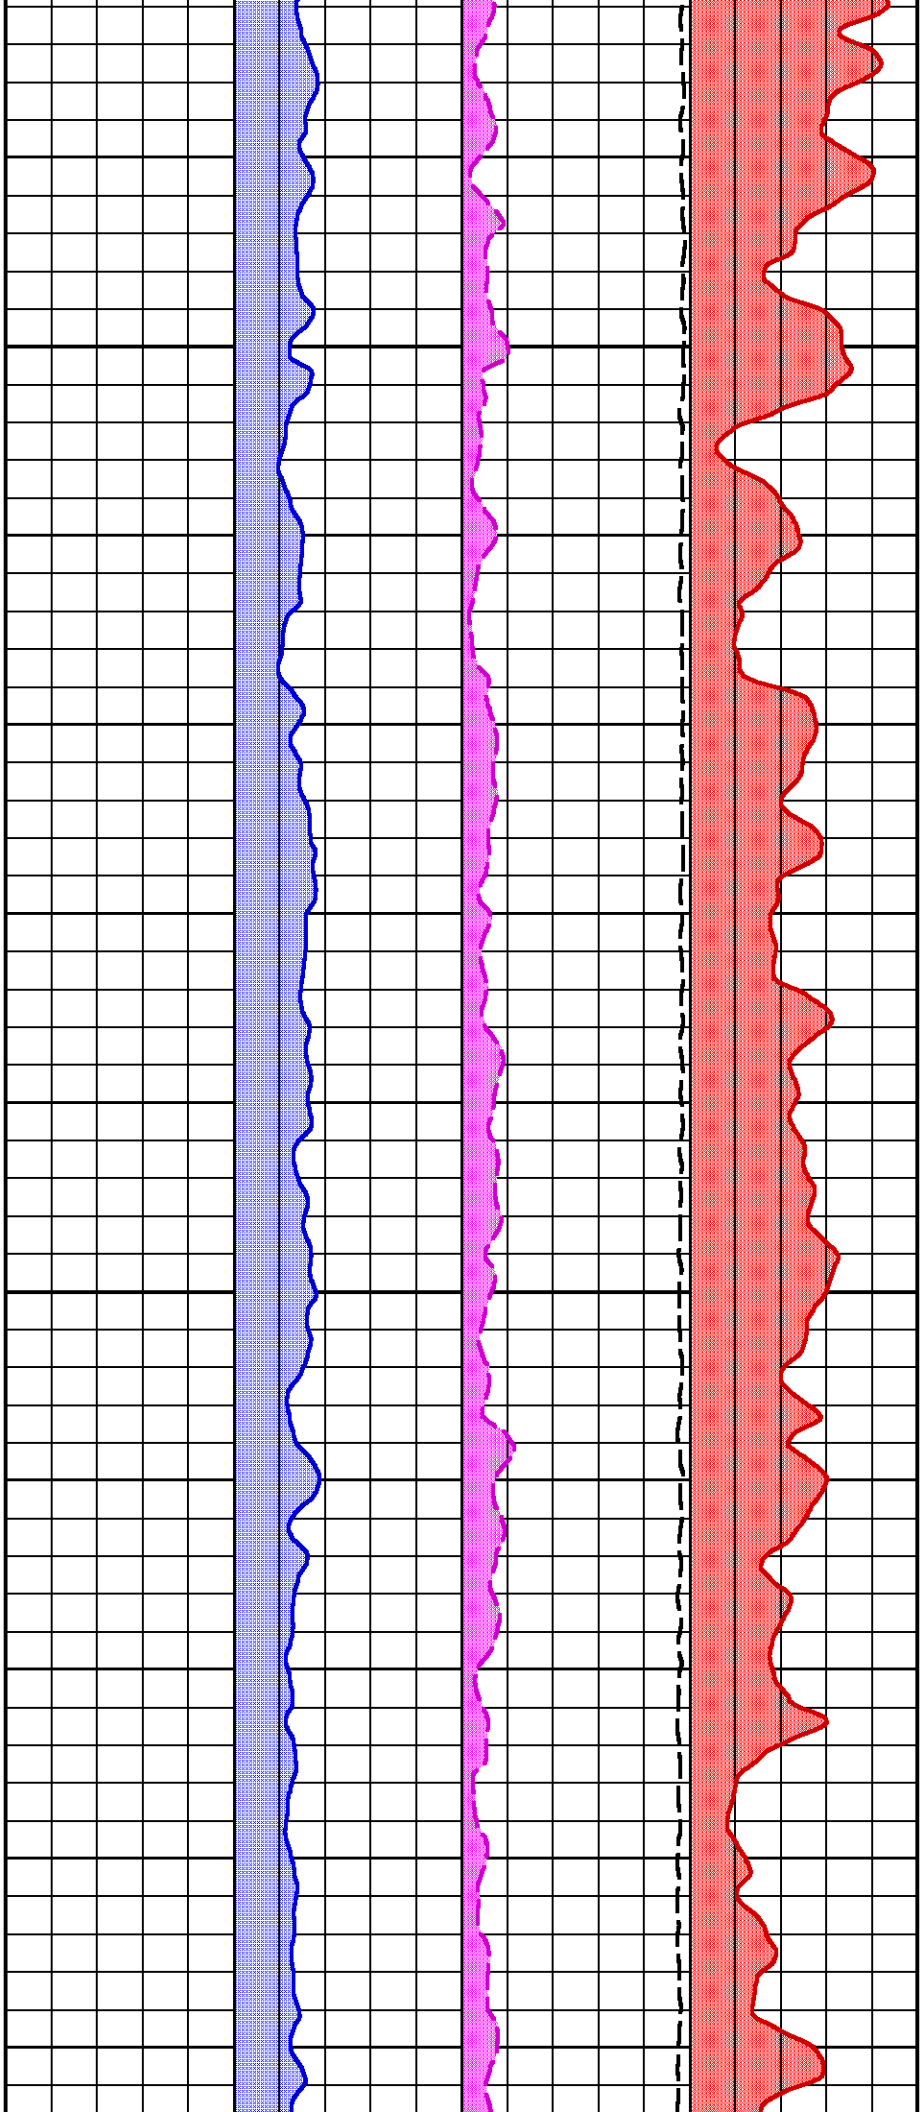

975

1000

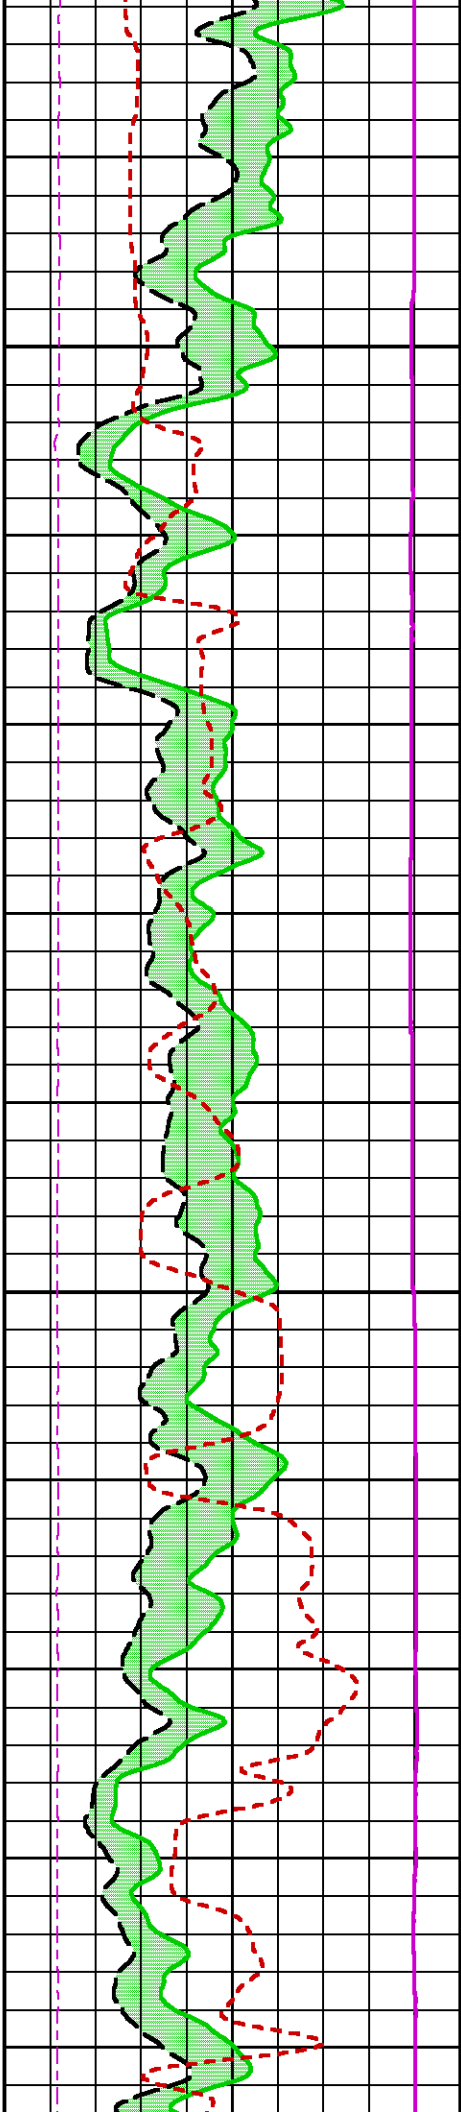


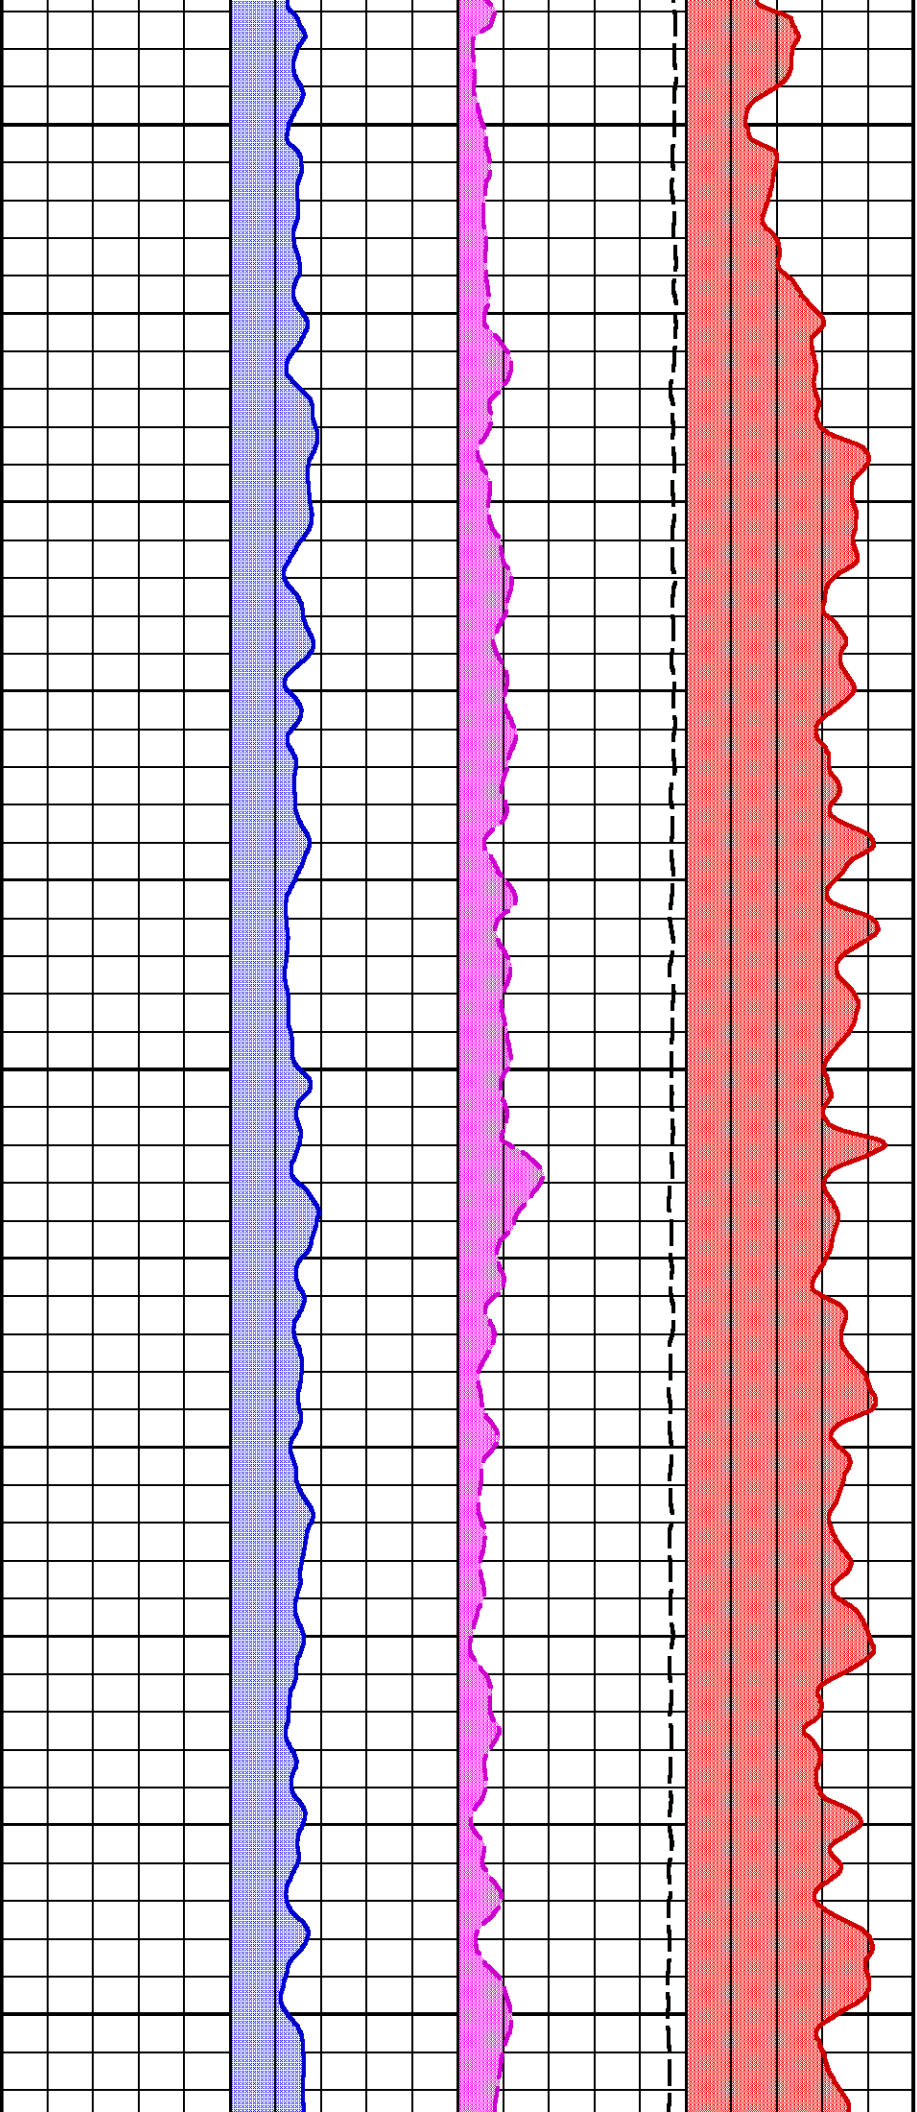


1025

1050


1075

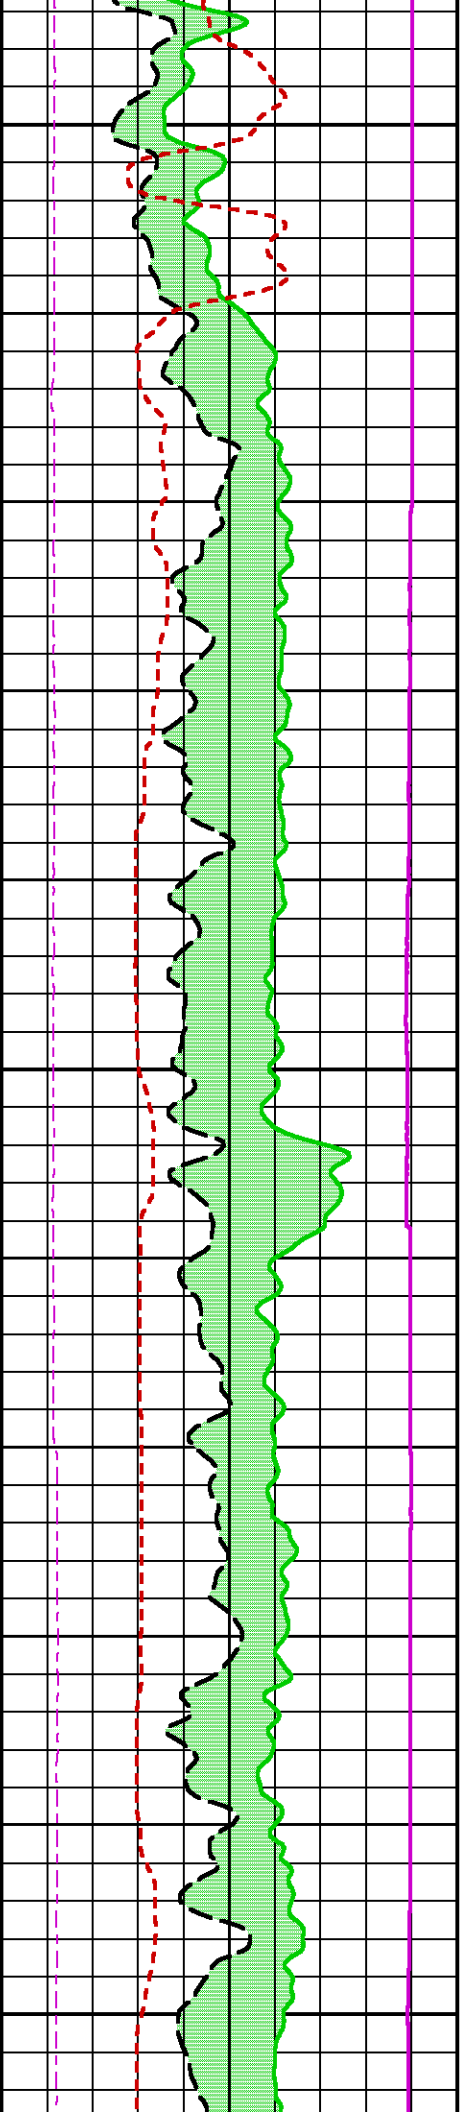


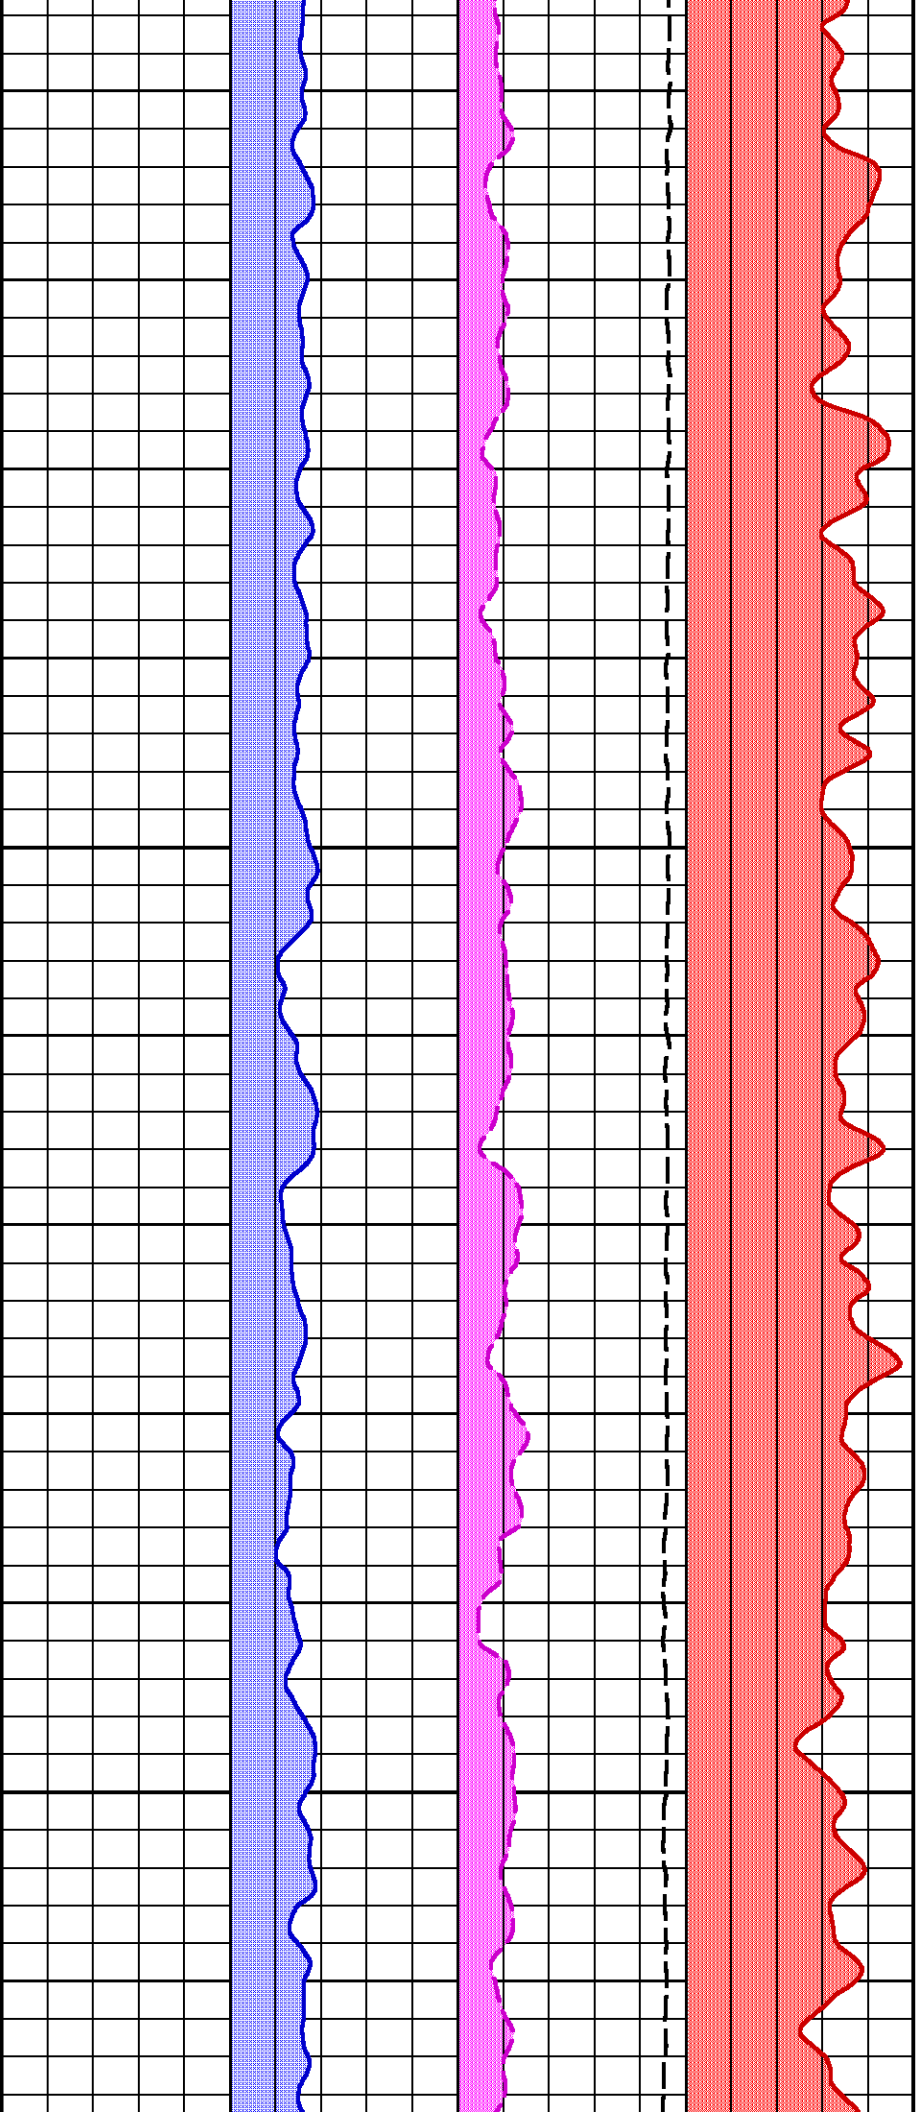

1100


1125

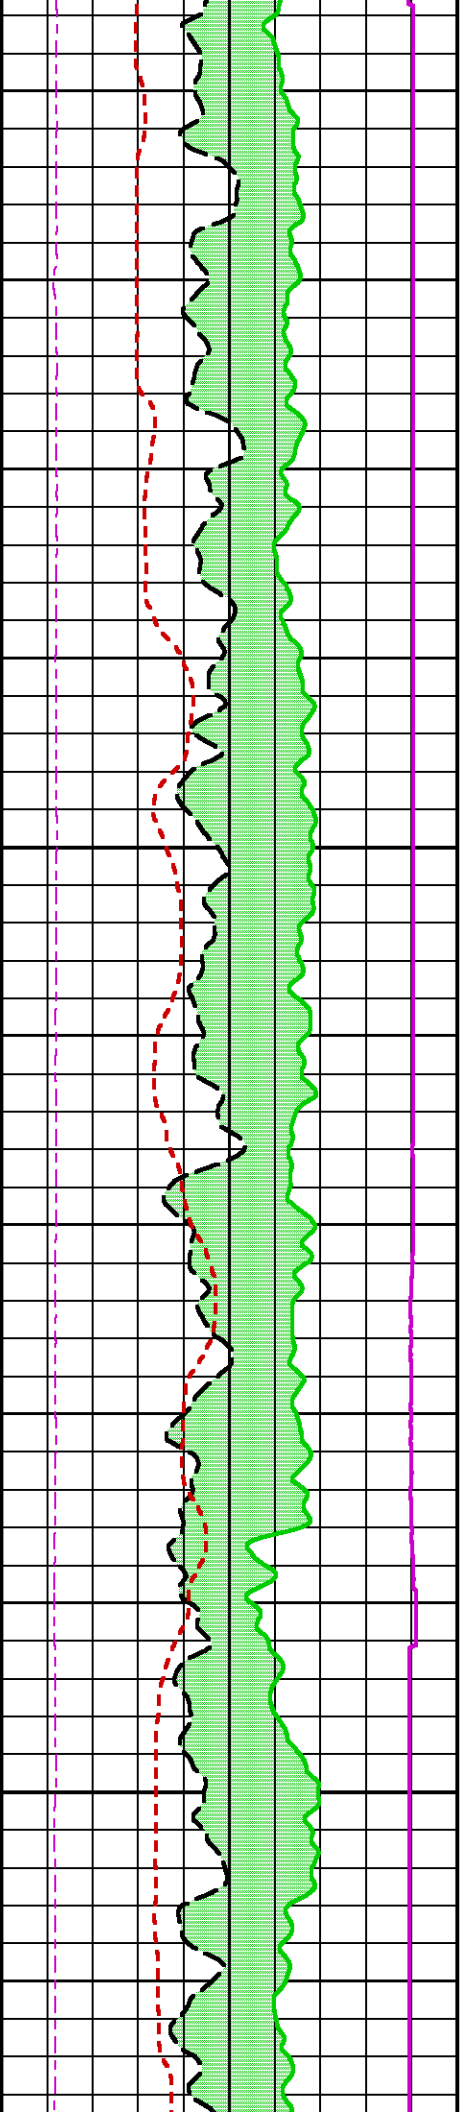


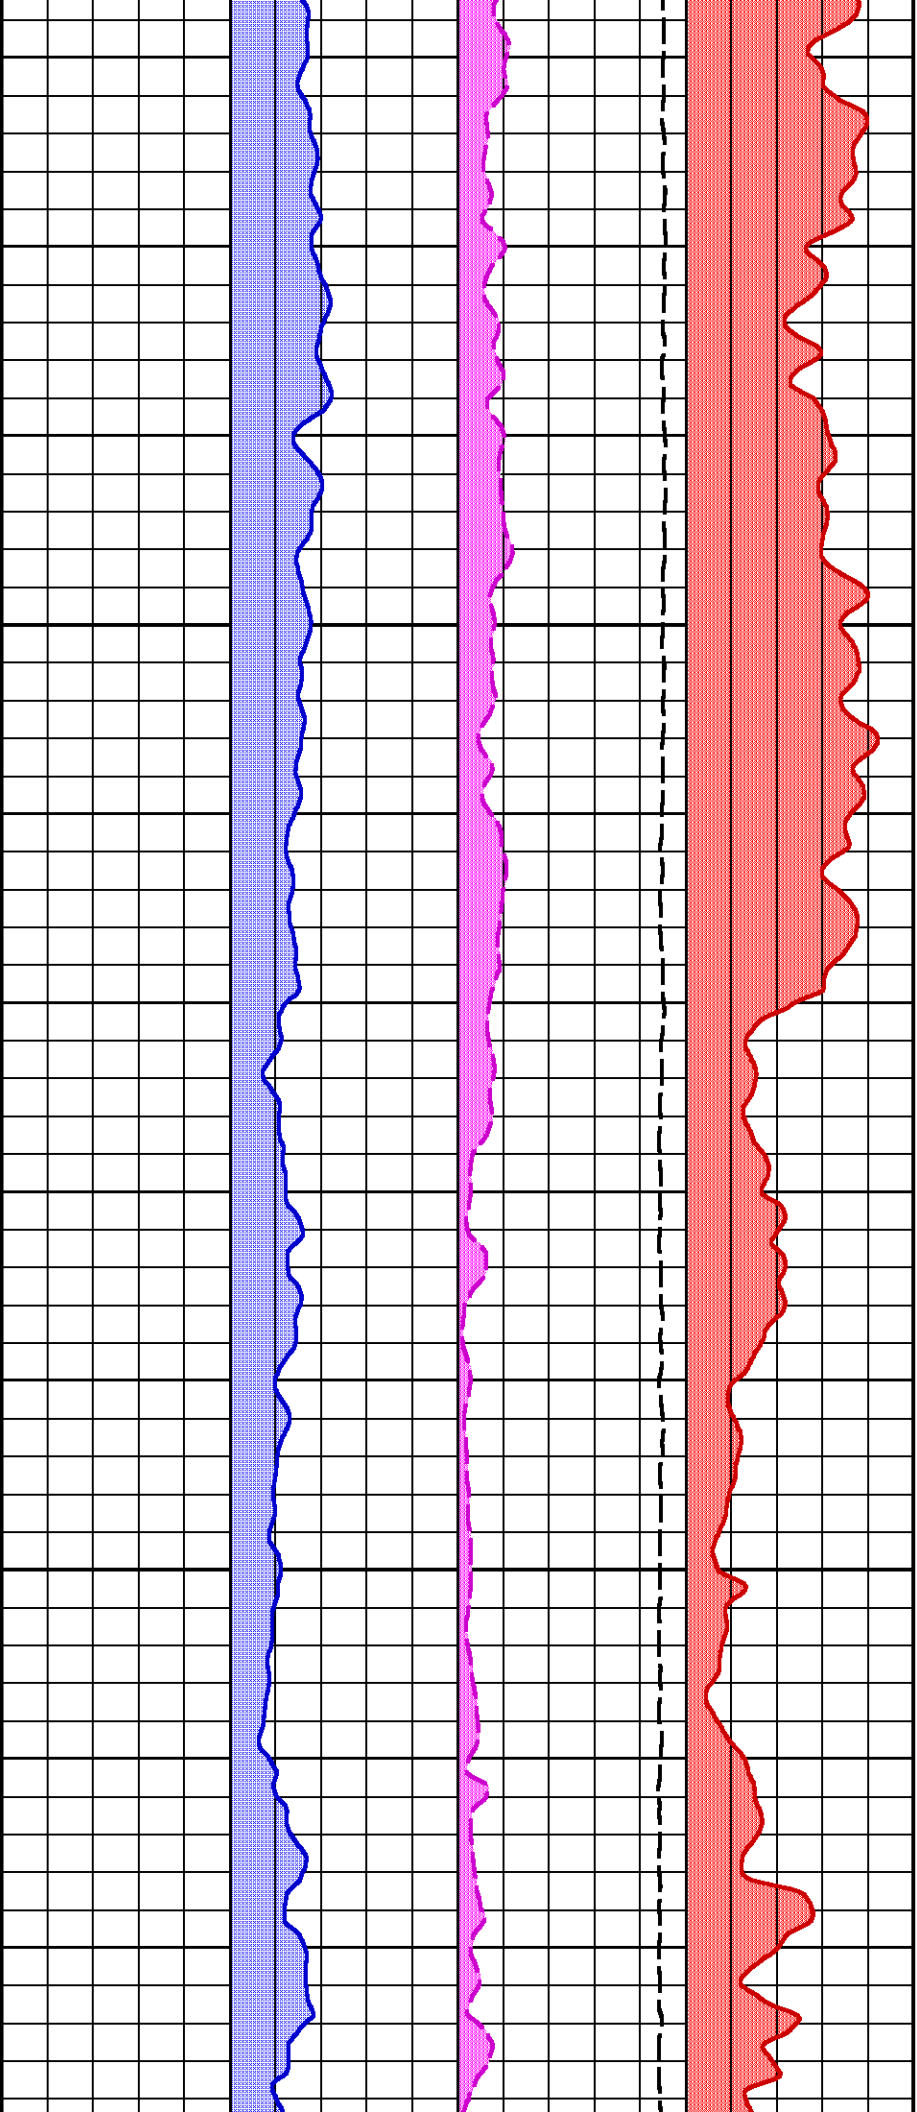

1150


1175

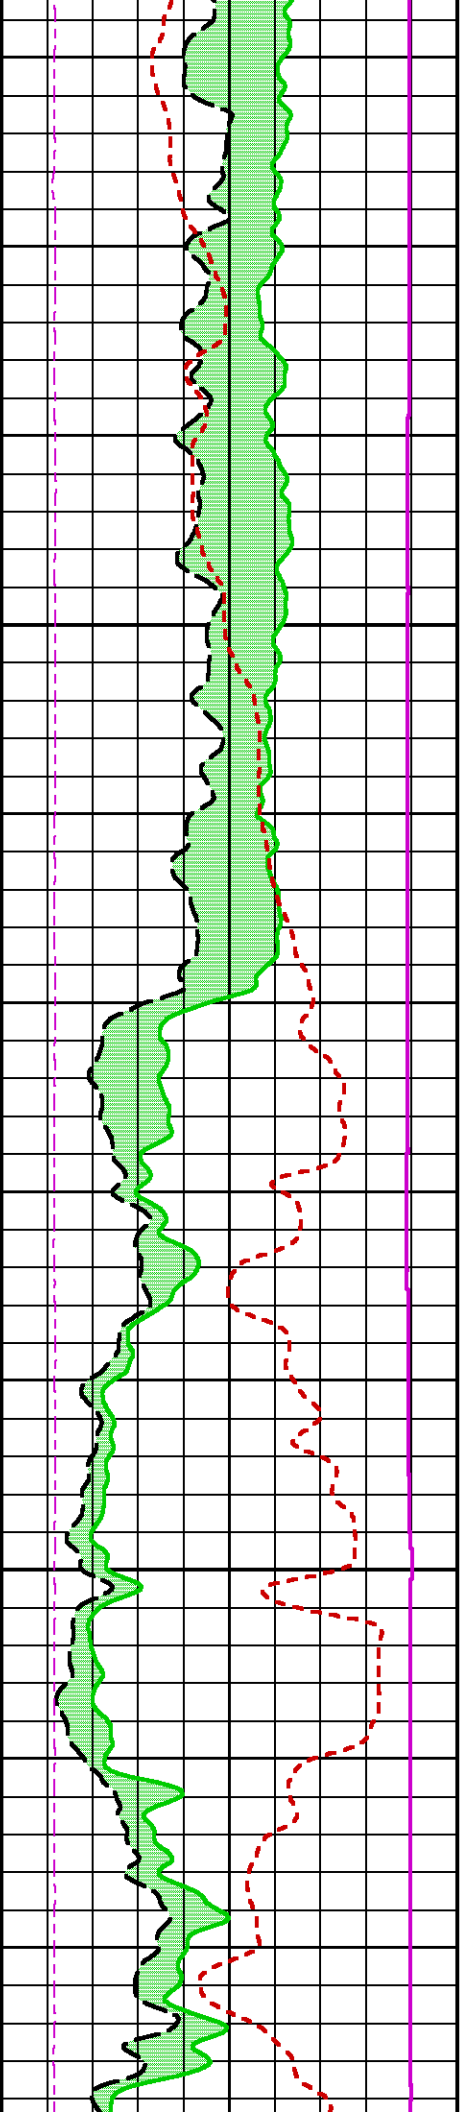


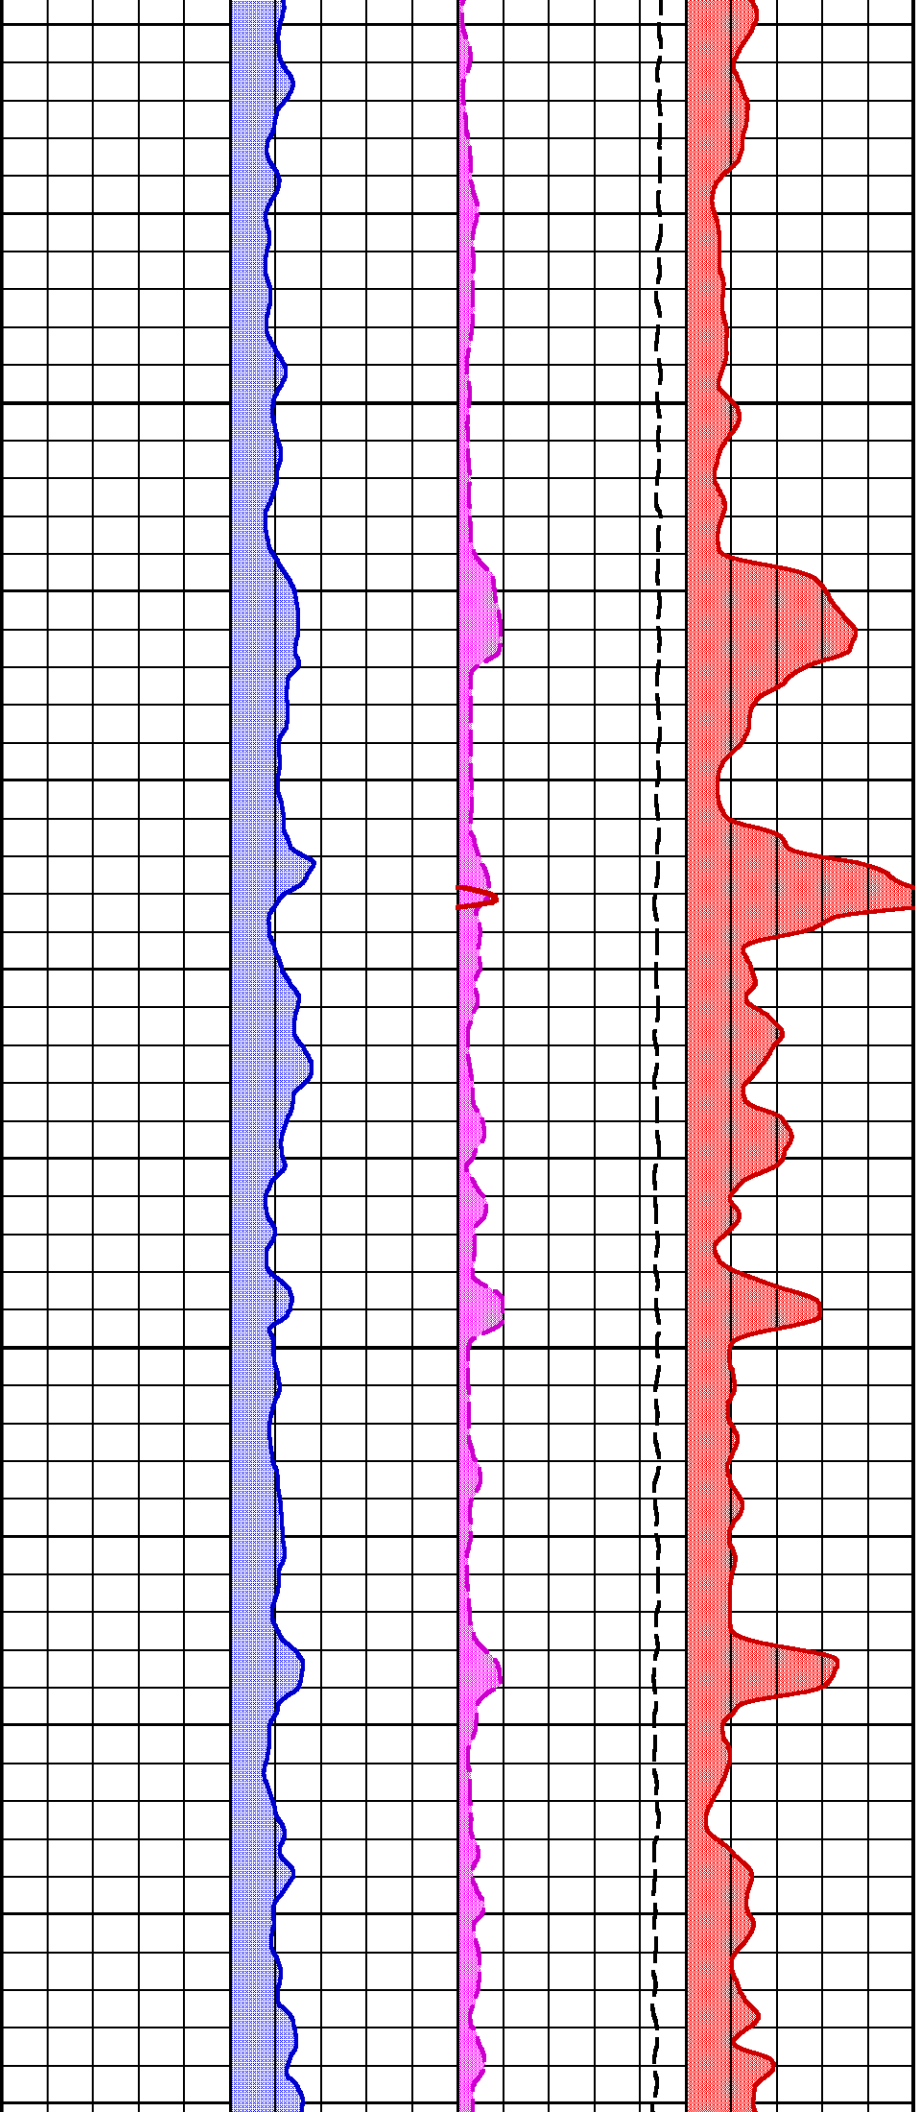

1200

1225

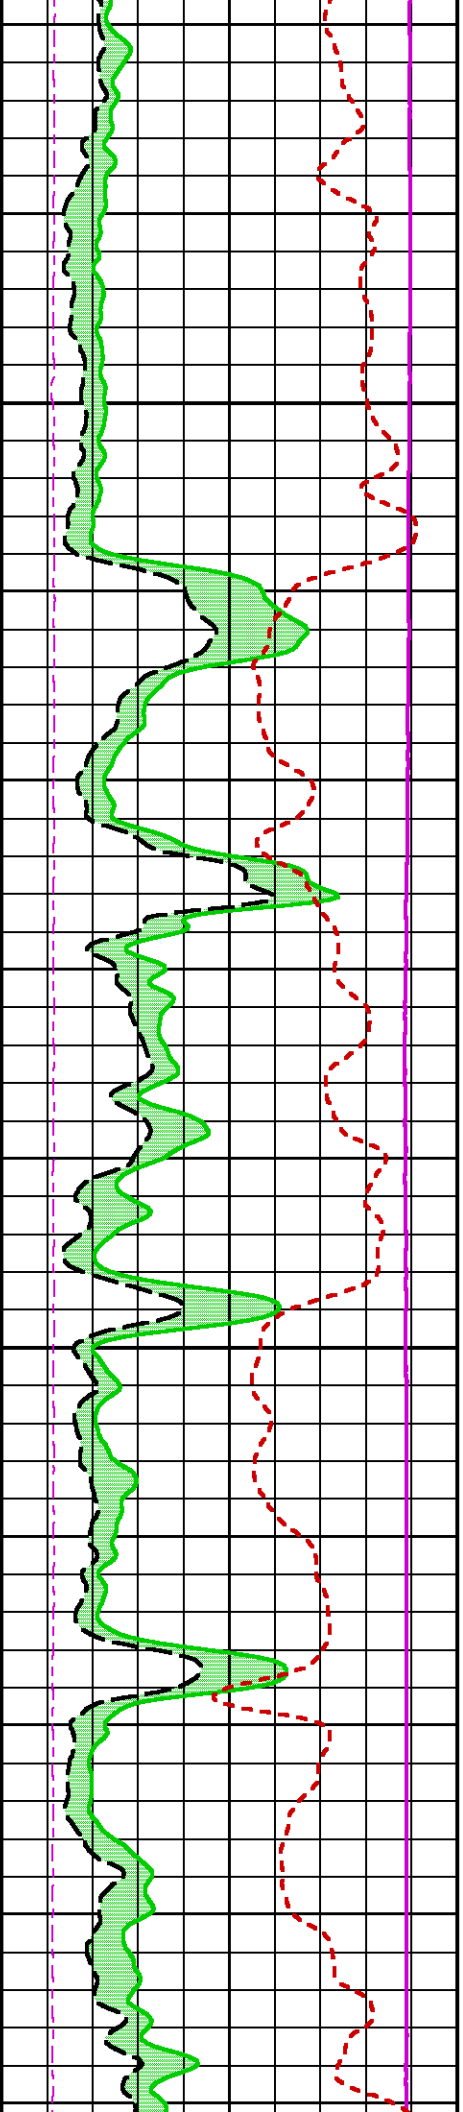


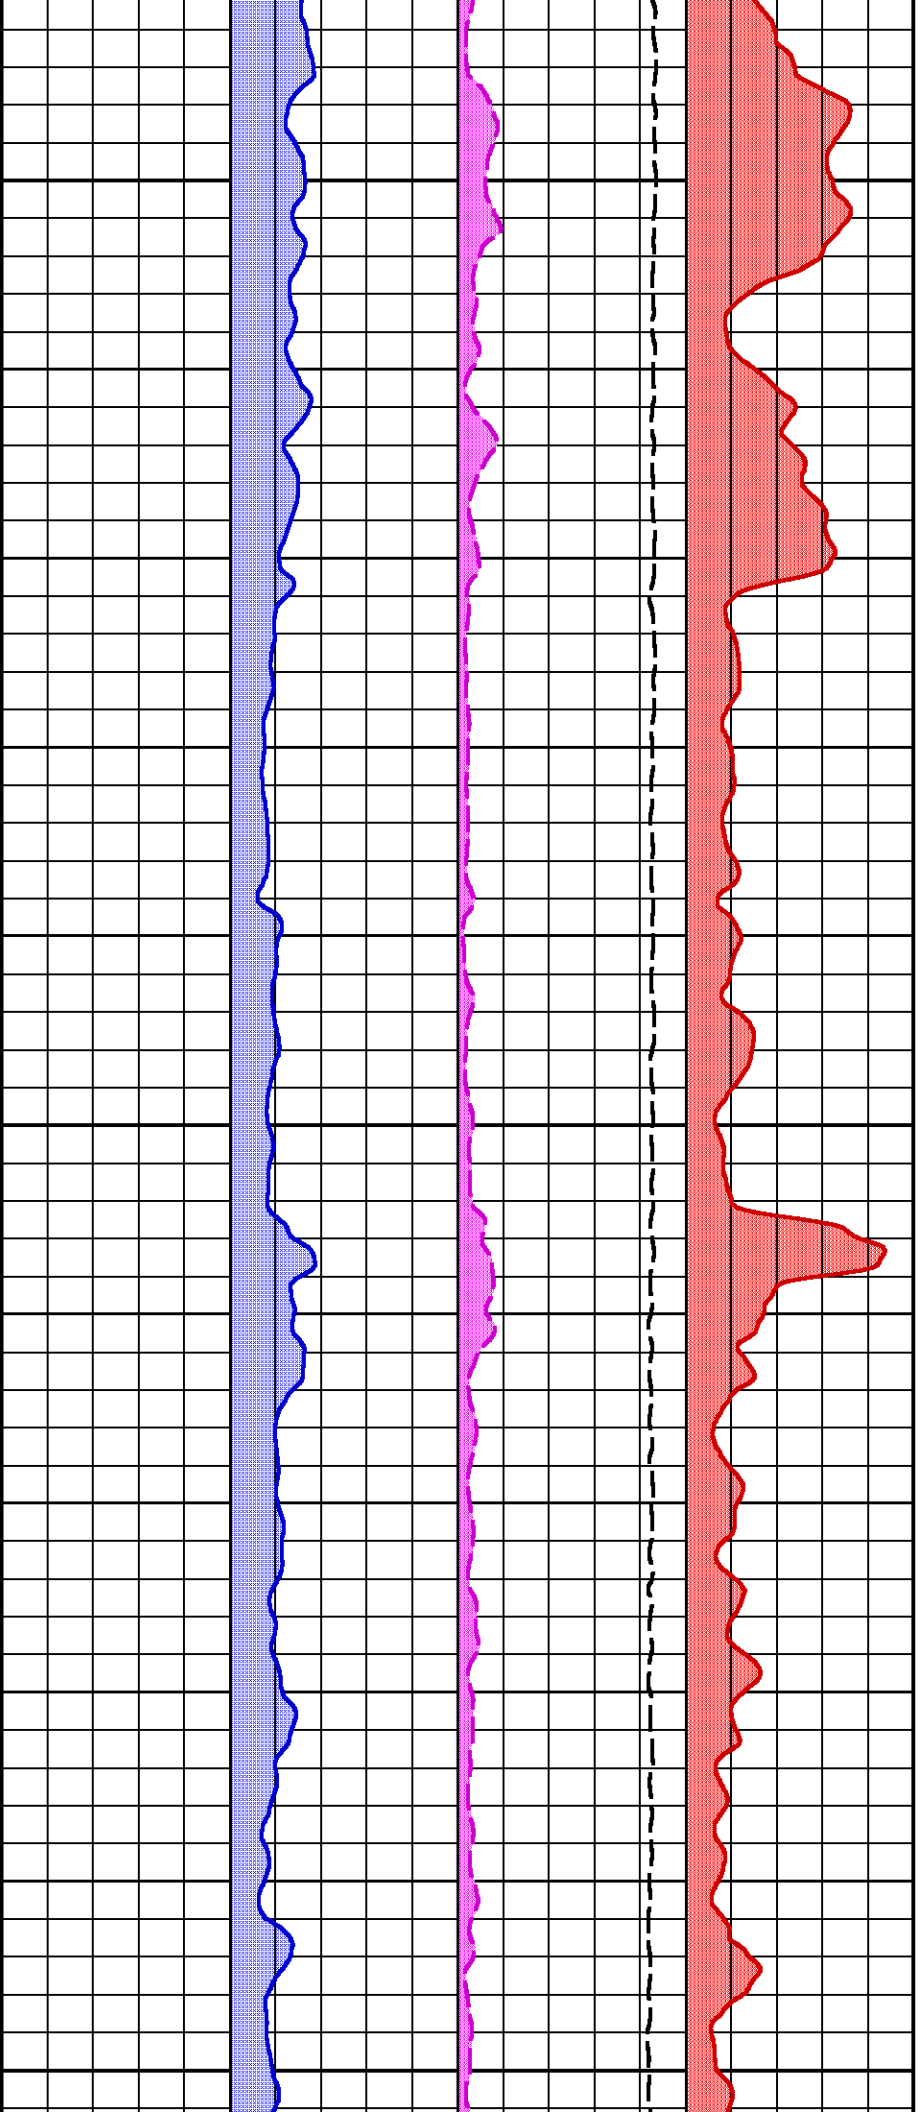


1250

1275


1300

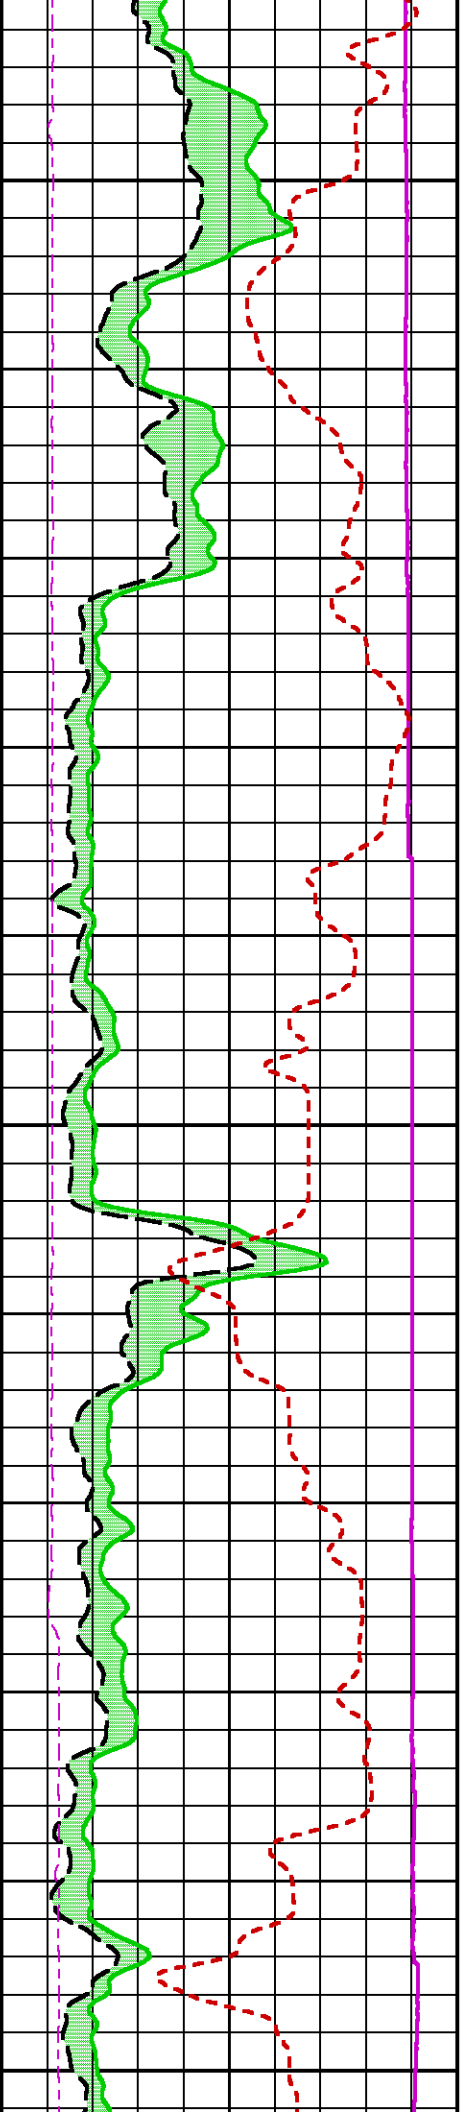


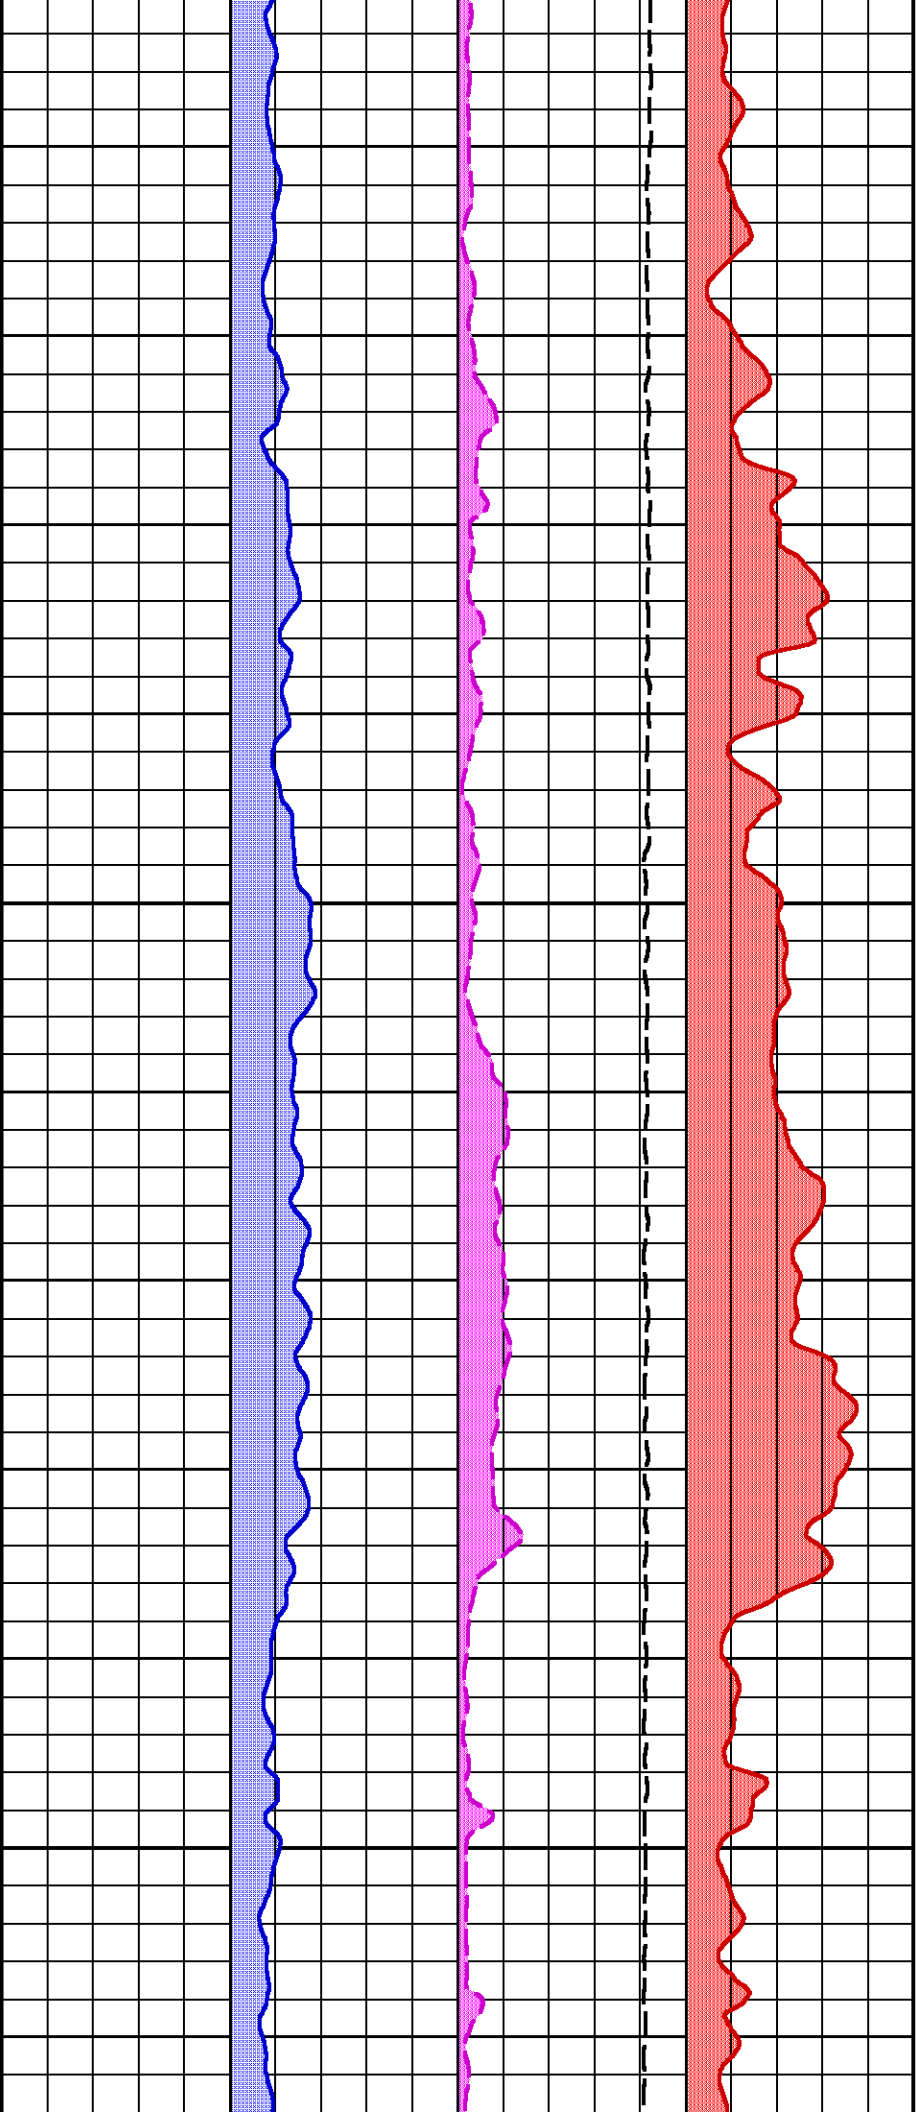

1325


1350

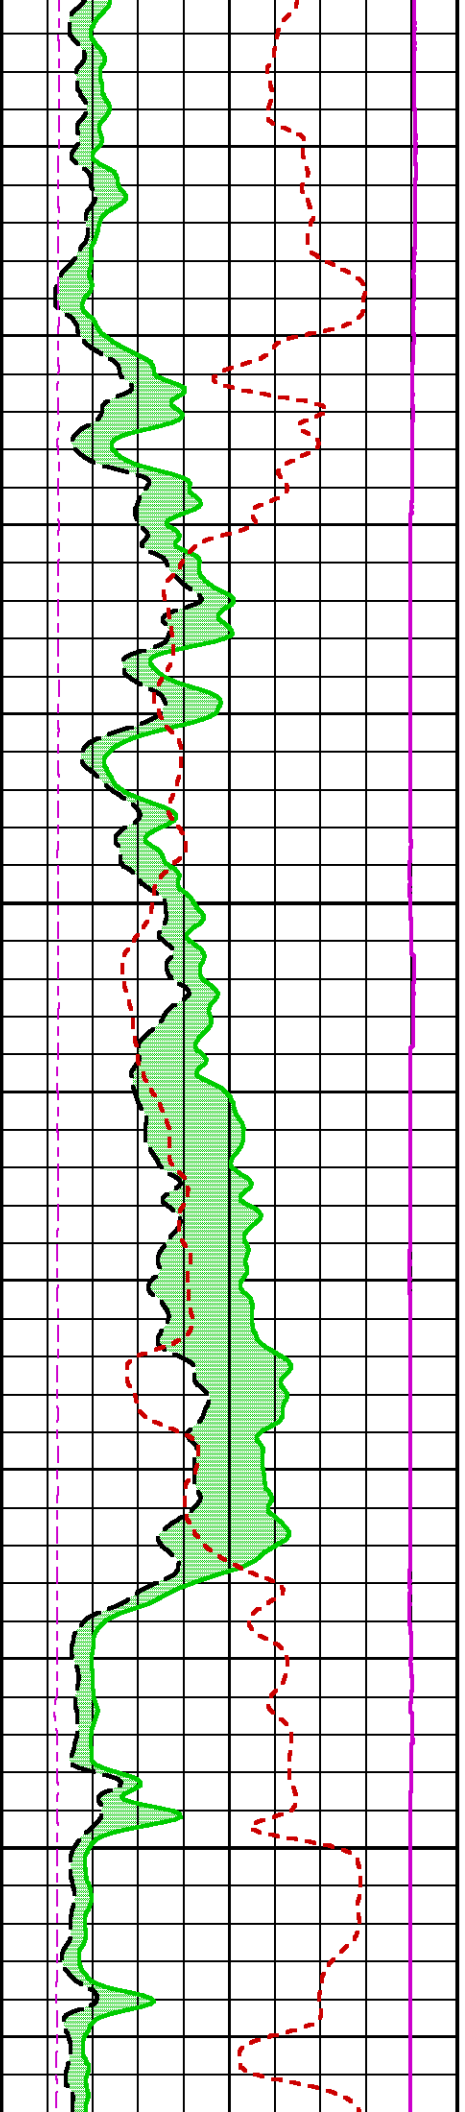


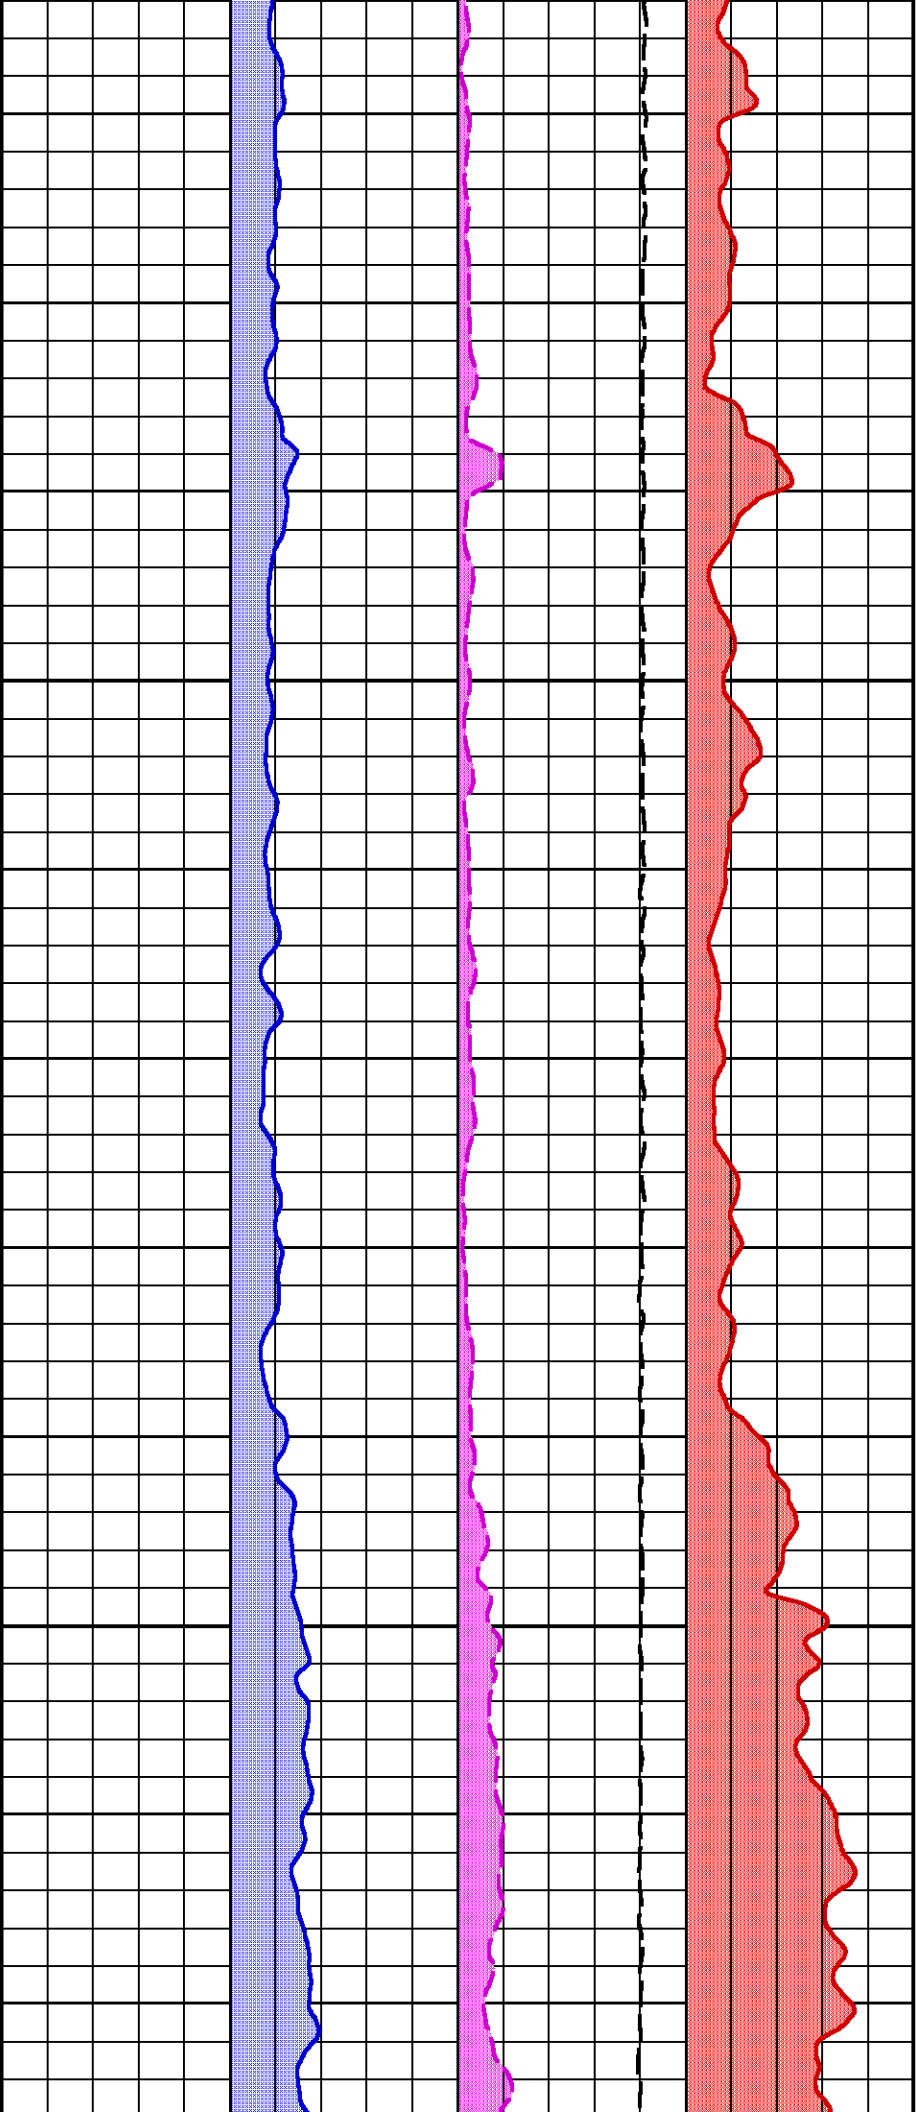

1375


1400

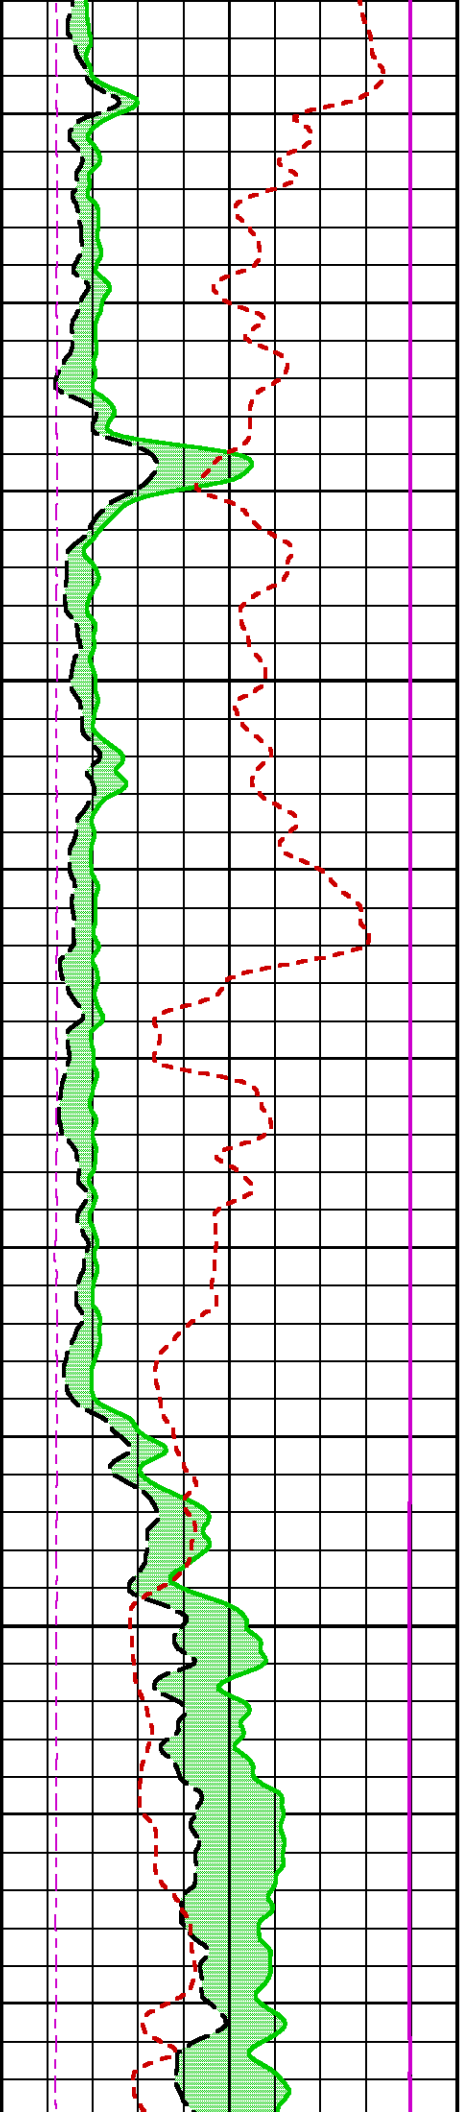


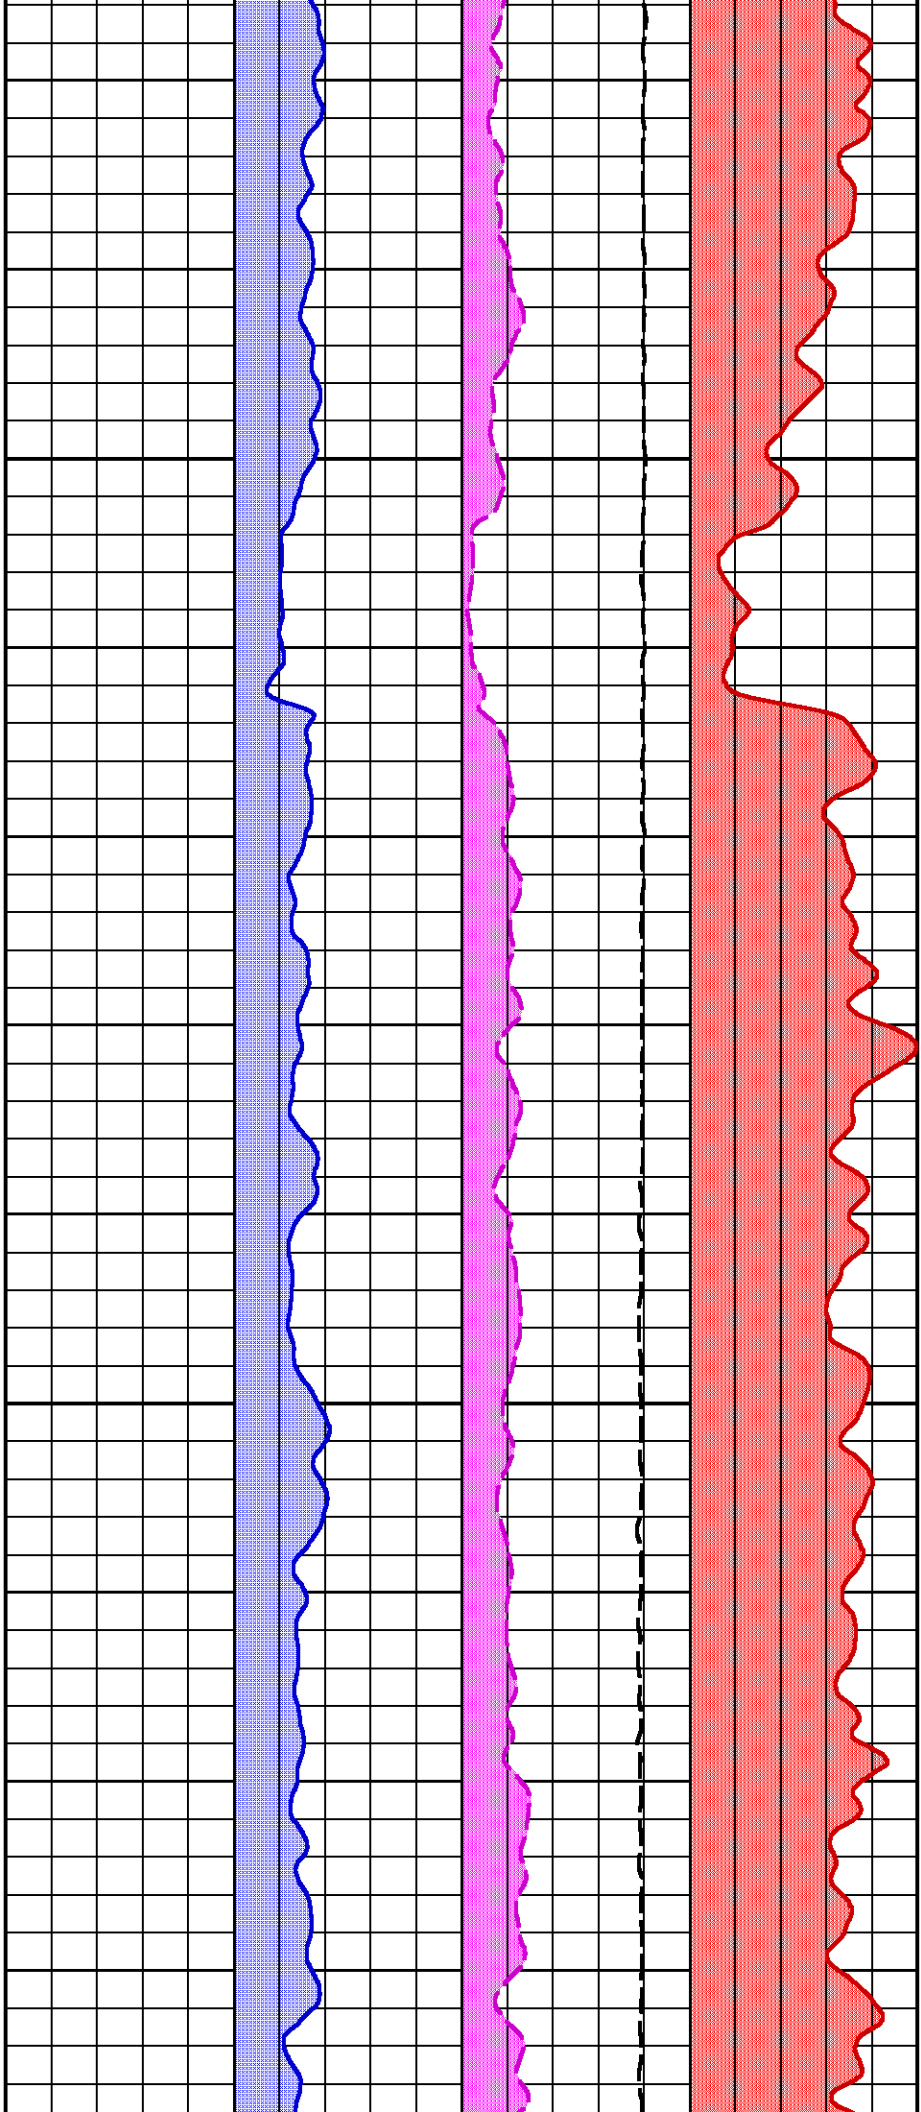

1425

1450

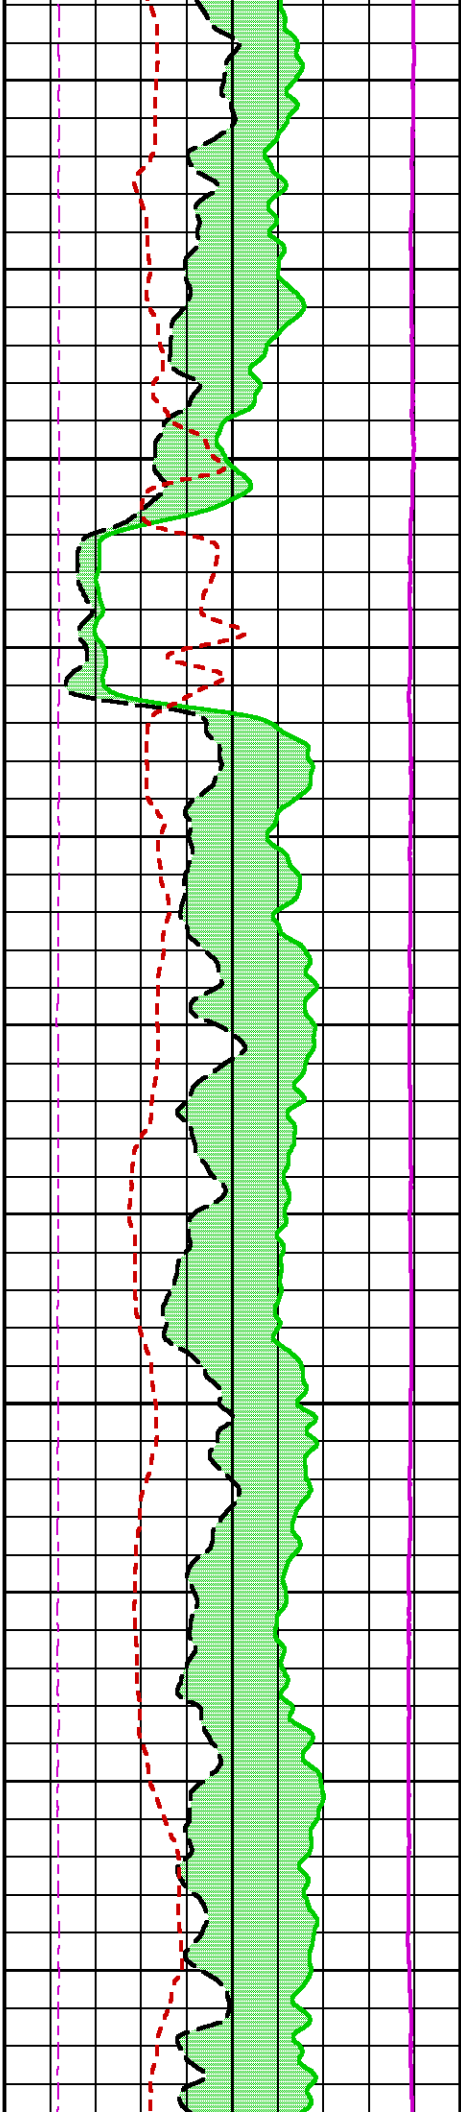


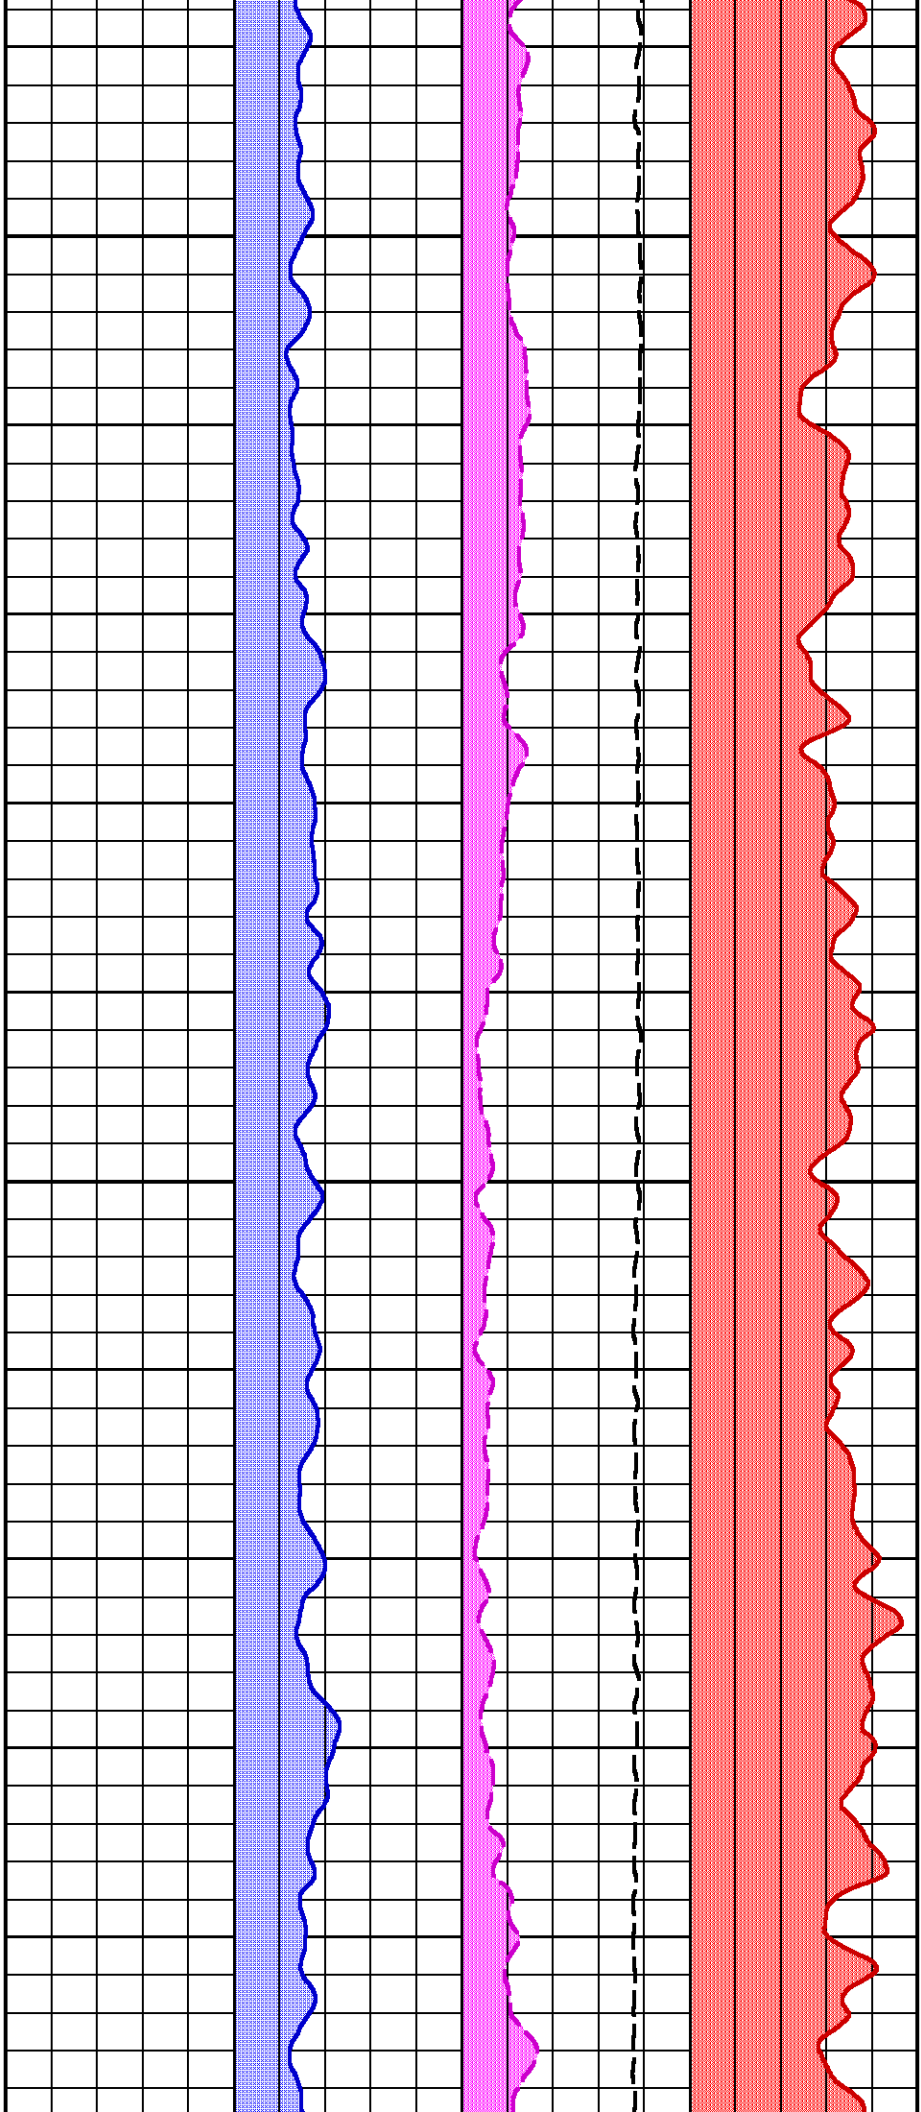


1475

1500

11

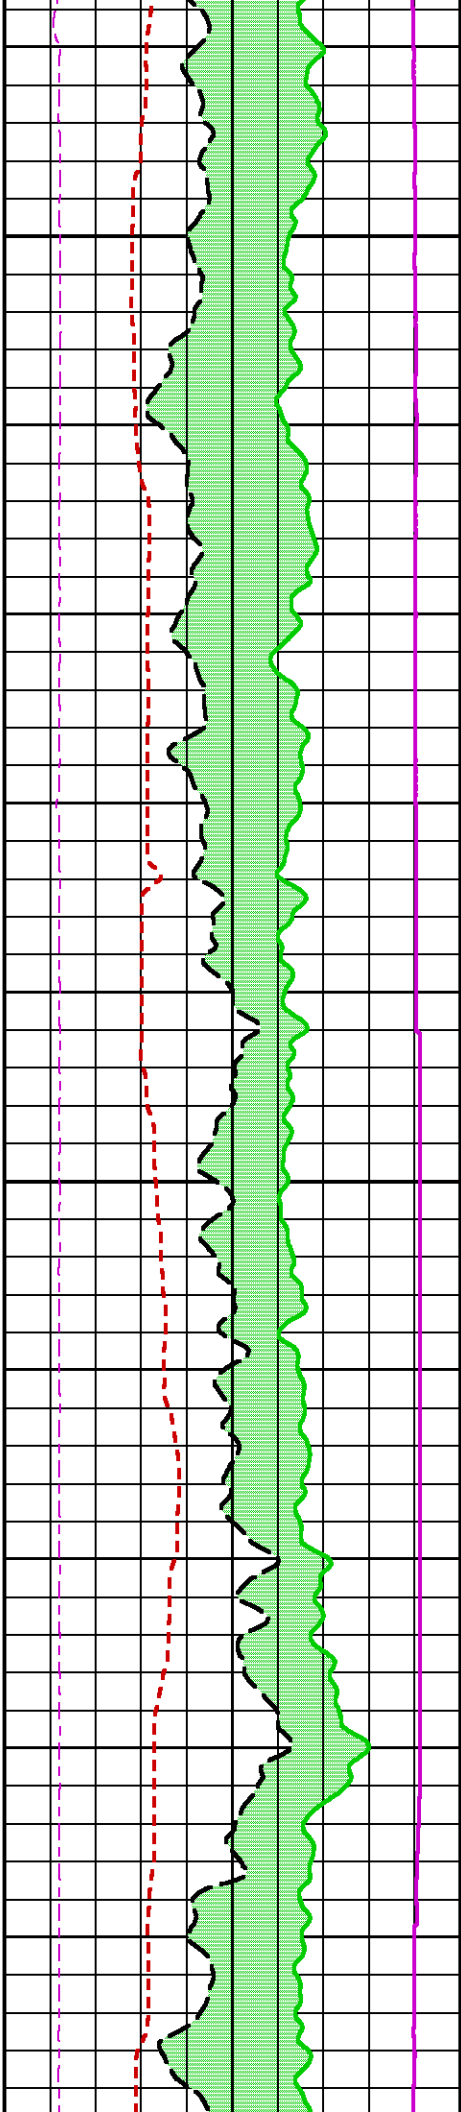


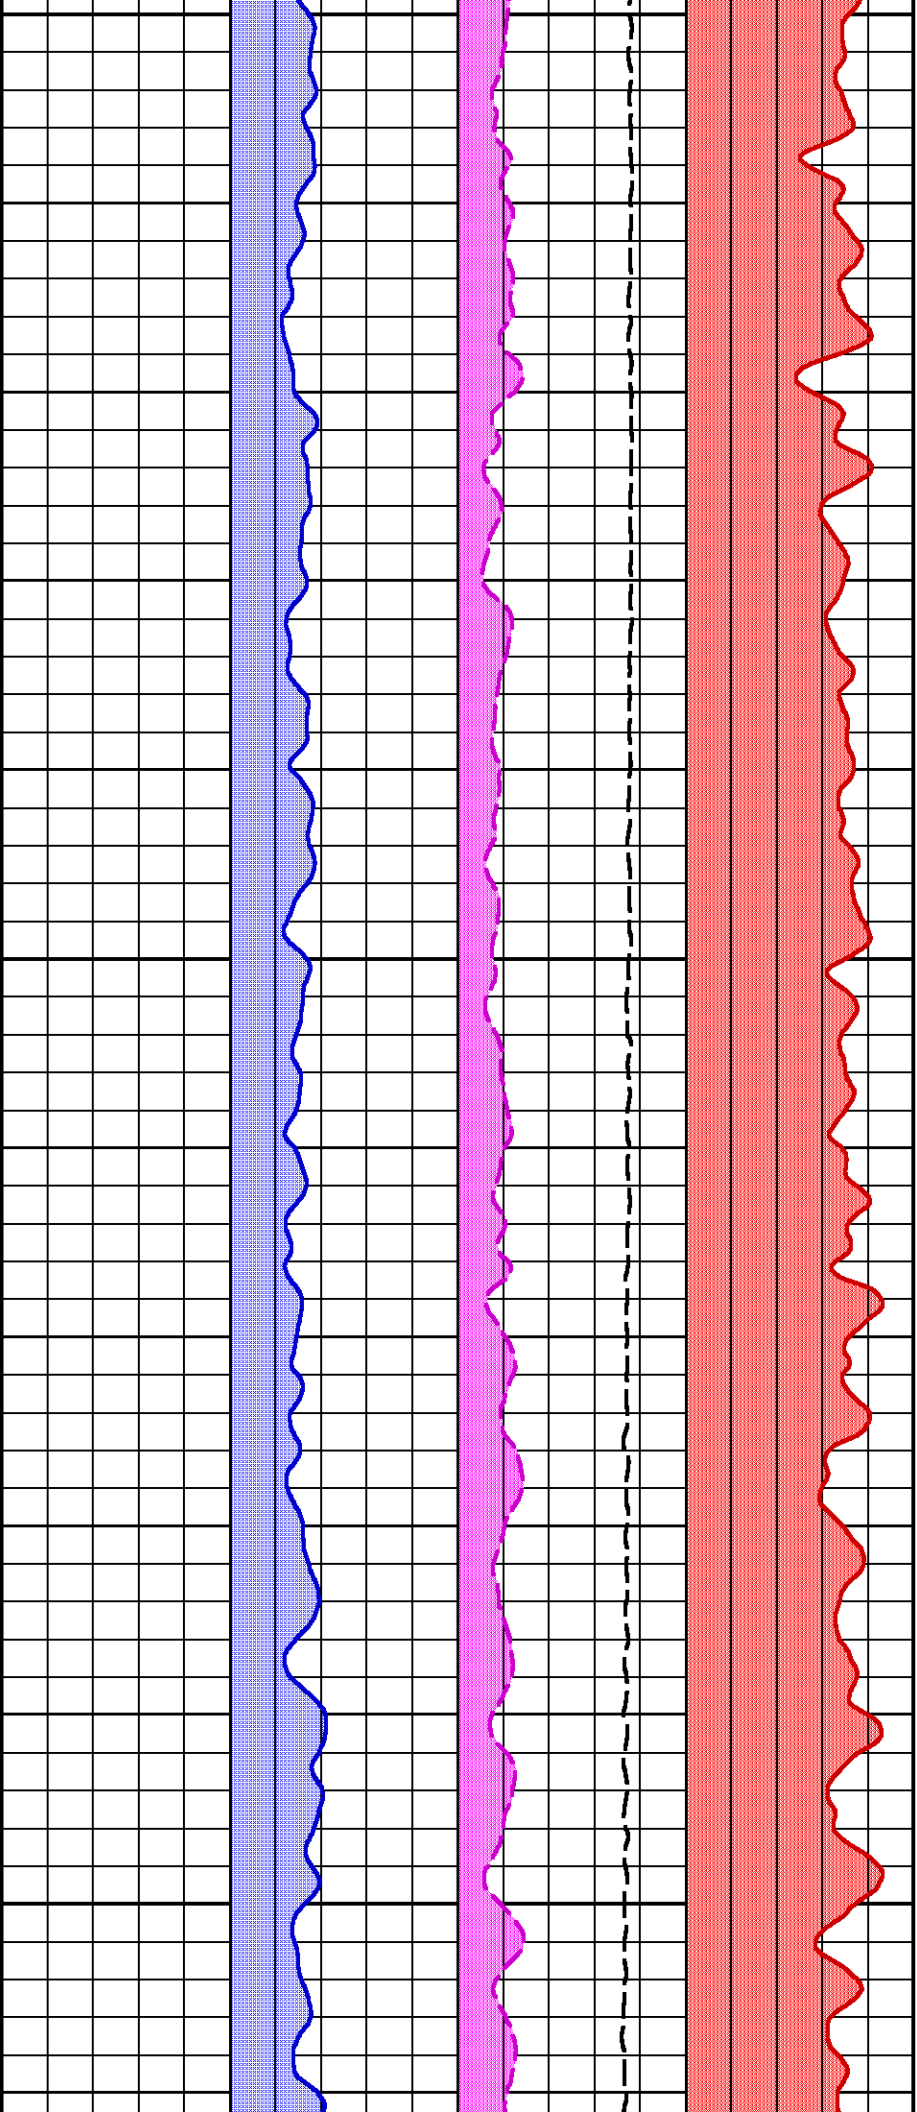


525

1550


1575

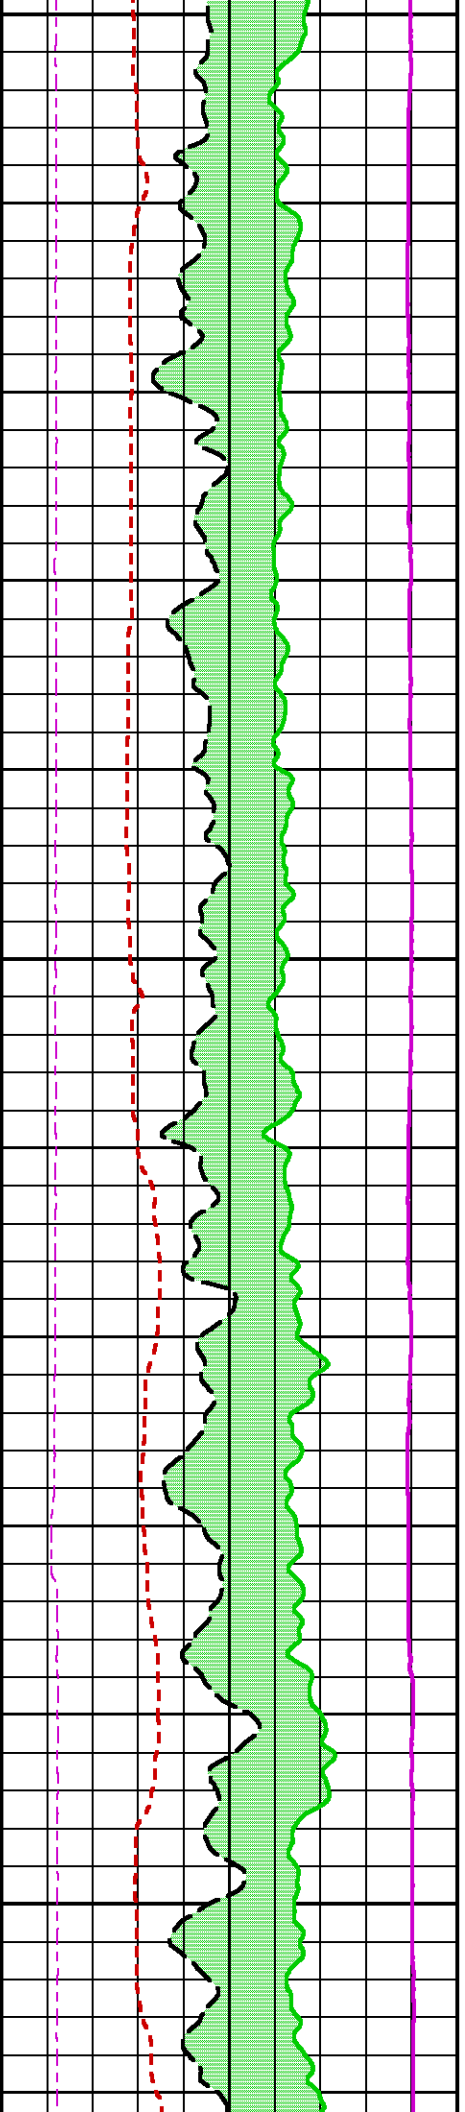


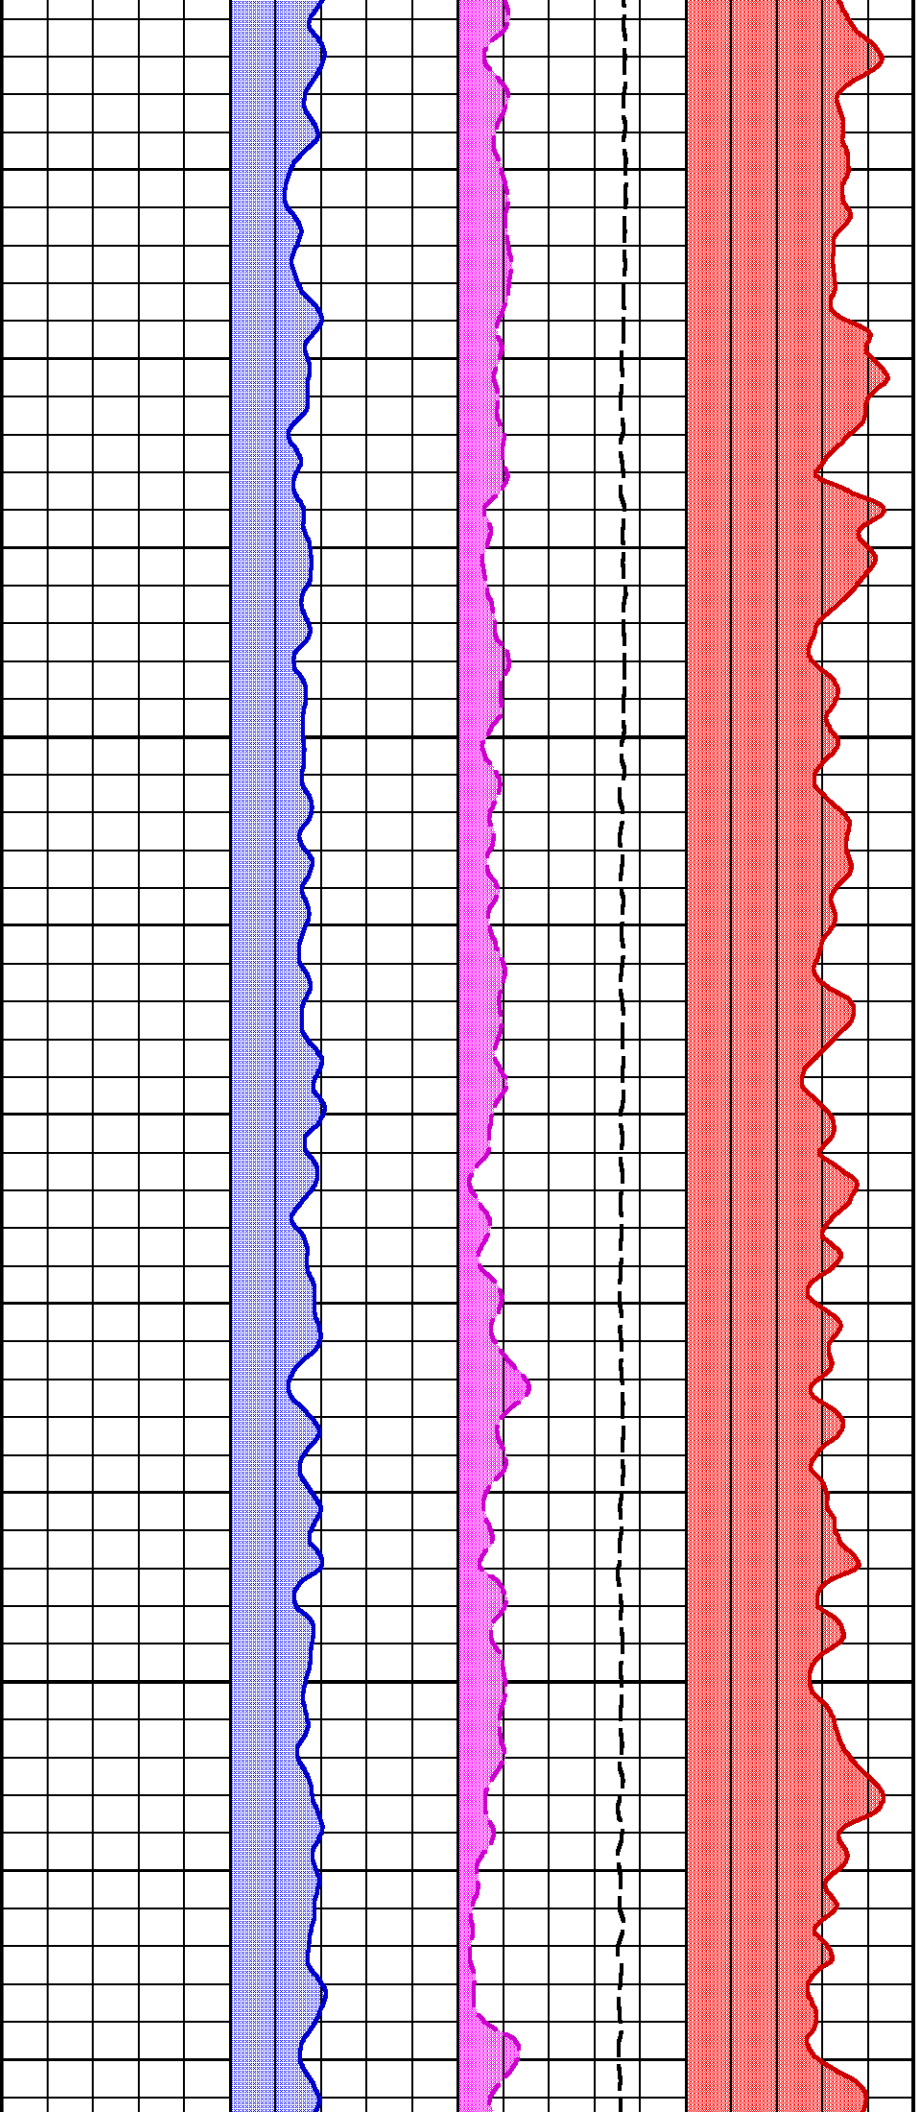

1600


1625

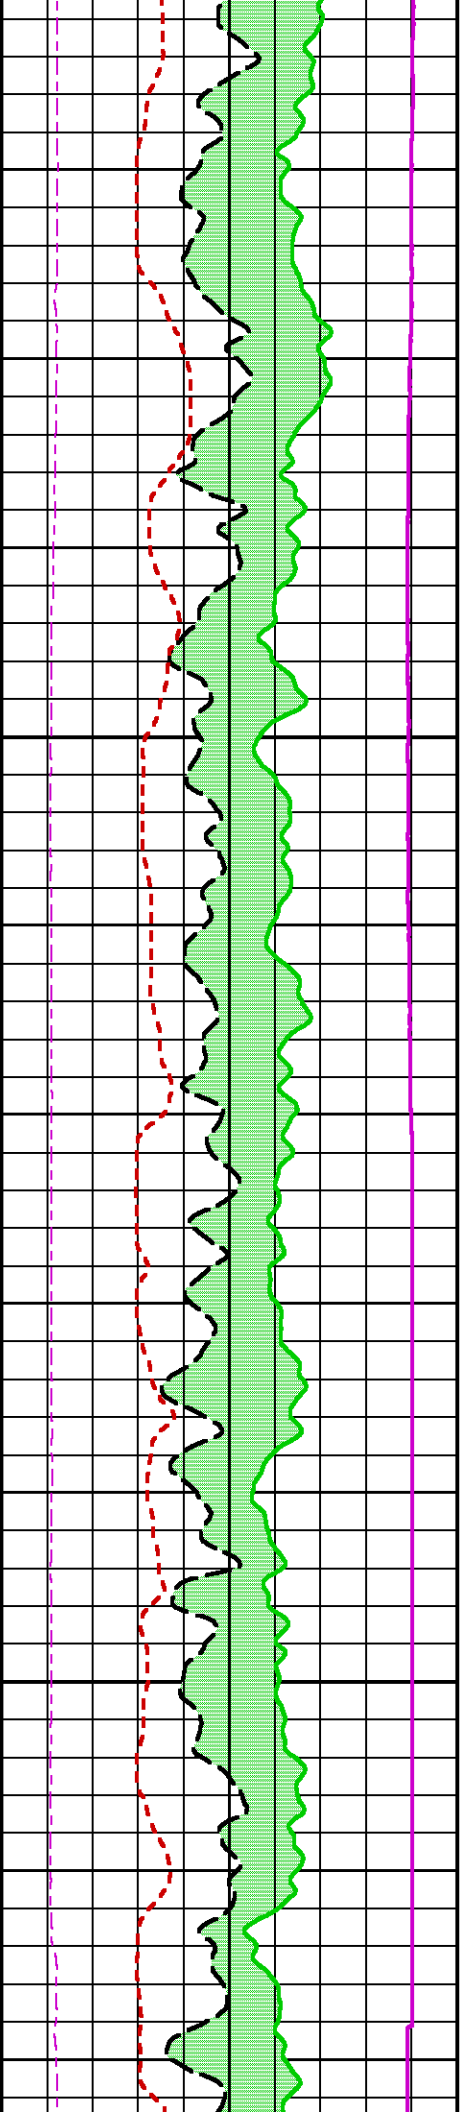


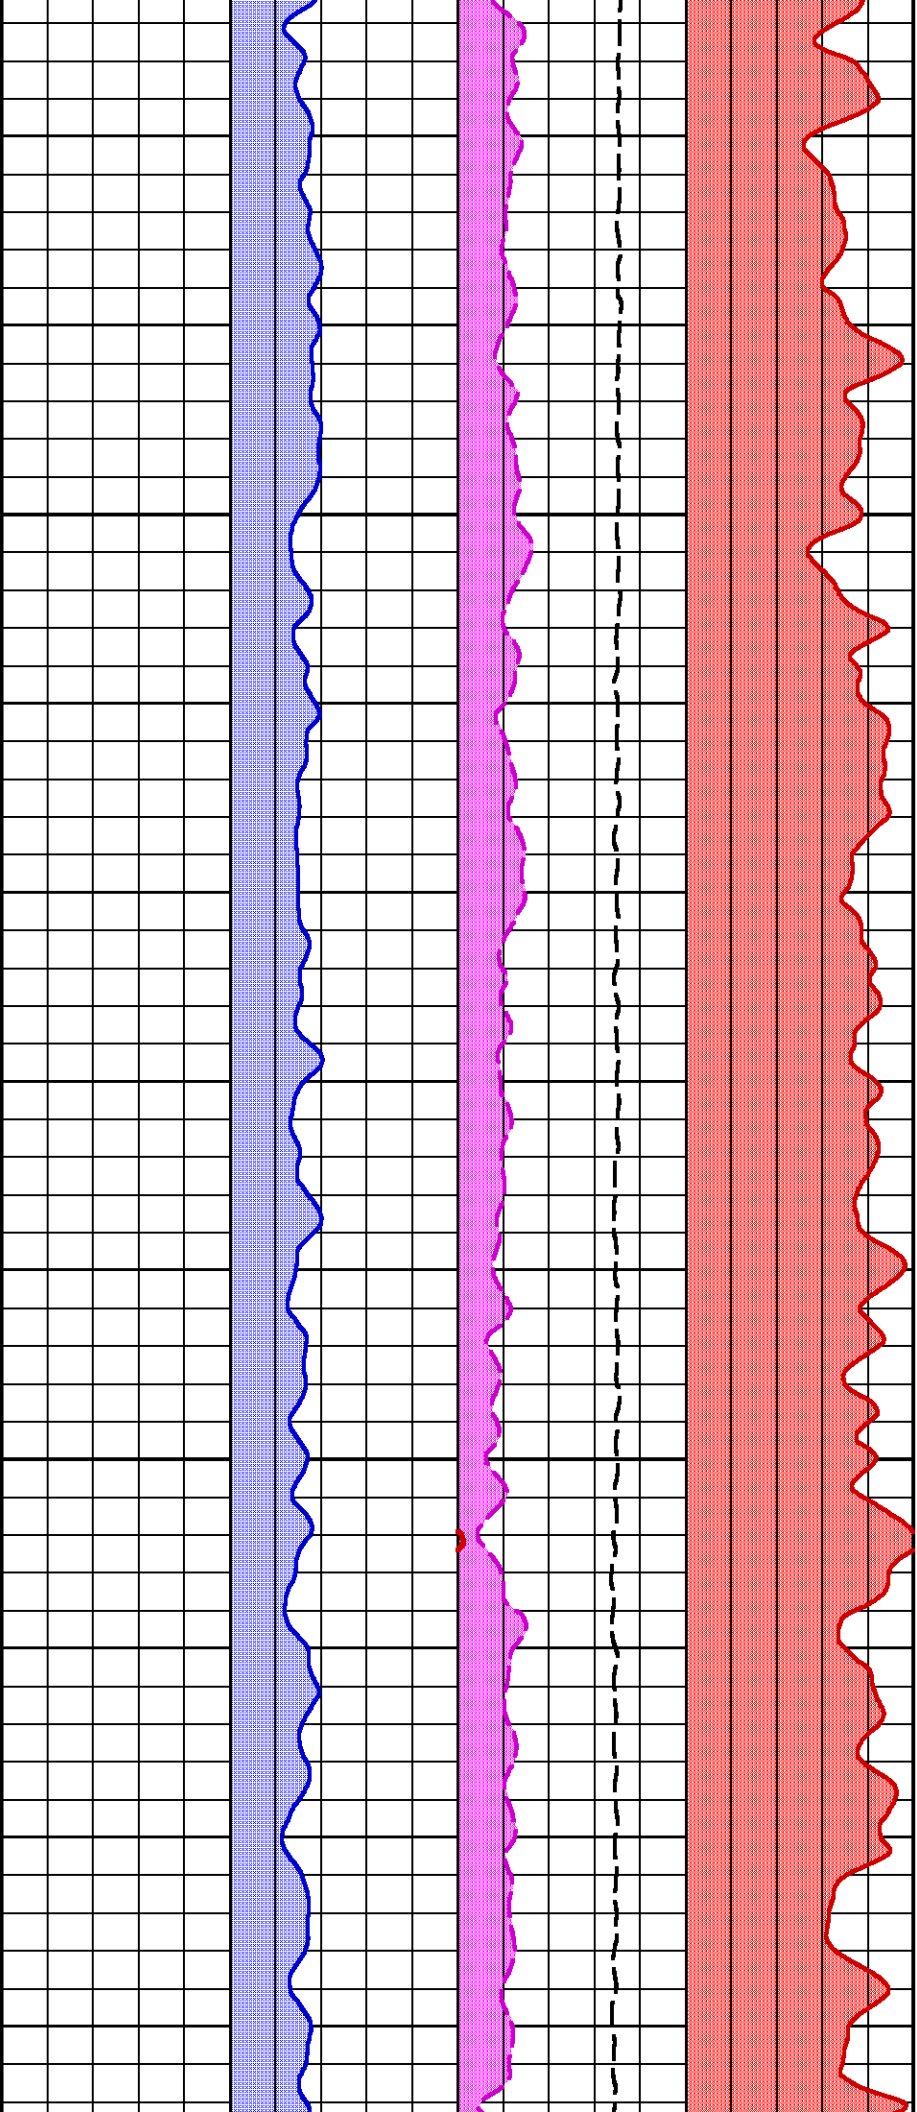

1650


1675

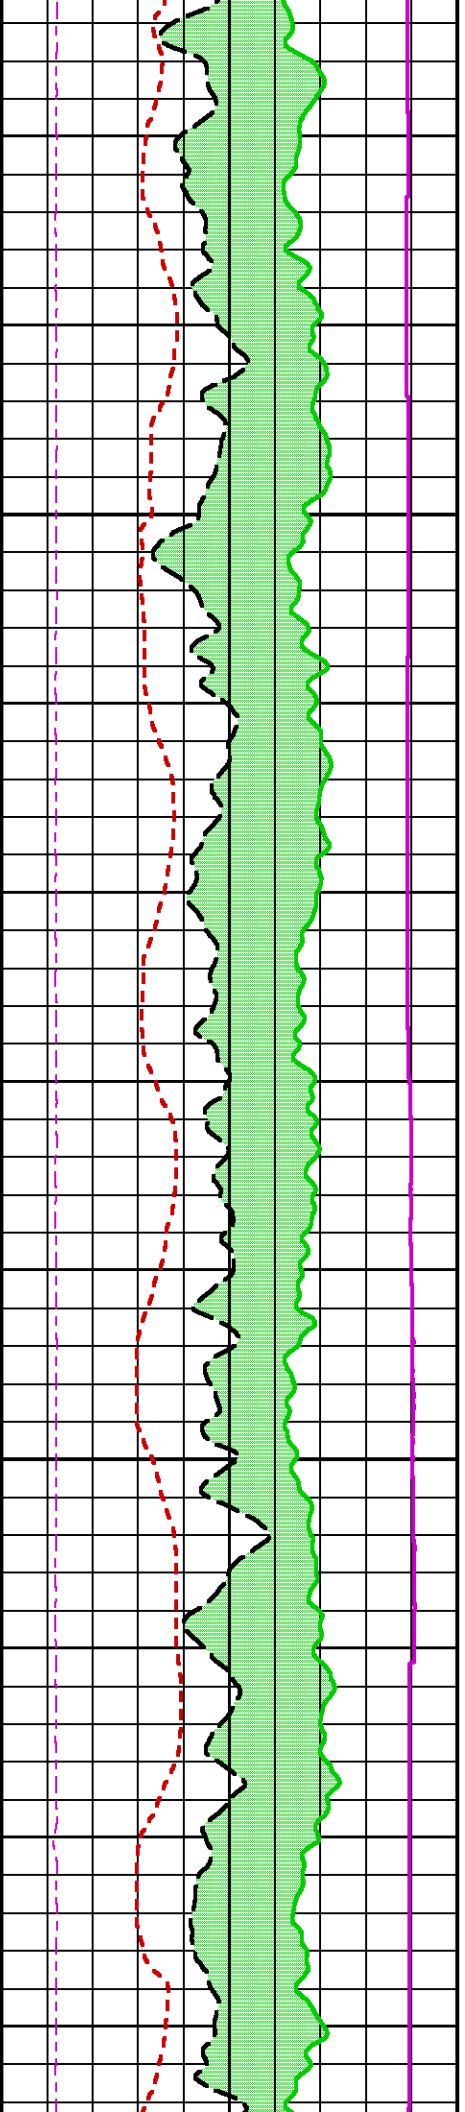


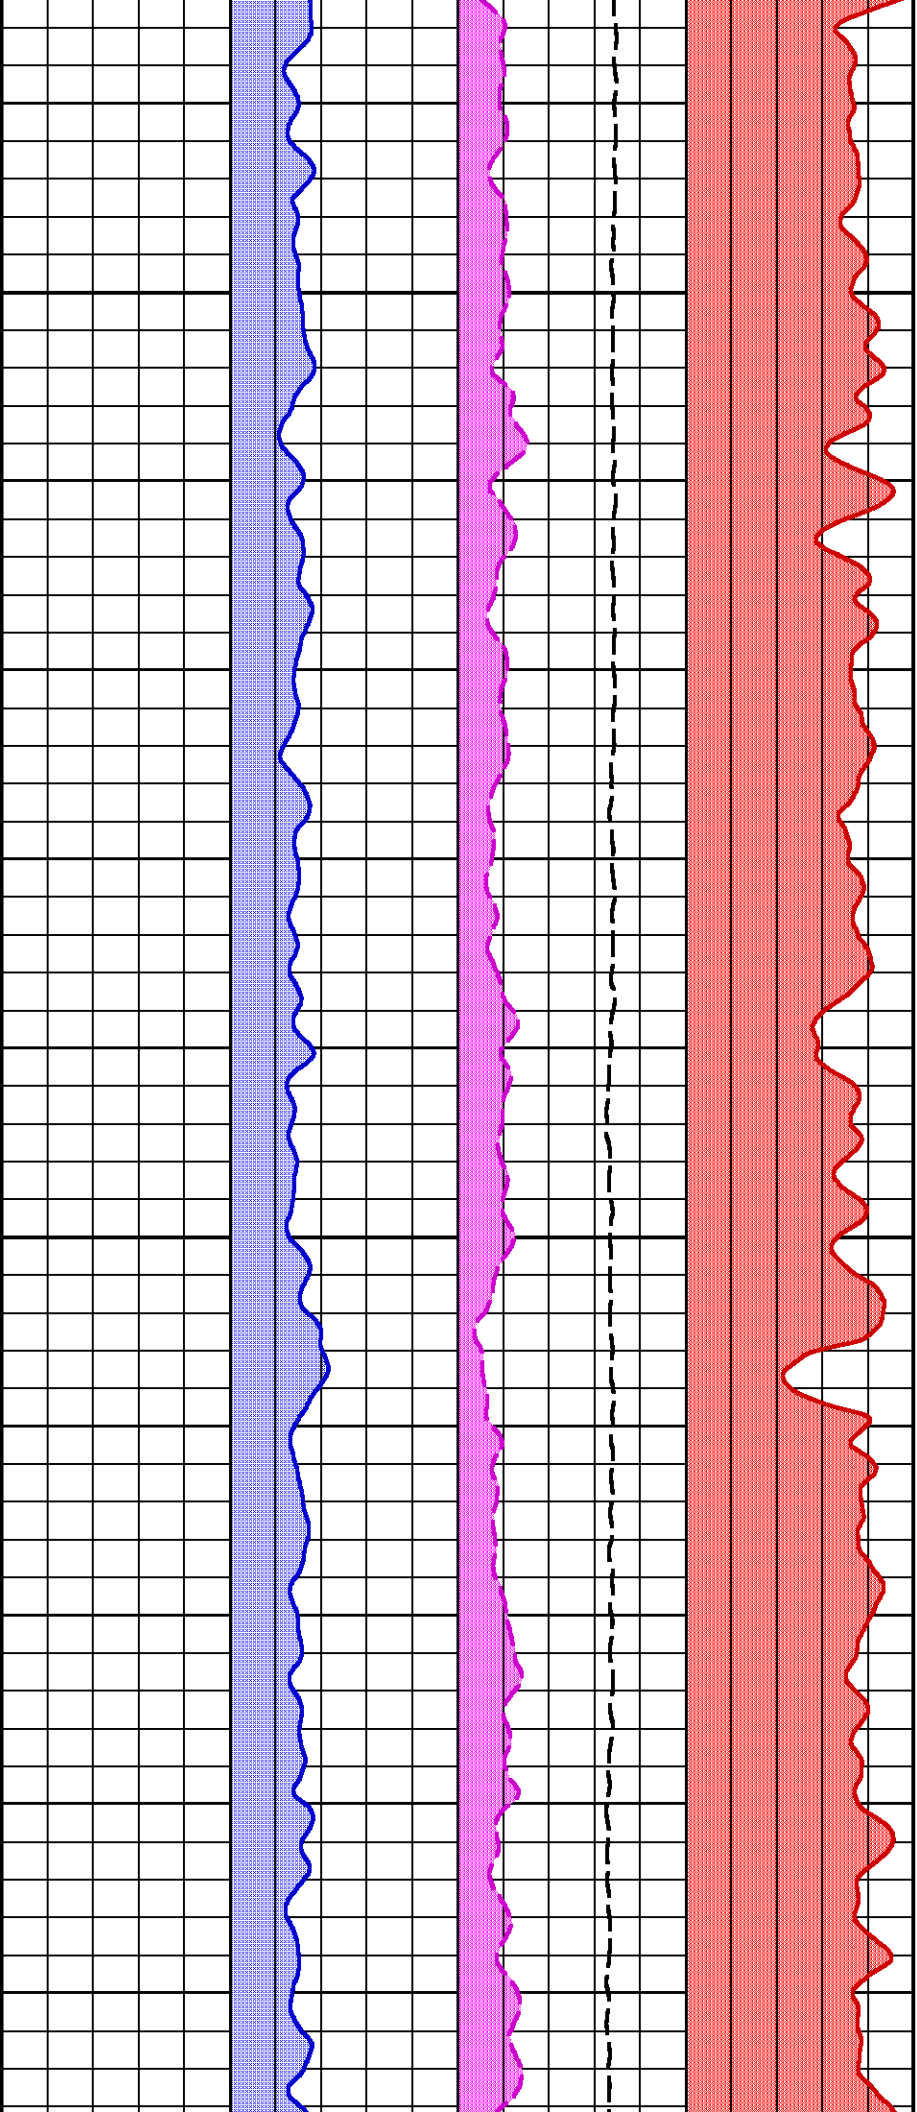

1700

1725

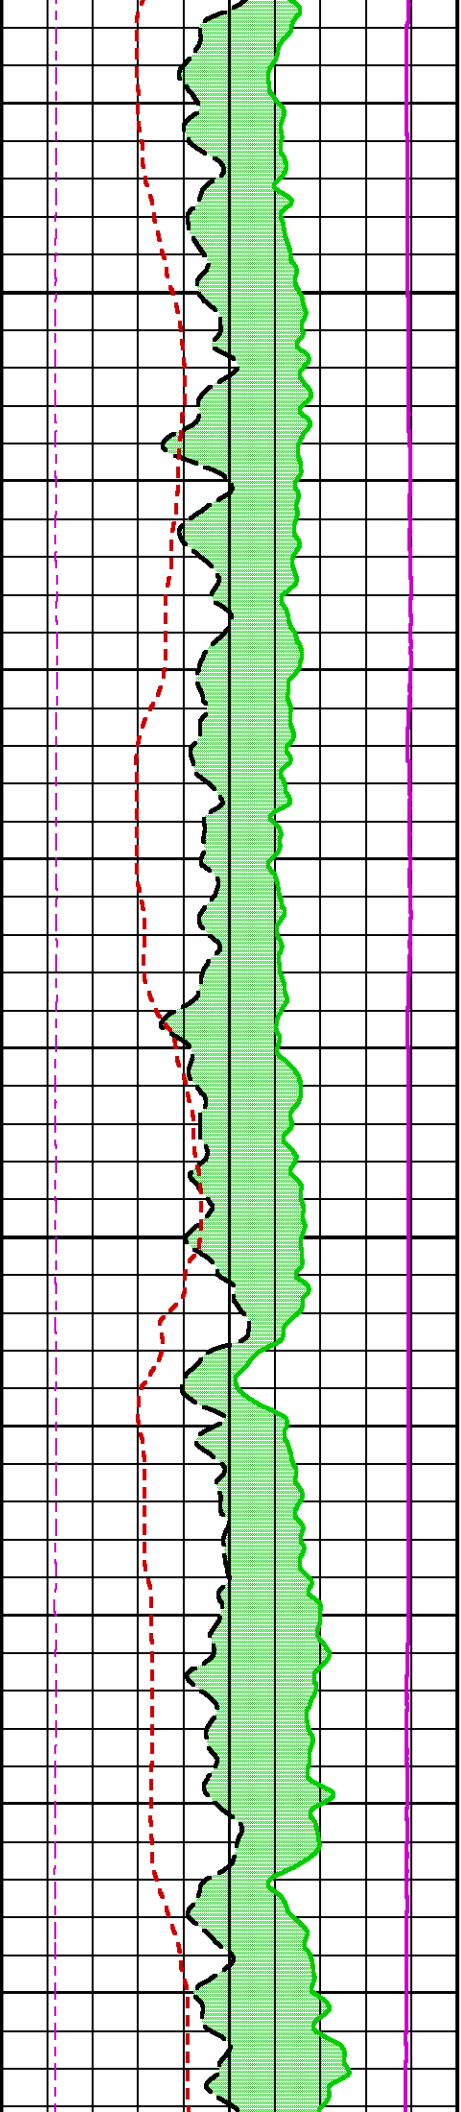


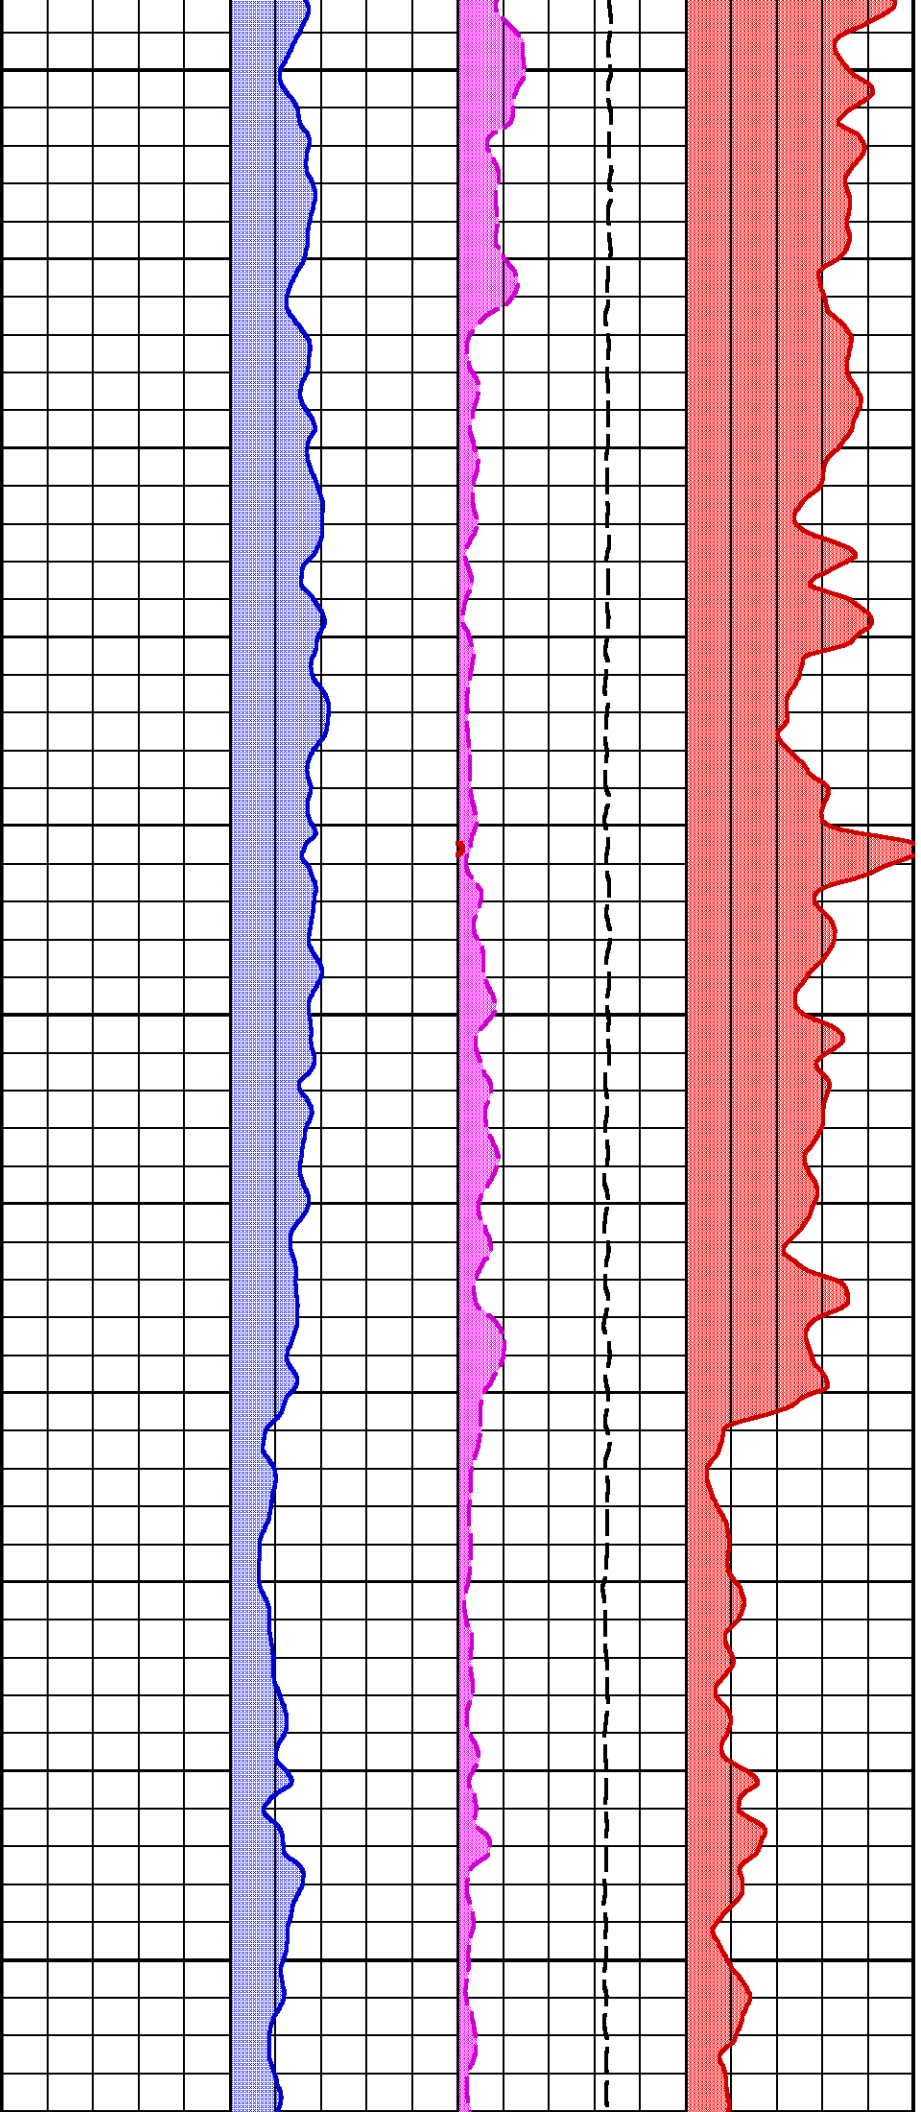


1750

1775


1800

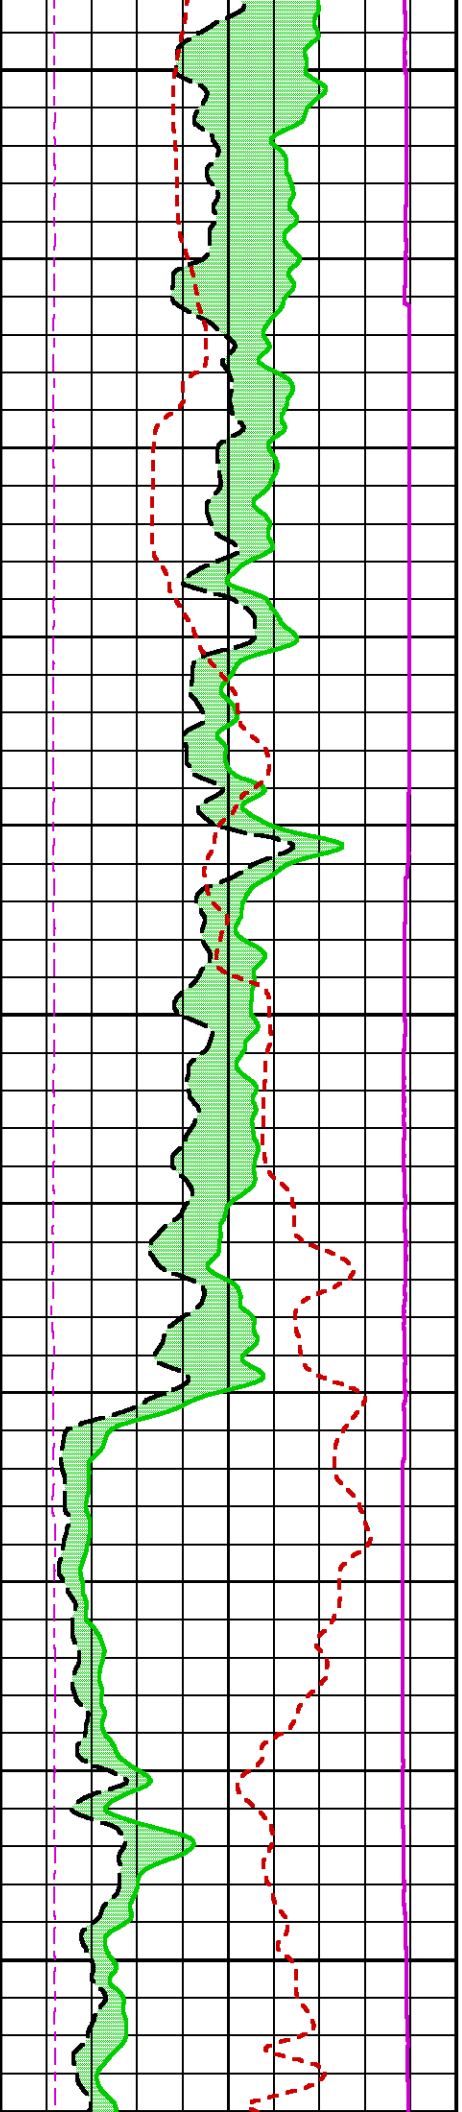


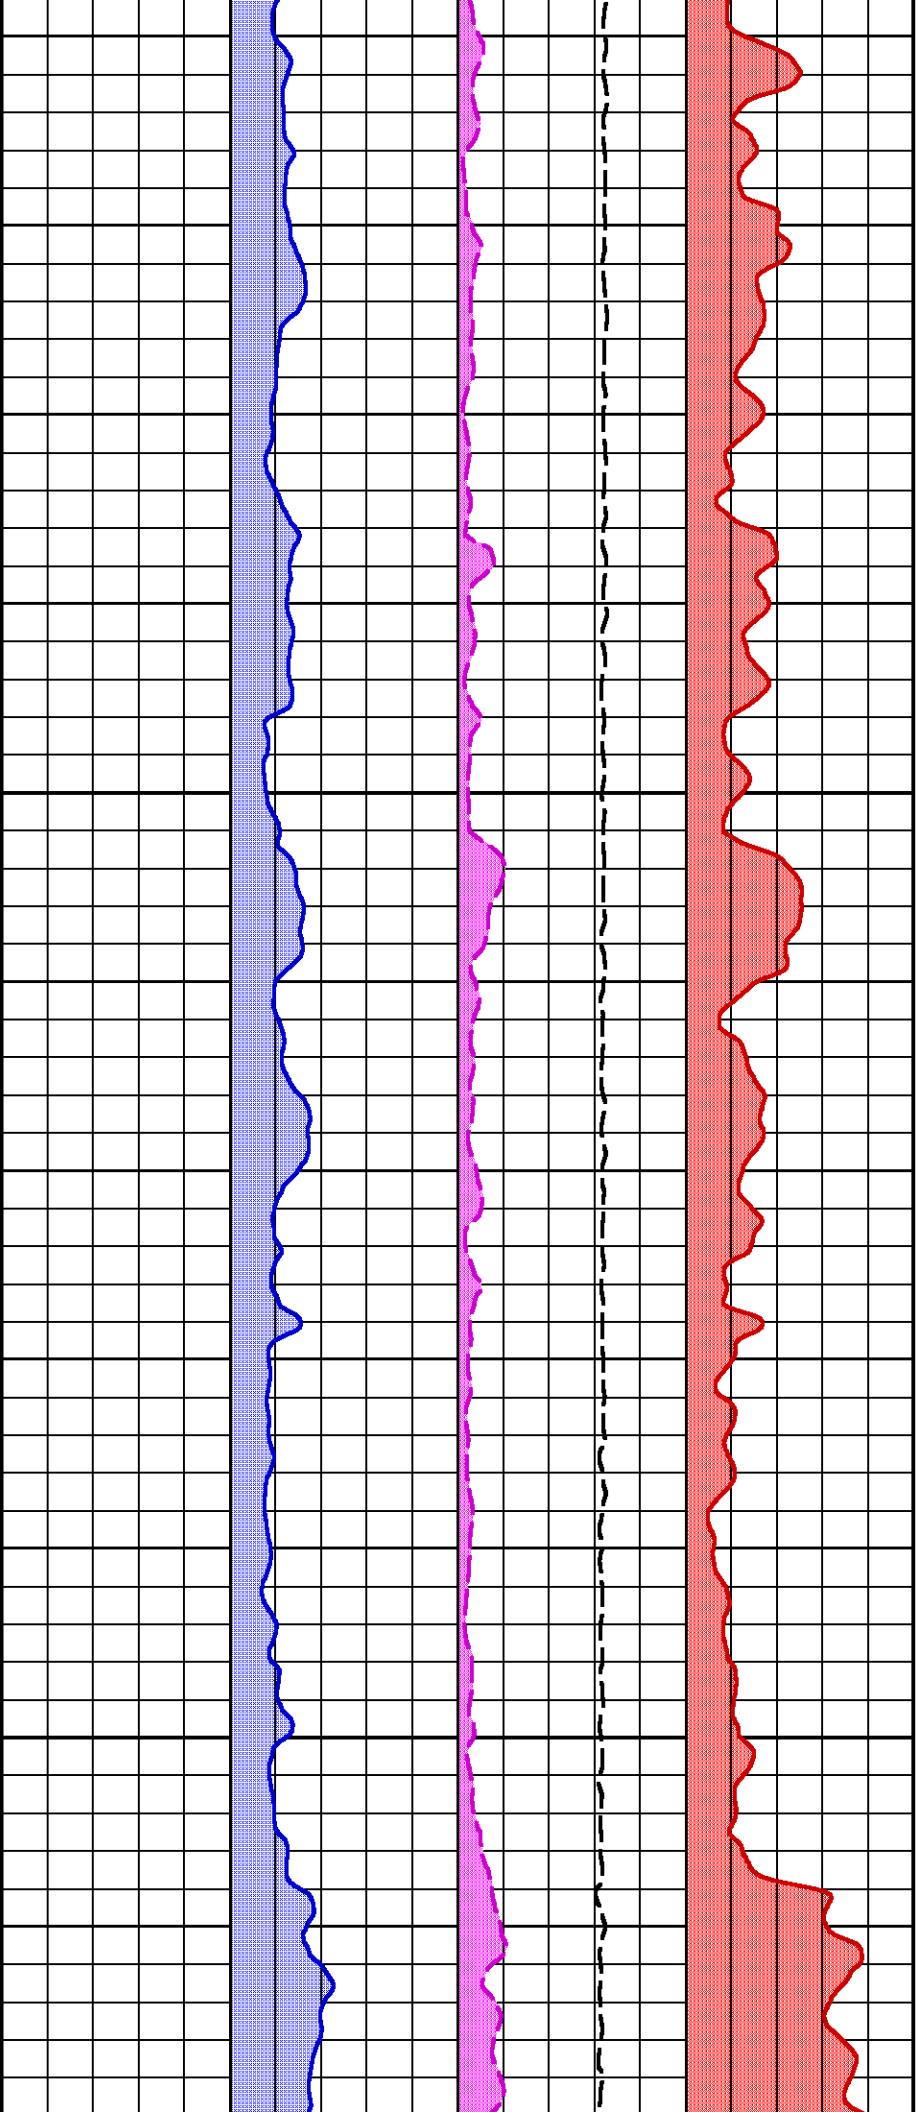

1825


1850

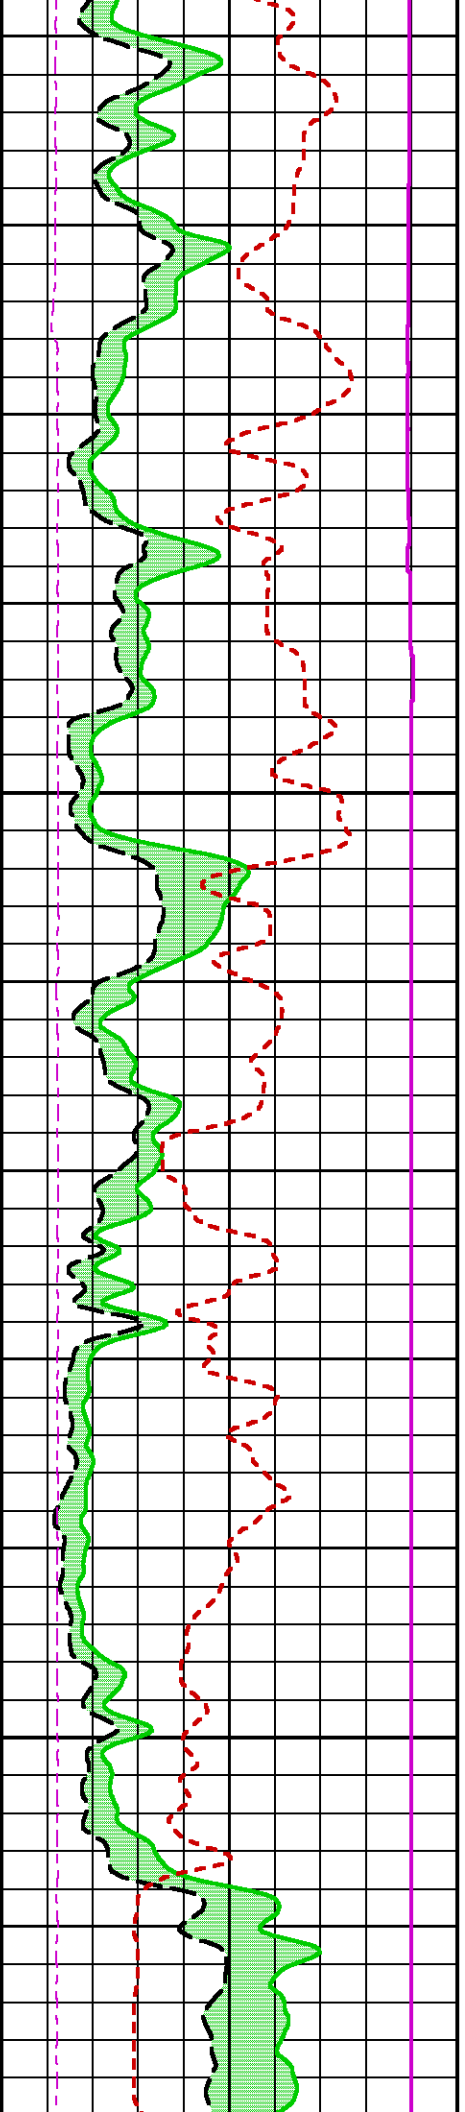


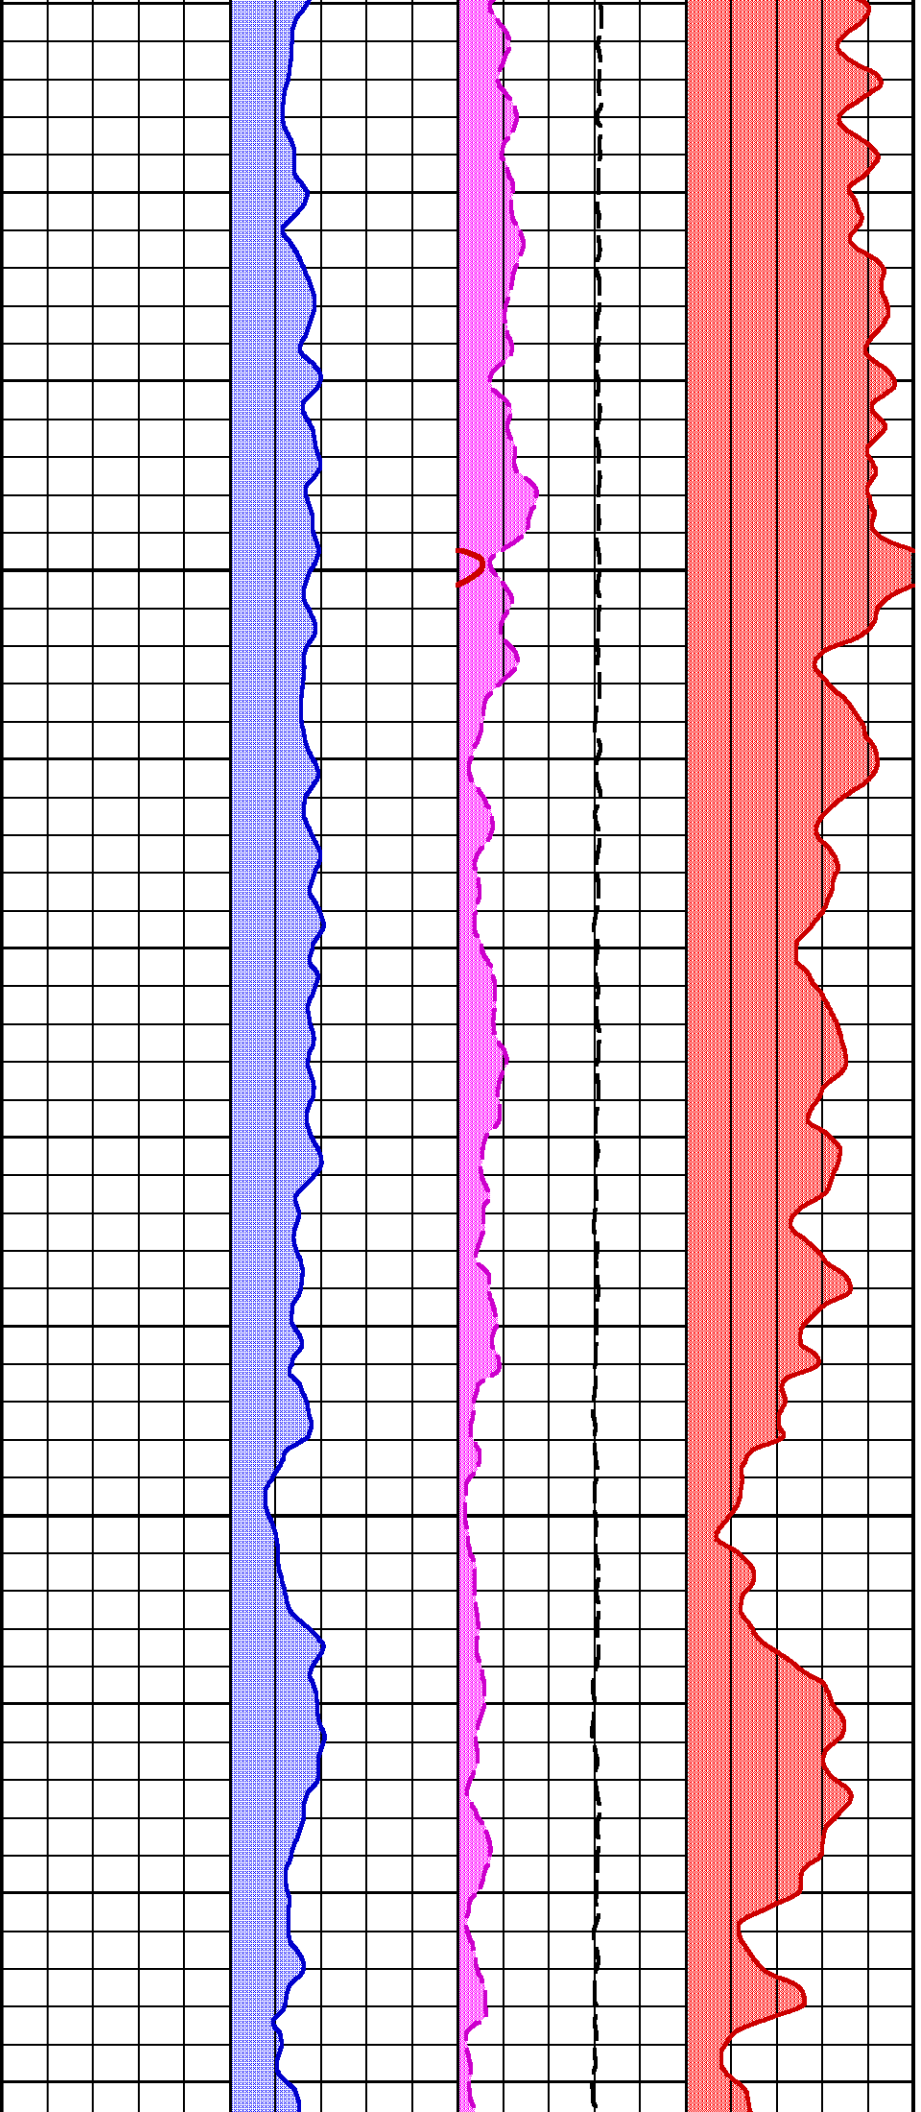

1875


1900

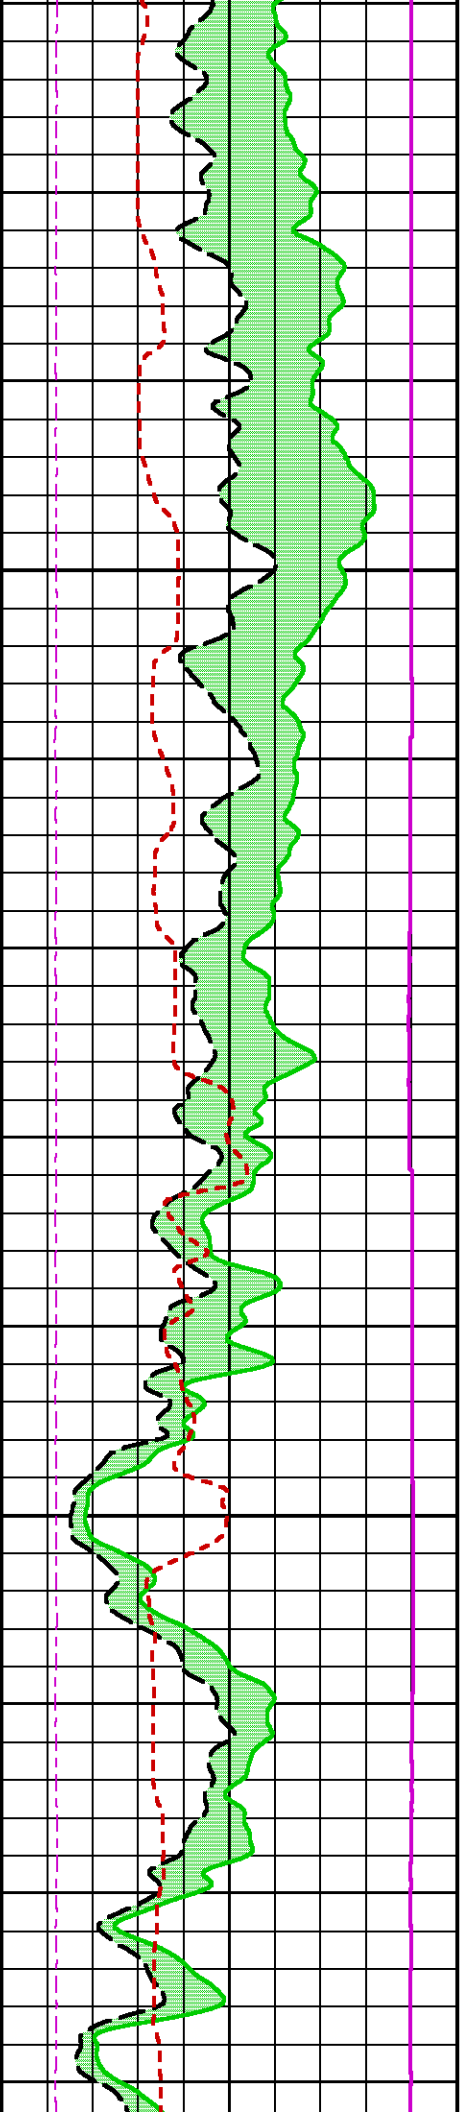


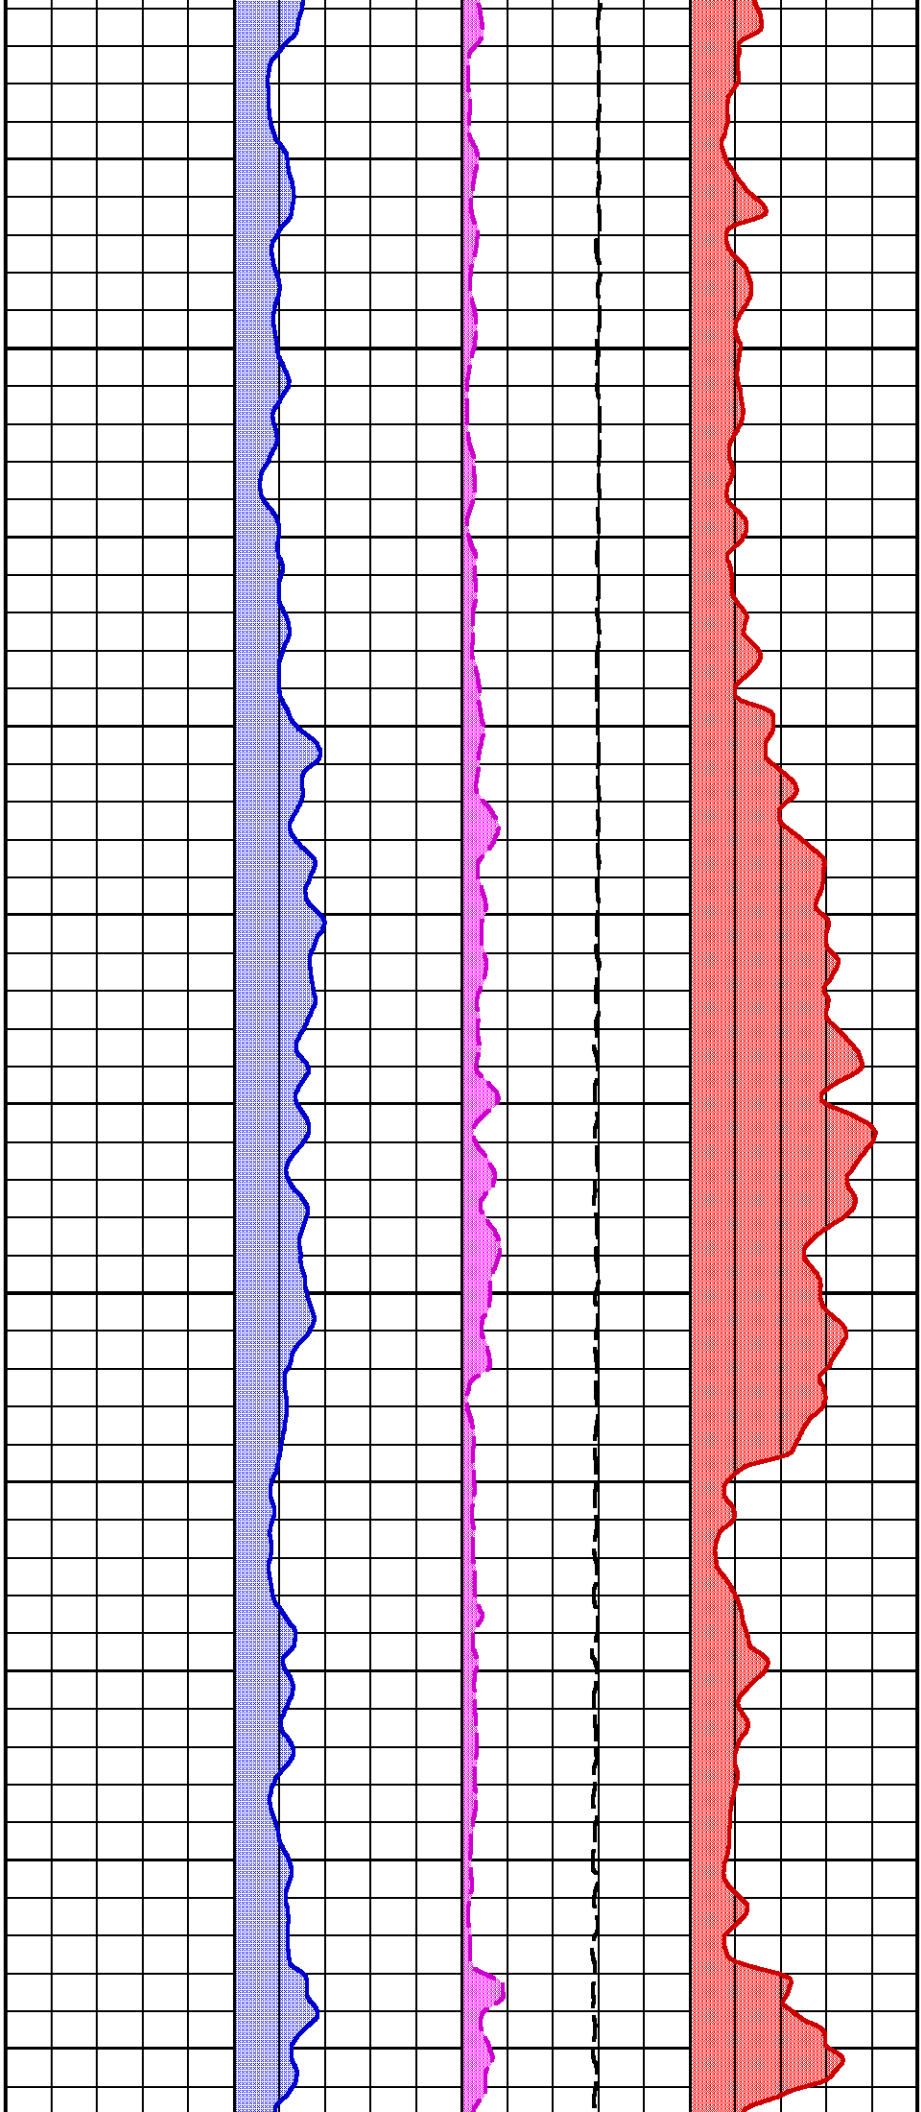

1925

1950

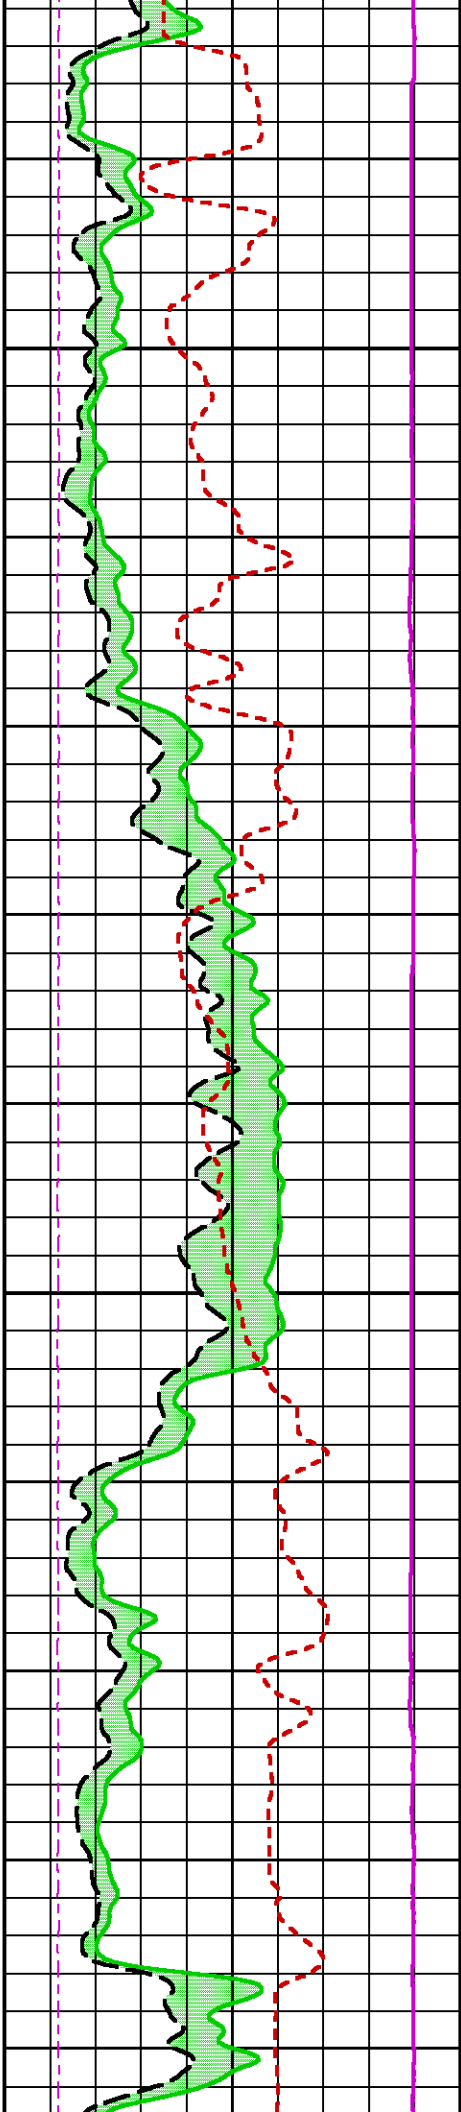


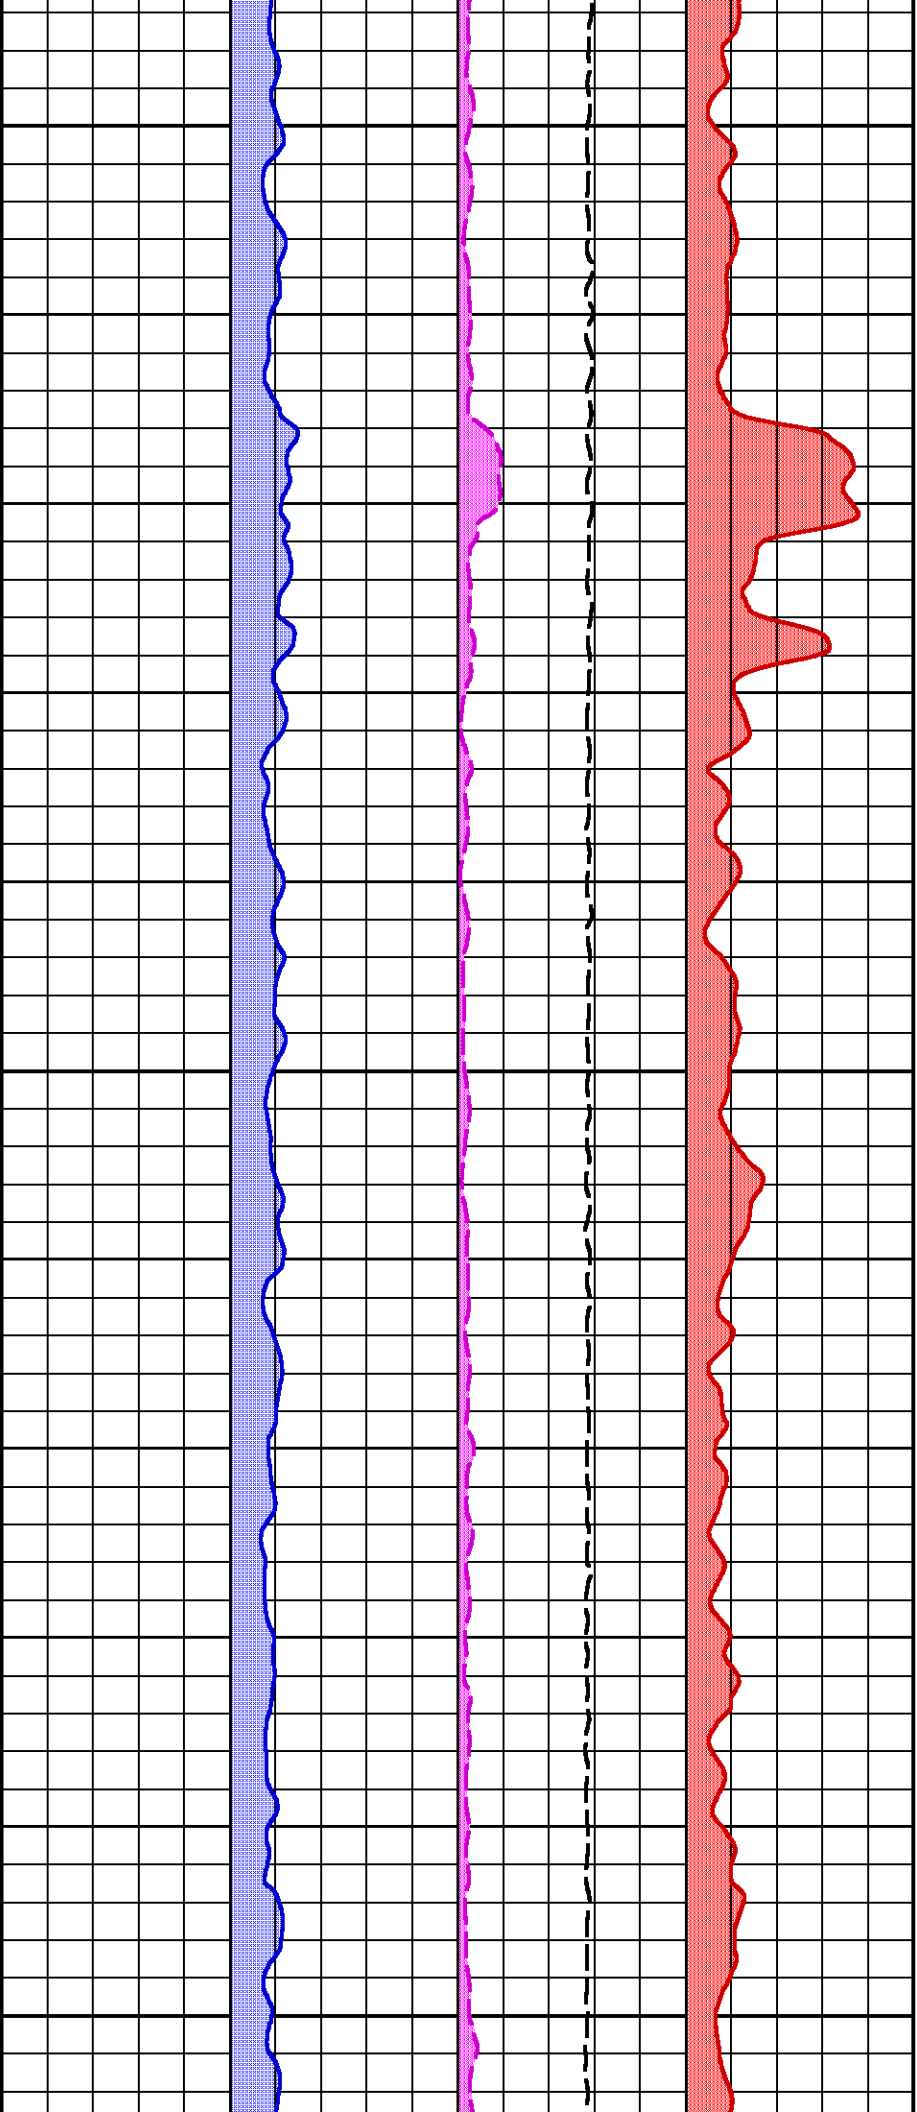


1975

2000


2025

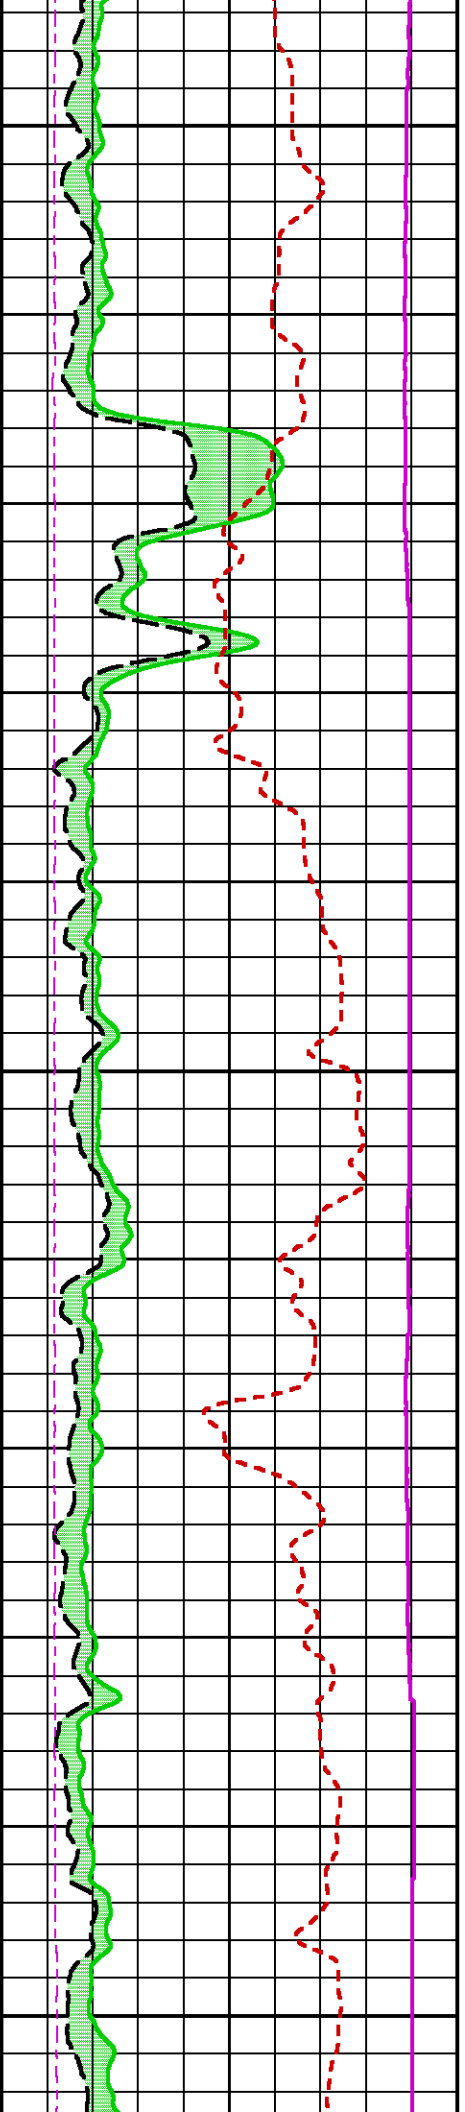


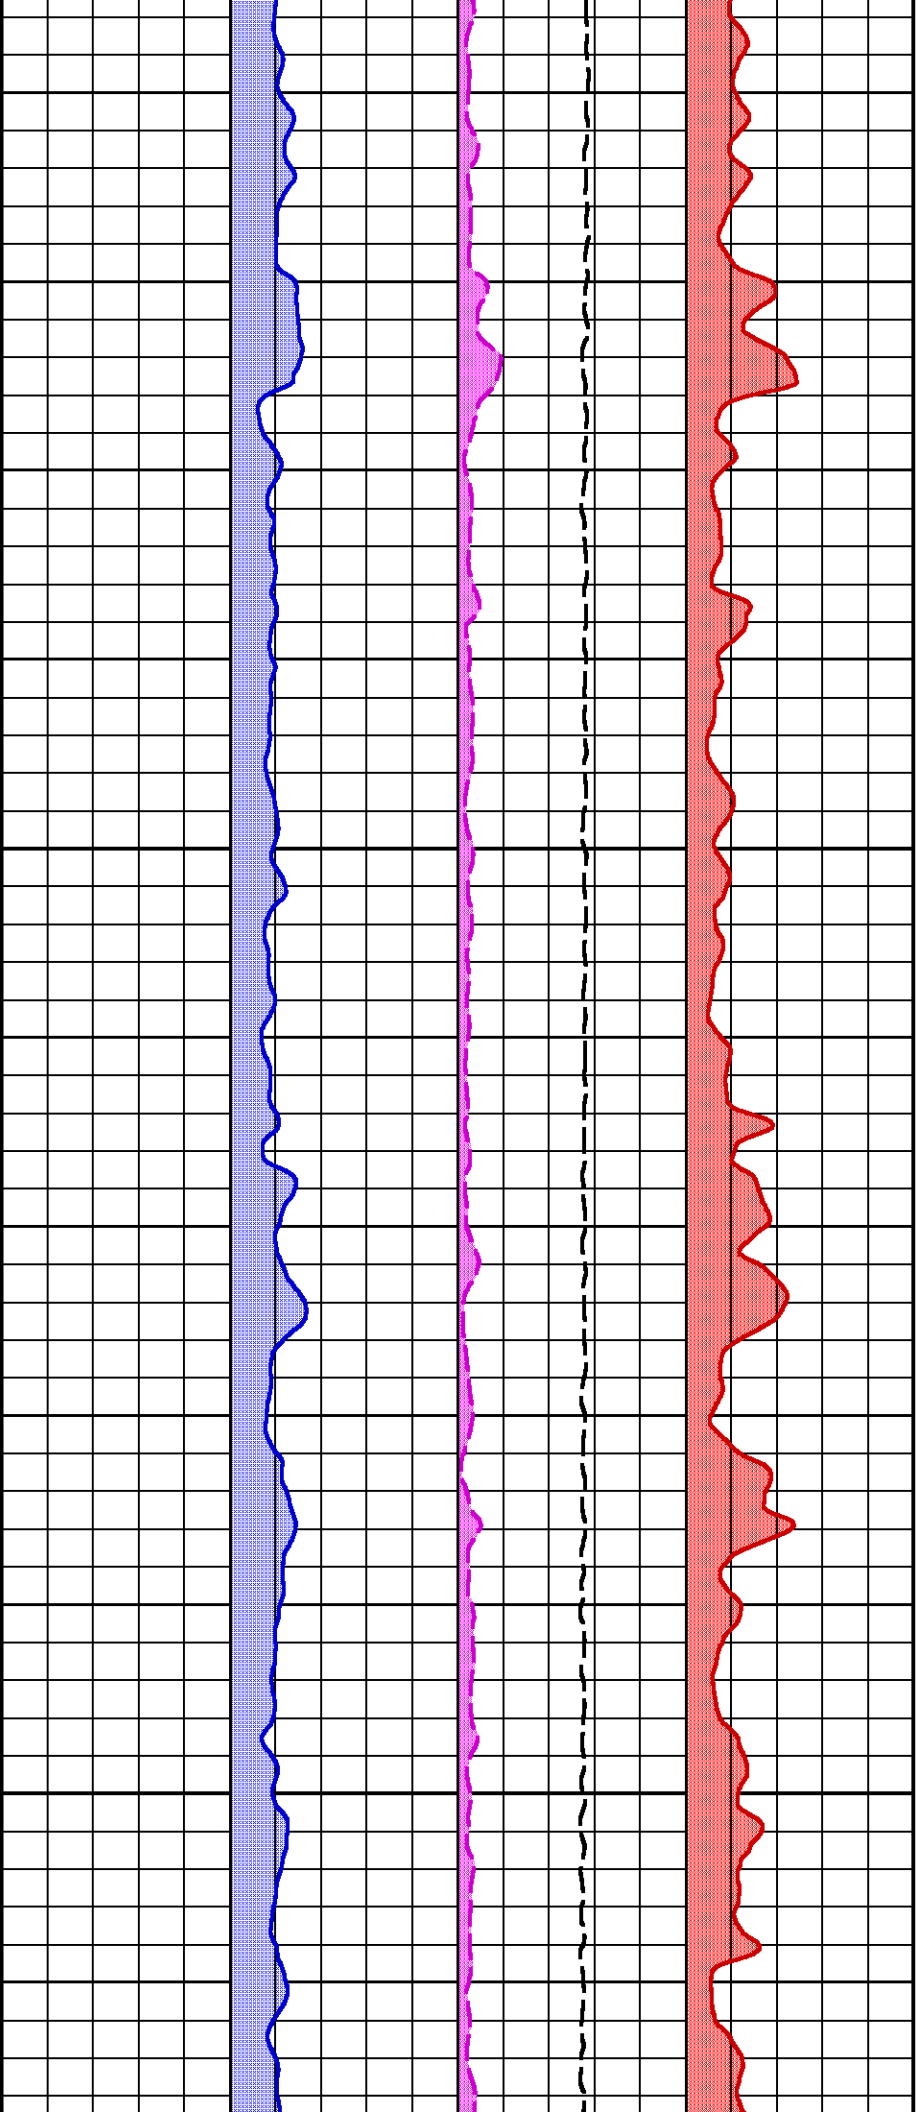

2050


2075

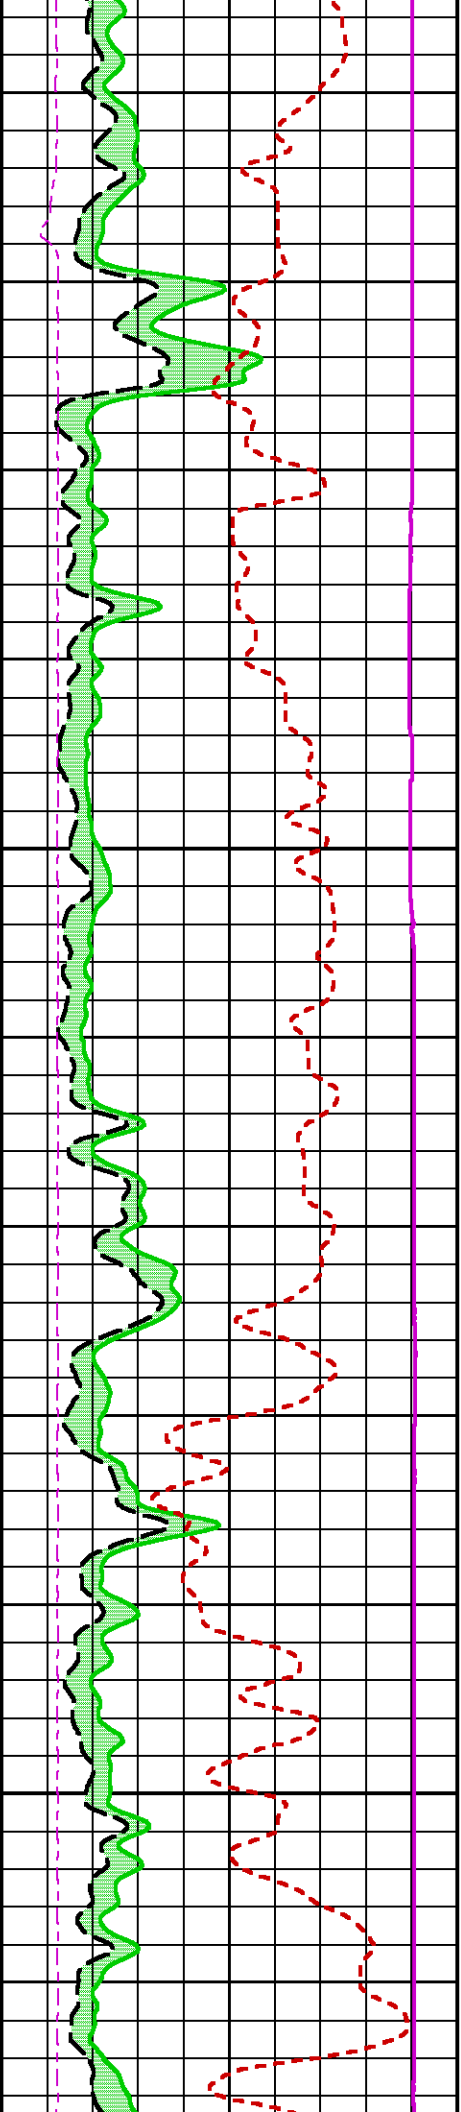


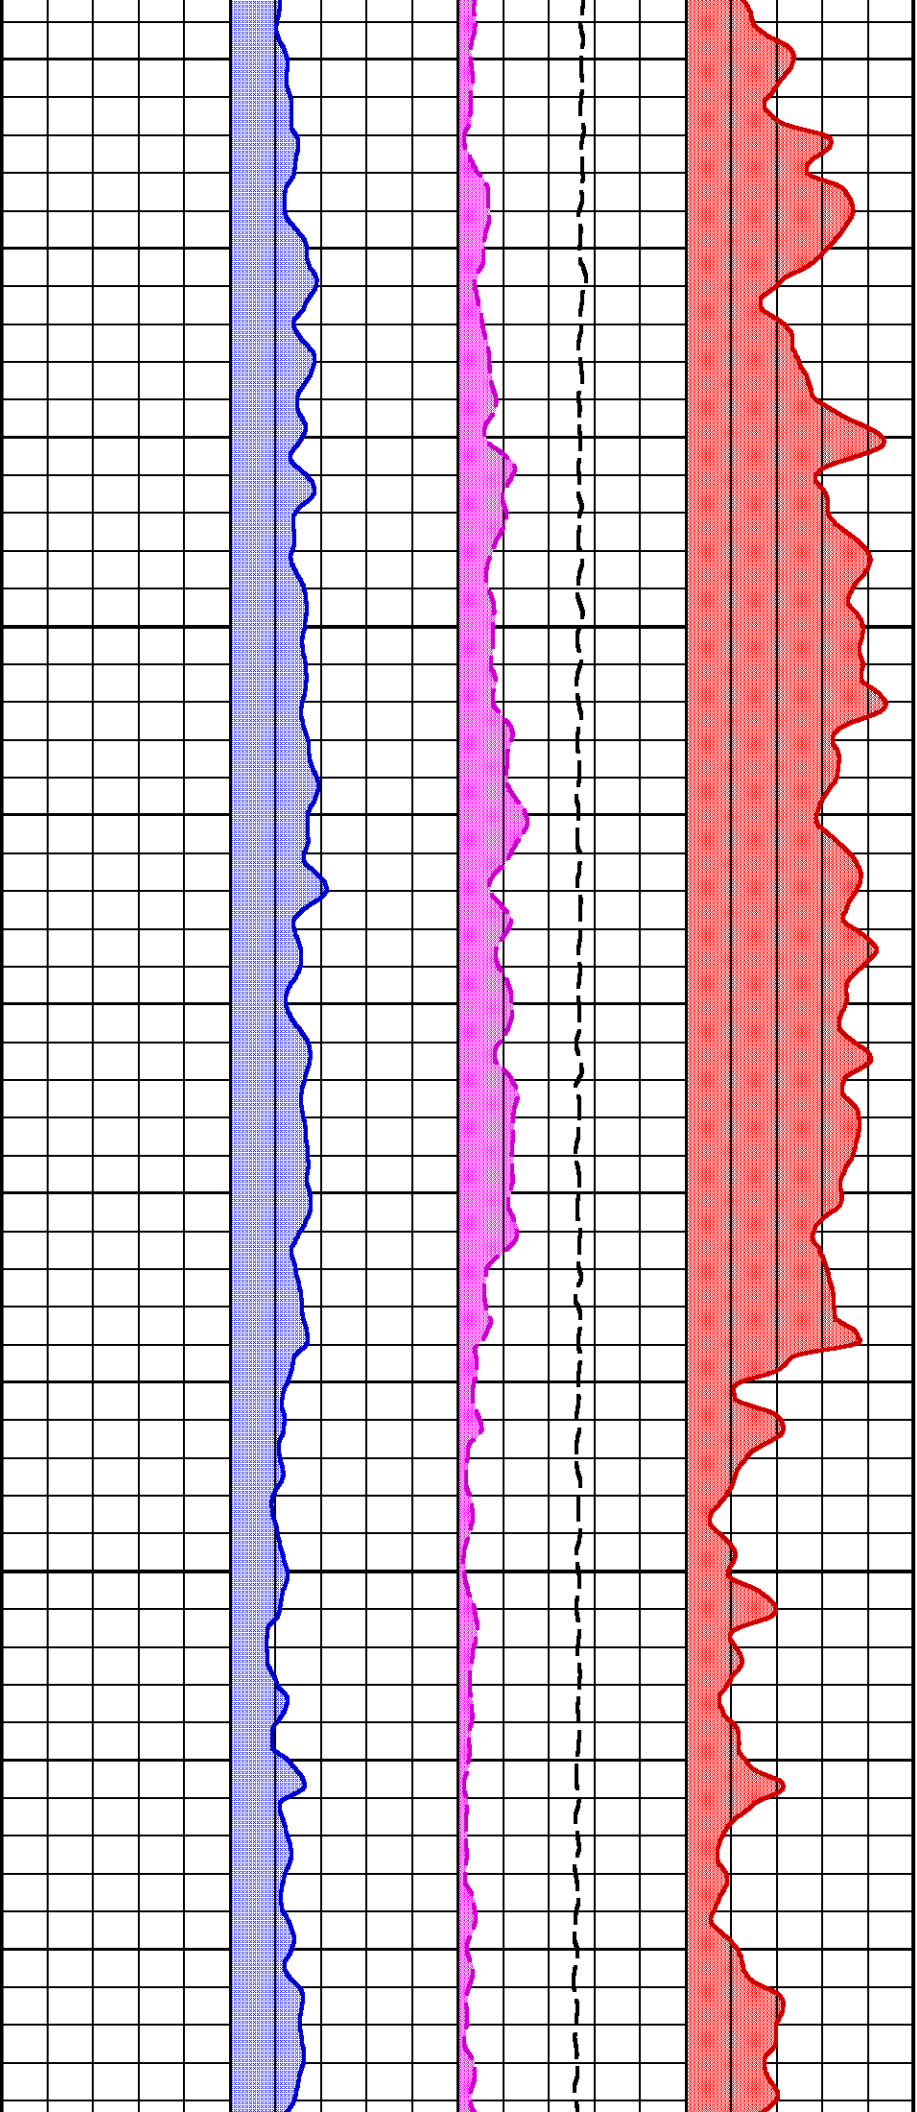

2100


2125

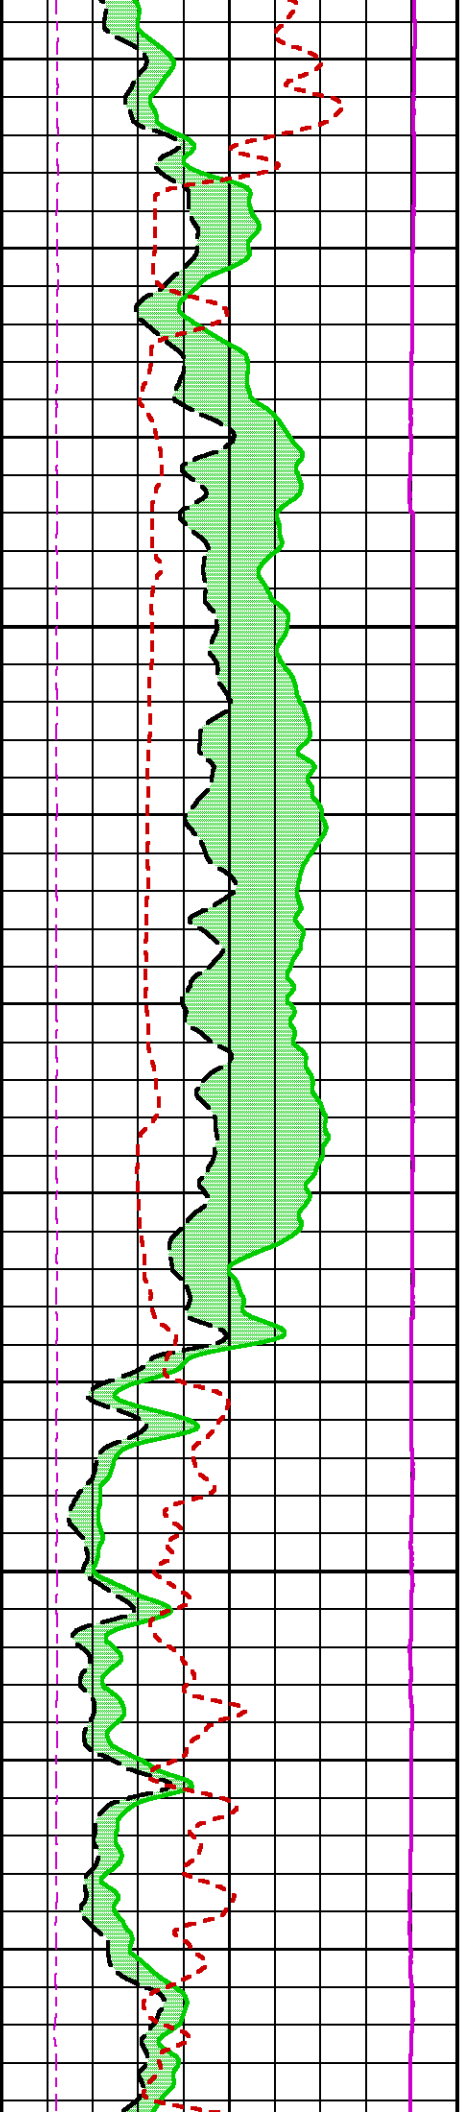


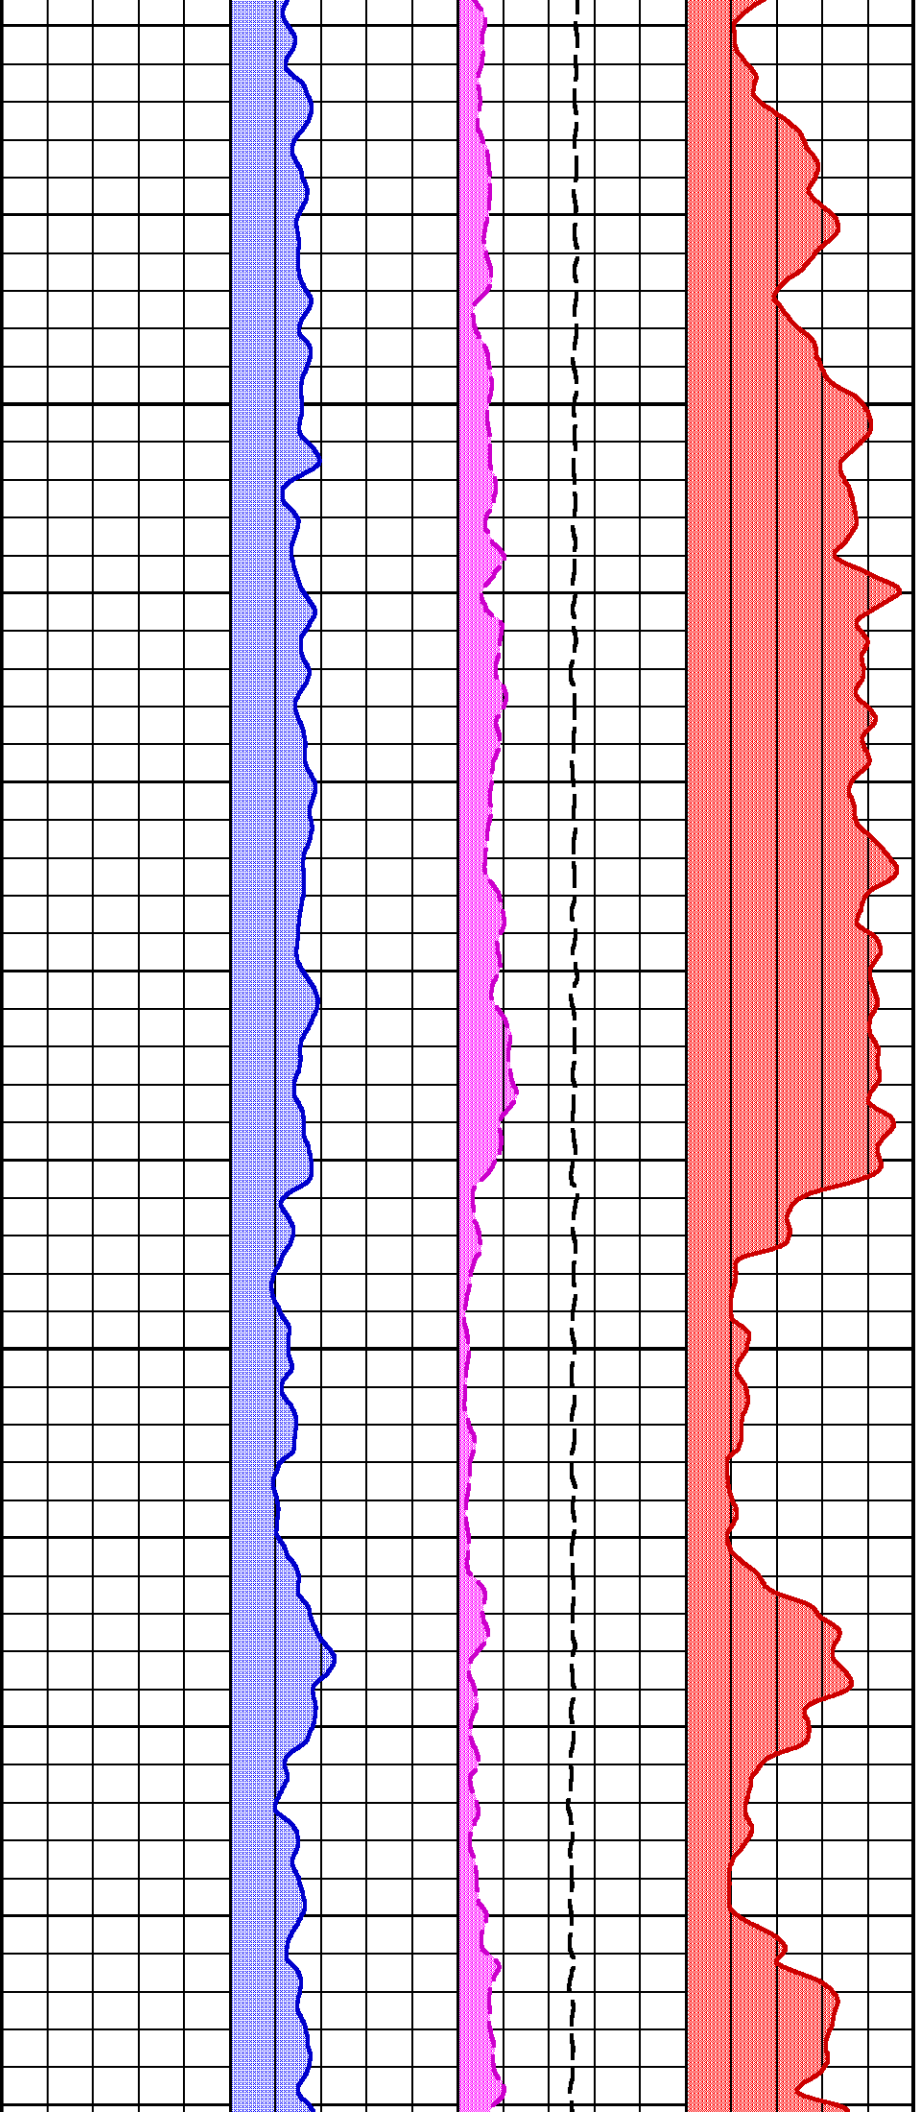

2150

2175

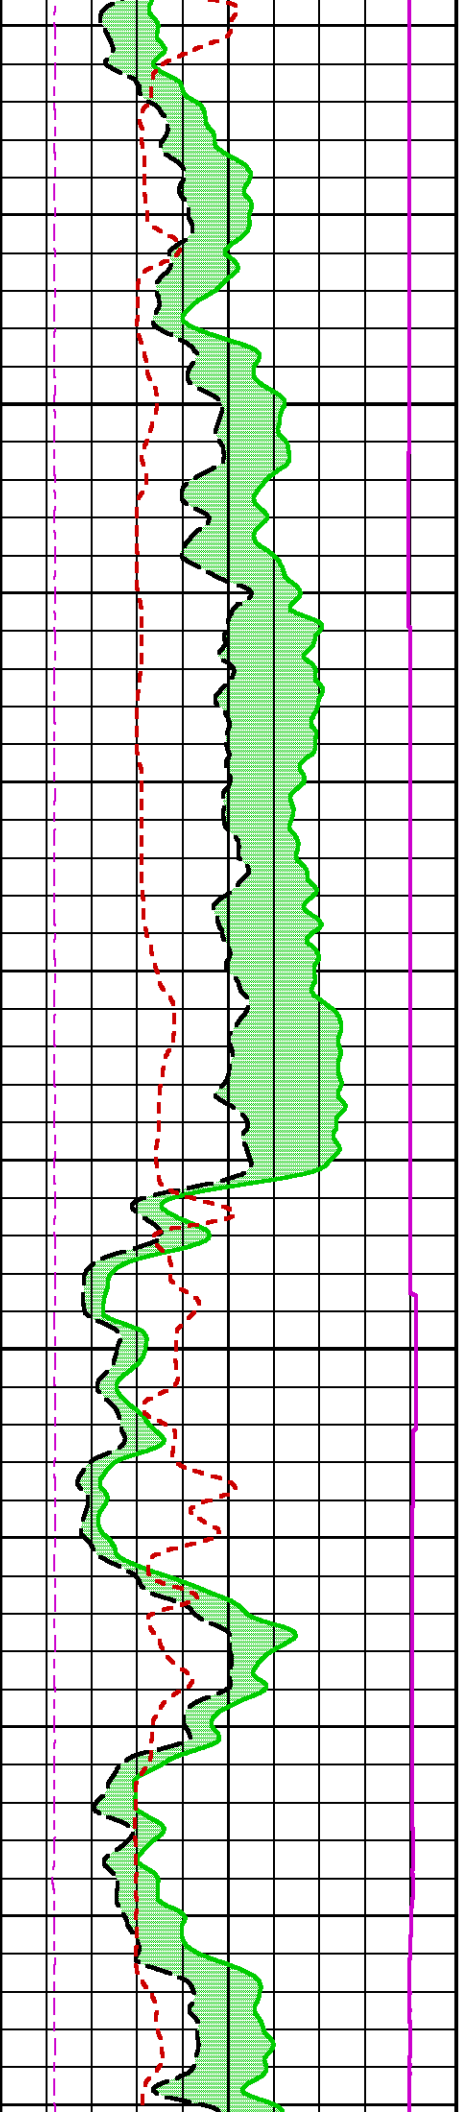


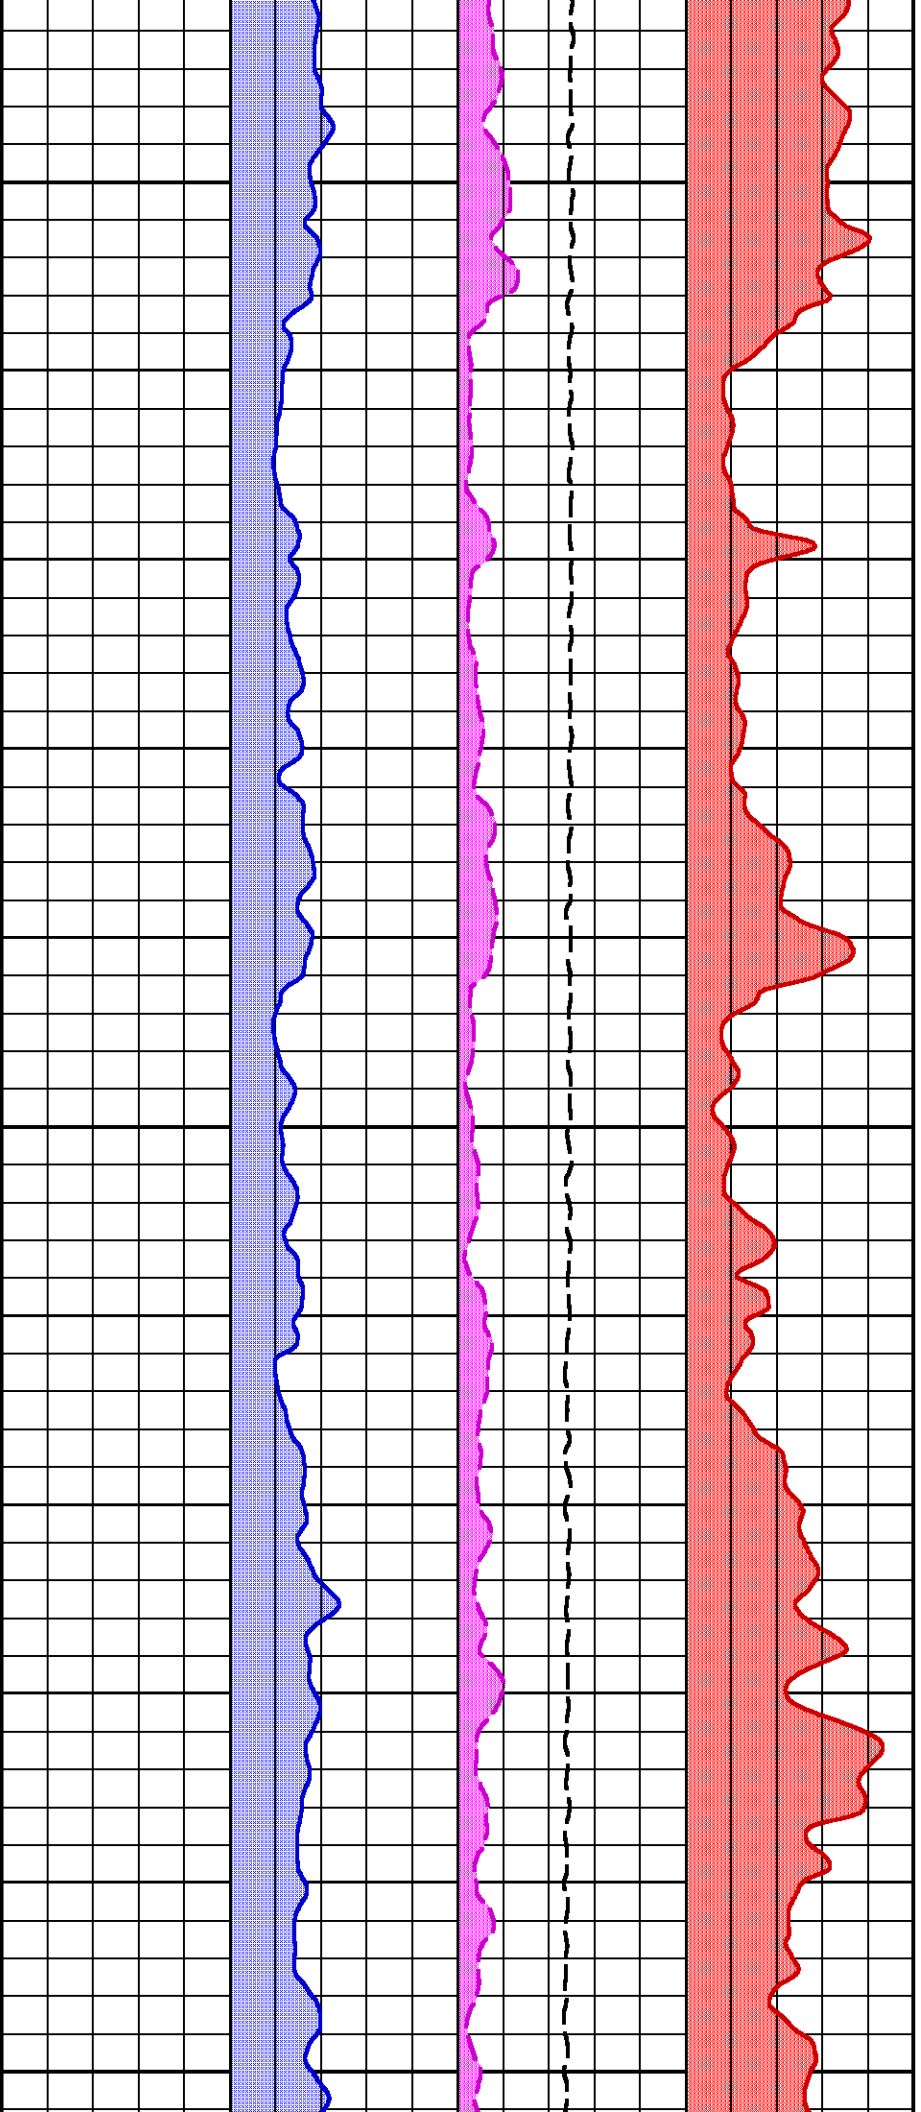


2200

2225


2250

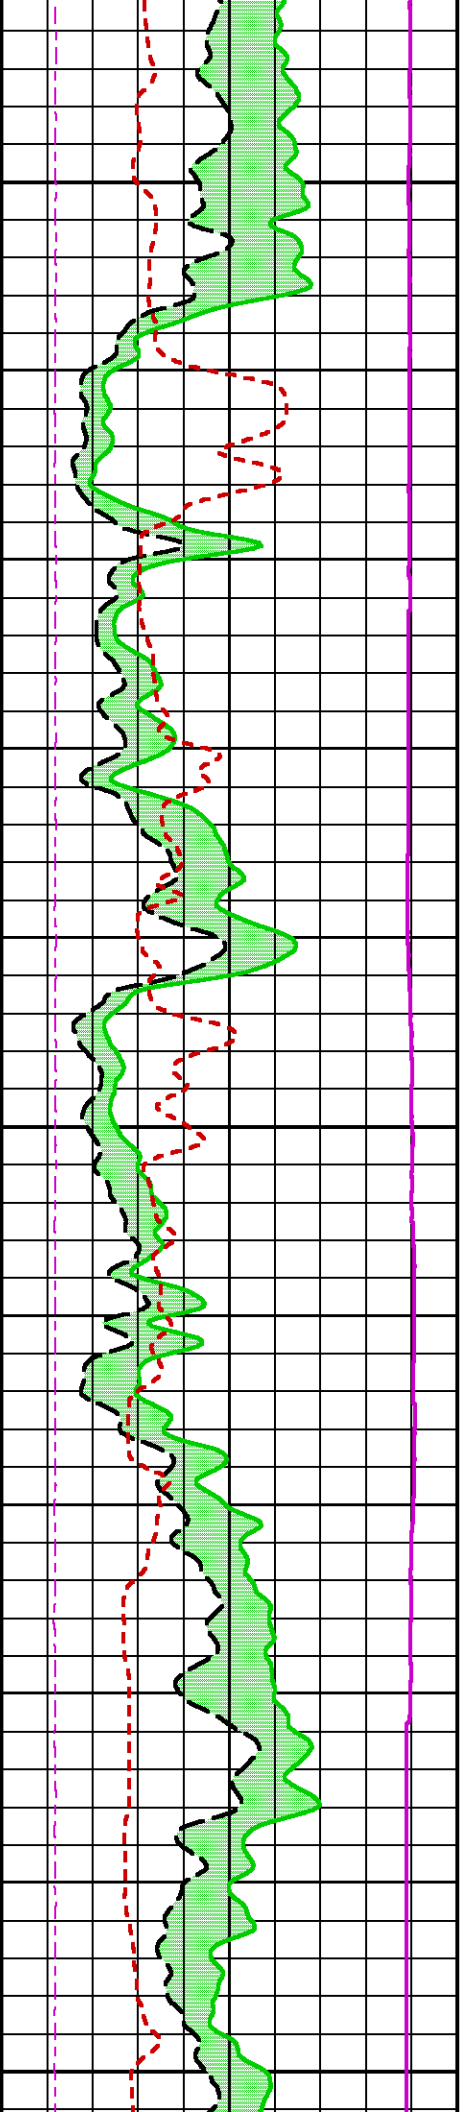


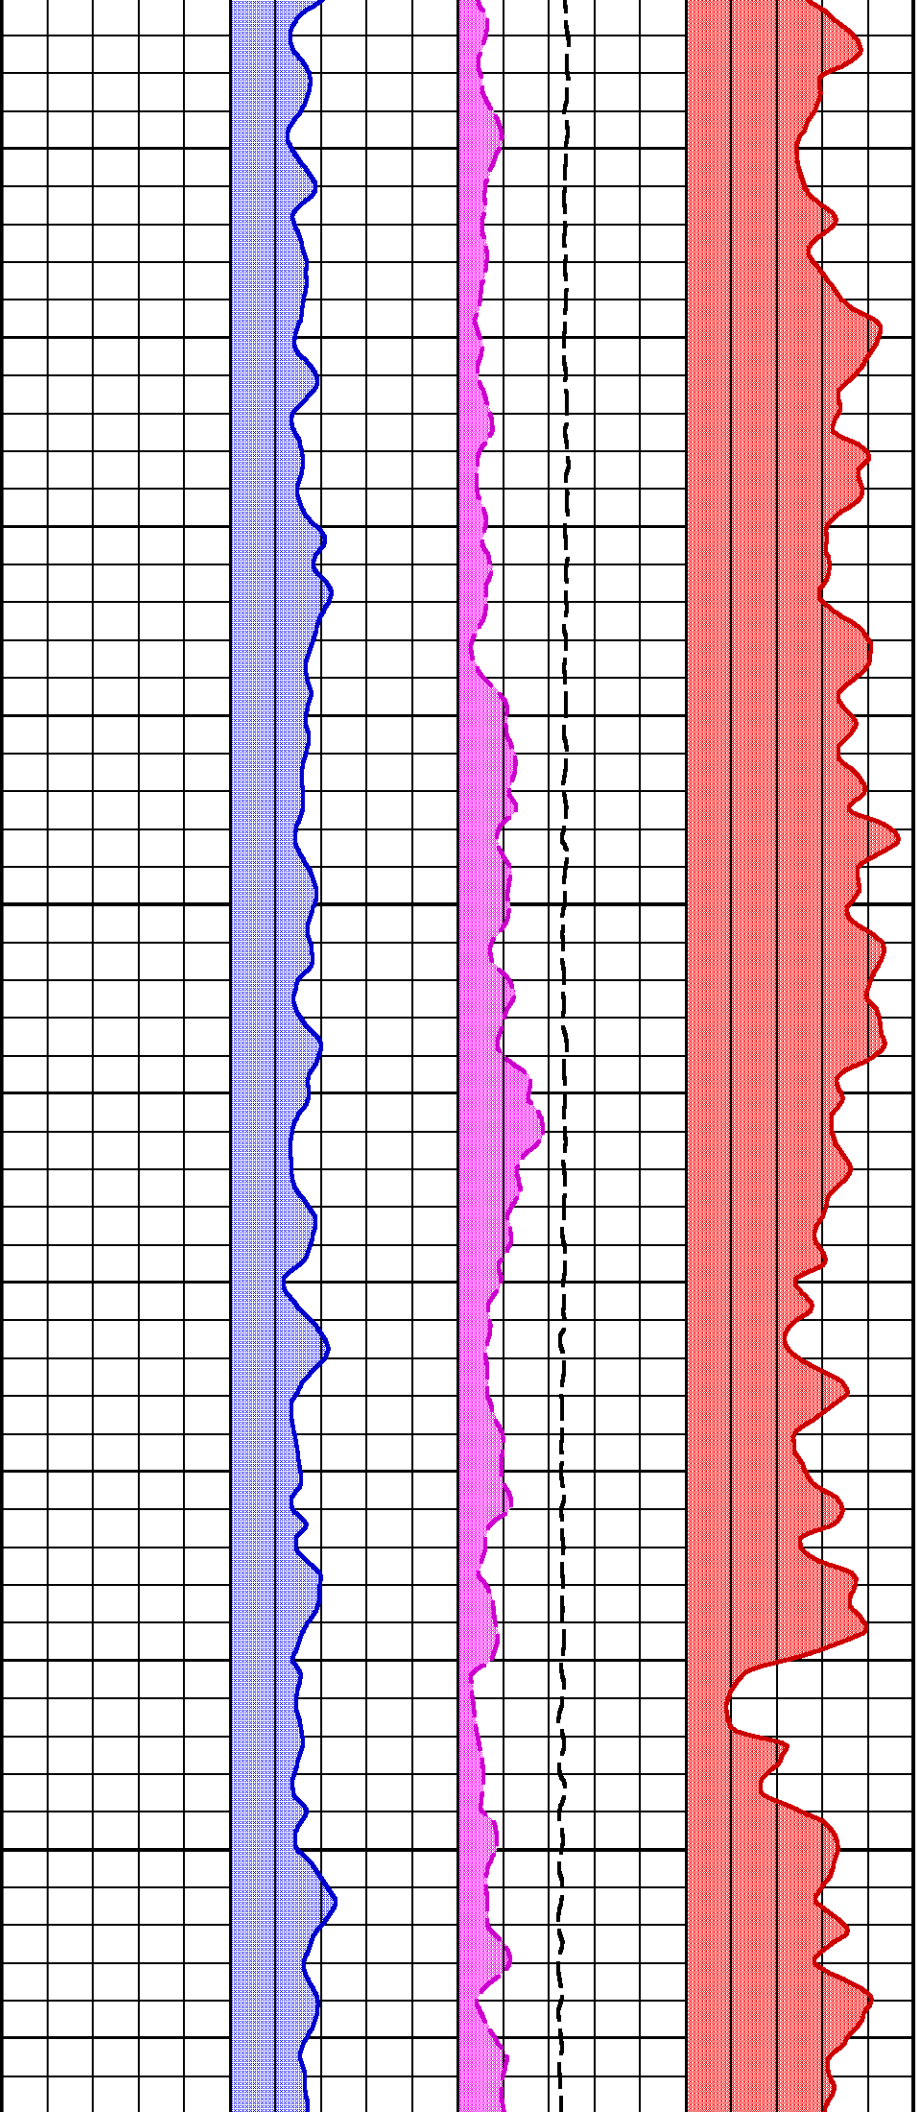

2275


2300

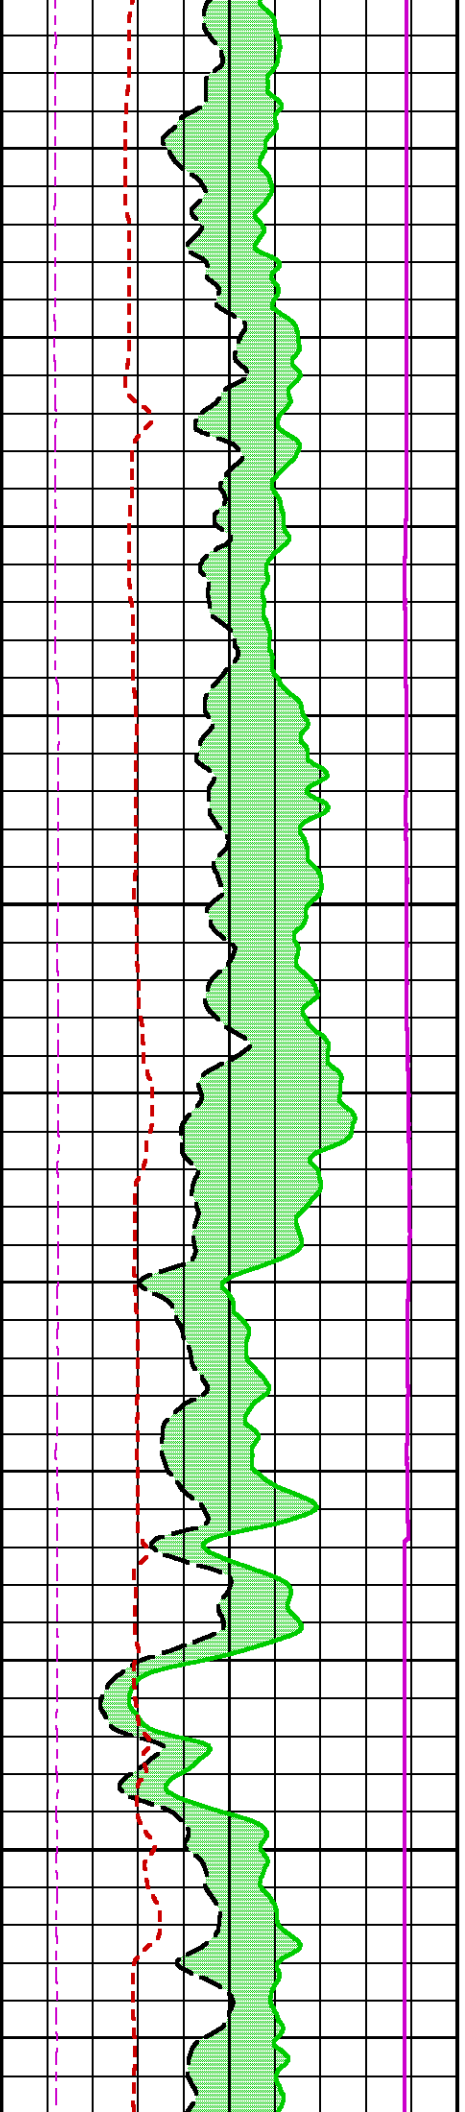


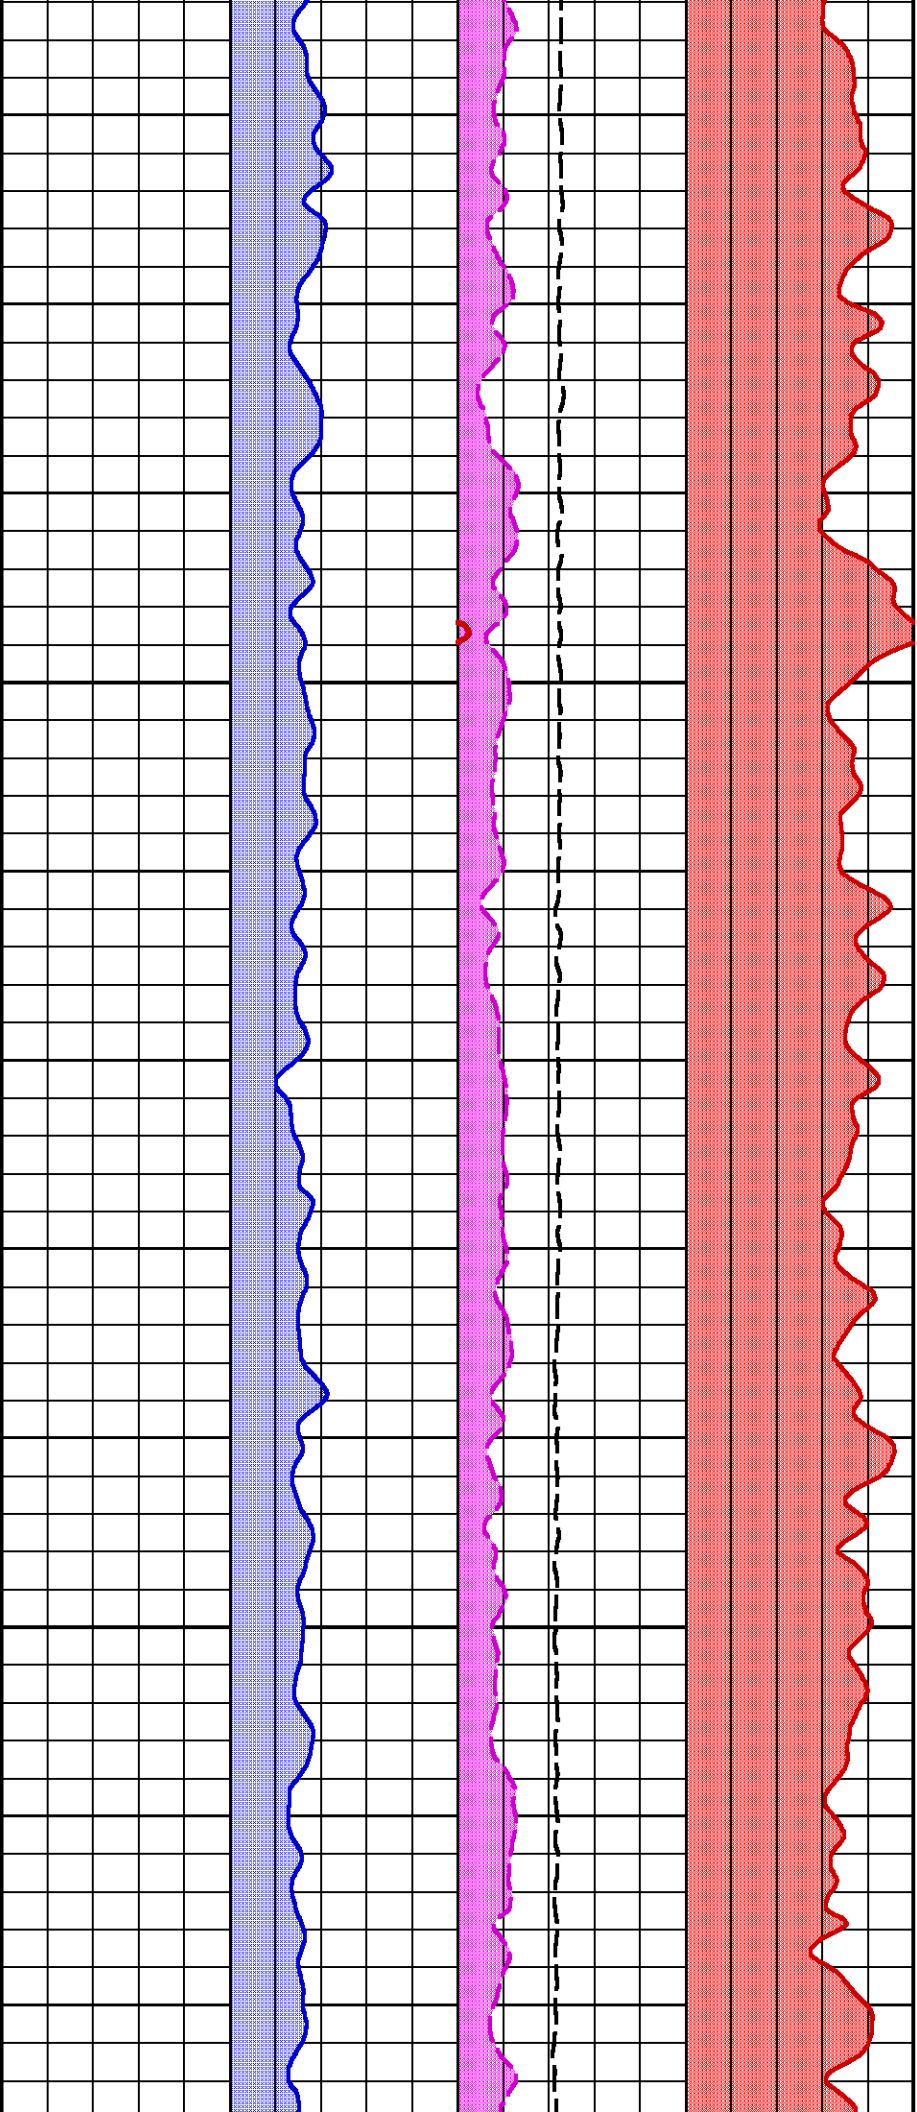

2325


2350

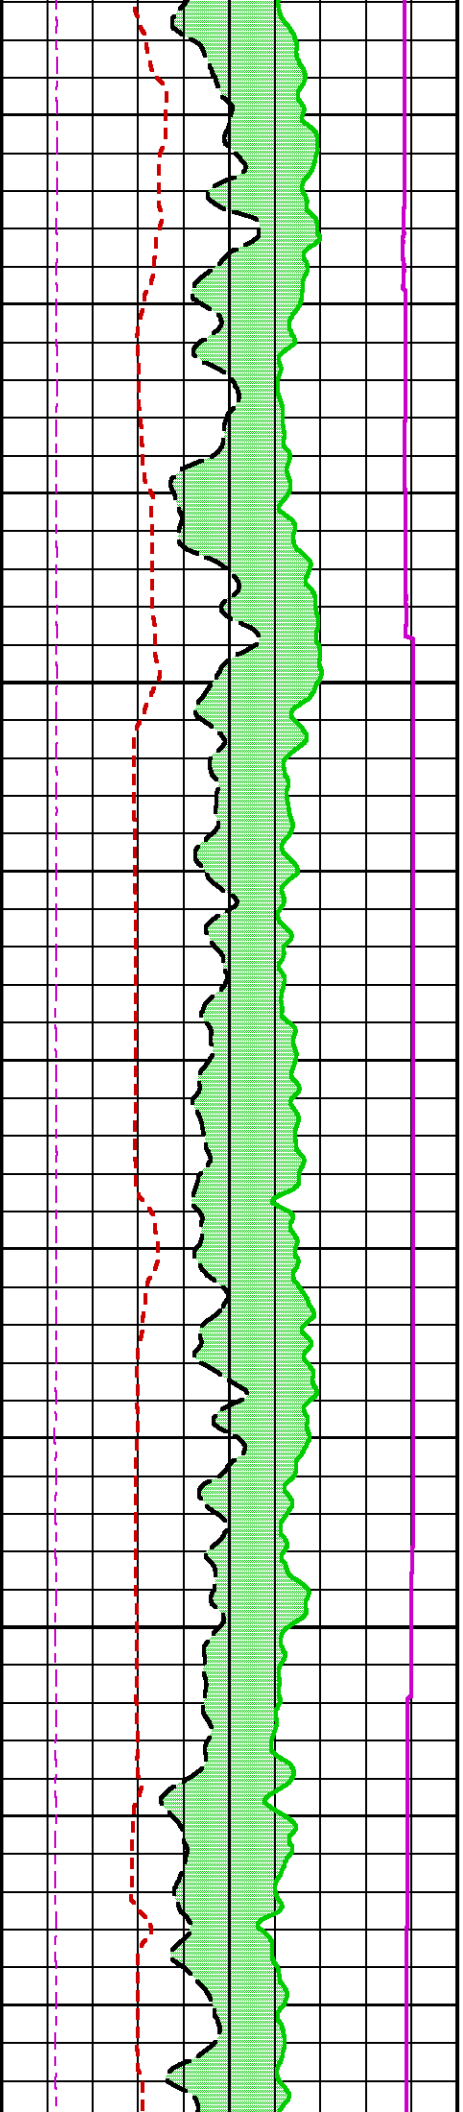


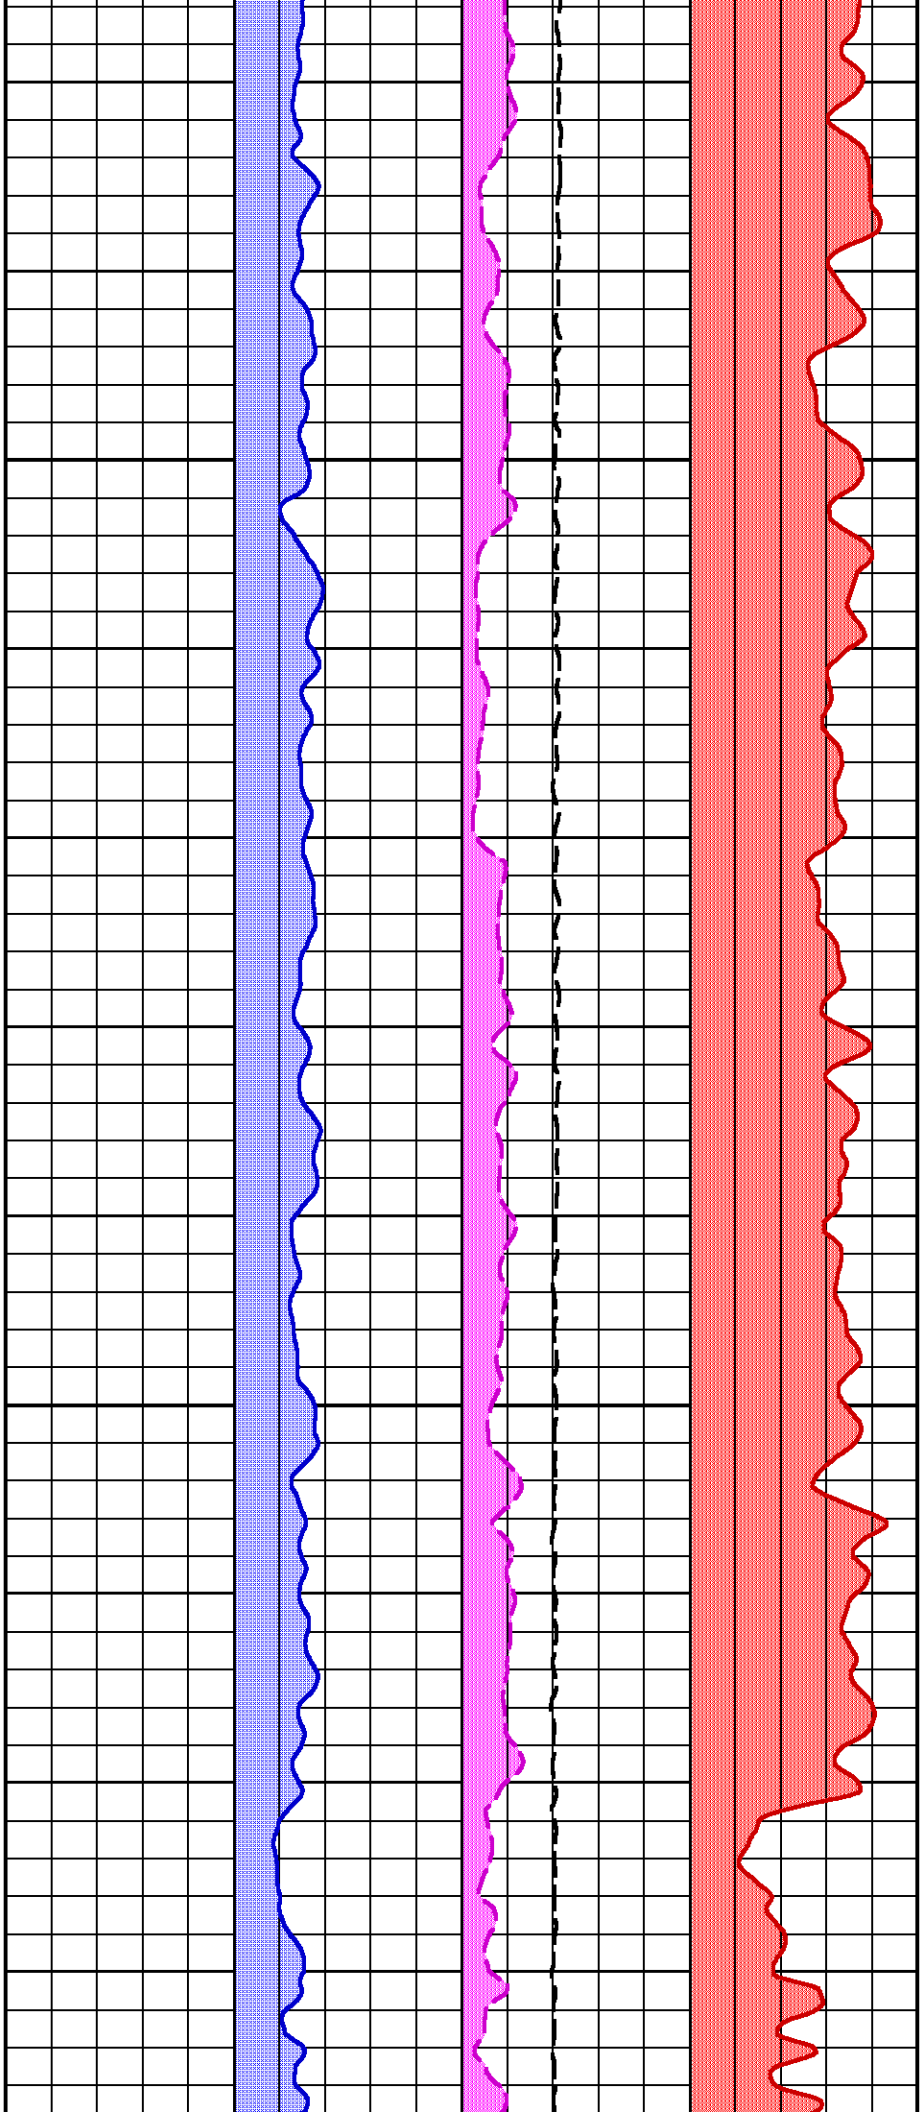

2375

2400

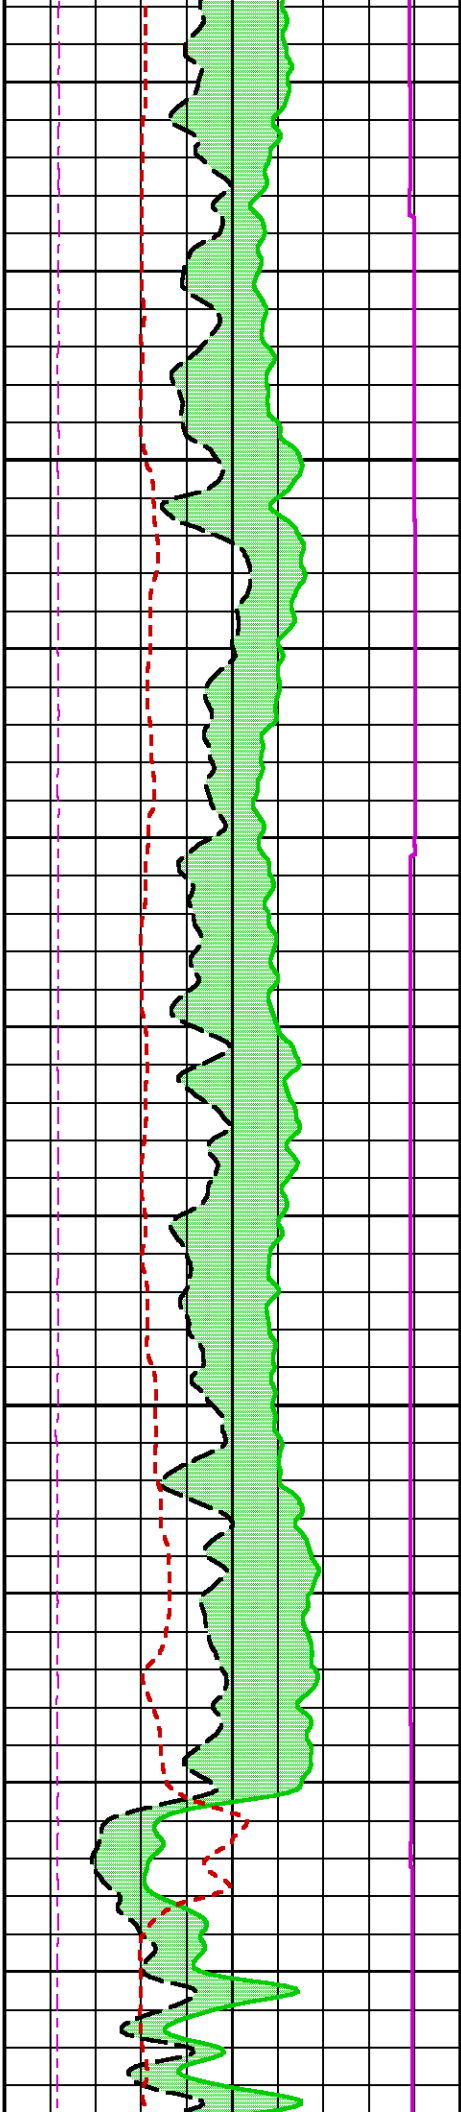



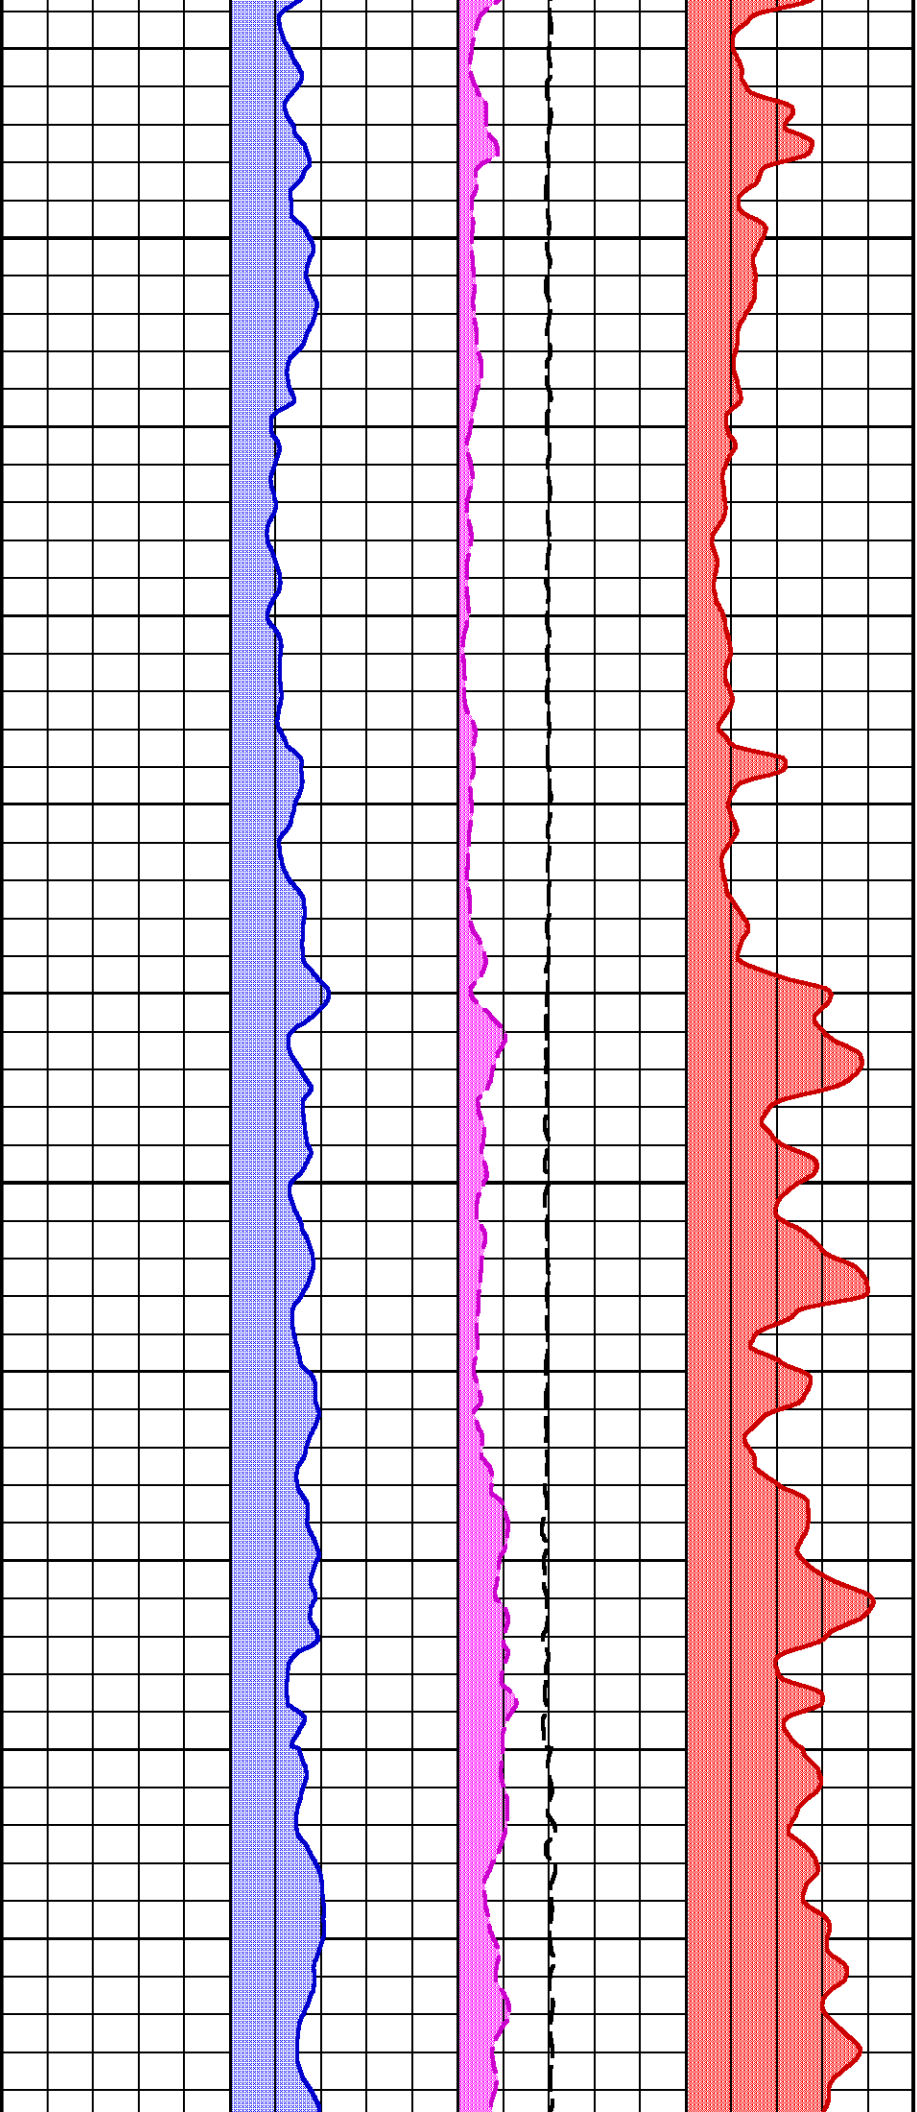



2425

2450

2

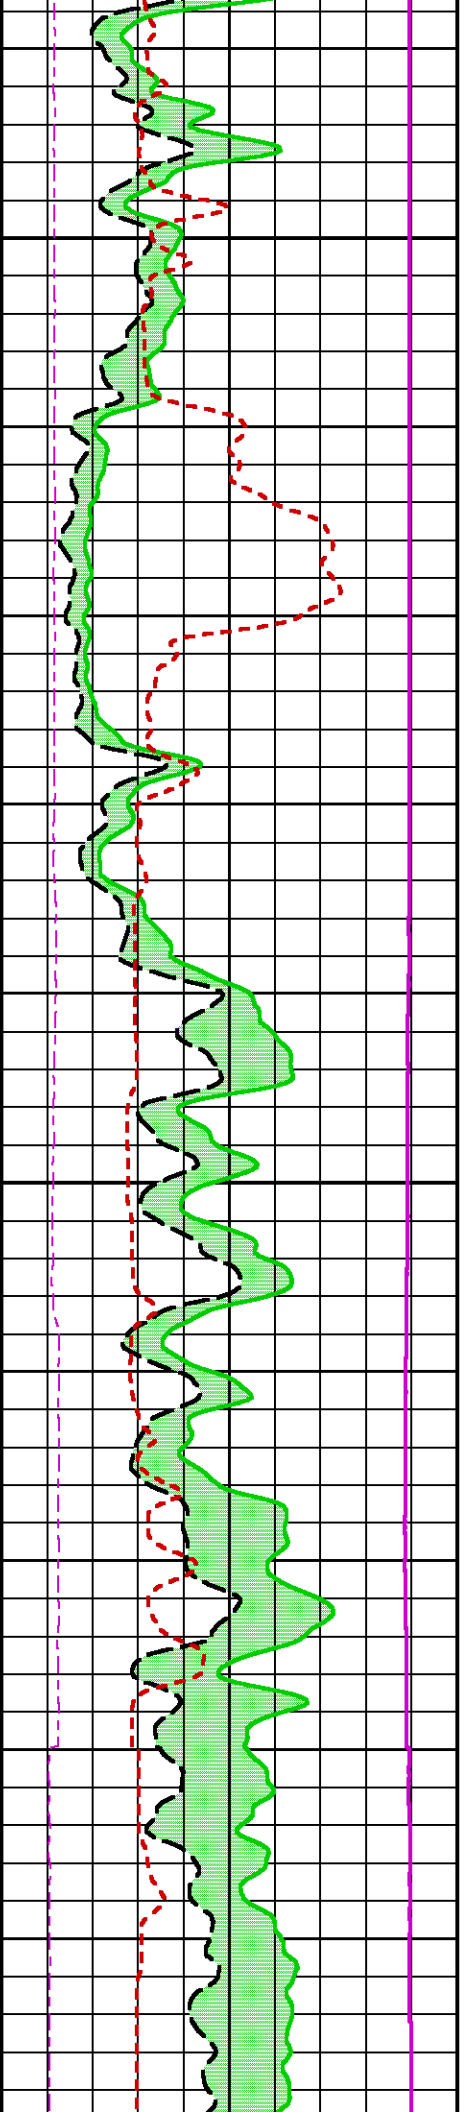

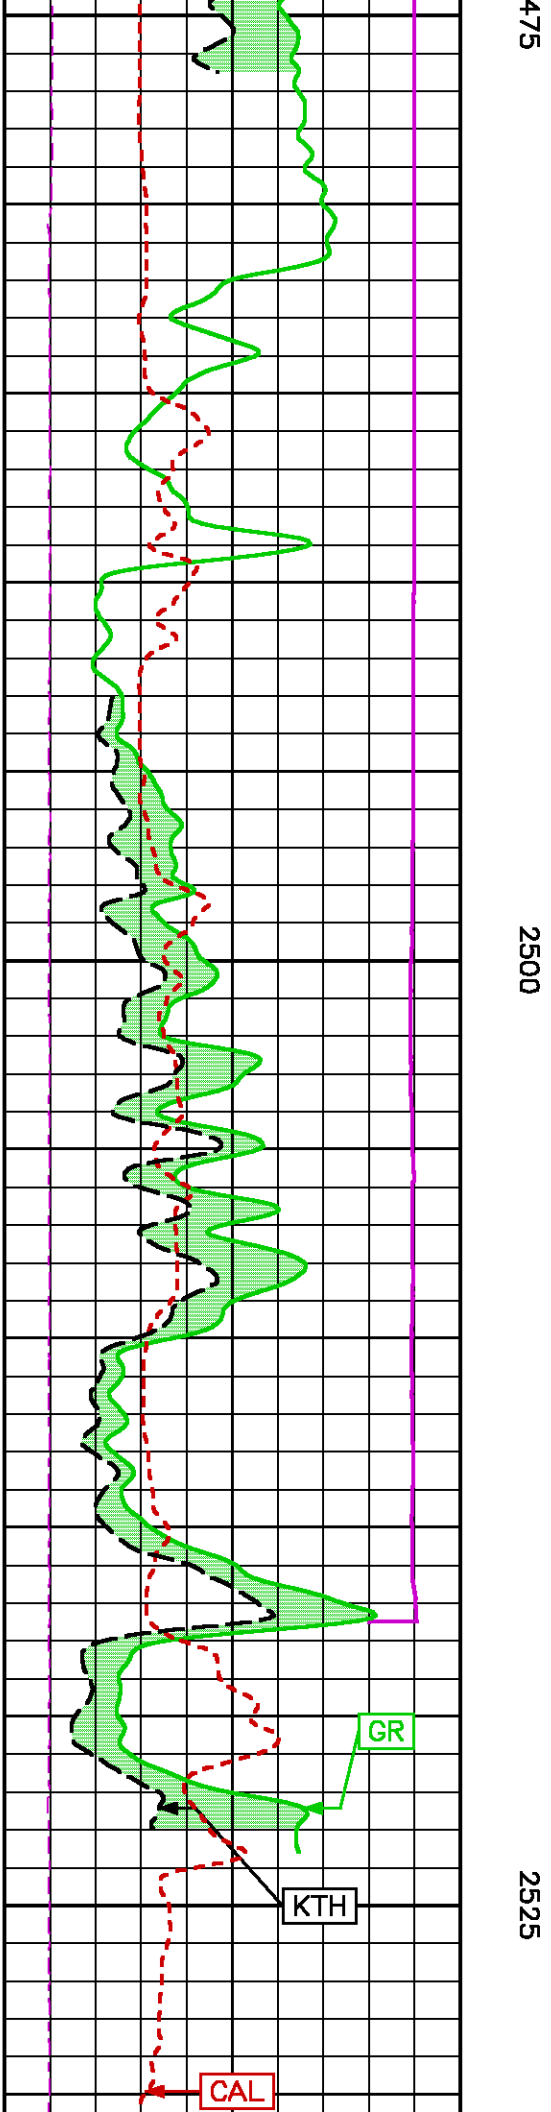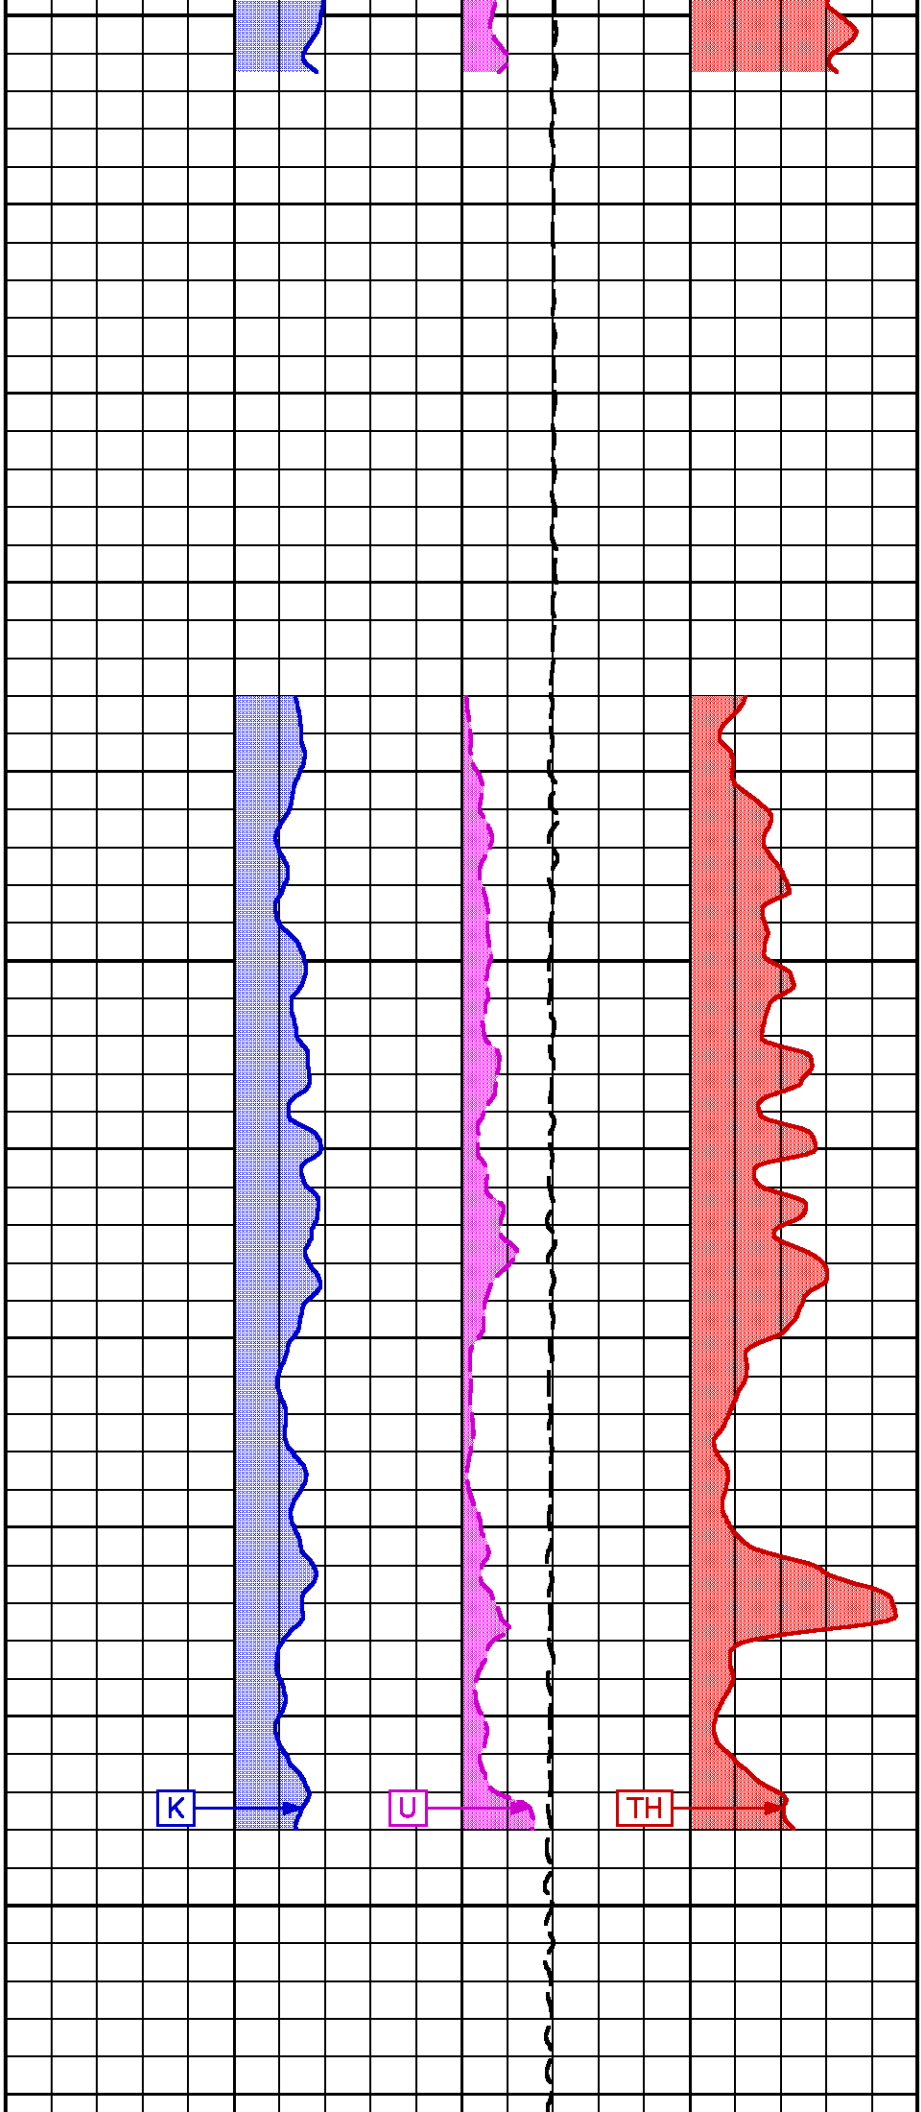

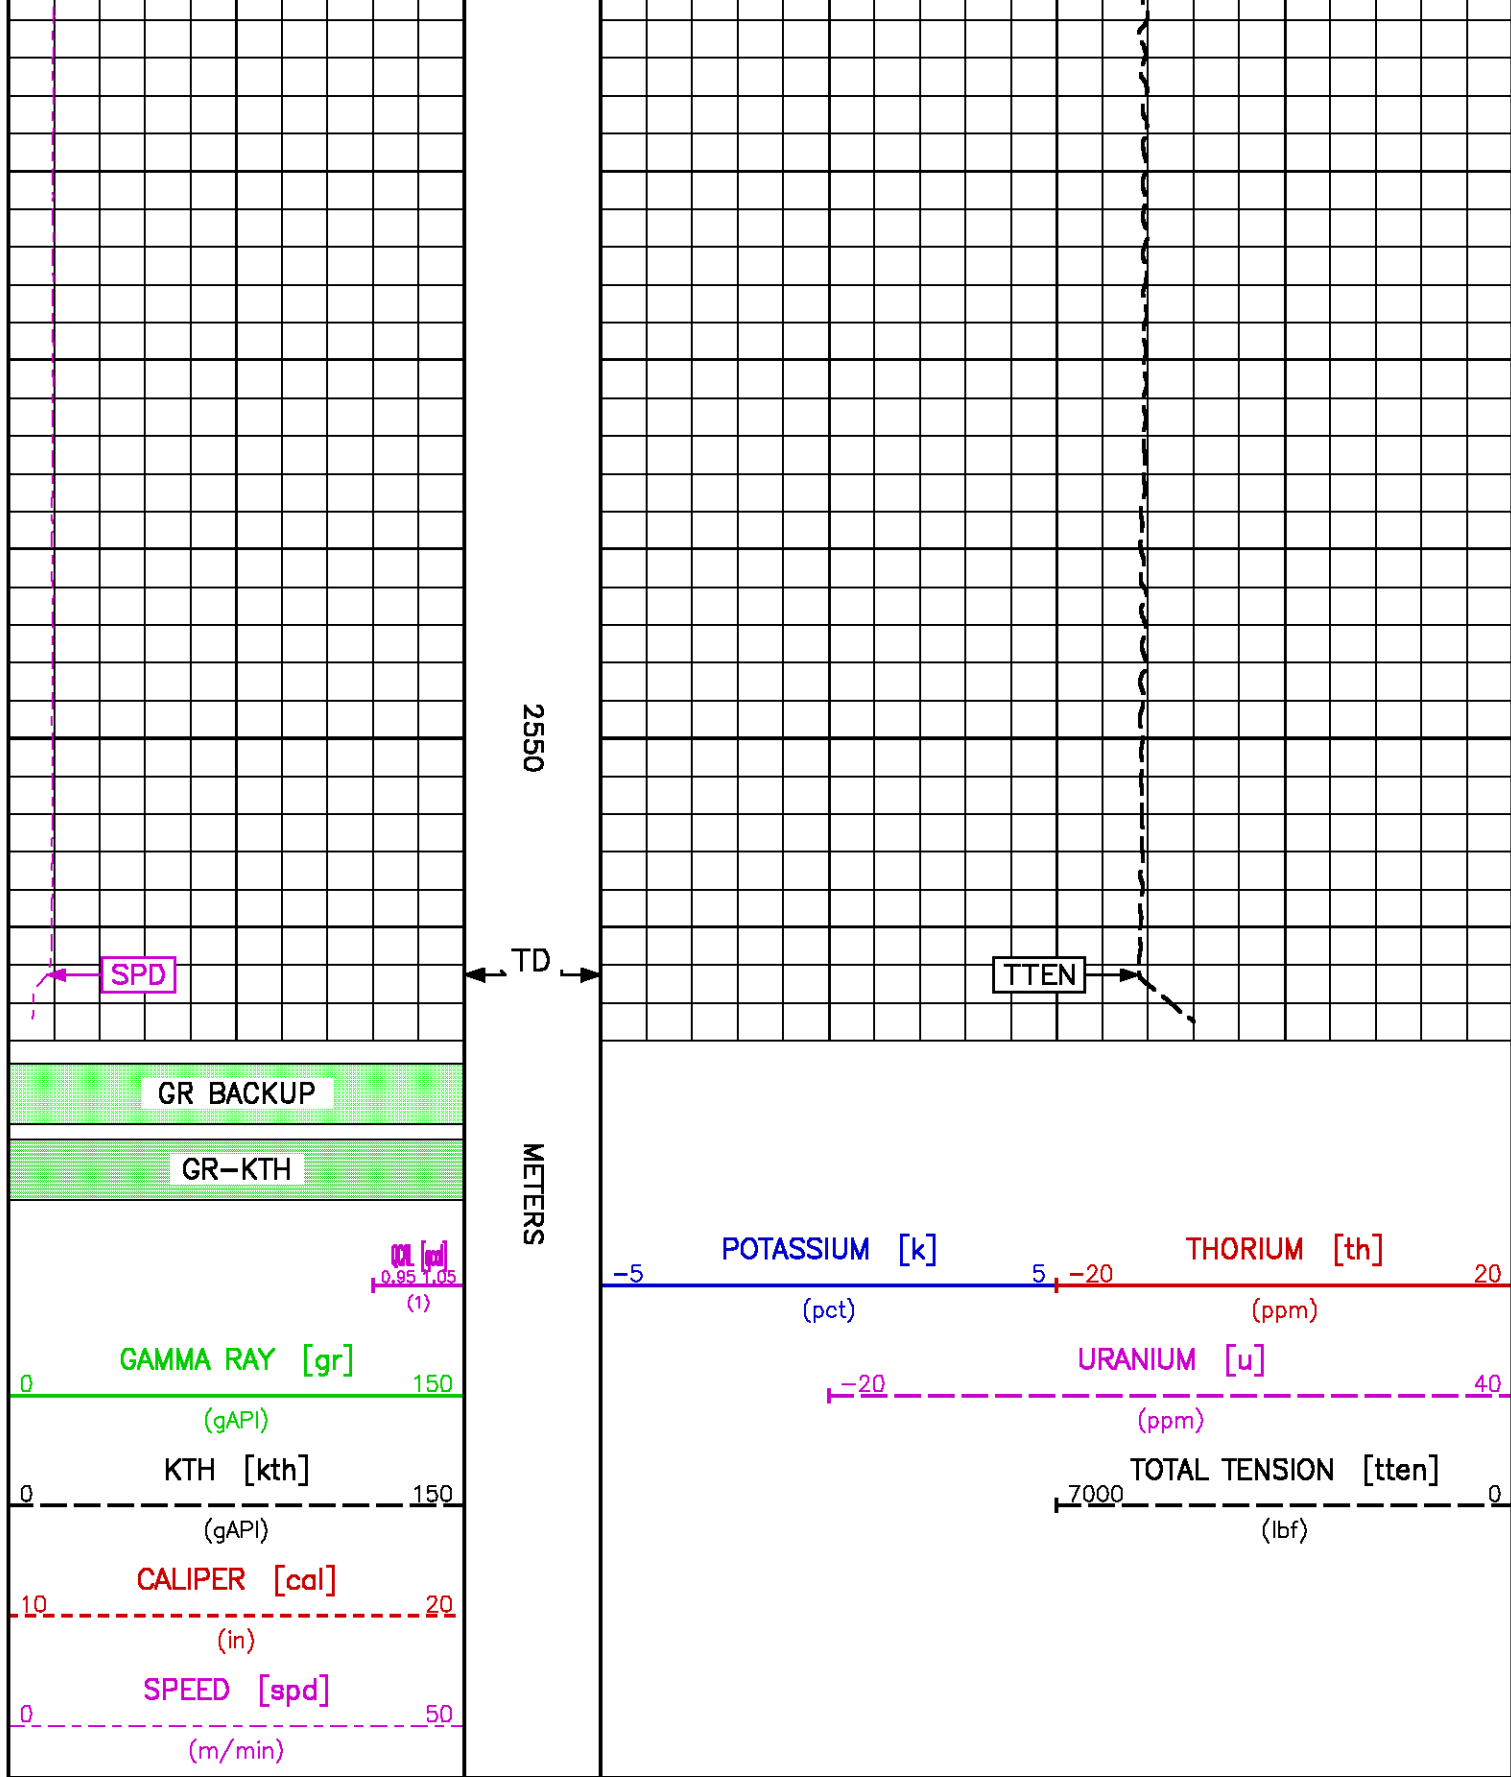

RUN 1 REPEAT LOG 1:200 SCALE

Pcrplt /main/61

Cplot 9.18

Pdf_Cpp /main/16

Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

FILE: /data/peak/bilabar1_D3/[777]02.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 2380.755 m BOTTOM DEPTH: 2512.428 m

SYMMETRIC FILTER

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER (.h)	medium (1)		TOP	BOTTOM
	FILTER (.i)	medium (1)		"	"
Y AXIS CALIPER SPEED	FILTER ()	medium (1)		"	"
	FILTER ()	medium (1)		"	"
	FILTER (.h)	medium (1)		"	"
TENSION GR	FILTER (.i)	medium (1)		"	"
	FILTER ()	medium (1)		"	"
	FILTER ()	medium (1)		"	"
SL-II X AXIS CALIPER	FILTER (.h)	medium (1)		"	"
	FILTER (.i)	medium (1)		"	"
	FILTER ()	medium (1)		"	"

BOREHOLE & CEMENT

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
BIT SIZE	BIT SIZE	12.250	In	TOP	BOTTOM

SLII PROCESSING

MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
E MATRIX	OPEN/CASED HOLE	OPEN HOLE		TOP	BOTTOM
SLII AUTO GAIN	AUTO GAIN	AUTO GAIN ON		"	"
SLII ENERGY RANGE	ENERGY RANGE	.15-3.0 MeV		"	"

CURVE DESCRIPTION REPORT

CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION
F1:CAL	CAL	Oct 25 22:21:58 2006	CALIPER
F1:GR	GR	Oct 25 22:21:58 2006	GAMMA RAY
F1:K	K	Oct 25 22:21:58 2006	POTASSIUM CONTENT
F1:KTH	KTH	Oct 25 22:21:58 2006	STRIPPED POTASSIUM-THORIUM
F1:QCAL	QCAL	Oct 25 22:21:58 2006	QUALITY CURVE
F1:SPD	SPD	Oct 25 22:21:58 2006	SPEED
F1:TH	TH	Oct 25 22:21:58 2006	THORIUM CONCENTRATION
F1:TEN	TEN	Oct 25 22:21:58 2006	TOTAL TENSION
F1:U	U	Oct 25 22:21:58 2006	URANIUM CONTENT

CURVE MEASURE POINT OFFSET

CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CAL	26.33	KTH	33.83	TH	33.83		
GR	33.83	QCAL	33.83	TEN	0.00		
K	33.83	SPD	0.00	U	33.83		

Presentation : sys1:/data/peak/bilabar1_D3/sl_rpt_200.pdf [1:200 Scale]
Plot Interval : 2347.04 - 2512.09 MetersData File 1 : F1 : sys1:/data/peak/bilabar1_D3/repeat.xtf
Created On : Oct 25 22:21:58 2006
Company : PEAK PETROLEUM
Well : BILABRI D3
Field : BILABRI
File Interval : 2343 - 2512.47 Meters
Oct : [777]

GR BACKUP

GR-KTH

QAL [cal]
0.95 1.05
(1)

GAMMA RAY [gr]

(gAPI)

KTH [kth]

(gAPI)

CALIPER [cal]

(in)

SPEED [spd]

(m/min)

METERS

2350

2375

QCAL

GR

KTH

CAL

POTASSIUM [k]

(pct)

THORIUM [th]

(ppm)

URANIUM [u]

(ppm)

TOTAL TENSION [tten]


(lbf)

K

U


TH


TTEN

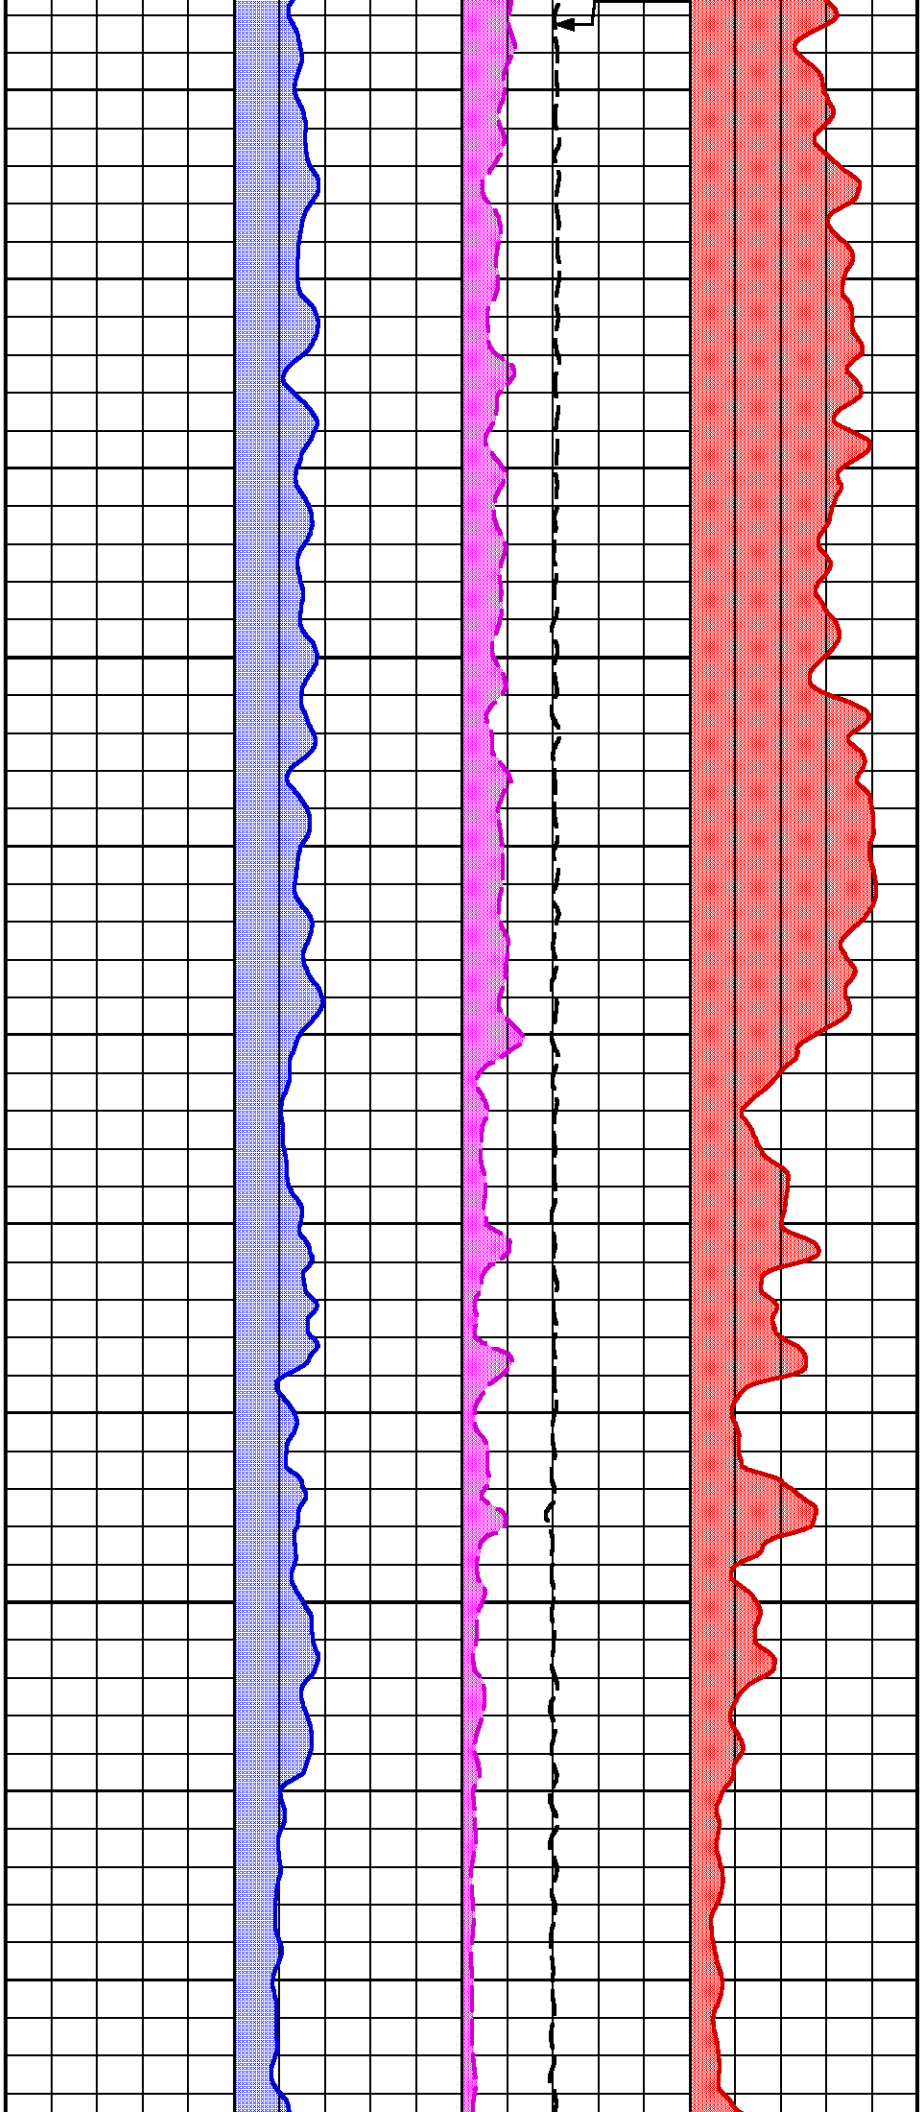

2400


2425

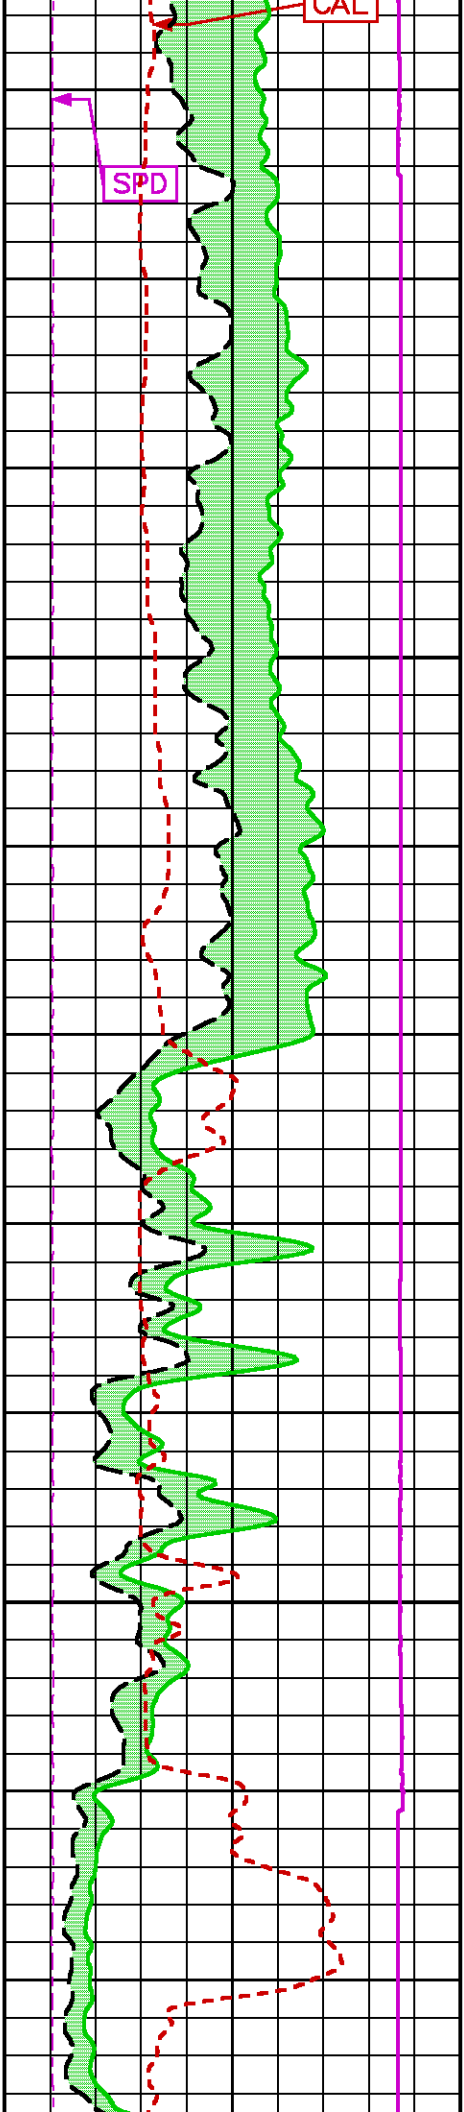


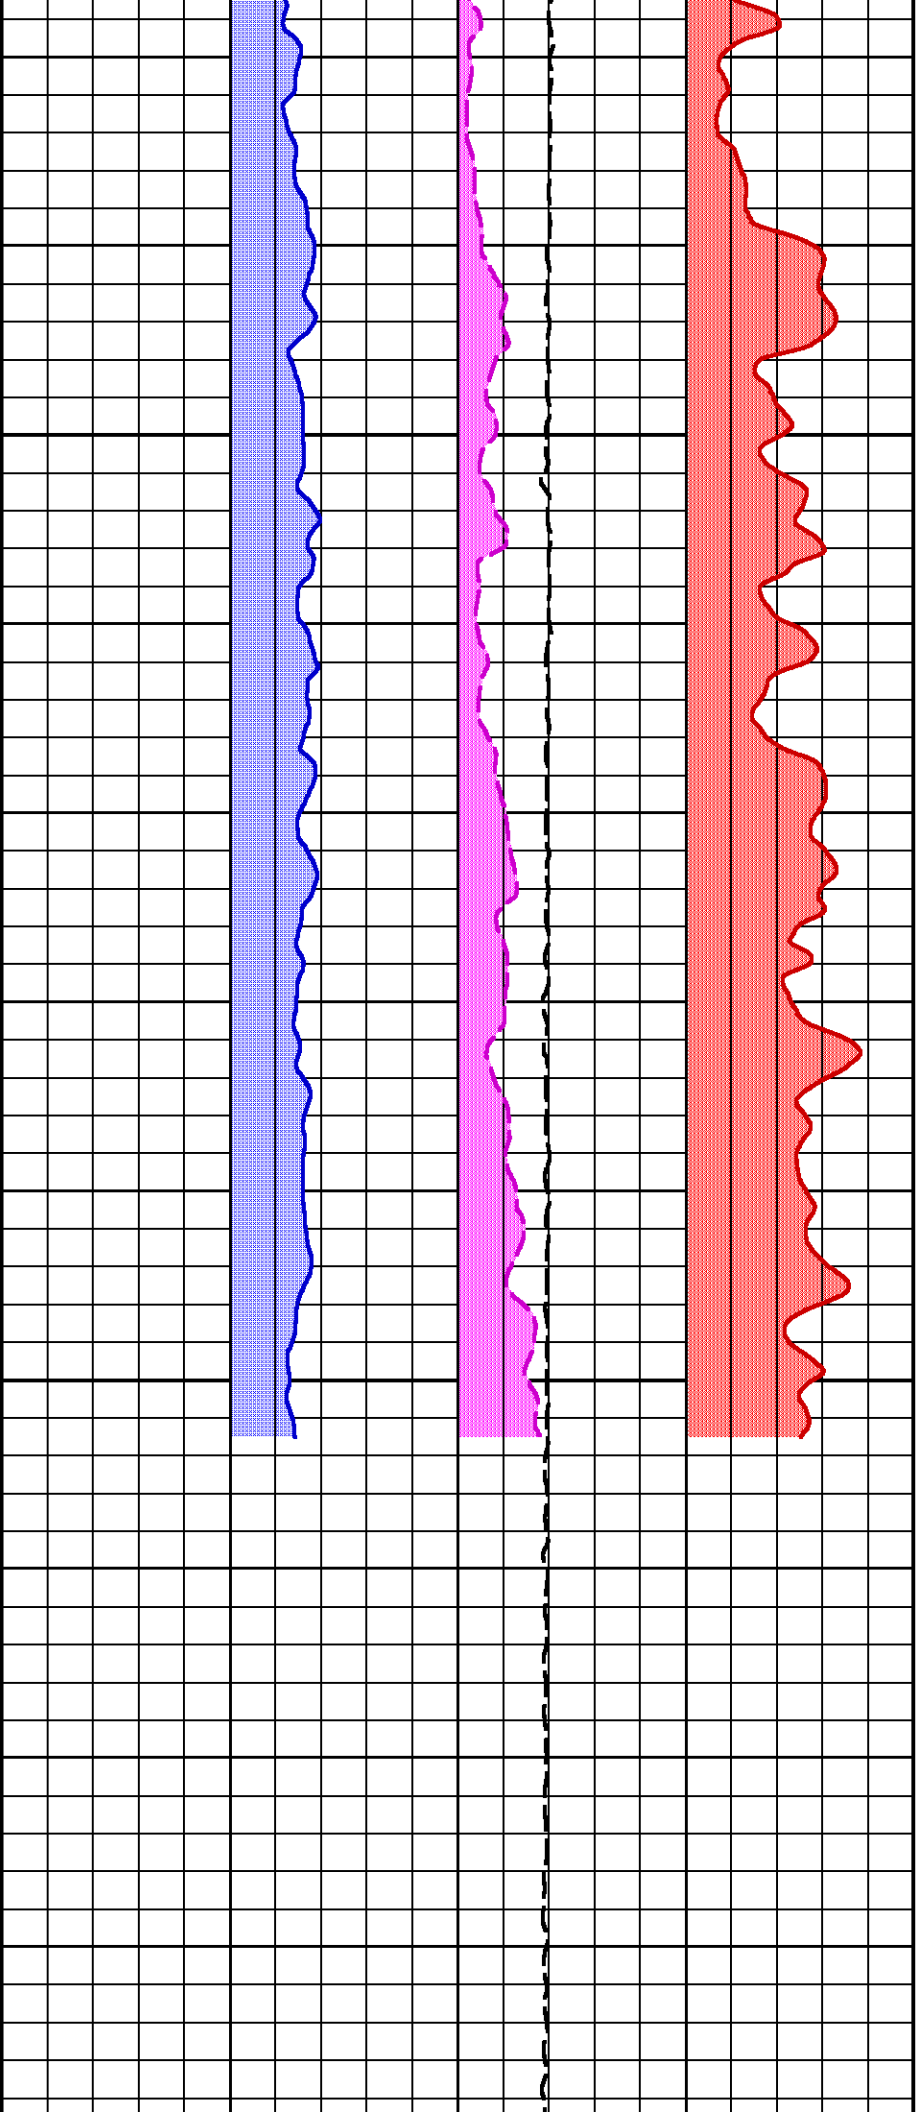

2450

2475

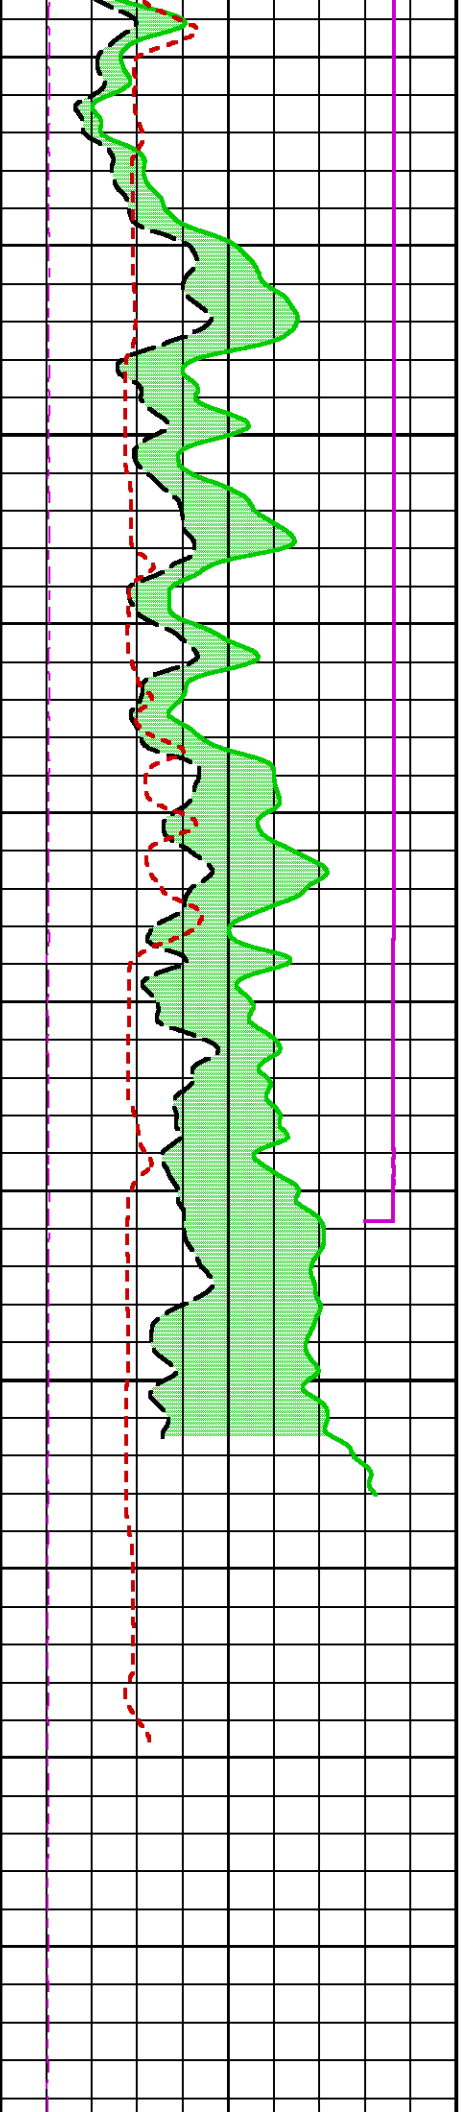

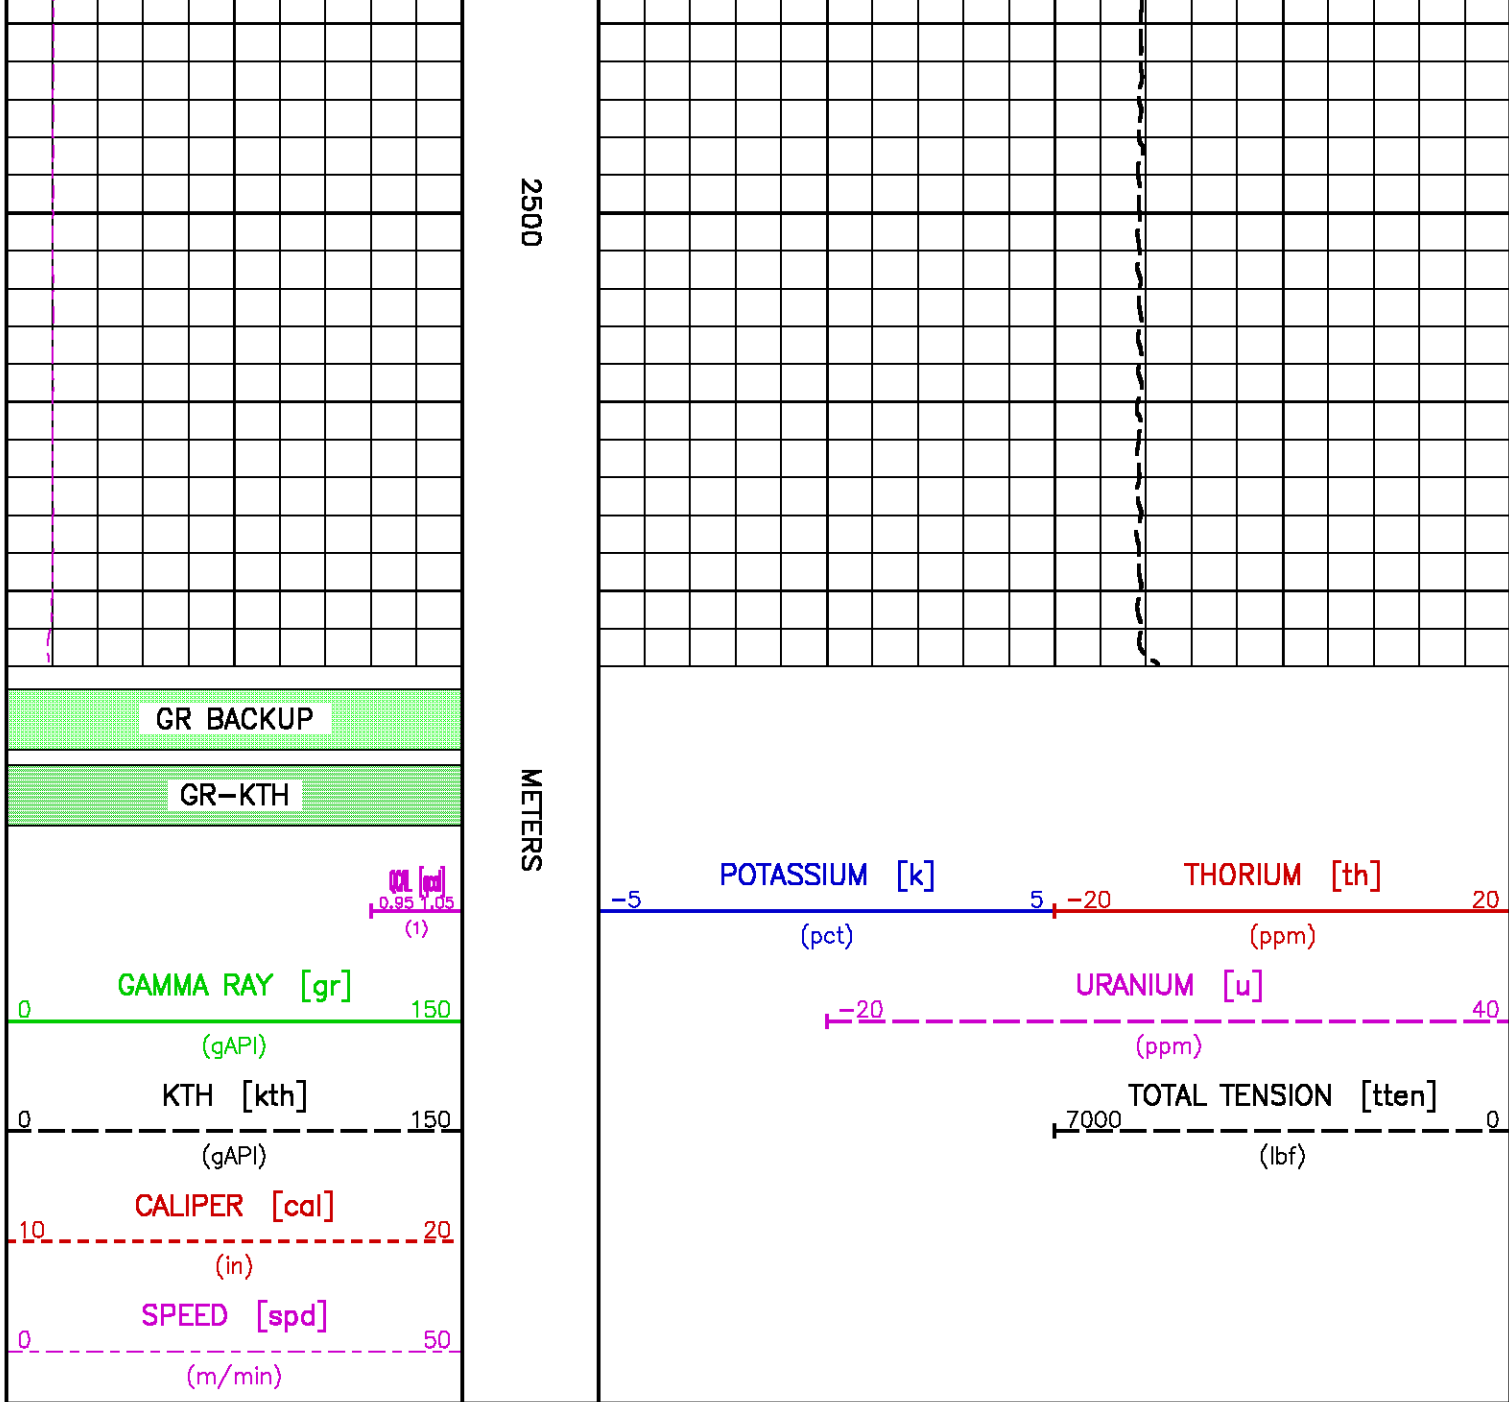

RUN 2 REPEAT LOG 1:200 SCALE

ECLIPS 5.1i Sep 16, 2005
Updates: 1,2,37

Sun Oct 29 12:40:16 2006

Pcrplt /main/61

Cplot 9.18

Pdf_Cpp /main/16

Fileview 5.00

PARAMETER AND FILTER SUMMARY REPORT

FILE: /data/peak/bilabar1_D3/1777104.prm
LOGGING MODE: DEPTH DIRECTION: UP
TOP DEPTH: 2380.907 m BOTTOM DEPTH: 2562.416 m

SYMMETRIC FILTER


MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
CHT	FILTER (.h)	medium (1)		TOP	BOTTOM
	FILTER (.i)	medium (1)		''	''
Y AXIS CALIPER	FILTER ()	medium (1)		''	''
SPEED	FILTER ()	medium (1)		''	''
	FILTER (.h)	medium (1)		''	''
	FILTER (.i)	medium (1)		''	''
TENSION	FILTER ()	medium (1)		''	''
GR	FILTER ()	medium (1)		''	''
	FILTER (.h)	medium (1)		''	''
	FILTER (.i)	medium (1)		''	''
SL-II	FILTER	medium (1)		''	''
X AXIS CALIPER	FILTER ()	medium (1)		''	''
	FILTER (.h)	medium (1)		''	''
	FILTER (.i)	medium (1)		''	''



BOREHOLE & CEMENT					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
BIT SIZE	BIT SIZE	12.250	In	TOP	BOTTOM
SLII PROCESSING					
MEASUREMENT TYPE	PARAMETER	VALUE	UNITS	INTERVAL (m)	
E MATRIX	OPEN/CASED HOLE	OPEN HOLE		TOP	BOTTOM
SLII AUTOGAIN	AUTO GAIN	AUTO GAIN ON		''	''
SLII ENERGY RANGE	ENERGY RANGE	.15-3.0 MeV		''	''

CURVE DESCRIPTION REPORT				
CURVE NAME	CURVE ALIAS	CREATION DATE	CURVE DESCRIPTION	
F1:CAL	CAL	Oct 27 11:22:07 2006	CALIPER	
F1:GR	GR	Oct 27 11:22:07 2006	GAMMA RAY	
F1:K	K	Oct 27 11:22:07 2006	POTASSIUM CONTENT	
F1:KTH	KTH	Oct 27 11:22:07 2006	STRIPPED POTASSIUM-THORIUM	
F1:QCAL	QCAL	Oct 27 11:22:07 2006	QUALITY CURVE	
F1:SPD	SPD	Oct 27 11:22:07 2006	SPEED	
F1:TH	TH	Oct 27 11:22:07 2006	THORIUM CONCENTRATION	
F1:TTEN	TTEN	Oct 27 11:22:07 2006	TOTAL TENSION	
F1:U	U	Oct 27 11:22:07 2006	URANIUM CONTENT	

CURVE MEASURE POINT OFFSET							
CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)	CURVE	OFFSET (m)
CAL	26.33	KTH	33.83	TH	33.83		
GR	33.83	QCAL	33.83	TTEN	0.00		
K	33.83	SPD	0.00	U	33.83		

Presentation	: sys1:/dat1a/peak/bilabari_D3/sl_run2rpt.pdf [1:200 Scale]
Plot Interval	: 2343.07 - 2557.96 Meters
Data File 1	: F1 : sys1:/dat1a/peak/bilabari_D3/C2rpt.xtf
Created On	: Oct 27 11:22:07 2006
Company	: PEAK PETROLEUM
Well	: BILABRI D3
Field	: BILABRI
File Interval	: 2339.04 - 2558.19 Meters
Oct	: [777]

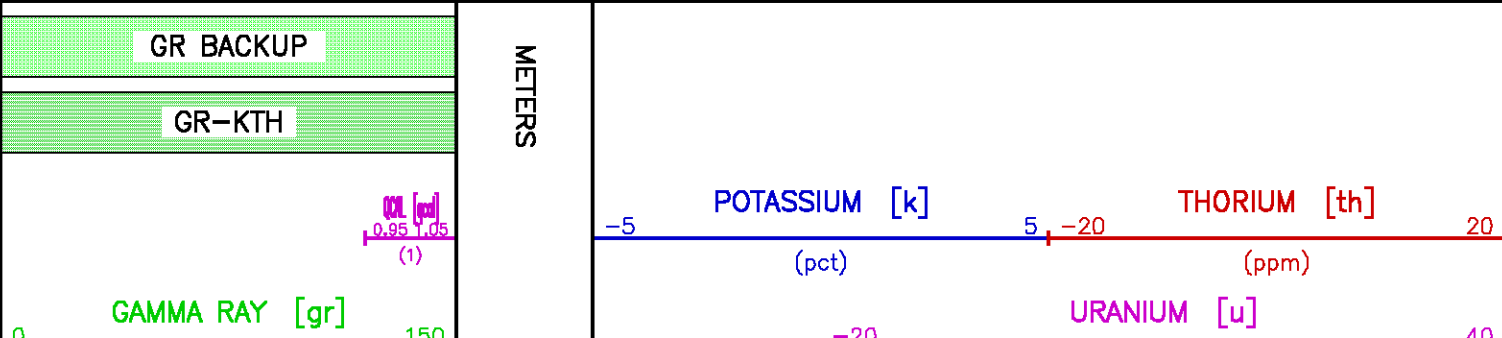

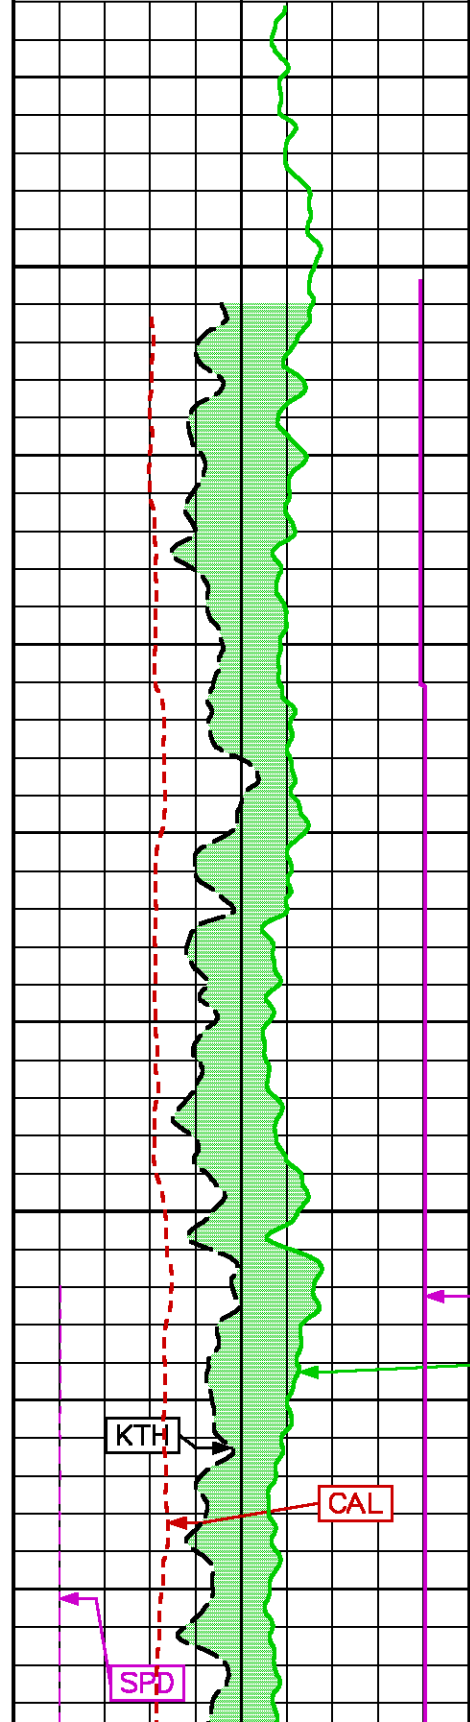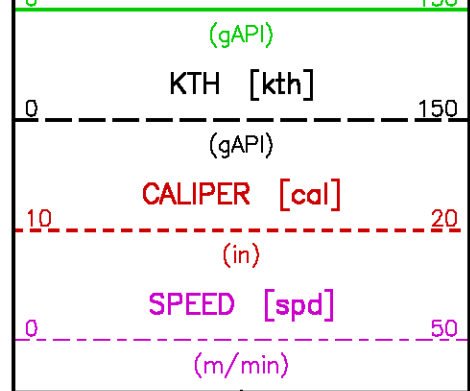

2350

2375



QCAL

GR

KTH

CAL

SPD

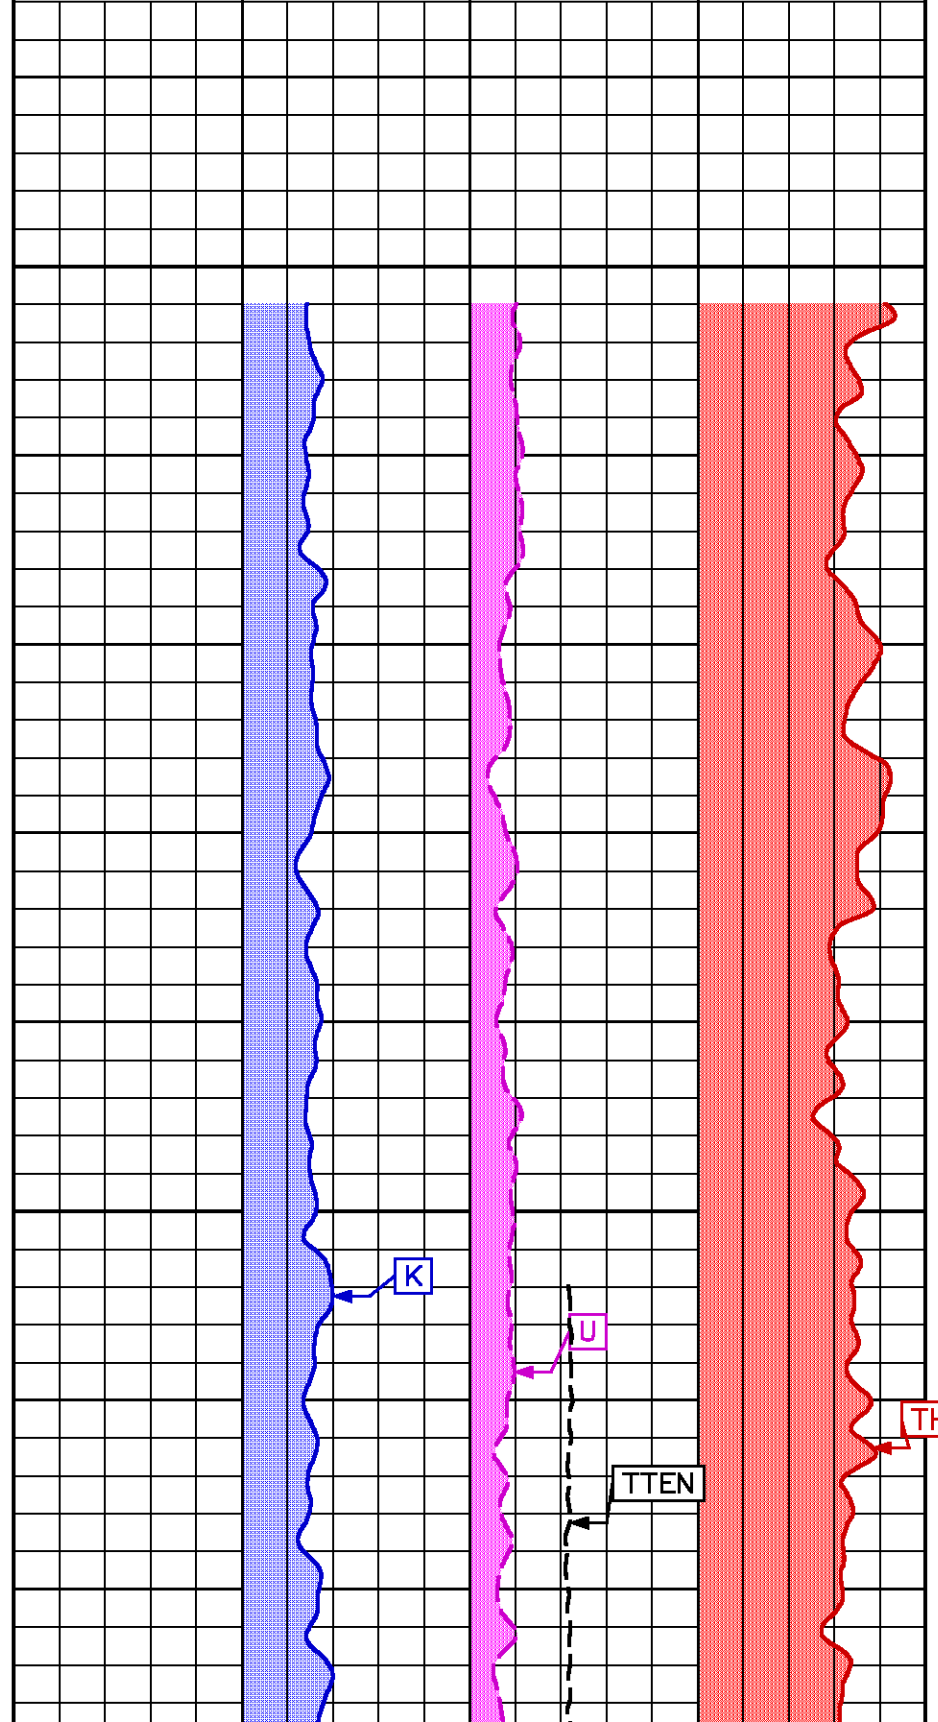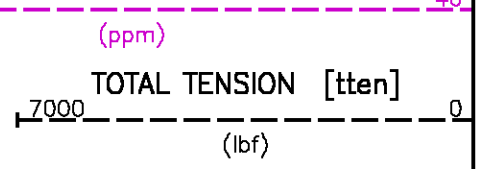


K

U


TTEN


TH

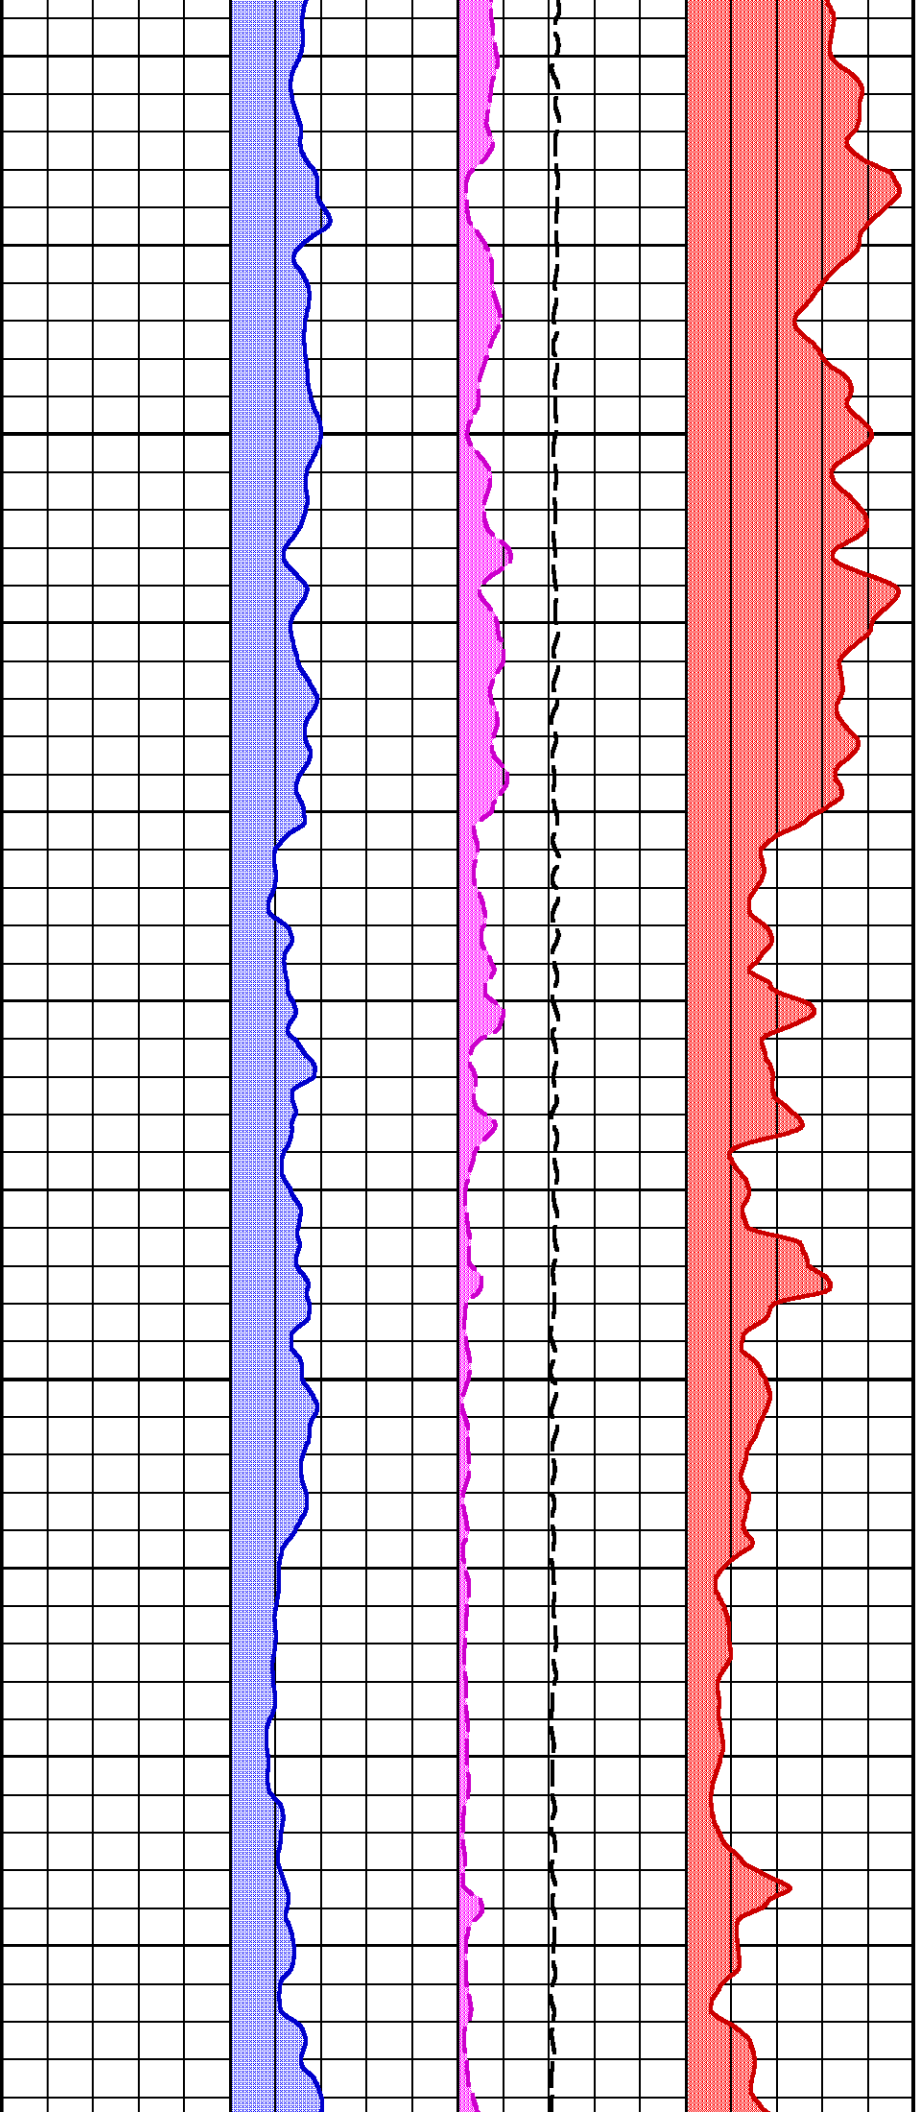

2400

2425

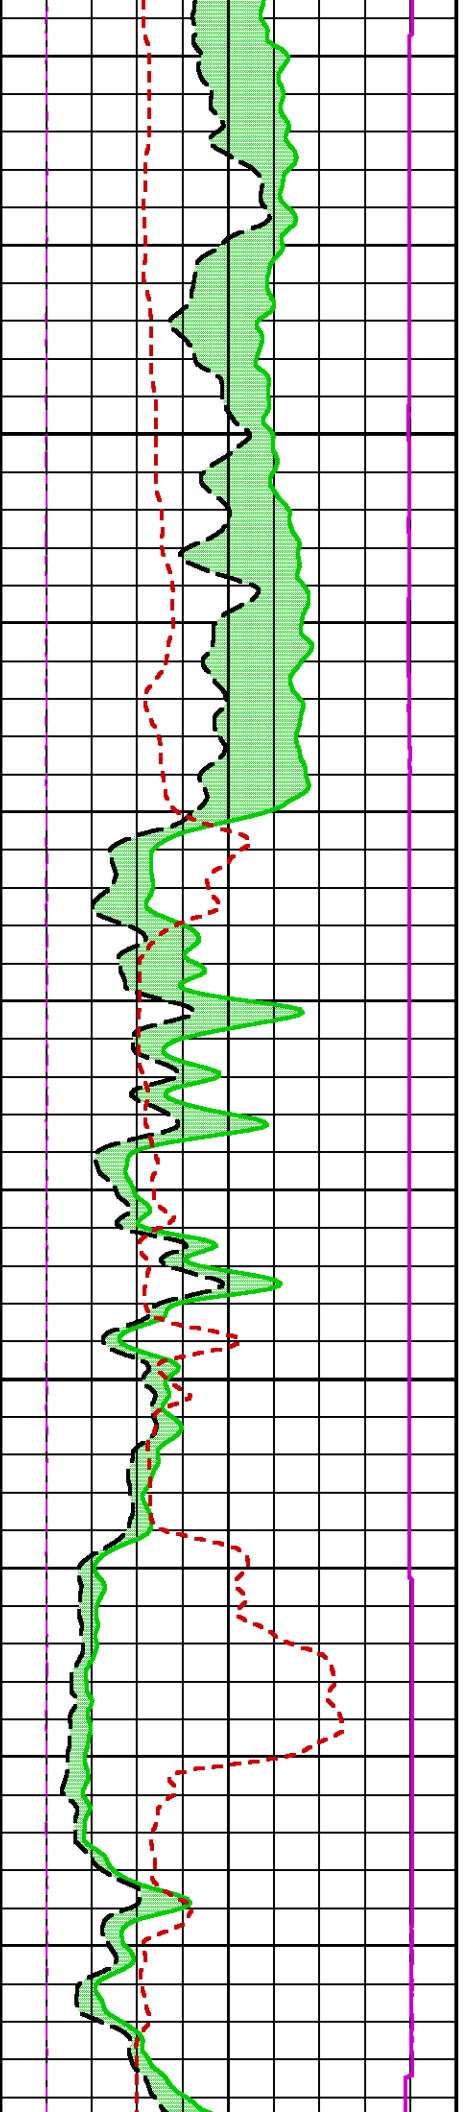



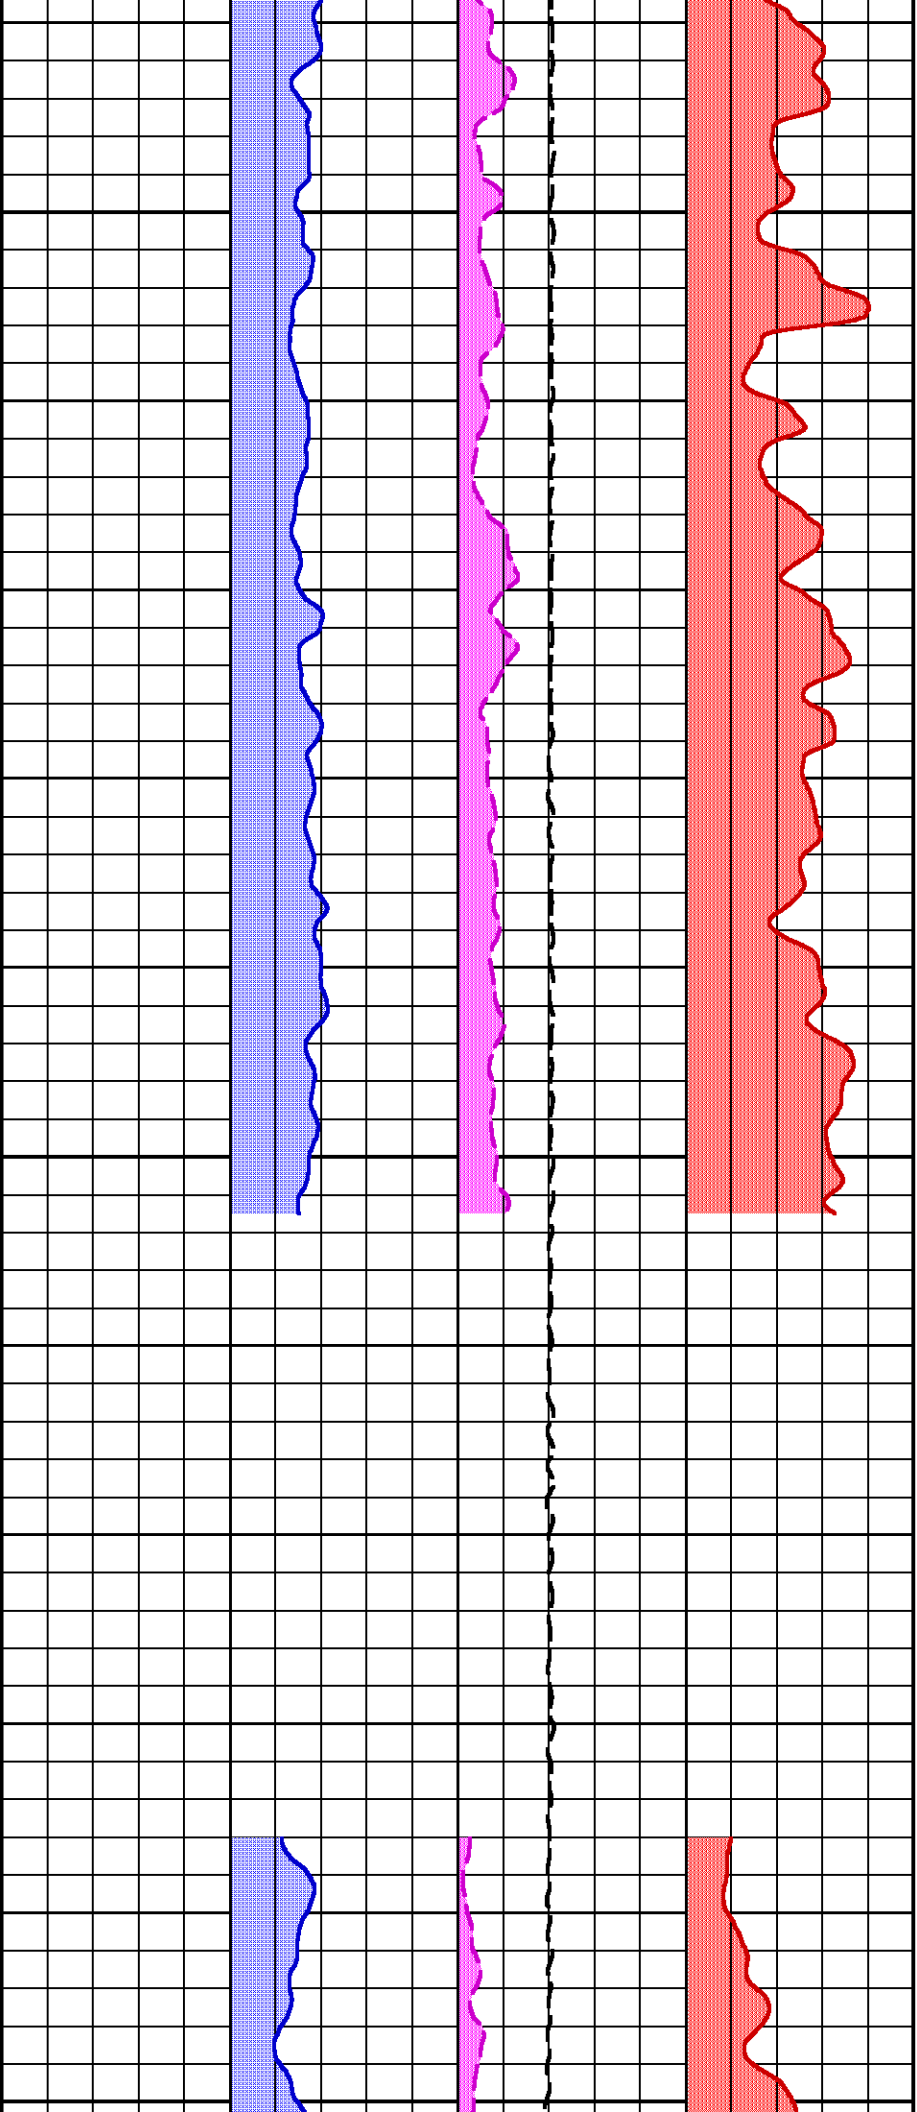


2450

2475

2500

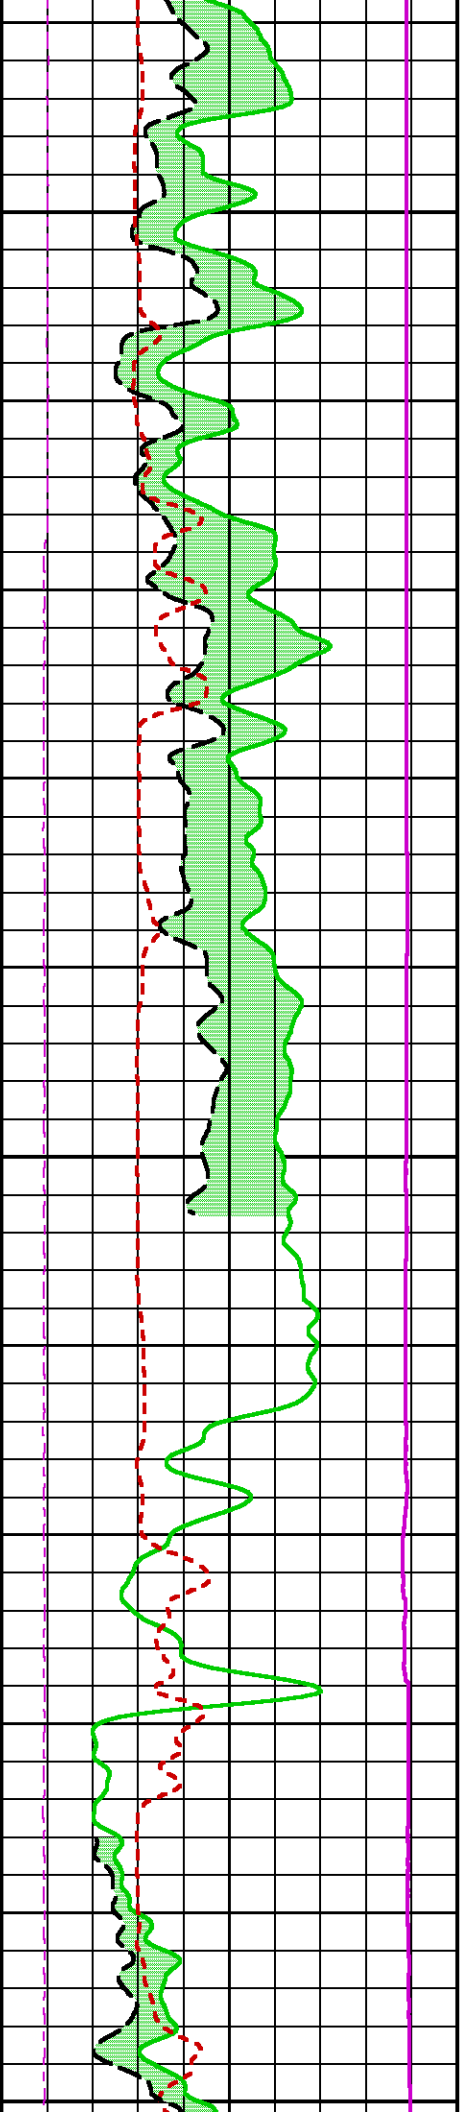

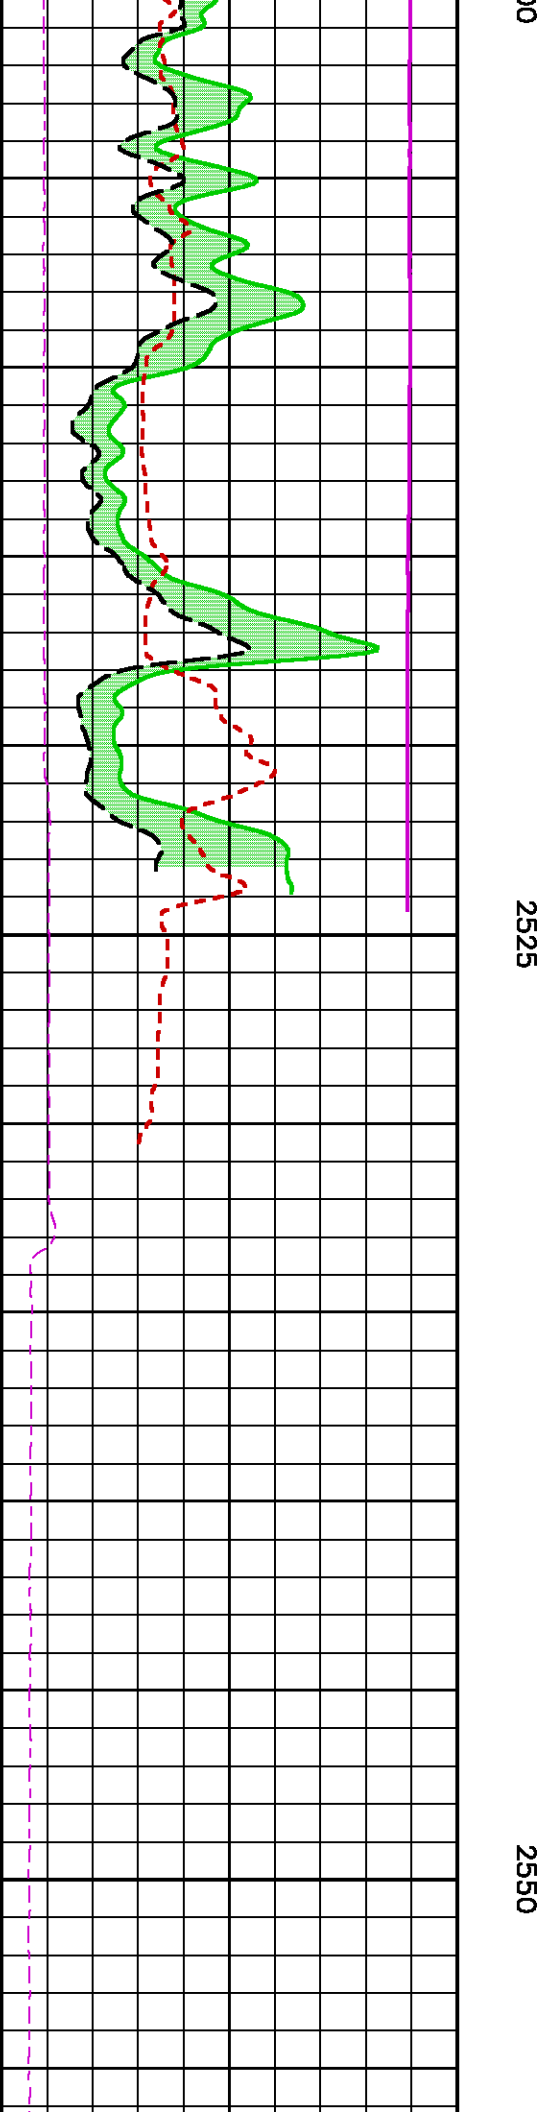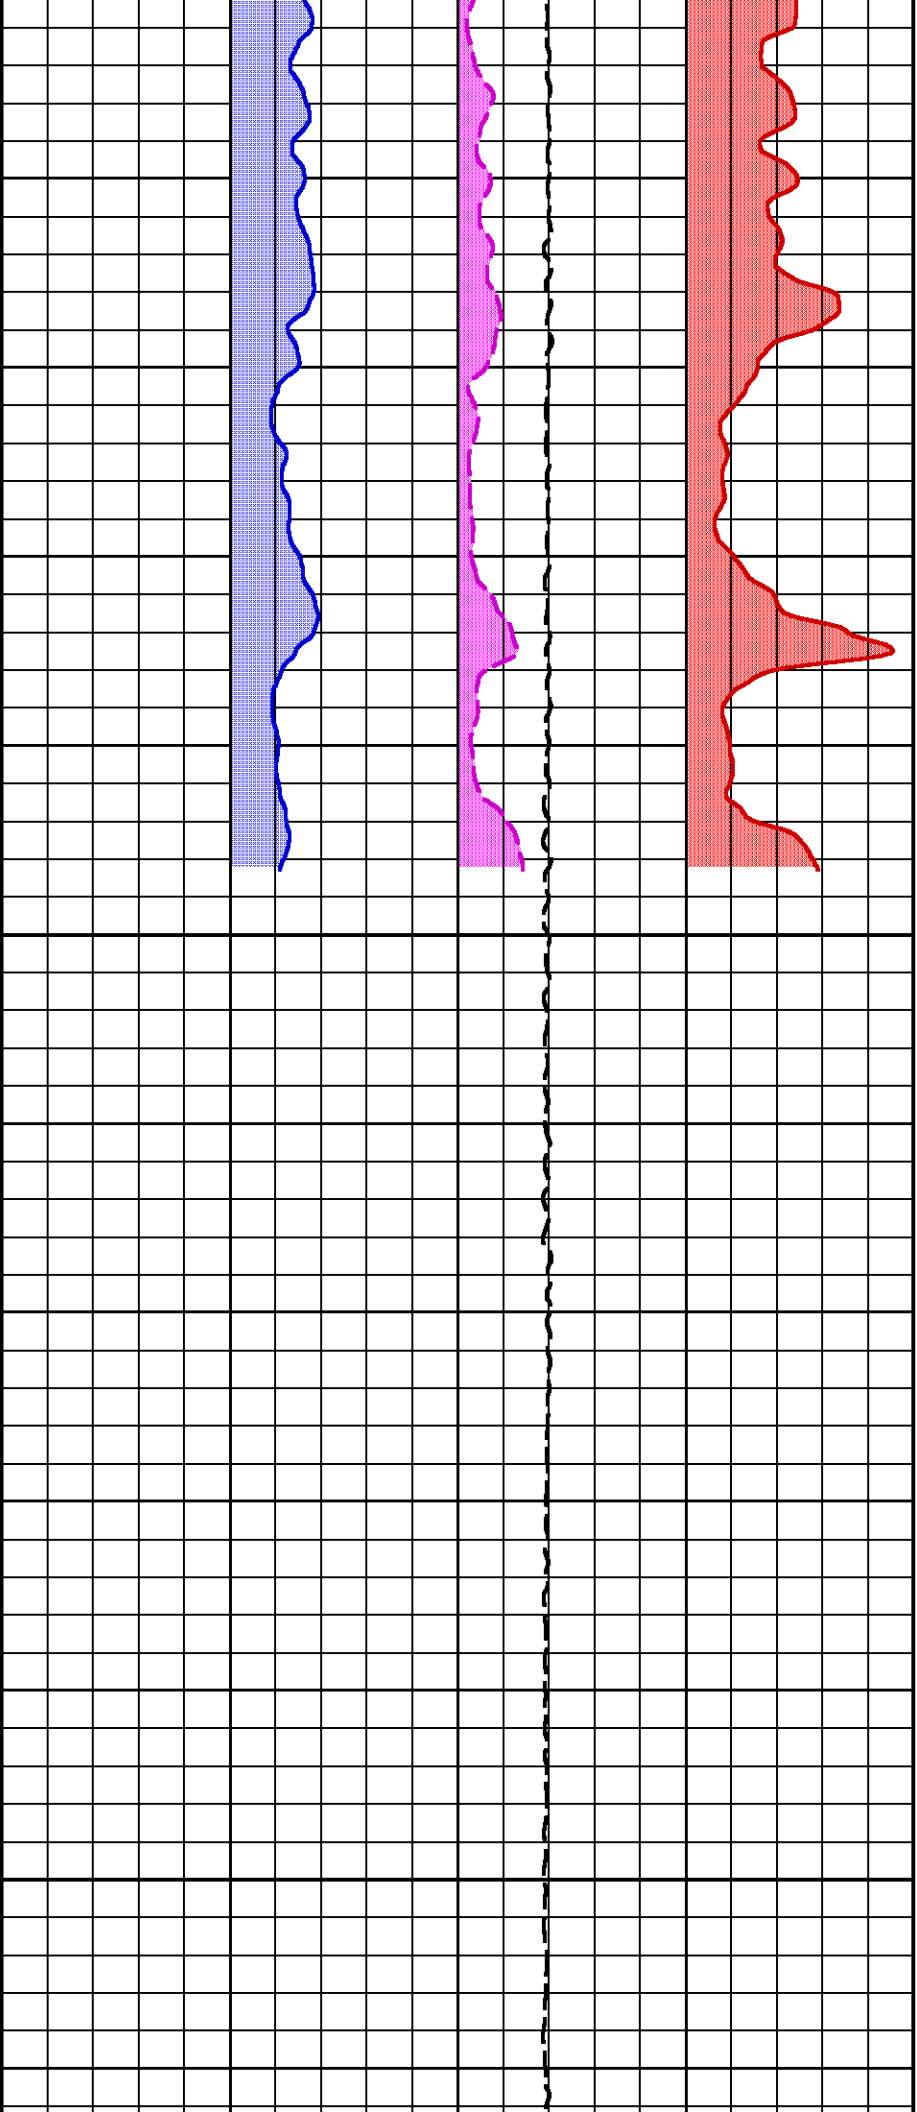

GR BACKUP

GR-KTH

METERS

0.95 1.05
(1)

GAMMA RAY [gr]

0 150

(gAPI)

KTH [kth]

0 150

(gAPI)

CALIPER [cal]

10 20

(in)

SPEED [spd]

0 50

(m/min)

POTASSIUM [k]

-5 5 -20 20

(pct)

THORIUM [th]

(ppm)

URANIUM [u]

-20 40

(ppm)

TOTAL TENSION [tten]

7000 0

(lbf)

CALIBRATION / VERIFICATION SUMMARY

Source File: /data/peak/blabarl_D3/slam.tp1

CHT PRIMARY CALIBRATION SUMMARY

TOOL #: 3981XA 186331

DATE/TIME PERFORMED: Sat Jul 1 01:12:15 2006

UNIT #: 3854SA 008601

	Signal Low (raw)	Signal High (raw)	Scale Mult	Scale Add	Engr Low (lbf)	Engr High (lbf)
CHT	140.29	669.21	5.05	-878.22	-170.00	2500.00

GR PRIMARY CALIBRATION SUMMARY

TOOL #: 1329XA 167531

DATE/TIME PERFORMED: Tue Oct 24 15:59:24 2006

UNIT #: 5753XB 10164949 CALB JIG #: 4702NK da-644

BACKGROUND (cts/s)	CALBRTR ON (cts/s)	CR DIFF (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	CALBRTR (gAPI)
-----------------------	-----------------------	--------------------	------	----------------------	----------------------	-------------------

GR	57.36	951.80	894.4	0.168	9.62	159.62	150
			830.0	960.0			

GR BEFORE LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Tue Oct 24 16:05:04 2006 DAYS SINCE CAL: 0

UNIT #: 5753XB 10164949 VERI JIG #: 4702NK da-644

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	DIFF. (gAPI)
GR	56.93	952.96	0.168	9.55	159.81	150.26
						140.00 160.00

GR AFTER LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Thu Oct 26 05:11:36 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949 VERI JIG #: 4702NK da-644

	BACKGROUND (cts/s)	CALBRTR ON (cts/s)	MULT	BACKGROUND (gAPI)	CALBRTR ON (gAPI)	DIFF. (gAPI)
GR	54.20	912.67	0.168	9.09	153.06	143.97
						140.26 160.26

SL_II PRIMARY CALIBRATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Tue Oct 24 16:01:49 2006

UNIT #: 5753XB 10164949 CALIBRATOR ID: 4702NA da-644

	Bkgnd (cts/s)	Cal ON (cts/s)	Mult (gAPI/(cts/s))	Bkgnd (gAPI)	Cal ON (gAPI)	Cal Value (gAPI)
GR-SL (.06-3.5)	53.18	948.88	0.167	8.91	158.91	150

	Std Rate (cts/s)	Meas Rate (cts/s)	Tool Norm	Std Mult	Log Mult	App Con (pct ppm)
E (.15-3.0)	748	746.7	1.002			
			0.900 1.100			

K	0.01169	0.01171	8.700
---	---------	---------	-------

U	0.02668	0.02673	20.000
---	---------	---------	--------

TH	0.07158	0.07171	53.500
----	---------	---------	--------

	Mult chnl/MeV	Add chnls	Chi Sqr qsa	QCAL	GAIN	QPKS
SPECTRUM	71.268	1.654	0.389	1.001	3014	5

0.980 1.020

	P1 .352 MeV	P2 .609 MeV	P3 1.120 MeV	P4 1.765 MeV	P5 2.204 MeV
Std Pk	25.80	44.20	81.00	127.40	159.00
Meas Pk	26.15	45.34	81.96	127.72	158.28
	22.80 28.80	40.20 48.20	76.00 86.00	121.40 133.40	152.00 166.00
Fit Pk	26.74	45.06	81.47	127.44	158.73

SL_II BEFORE LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Tue Oct 24 16:05:21 2006 DAYS SINCE CAL: 0

UNIT #: 5753XB 10164949 CALIBRATOR ID: 4702NA da-644

	Bkgnd (cts/s)	Cal ON (cts/s)	Mult (gAPI/(cts/s))	Bkgnd (gAPI)	Cal ON (gAPI)	Cal Value (gAPI)
GR-SL (.06-3.5)	53.48	957.07	0.167	8.96	160.28	151
						135 165

	Std rate (cts/s)	Meas rate (cts/s)	Tool norm	Std Mult	Log Mult	App Con (pct ppm)
E (.15-3.0)	748	746.6	1.002			

K	0.01169	0.01171	8.744
			7.830 9.570
U	0.02668	0.02673	19.956
			18.000 22.000
TH	0.07158	0.07171	53.539
			48.150 58.850

	Mult chnl/MeV	Add chnls	Chi Sqr qsa	QCAL	GAIN	QPKS
SPECTRUM	71.346	1.732	0.610	1.003	3014	5
				0.980 1.020		

	P1 .352 MeV	P2 .609 MeV	P3 1.120 MeV	P4 1.765 MeV	P5 2.204 MeV
Std Pk	25.80	44.20	81.00	127.40	159.00
Meas Pk	26.20	45.31	82.44	127.95	158.41
	22.80 28.80	40.20 48.20	76.00 86.00	121.40 133.40	152.00 166.00
Fit Pk	26.85	45.18	81.64	127.66	158.98

SL_II AFTER LOG VERIFICATION SUMMARY

TOOL #: 1329XA 167531 DATE/TIME PERFORMED: Thu Oct 26 05:12:01 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949 CALIBRATOR ID: 4702NA da-644

	Bkgnd (cts/s)	Cal ON (cts/s)	Mult (gAPI/(cts/s))	Bkgnd (gAPI)	Cal ON (gAPI)	Cal Value (gAPI)
GR-SL (.06-3.5)	50.27	915.98	0.167	8.42	153.40	145
						135 165

	Std rate (cts/s)	Meas rate (cts/s)	Tool norm	Std Mult	Log Mult	App Con (pct ppm)
E (.15-3.0)	748	737.9	1.002			

K	0.01169	0.01171	8.642
			7.830 9.570
U	0.02668	0.02673	19.723
			18.000 22.000
TH	0.07158	0.07171	52.915
			48.150 58.850

	Mult chnl/MeV	Add chnls	Chi Sqr qsa	QCAL	GAIN	QPKS
SPECTRUM	70.122	0.989	0.684	0.980	3014	5
				0.980 1.020		

	P1 .352 MeV	P2 .609 MeV	P3 1.120 MeV	P4 1.765 MeV	P5 2.204 MeV
Std Pk	25.80	44.20	81.00	127.40	159.00
Meas Pk	24.96	43.85	80.44	124.93	155.01
	22.80 28.80	40.20 48.20	76.00 86.00	121.40 133.40	152.00 166.00
Fit Pk	25.67	43.69	79.53	124.75	155.54

CAL PRIMARY CALIBRATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Tue Oct 24 15:42:35 2006

UNIT #: 5753XB 10164949

	SMALL RING (raw)	LARGE RING (raw)	MULT	ADD	SMALL RING (in)	LARGE RING (in)
CALIPER	1927.5	2638.8	0.00590	-3.58127	7.800	12.000

CAL BEFORE LOG VERIFICATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Wed Oct 25 20:37:44 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949

	I.D. (raw)	MULT	ADD	I.D. (in)
CALIPER	2682.3	0.00590	-3.43813	12.400

CAL AFTER LOG VERIFICATION SUMMARY

TOOL #: 2228MA 114428 DATE/TIME PERFORMED: Thu Oct 26 03:54:59 2006 DAYS SINCE CAL: 1

UNIT #: 5753XB 10164949

	I.D. (row)	MULT	ADD	I.D. (in)
CALIPER	2708.2	0.00590	-3.43813	12.553
				11.900 12.900



COMPANY PEAK PETROLEUM INDUSTRIES NIGERIA LTD
 WELL BILABRI D3
 FIELD BILABRI
 RIG NAME BULFORD DOLPHIN

FILE NO:

API NO:

SCALE 1:200

Baker Atlas



LOCATION:

NORTH: 515,558.23 M
EAST: 731,847.1 M

ELEVATIONS:

KB
 DF 25 M
 GL -145 M

FIELD PRINT
TIGHT HOLE

DATE 26-OCT-2006