

Class13_RNA-Seq analysis mini-project

Zixuan Zeng(A16142927)

Table of contents

Background

Today we will run through a complete RNAseq analysis. The data for the hands-on session comes from GEO entry: GSE37704, which is associated with the following publication:

Trapnell C, Hendrickson DG, Sauvageau M, Goff L et al. "Differential analysis of gene regulation at transcript resolution with RNA-seq". Nat Biotechnol 2013 Jan;31(1):46-53. PMID: 23222703

The authors report on differential analysis of lung fibroblasts in response to loss of the developmental transcription factor HOXA1. Their results and others indicate that HOXA1 is required for lung fibroblast and HeLa cell cycle progression. In particular, their analysis shows that "loss of HOXA1 results in significant expression level changes in thousands of individual transcripts, along with isoform switching events in key regulators of the cell cycle". For our session, we have used their Sailfish gene-level estimated counts and hence are restricted to protein-coding genes only.

Data Import

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"

colData = read.csv(metaFile, row.names=1)
countData = read.csv(countFile, row.names=1)
head(colData)
```

```

condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369 hoxa1_kd
SRR493370 hoxa1_kd
SRR493371 hoxa1_kd

```

```
head(countData)
```

```

length SRR493366 SRR493367 SRR493368 SRR493369 SRR493370
ENSG00000186092    918         0         0         0         0
ENSG00000279928    718         0         0         0         0
ENSG00000279457   1982        23        28        29        29        28
ENSG00000278566    939         0         0         0         0
ENSG00000273547    939         0         0         0         0
ENSG00000187634   3214       124       123       205       207       212
SRR493371
ENSG00000186092         0
ENSG00000279928         0
ENSG00000279457        46
ENSG00000278566         0
ENSG00000273547         0
ENSG00000187634       258

```

Check corespondance of metadata and countsdata

```

countData <- as.matrix(countData[,-1])
countData = countData[rowSums(countData) > 0, ]
head(countData)

```

```

SRR493366 SRR493367 SRR493368 SRR493369 SRR493370 SRR493371
ENSG00000279457      23      28      29      29      28      46
ENSG00000187634     124     123     205     207     212     258
ENSG00000188976    1637    1831    2383    1226    1326    1504
ENSG00000187961     120     153     180     236     255     357
ENSG00000187583      24      48      65      44      48      64
ENSG00000187642       4       9      16      14      16      16

```

Setup for DESeq2

```
library(DESeq2)
```

Loading required package: S4Vectors

Loading required package: stats4

Loading required package: BiocGenerics

Loading required package: generics

Attaching package: 'generics'

The following objects are masked from 'package:base':

```
as.difftime, as.factor, as.ordered, intersect, is.element, setdiff,  
setequal, union
```

Attaching package: 'BiocGenerics'

The following objects are masked from 'package:stats':

```
IQR, mad, sd, var, xtabs
```

The following objects are masked from 'package:base':

```
anyDuplicated, aperm, append, as.data.frame, basename, cbind,  
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,  
get, grep, grepl, is.unsorted, lapply, Map, mapply, match, mget,  
order, paste, pmax, pmax.int, pmin, pmin.int, Position, rank,  
rbind, Reduce, rownames, sapply, saveRDS, table, tapply, unique,  
unsplit, which.max, which.min
```

Attaching package: 'S4Vectors'

The following object is masked from 'package:utils':

findMatches

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Loading required package: GenomicRanges

Loading required package: GenomeInfoDb

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars

Loading required package: Biobase

Welcome to Bioconductor

Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

rowMedians

The following objects are masked from 'package:matrixStats':

anyMissing, rowMedians

```
dds <- DESeqDataSetFromMatrix(countData = countData,  
                              colData = colData,  
                              design = ~ condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in
design formula are characters, converting to factors

Run DESeq2

```
dds <- DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

Get results

```
res <- results(dds)
head(res)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 6 rows and 6 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248215	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630156	1.43993e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.9798	0.5428105	0.5215598	1.040744	2.97994e-01
	padj				
	<numeric>				
ENSG00000279457	6.86555e-01				
ENSG00000187634	5.15718e-03				
ENSG00000188976	1.76553e-35				
ENSG00000187961	1.13413e-07				
ENSG00000187583	9.19031e-01				
ENSG00000187642	4.03379e-01				

Add annotation

```
library(AnnotationDbi)
library(org.Hs.eg.db)
```

```
res$symbol <- mapIds(org.Hs.eg.db,
                     keys=row.names(res),
                     column="SYMBOL",
                     keytype="ENSEMBL",
                     multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez <- mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    column="ENTREZID",
                    keytype="ENSEMBL",
                    multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name <- mapIds(org.Hs.eg.db,
                  keys=row.names(res),
                  column="GENENAME",
                  keytype="ENSEMBL",
                  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna


DataFrame with 6 rows and 9 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248215	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630156	1.43993e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.9798	0.5428105	0.5215598	1.040744	2.97994e-01

	padj	symbol	entrez	name
	<numeric>	<character>	<character>	<character>
ENSG00000279457	6.86555e-01	NA	NA	NA
ENSG00000187634	5.15718e-03	SAMD11	148398	sterile alpha motif ..
ENSG00000188976	1.76553e-35	NOC2L	26155	NOC2 like nucleolar ..
ENSG00000187961	1.13413e-07	KLHL17	339451	kelch like family me..
ENSG00000187583	9.19031e-01	PLEKHN1	84069	pleckstrin homology ..
ENSG00000187642	4.03379e-01	PERM1	84808	PPARGC1 and ESRR ind..


Visualize results

```
plot(res$log2FoldChange, -log10(res$pvalue),  
     pch=20, main="Differential expression",  
     xlab="Log2 fold change", ylab="-Log10 p-value", col="gray")  
abline(h=-log10(0.05), col="red")  
abline(v=1, col="blue")  
abline(v=-1, col="blue")
```

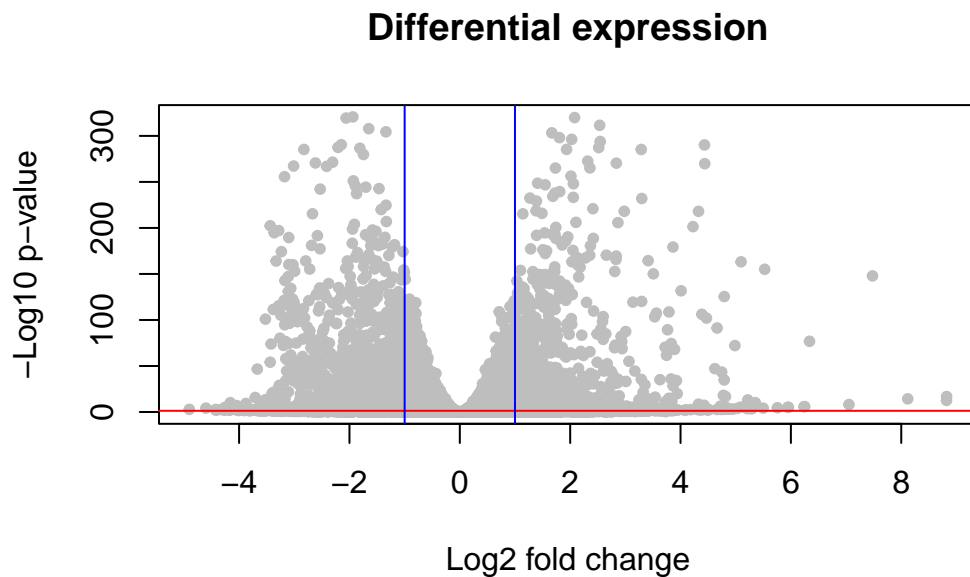

```
library(ggplot2)  
mycols <- rep("gray", nrow(res))  
mycols[(res$log2FoldChange) > 2] <- "red"  
mycols[(res$log2FoldChange) < -2] <- "blue"  
mycols[res$padj >= 0.05] <- "gray"  
ggplot(res) + aes(log2FoldChange, -log(padj)) + geom_point(col=mycols) + geom_vline(xintercept=
```

Warning: Removed 1237 rows containing missing values or values outside the scale range (``geom_point()``).

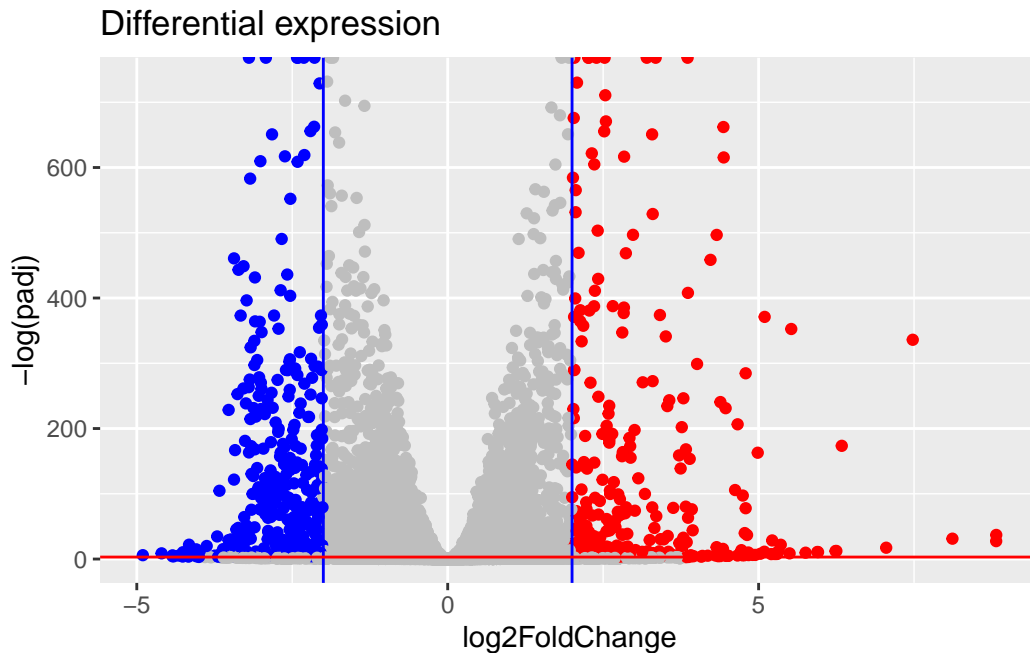

Pathway analysis

```
library(pathview)
```

```
#####  
Pathview is an open source software package distributed under GNU General  
Public License version 3 (GPLv3). Details of GPLv3 is available at  
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to  
formally cite the original Pathview paper (not just mention it) in publications  
or products. For details, do citation("pathview") within R.
```

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG
license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

```
#####
```

```
library(gage)
```

```
library(gageData)
data(kegg.sets.hs)
data(sigmet.idx.hs)
# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"
```

```
[161] "9583"    "9615"
```

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)
```

```
      <NA>      148398      26155      339451      84069      84808
0.17925708 0.42645712 -0.69272046 0.72975561 0.04057653 0.54281049
```

```
keggres = gage(foldchanges, gsets=kegg.sets.hs)
head(keggres$less)
```

	p.geomean	stat.mean	p.val
hsa04110 Cell cycle	8.995727e-06	-4.378644	8.995727e-06
hsa03030 DNA replication	9.424076e-05	-3.951803	9.424076e-05
hsa03013 RNA transport	1.246882e-03	-3.059466	1.246882e-03
hsa03440 Homologous recombination	3.066756e-03	-2.852899	3.066756e-03
hsa04114 Oocyte meiosis	3.784520e-03	-2.698128	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	8.961413e-03	-2.405398	8.961413e-03

	q.val	set.size	exp1
hsa04110 Cell cycle	0.001448312	121	8.995727e-06
hsa03030 DNA replication	0.007586381	36	9.424076e-05
hsa03013 RNA transport	0.066915975	144	1.246882e-03
hsa03440 Homologous recombination	0.121861535	28	3.066756e-03
hsa04114 Oocyte meiosis	0.121861535	102	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	0.212222694	53	8.961413e-03

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/jason/Documents/BGGN213/Hands-on section/Class13

Info: Writing image file hsa04110.pathview.png

GO analysis

Lets try GO analysis and compare with KEGG results

```

data(go.sets.hs)
data(go.subs.hs)

# Focus on Biological Process subset of GO
gobpsets = go.sets.hs[go.subs.hs$BP]

gobpres = gage(foldchanges, gsets=gobpsets, same.dir=TRUE)

lapply(gobpres, head)

```

\$greater

	p.geomean	stat.mean	p.val
G0:0007156 homophilic cell adhesion	8.519724e-05	3.824205	8.519724e-05
G0:0002009 morphogenesis of an epithelium	1.396681e-04	3.653886	1.396681e-04
G0:0048729 tissue morphogenesis	1.432451e-04	3.643242	1.432451e-04
G0:0007610 behavior	1.925222e-04	3.565432	1.925222e-04
G0:0060562 epithelial tube morphogenesis	5.932837e-04	3.261376	5.932837e-04
G0:0035295 tube development	5.953254e-04	3.253665	5.953254e-04

	q.val	set.size	expl
G0:0007156 homophilic cell adhesion	0.1951953	113	8.519724e-05
G0:0002009 morphogenesis of an epithelium	0.1951953	339	1.396681e-04
G0:0048729 tissue morphogenesis	0.1951953	424	1.432451e-04
G0:0007610 behavior	0.1967577	426	1.925222e-04
G0:0060562 epithelial tube morphogenesis	0.3565320	257	5.932837e-04
G0:0035295 tube development	0.3565320	391	5.953254e-04

\$less

	p.geomean	stat.mean	p.val
G0:0048285 organelle fission	1.536227e-15	-8.063910	1.536227e-15
G0:0000280 nuclear division	4.286961e-15	-7.939217	4.286961e-15
G0:0007067 mitosis	4.286961e-15	-7.939217	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.169934e-14	-7.797496	1.169934e-14
G0:0007059 chromosome segregation	2.028624e-11	-6.878340	2.028624e-11
G0:0000236 mitotic prometaphase	1.729553e-10	-6.695966	1.729553e-10

	q.val	set.size	expl
G0:0048285 organelle fission	5.841698e-12	376	1.536227e-15
G0:0000280 nuclear division	5.841698e-12	352	4.286961e-15
G0:0007067 mitosis	5.841698e-12	352	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.195672e-11	362	1.169934e-14
G0:0007059 chromosome segregation	1.658603e-08	142	2.028624e-11
G0:0000236 mitotic prometaphase	1.178402e-07	84	1.729553e-10