

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **CREATION OF HTML FILES**

### **SOURCE CODE**

#### **HOME PAGE:**

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<link href="style.css" rel="stylesheet" type="text/css" />
<title>Pizza huts template</title>
</head>
<body>
<div id="container">
<div id="header">
<div id="logo_w1"></div>
<div id="logo_w2"></div>
<div id="header_text">
<a href="#"></a>
</div> <ul>
<li><a href="index.html">Home</a></li>
<li><a href="Aboutus.html">About Us</a></li>
<li> <a href="Menu.html">Menu Card</a></li>
<li><a href="Contact.html">Contact us</a></li>
</ul> </div>
<div id="content">
<div id="left">
```

<h1>Welcome to our Bill's pizza</h1>

<p>Pizza Hut is one of the flagship brands of Yum! Brands, Inc., which also has KFC, Taco Bell, A&W and Long John Silver's under its umbrella. Pizza Hut is the world's largest pizza chain with over 12,500 restaurants across 91 countries.</p><p>In India, Pizza Hut has 140 restaurants across 34 cities, including Delhi, Mumbai, Bangalore, Chennai, Kolkata, Hyderabad, Pune, and Chandigarh amongst others. Yum! is in the process of opening Pizza Hut restaurants at many more locations to service a larger customer base across the country.</p>

<h1>Photos</h1>

<div id="photos">

<a href="#"></a>

<a href="#"></a>

<a href="#"></a>

<a href="#"></a>

</div> </div>

<div id="right">

<h2>QUOTES</h2>

<a href="#">Jim Davis</a>

<p>Vegetables are a must on a diet. I suggest carrot cake, zucchini bread, and pumpkin pie. </p>

<a href="#">Adelle Davis </a>

<p>Eat breakfast like a king, lunch like a prince, and dinner like a pauper.</p>

<a href="#">Elizabeth Berry</a>

<p>Shipping is a terrible thing to do to vegetables. They probably get jetlagged, just like people.</p>

</div> <div id="footerline"> </div> </div>

<div id="footer">THANKS FOR VISIT OUR WEBSITE KEEP VISITING....

Copyright © 2011 BILL'S PIZZA.All rights reserved.</div>

</div>

</body>

</html>

## OUTPUT



## ABOUT US:

```
<html>
<head>
<link href="style.css" rel="stylesheet" type="text/css" />
<title>Pizza hut template</title>
</head>
<body>
<div id="container">
<div id="header">
<div id="logo_w1"></div>
<div id="logo_w2"></div>
<div id="header_text">
<a href="#"></a>
</div>
<ul>
<li><a href="index.html">Home</a></li>
<li><a href="Aboutus.html">About Us</a></li>
<li><a href="Menu.html">Menu Card</a></li>
<li><a href="Contact.html">Contact us</a></li>
</ul>
</div>
<div id="content">
<div id="left">
<h1>Contact Details</h1>
<p>BILL'S PIZZA<br />
Houghton Street<br />
City of France, Greater France, <br />
020 7995 7686<br />
```

</p>

<h1>Photos</h1>

<div id="photos">

<a href="#"></a>

<a href="#"></a>

<a href="#"></a>

<a href="#"></a>

</div>

</div>

<div id="right">

<h2>Quotes of the day</h2>

<a href="#">Robert Orben</a>

<p>I take my children everywhere, but they always find their way back home.</p>

<a href="#">John F. Kennedy</a>

<p>Forgive your enemies, but never forget their names.</p>

<a href="#">George Bernard Shaw</a>

<p>Hell is full of musical amateurs.</p>

</div>

<div id="footerline"></div>

</div>

<div id="footer">THANKS FOR VISIT OUR WEBSITE KEEP VISITING....

Copyright © 2011 BILL'S PIZZA.All rights reserved.</div>

</div>

</body>

</html>

## OUTPUT



## MENU CARD:

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<link href="style.css" rel="stylesheet" type="text/css" />
<title>Make a donation</title>
</head>
<body>
<div id="container">
<div id="header">
<div id="logo_w1"></div>
<div id="logo_w2"></div>
<div id="header_text">
<a href="#"></a>
</div>
<ul>
<li><a href="index.html">Home</a></li>
<li><a href="AboutUs.html">About US</a></li>
<li><a href="Menu.html">Menu Card</a></li>
<li><a href="Contact.html">Contact us</a></li>
</ul>
</div>
<div id="content">
<div id="left">
<h1> OUR PRICES</h1>
<table border=0 cellspacing="20" cellpadding="20">
<tr>
<th>ITEMS</th>
<th>PRICE</th>
```

```
</tr>
<tr>
<td>Hot n Spicypanner</td>
<td> Rs.500</td>
</tr>
<tr>
<td>Chiken Skewers</td>
<td>Rs.400</td>
</tr>
<tr>
<td>Chiken Sings</td>
<td>Rs.450</td></tr>
<tr>
<td>Tuscani Singles</td>
<td>Rs.300</td></tr>
<tr>
<td>Costco</td>
<td>Rs.200</td>
</tr>
</table>
```

```
<h1>Photos</h1>
```

```
<div id="photos">
```

```
<a href="#"></a>
```

```
<a href="#"></a>
```

```
<a href="#"></a>
```

```
<a href="#"></a>
```

```
</div>
```

```
</div>
```

```
<div id="right">
```



## Motivation

[Edward Gibbon](#)

We improve ourselves by victories over ourself. There must be contests, and you must win.

[Oprah Winfrey](#)

I define joy as a sustained sense of well-being and internal peace - a connection to what matters.

[Jef Mallett](#),

Mach-S, the speed at which stress can't keep up, is simply forward motion. But it has to be self-propelled. Note that people in cars are still stressed.

THANKS FOR VISIT OUR WEBSITE KEEP VISITING....

Copyright © 2011 BILL'S PIZZA. All rights reserved.

## OUTPUT



## CONTACT US:

```
<html>
<head>
<link href="style.css" rel="stylesheet" type="text/css" />
<title>Pizza hut template</title>
</head>
<body>
<div id="container">
<div id="header">
<div id="logo_w1"></div>
<div id="logo_w2"></div>
<div id="header_text">
<a href="#"></a>
</div>
<ul>
<li><a href="index.html">Home</a></li>
<li><a href="Aboutus.html">About Us</a></li>
<li><a href="Menu.html">Menu Card</a></li>
<li><a href="Contact.html">Contact us</a></li>
</ul>
</div>
<div id="content">
<div id="left">
<h1>Contact Details</h1>
<p>BILL'S PIZZA<br />
Houghton Street<br />
City of France, Greater France, <br />
020 7995 7686<br />
</p>
```

<h1>Photos</h1>

<div id="photos">

<a href="#"></a>

<a href="#"></a>

<a href="#"></a>

<a href="#"></a>

</div>

</div>

<div id="right">

<h2>Quotes of the day</h2>

<a href="#">Robert Orben</a>

<p>I take my children everywhere, but they always find their way back home.</p>

<a href="#">John F. Kennedy</a>

<p>Forgive your enemies, but never forget their names.</p>

<a href="#">George Bernard Shaw</a>

<p>Hell is full of musical amateurs.</p>

</div>

<div id="footerline"></div>

</div>

<div id="footer">THANKS FOR VISIT OUR WEBSITE KEEP VISITING....


Copyright © 2011 BILL'S PIZZA.All rights reserved.</div>

</div>

</body>

</html>

## OUTPUT

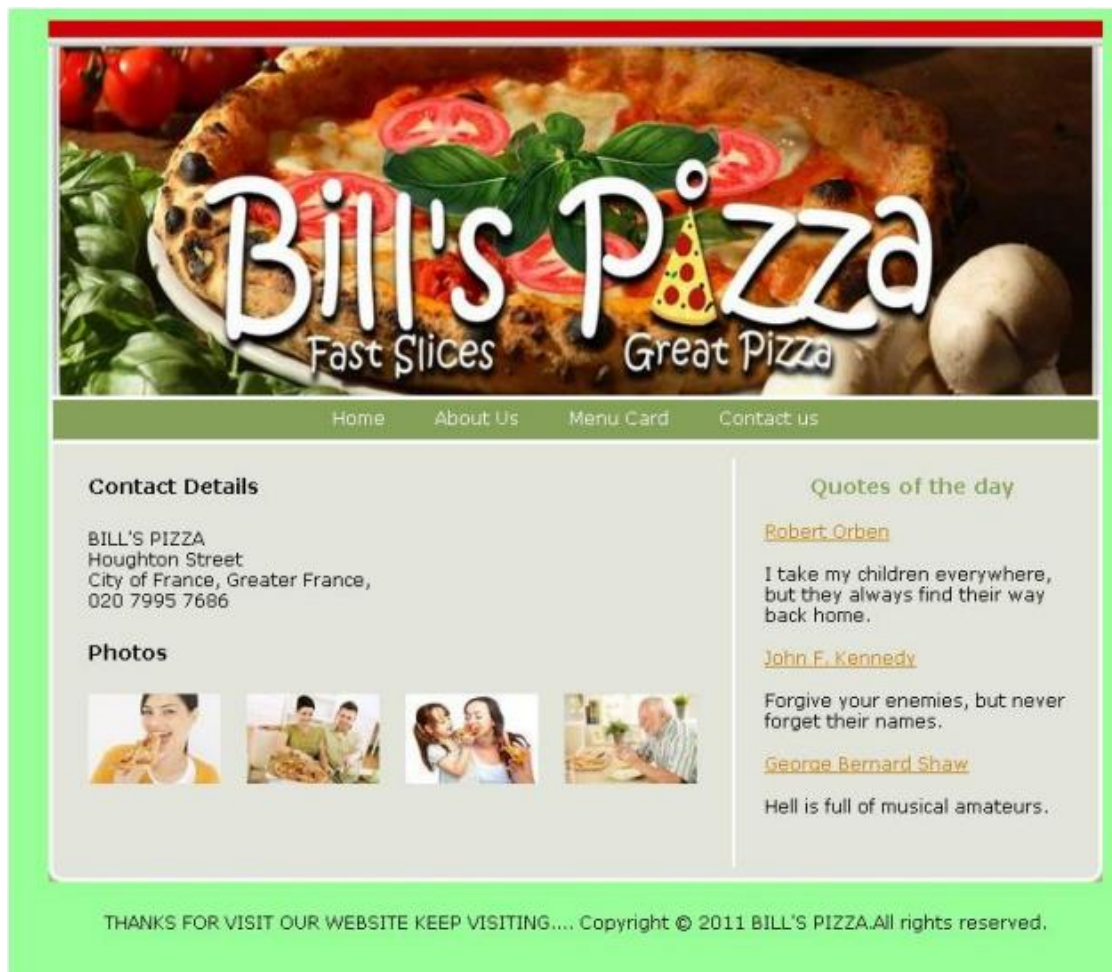

## CASCADING STYLE SHEET:

```
body {
background-color:#99ff99;
color:#000000;
font-family: Verdana, Arial, Helvetica, sans-serif;
font-size: 12px;
margin: 10px 10px;
padding: 0px;
}
.clear{clear:both;}
* {
margin: 0px;
padding: 0px;
}
#container {
margin: 0px auto;
text-align: left;
width: 717px;
}
a{
font-size:12px;
}
p{
margin: 15px 0px;
}
/* Header */
#header {
margin: 0px 0px 0px 0px;
background-image:url(images/header.jpg);
```

```
width:717px;
height:288px;
position:relative;
}
#header ul{
background-color:#85a157;
width:711px;
border: 3px solid #FFFFFF;
display:block;
top:255px;
position:absolute;
margin: 0px 0px 0px 0px;
height:22px;
padding:5px 0px 0px 0px;
text-align:center;
}
#header li{
display:inline;
}
#header ul a{
text-decoration:none;
color:#FFFFFF;
margin: 0px 15px;
}
#header ul a:hover{
text-decoration:underline;
color:#28556b;
}
#logo_w1,#logo_w2 {
```

```
font-size: 24px;
font-style:italic;
color:#FFFFFF;
position:absolute;
}
#logo_w1{
top:15px;
left:70px;
}
#logo_w2{
top:44px;
left:94px;
}
#header_text {
top:90px;
left:43px;
width:230px;
position:absolute;
}
#header_text p{
font-size: 18px;
color:#FFFFFF;
}
#header_text a{color:#28556b;}
#header_text a:hover{color:#c77e0c;}
/* Content */
#content {
background-image:url(images/content_bg.gif);
width:717px;
```



```
}  
img{  
border-width:0px;  
}  
h1{  
color:#000000;  
font-size:14px;  
margin: 20px 0px 20px 0px;  
}  
h2{  
color:#85a157;  
font-size:14px;  
text-align:center;  
width:200px;  
margin: 10px 0px 15px 0px;  
}  
#left {  
float:left;  
width:428px;  
margin-left:27px;  
padding: 0px 10px 30px 0px;  
display:inline;  
}  
#left a{color:#28556b;}  
#left a:hover{color:#c77e0c;}  
#photos a{  
margin-right:14px;  
}  
#right {
```

```
float:right;
width:210px;
padding: 0px 20px 20px 20px;
margin-top:10px;
border-left: #FFF 2px solid;
}
#right a{
color:#c77e0c;
}
#right a:hover{
color:#85a157;
}
/* Footer */
#footerline {
clear:both;
background-image:url(images/footer_bg.gif);
font-size:1px;
height:10px;
}
#footer {
width:717px;
text-align:center;
padding: 20px 0px;
}
```

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **USER REGISTRATION FORM VALIDATION USING JAVASCRIPT**

### **SOURCE CODE**

```
<html>
<head>
<title>user registration form</title>
</head>
<body>
<center>
<script type='text/javascript'>
function validate()
{
var g,c,chk1;
g="";
c="";
chk1="";
for(i=0;i<document.reg.gen.length;i++)
{
if(document.reg.gen[i].checked)
g=document.reg.gen[i].value;
}
for(i=0;i<document.reg.cou.length;i++)
{
if(document.reg.cou[i].selected)
c=document.reg.cou[i].value;
```

```
}
for(i=0;i<document.reg.chk1.length;i++)
{
if(document.reg.chk1[i].checked)
chk1=document.reg.chk1[i].value;
}
if(document.reg.n.value=="")
{
alert("enter your name")
document.reg.n.focus();
}
else if(document.reg.addr.value=="")
{
alert("enter your address")
document.reg.addr.focus();
}
else if(document.reg.ph.value=="")
{
alert("enter your phone number")
document.reg.ph.focus();
}
else if(g=="")
{
alert("Select your gender")
document.reg .gen.focus();
}
else if(document.reg.id.value=="")
{
alert("enter your mail id ")
}
```

```

document.reg.id.focus();
}
else if(c=="")
{
alert("select your country")
document.reg .cou.focus();
}
else if(chk1=="")
{
alert("Check your hobbies")
document.reg .chk1.focus();
}
else
{
alert("Registration Successful")
}
}
</script>
<form name="reg" method="post">
<center><strong>
<font color="voilet"> USER REGISTRATION FORM VALIDATION </font>
</strong></center>
<hr><table width="30%" cellpadding="15" cellspacing="0" border="0">
<tr>
<td>
<b>Name:<td><input type="text" name="n">
</tr> <tr>
<td><b>Address:<td><textarea rows="4" columns="4" name="addr">
</textarea>

```

```

</tr> <tr>
<td><b>Phone:<td><input type="text" size="15" name="ph">
</tr> <tr>
<td><b>Gender:<td><input type="radio" name="gen" value="ml">male
<input type="radio" name="gen" value="fl">female
</tr>
<tr>
<td><b>E-mail:<td><input type="text" name="id" size="20">
</tr> <tr>
<td><b>Country:<td><select name="cou">
<option><option value=India> India
<option><option value= Pakistan>Pakistan
<option><option value= Australia>Australia
</select>
</tr> <tr>
<td><b>Hobbies:
<td><br><br><input type="checkbox" name="chk1" value="sing">Sing
<br><input type="checkbox" name="chk1" value="Play">Play
<br><input type="checkbox" name="chk1" value="Read">Read
<br><br>
</tr> <tr>
<td><center><input type="button" value="Register" OnClick=validate()></center>
<td><center><input type="reset" value="Reset Me"></center>
</tr>
</center>
</table>
</form>
</body>
</html>

```

## OUTPUT

user registration form - Windows Internet Explorer

E:\web\lab\ed.html

Search the web Search

user registration form

### USER REGISTRATION FORM VALIDATION

**Name:** K Priya keerthana

**Address:** No:56, 1st crossa,  
Gandhi Nagar,  
Pondicherry-9

**Phone:** 9500650164

**Gender:** ☐ male ☒ female

**E-mail:** keerthana@gmail.com

**Country:** India

**Hobbies:** ☐ Sing  
☒ Play  
☒ Read

Message from webpage

Registration Successful

OK

Done Computer | Protected Mode: Off 100%

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **USER REGISTRATION FORM VALIDATION USING JAVASCRIPT**

### **SOURCE CODE**

```
<html>
<head>
<title>Form Validation Example</title>
<script>
function ValidateContactForm()
{
    var name = document.ContactForm.Name;
    var email = document.ContactForm.Email;
    var phone = document.ContactForm.Telephone;
    var nocall = document.ContactForm.DoNotCall;
    var what = document.ContactForm.Subject;
    var comment = document.ContactForm.Comment;
    if (name.value == "")
    {
        window.alert("Please enter your name.");
        name.focus();
        return false;
    }
    if (email.value == "")
    {
        window.alert("Please enter a valid e-mail address.");
        email.focus();
```



```
return false;
}
if (email.value.indexOf("@", 0) < 0)
{
window.alert("Please enter a valid e-mail address.");
email.focus();
return false;
}
if (email.value.indexOf(".", 0) < 0)
{
window.alert("Please enter a valid e-mail address.");
email.focus();
return false;
}
if ((nocall.checked == false) && (phone.value == ""))
{
window.alert("Please enter your telephone number.");
phone.focus();
return false;
}
if (what.selectedIndex < 1)
{
alert("Please tell us how we can help you.");
what.focus();
return false;
}
if (comment.value == "")
{
window.alert("Please provide a detailed description or comment.");
```

```
comment.focus();
return false;
}
return true;
}
function EnableDisable(chkbox)
{
    if(chkbox.checked == true)
    {
        document.ContactForm.Telephone.disabled = true;
    }
    else
    {
        document.ContactForm.Telephone.disabled = false;
    }
}
</script>
</head>
<body>
<center><font color="blue" size="5"><h1>Validation Form</h1></font></center>
<hr>
<br>
<form method="post" action="mailto:paul@drsjspaulmcet.edu.in"
name="ContactForm" onsubmit="return ValidateContactForm();">
<center>
<table>
<tr><td>Name: </td>
<td><input type="text" size="65" name="Name"></td>
</tr>
```

```

<tr><td>E-mail Address: </td>
<td> <input type="text" size="65" name="Email"></td>
</tr><tr><td>Telephone: </td>
<td> <input type="text" size="65" name="Telephone"></td>
</tr>
</tr><tr><td colspan="2"> <input type="checkbox" name="DoNotCall"
onclick="EnableDisable(this);"> Please do not call me.</td>
</tr>
<tr><td>What can we help you with? </td>
<td> <select type="text" value="" name="Subject">
<option> </option>
<option>Customer Service</option>
<option>Question</option>
<option>Comment</option>
<option>Consultation</option>
<option>Other</option>
</select></td>
</tr>
<tr><td>Comments: </td>
<td><textarea cols="55" name="Comment"> </textarea></td>
</tr>
<tr><td><input type="submit" value="Send" name="submit"></td>
<td><input type="reset" value="Reset" name="reset"></td>
</tr>
</table>
</center>
</form>
</body>
</html>

```

## OUTPUT

Form Validation Example - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address C:\Documents and Settings\Administrator\Desktop\Java Record\Java Record\validation.html

### Validation Form

Name:

E-mail Address:

Telephone:

☐ Please do not call me.

What can we help you with?

Comments:

Microsoft Internet Explorer

Please enter your name.

Form Validation Example - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address C:\Documents and Settings\Administrator\Desktop\Java Record\Java Record\validation.html

### Validation Form

Name:

E-mail Address:

Telephone:

☐ Please do not call me.

What can we help you with?

Comments:

Microsoft Internet Explorer

Please enter a valid e-mail address.

Form Validation Example - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address C:\Documents and Settings\Administrator\Desktop\Java Record\Java Record\validation.html

### Validation Form

Name:

E-mail Address:

Telephone:

☐ Please do not call me.

What can we help you with?

Comments:

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

**USER REGISTRATION FORM VALIDATION USING VBSCRIPT**

**SOURCE CODE**

```
<html>
<head>
<script language="vbscript">
function radiogroupvalid(radgroup)
dim radno
radiogroupvalid=false
for radno=0 to radgroup.length-1
if radgroup(radno).checked=true then
radiogroupvalid=true
end if
next
end function
function countryvalid(cgroup)
dim cno
countryvalid=false
for cno=0 to cgroup.length-1
if cgroup(cno).selected=true then
countryvalid=true
end if
next
end function
function checkboxvalid(checkgroup)
```

```

dim checkno
checkboxvalid=false
for checkno=0 to checkgroup.length-1
if checkgroup(checkno).checked=true then
checkboxvalid=true
end if
next
end function
sub cmduserinfo_OnClick()
if len(form.txtname.value)<2 or IsNumeric(form.txtname.value) then
msgbox("type a valid name")
form.txtname.focus
form.txtname.select
elseif len(form.txtage.value)="" or Not IsNumeric(form.txtage.value) then
msgbox("type a valid age")
form.txtage.focus
form.txtage.select
elseif len(form.txtph.value)="" or Not IsNumeric(form.txtph.value) then
msgbox("type a valid phone number")
form.txtph.focus
form.txtph.select
elseif not radiogroupvalid(form.gender)then
msgbox("enter the gender")
elseif (form.txtmail.value ="") then
msgbox("enter the valid email")
form.txtmail.focus
form.txtmail.select
elseif instr(form.txtmail.value,"@")=0 then
msgbox("type a valid email")

```

```

form.txtmail.focus
elseif not countryvalid(form.country)then
msgbox("select your country")
elseif not checkboxvalid(form.hob)then
msgbox("check your hobbies")
else
msgbox("Registration Successful!!!")
end if
end sub
</script>
</head>
<body>
<form name="form" method="post">
<center>
<center><strong> <font color="voilet">USER REGISTRATION FORM VALIDATION
using VBSCRIPT</font></strong></center>
<hr>
<table width="30%" cellpadding="35" cellspacing="0" border="0"
<tr>
<td>
<b>Name:</b><td><input type="text" name="txtname">
</tr>
<tr>
<td><b>Age:</b><td><input type="text" name="txtage">
</tr>
<tr>
<td><b>Phone:</b><td><input type="text" size="15" name="txtph">
</tr>
<tr><td><b>Gender:</b><td><input type=radio name=gender >Male

```

```

<input type=radio name=gender >Female
</tr>
<tr>
<td><b>E-mail:<td><input type="text" name="txtmail" >
</tr>
<tr>
<td><b>Country:<td><select name="country" size="3">
<option><option value=India> India
<option><option value= Pakistan>Pakistan
<option><option value= Australia>Australia
</select>
</tr>
<tr>
<td><b>Hobbies:</b>
<td><input type=checkbox name=hob value=read>read
<input type=checkbox name=hob value=sing>sing
<input type=checkbox name=hob value=play>play</tr>
<tr>
<td><center><input type="button" name="cmduserinfo" value="Register"></center>
<td><center><input type="reset" value="Reset Me"></center>
</tr>
</table>
</center>
</form>
</body>
</html>

```



## OUTPUT

user registration form - Windows Internet Explorer

E:\web lab\lab1.html

Search the web

user registration form

**USER REGISTRATION FORM VALIDATION using VBscript**

**Name:** K.Priya Keerthana

**Address:** No:155, 1st cross,  
Gandhi Nagar,  
Pondicherry-9

**Phone:** 9500850194

**Gender:** ☒ male ☐ female

**E-mail:** keerthana@gmail.com

**Country:** India

**Hobbies:** ☐ Sing  
☒ Play  
☐ Read

Message from webpage  
Registration Successful  
OK

Done Computer | Protected Mode: Off 100%

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

### **EMPLOYEE PAYROLL USING VBSCRIPT**

#### **SOURCE CODE**

```
<html>
<head>
<Script Language="VBScript">
<!--
Sub GiveFocus
    Document.EmployeesPayroll.txtFirstName.Focus()
End Sub

Function GetFullName()
    Dim FirstName, LastName
    FirstName = Document.EmployeesPayroll.txtFirstName.Value
    LastName = Document.EmployeesPayroll.txtLastName.Value
    GetFullName = LastName & ", " & FirstName
End Function

Function CalculateWeeklySalary(HourlySalary, WeeklyHours, OverTimeHours)
    dim OverTimeSalary
    OverTimeSalary=OverTimeHours*1.5*HourlySalary
    WeeklyHours=WeeklyHours-OverTimeHours
    CalculateWeeklySalary = (HourlySalary * WeeklyHours)+OverTimeSalary
End Function

Sub ProcessPayroll()
    Dim dMon, dTue, dWed, dThu, dFri, dSat, dSun, TotalHours,OverTimeHours
    Dim HourlySalary, WeeklySalary
```

```

Dim FullName
dMon = CDb1(Document.EmployeesPayroll.txtMon.Value)
dTue = CDb1(Document.EmployeesPayroll.txtTue.Value)
dWed = CDb1(Document.EmployeesPayroll.txtWed.Value)
dThu = CDb1(Document.EmployeesPayroll.txtThu.Value)
dFri = CDb1(Document.EmployeesPayroll.txtFri.Value)
dSat = CDb1(Document.EmployeesPayroll.txtSat.Value)
dSun = CDb1(Document.EmployeesPayroll.txtSun.Value)
HourlySalary = Document.EmployeesPayroll.txtHourlySalary.Value
TotalHours = dMon + dTue + dWed + dThu + dFri + dSat + dSun
if(TotalHours>56)then
OverTimeHours=TotalHours-56
else
OverTimeHours=0
end if
WeeklySalary = CalculateWeeklySalary(HourlySalary, TotalHours,OverTimeHours)
FullName = GetFullName()
PayrollResults.txtFullName.Value = FullName
PayrollResults.txtWeeklyEarnings.Value = "$" & WeeklySalary
End Sub
-->
</Script>
<title>Employees Payroll</title>
</head>
<body OnLoad="GiveFocus()">
<h1>Employees Payroll</h1>
<form name="EmployeesPayroll" method="POST">
<table border="0" width="548">
<tr>

```

```

<td width="104">First Name:</td>
<td width="430"><input type="text" name="txtFirstName" size="20"></td>
</tr>
<tr>
<td width="104">LastName:</td>
<td width="430"><input type="text" name="txtLastName" size="20"></td>
</tr>
</table>
<table border="0" width="548">
<tr>
<td width="104">Hourly Salary</td>
<td width="428"><input type="text" name="txtHourlySalary" size="10" value="0.00"></td>
</tr>
</table>
<table border="0" width="563">
<tr>
<td width="124">Weekly Hours</td>
<td width="62" align="center">Mon</td>
<td width="62" align="center">Tue</td>
<td width="62" align="center">Wed</td>
<td width="62" align="center">Thu</td>
<td width="62" align="center">Fri</td>
<td width="62" align="center">Sat</td>
<td width="62" align="center">Sun</td>
</tr>
<tr>
<td width="124"></td>
<td width="62" align="center"><input type="text" name="txtMon" size="6"
value="0.00"></td>

```

[illegible]

```
<table border="0" width="546">
  <tr>
    <td width="113">Full Name:</td>
    <td width="419"><input type="text" name="txtFullName" size="20"></td>
  </tr>
</table>
<table border="0" width="545">
  <tr>
    <td width="112">Weekly Earnings:</td>
    <td width="419"><input type="text" name="txtWeeklyEarnings" size="20"
value="$0.00"></td>
  </tr>
</table>
</form>
</body>
</html>
```

OUTPUT

Employees Payroll

file:///D:/Staff%20Data/MSug/MSugIII%20LabPrograms/Copy%20of%20payroll.html

For quick access, place your bookmarks here on the bookmarks bar. [Import bookmarks now...](#)

# Employees Payroll

First Name:

Last Name:

Hourly Salary:

Weekly Hours: 

| Mon                               | Tue                               | Wed                               | Thu                               | Fri                               | Sat                               | Sun                               |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| <input type="text" value="0.00"/> | <input type="text" value="0.00"/> | <input type="text" value="0.00"/> | <input type="text" value="0.00"/> | <input type="text" value="0.00"/> | <input type="text" value="0.00"/> | <input type="text" value="0.00"/> |

Process

Reset

Full Name:

Weekly Earnings:

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **APACHE TOMCAT SERVER**

### **Step 1:**

Installation of JDK:

Before beginning the process of installing Tomcat on your system, ensure first the availability of JDK on your system program directory. Install it on your system if not already installed (because any version of tomcat requires the Java 1.6 or higher versions) and then set the class path (environment variable) of JDK. To set the JAVA\_HOME Variable: you need to specify the location of the java run time environment to support the Tomcat else Tomcat server cannot run.

This variable contains the path of JDK installation directory.

set JAVA\_HOME=C:\Program Files\Java\jdk1.6

Note: it should not contain the path up to bin folder. Here, we have taken the URL path according

to our installation convention.

For Windows OS, go through the following steps:

Start menu->Control Panel->System->Advanced tab->Environment Variables->New->

set the Variable name = JAVA\_HOME and variable value = C:\Program Files\Java\jdk1.6

Now click on all the subsequent ok buttons one by one. It will set the JDK path.

### **Step 2:**

For setting the class path variable for JDK, do like this:

Start menu->Control Panel->System->Advanced tab->Environment Variables->New->

Set PATH="C:\Program Files\Java\jdk1.6\bin"; %PATH%

OR

First, right click on the

My Computer->properties->advance->Environment Variables->path.




Now, set bin directory path of JDK in the path variable

### Step 3:

The process of installing Tomcat 6.0 begins here from now. It takes various steps for installing and configuring the Tomcat 6.0.


For Windows OS, Tomcat comes in two forms: .zip file and .exe file (the Windows installer file). Here we are exploring the installation process by using the .exe file. First unpack the zipped file and simply execute the '.exe' file.

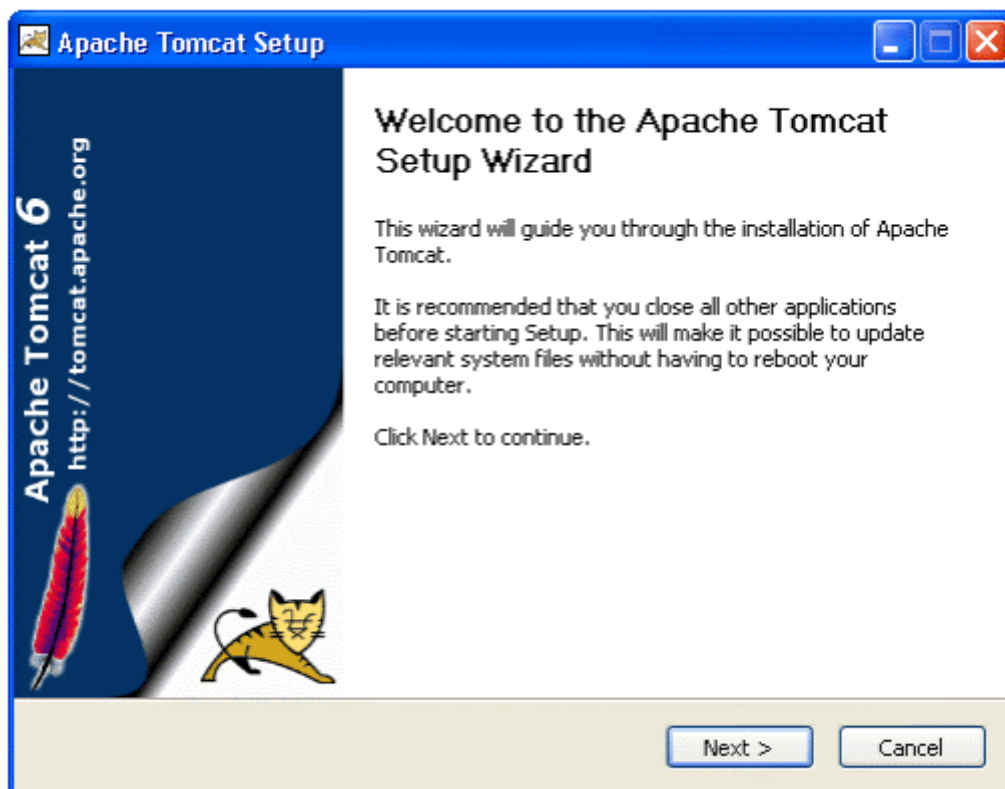

A Welcome screen shot appears that shows the beginning of installation process. Just click on the 'Next' button to proceed the installation process.

### Steps 4:


A screen of 'License Agreement' displays.

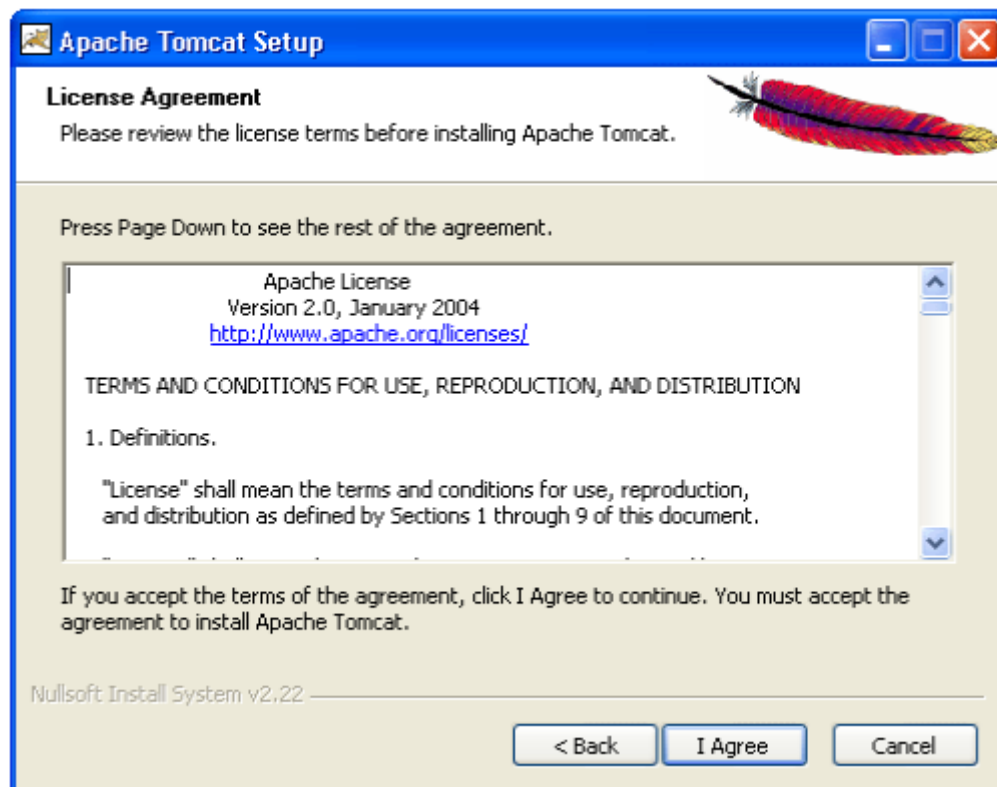

Click on the 'I Agree' button.

#### Step 5:


A screen shot appears asking for the 'installing location'

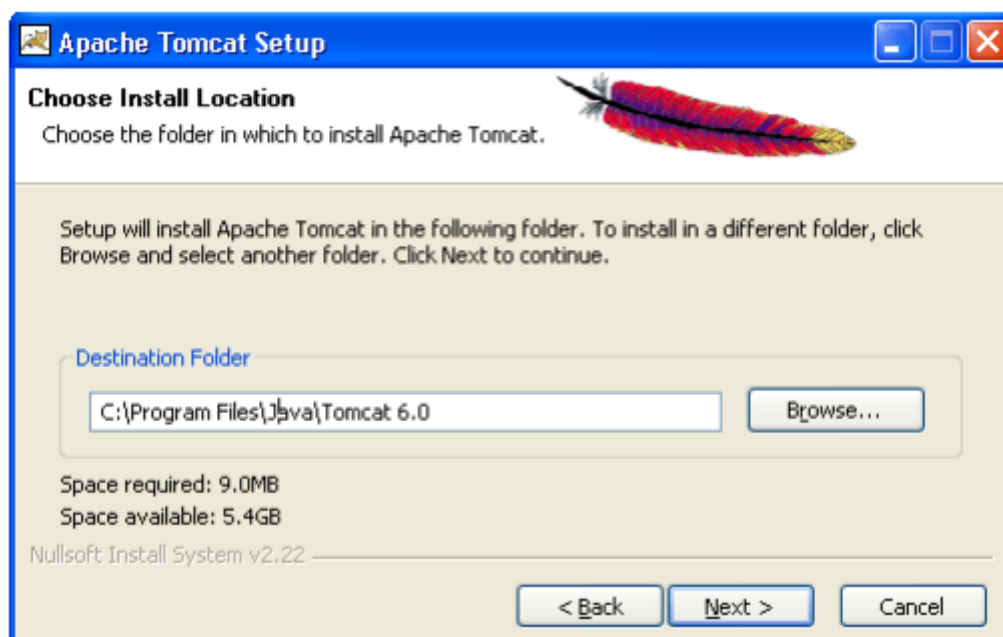

Choose the default components and click on the 'Next' button.

### Step 6:

A screen shot of 'Configuration Options' displays on the screen. Choose the location for the Tomcat files as per your convenience. You can also opt the default Location

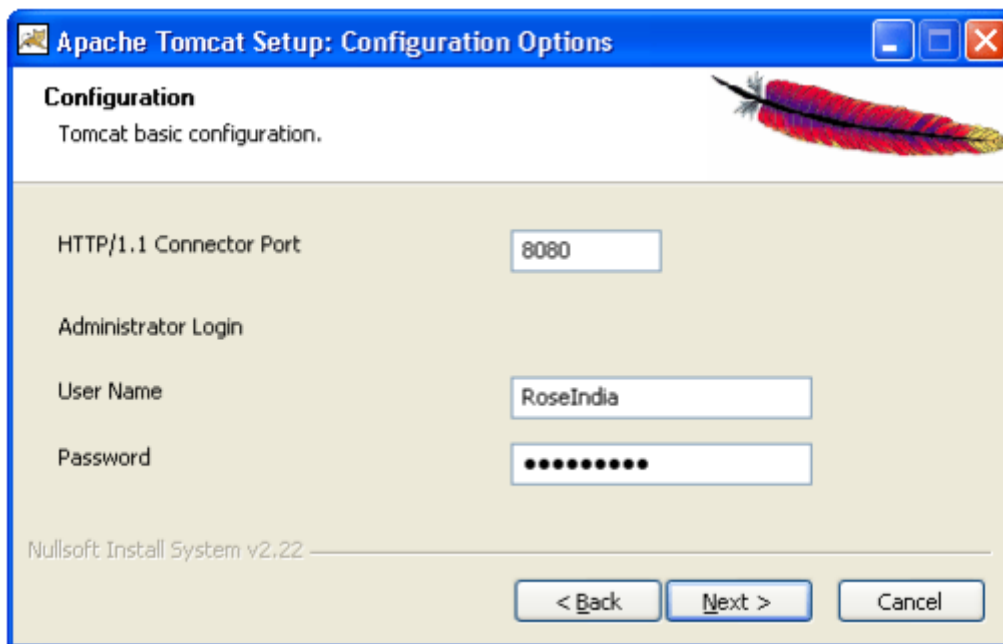


The port number will be your choice on which you want to run the tomcat server. The port number 8080 is the default port value for tomcat server to proceed the HTTP requests. The user can also change the 'port number' after completing the process of installation; for this, users have to follow the following tips.

Go to the specified location as " Tomcat 6.0 \conf \server.xml ". Within the server.xml file choose "Connector" tag and change the port number.

Now, click on the 'Next' button to further proceed the installation process.

### Step 7:


A Window of Java Virtual Machine displays on the screen

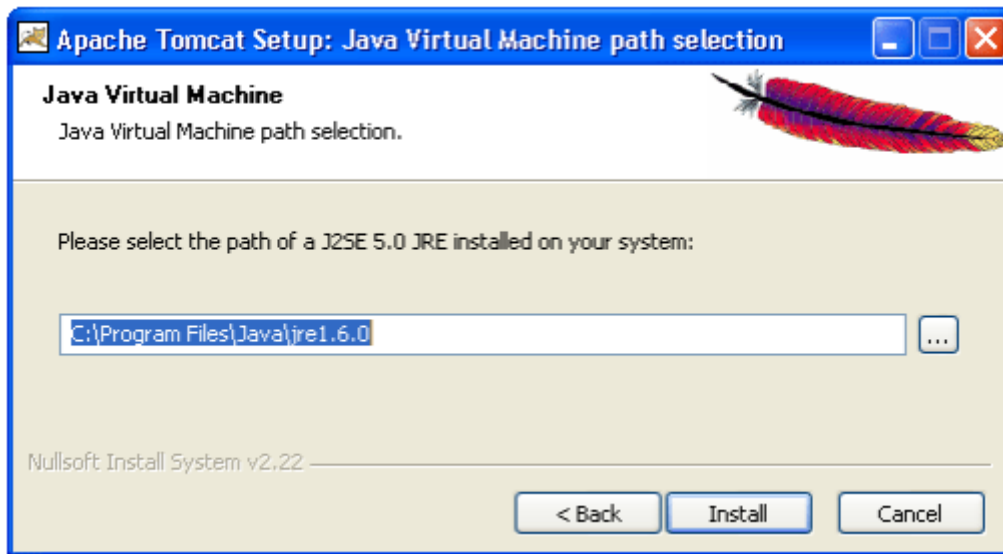

This window asks for the location of the installed Java Virtual Machine. Browse the location of the JRE folder and click on the Install button. This will install the Apache tomcat at the specified location.

#### Step 8:


A processing window of installing displays on the screen.

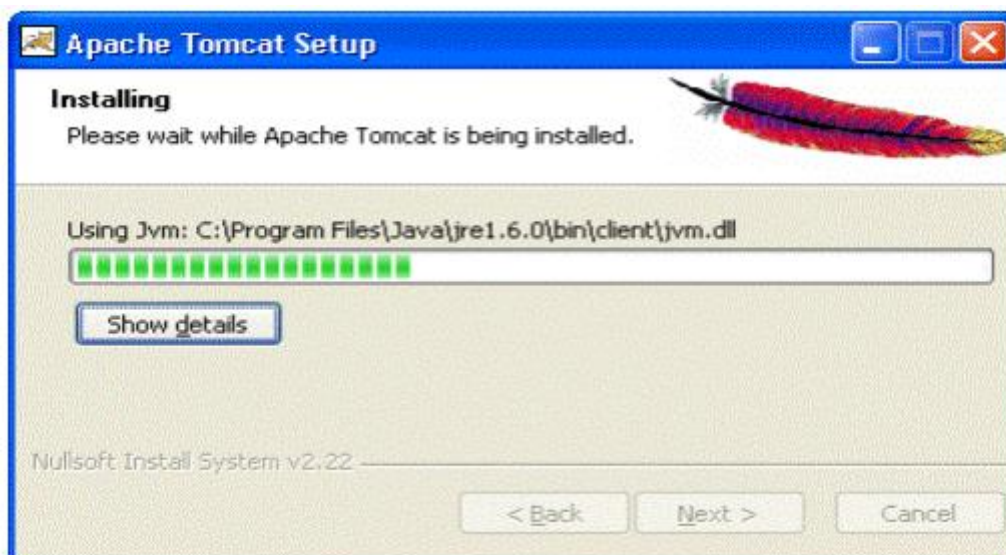

To get the information about installer click on the "Show details" button

#### Step 9:


A screen shot of 'Tomcat Completion' displays on the screen.

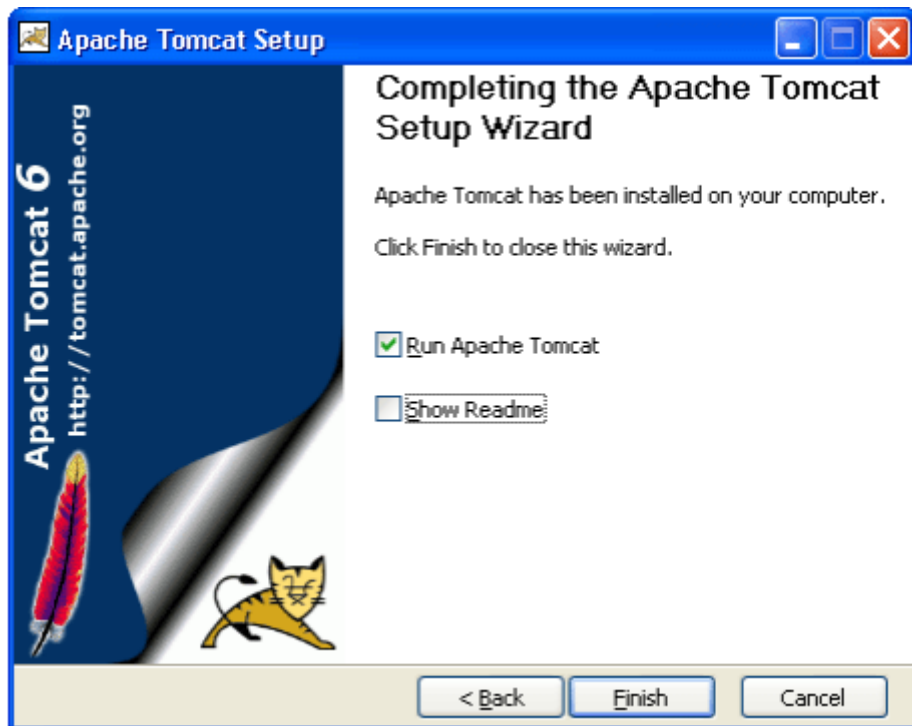

Click on the 'Finish' button.

**Step 10:**

A window of Apache Service Manager appears with displaying the running process.

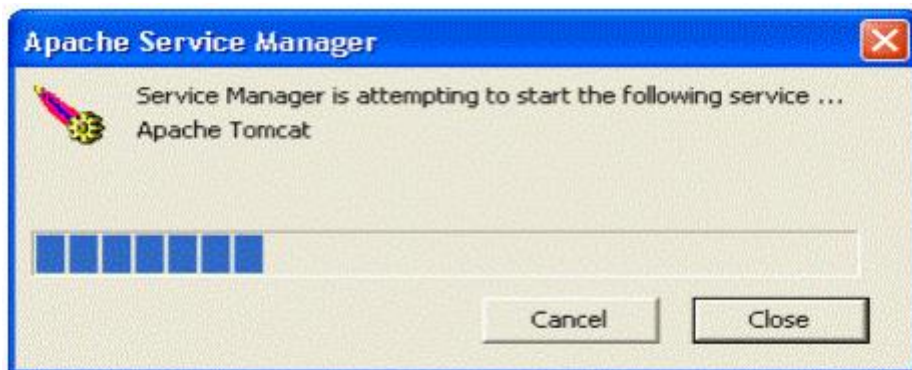

Let the running process goes on.

**Step 11:**

After completing the installation process, the Apache Tomcat Manager appears on the toolbar panel like shown in the below picture.




## Apache Tomcat Manager

### Configuring Tomcat Manager

To Configure the Tomcat Manager, there are two ways; either user can configure Tomcat directly from the toolbar panel or can configure it from Control Panel Section.

#### i-) Configuring from toolbar Panel

To Configure Apache Tomcat web server from the toolbar panel, you have to press 'double click' on the appeared icon.

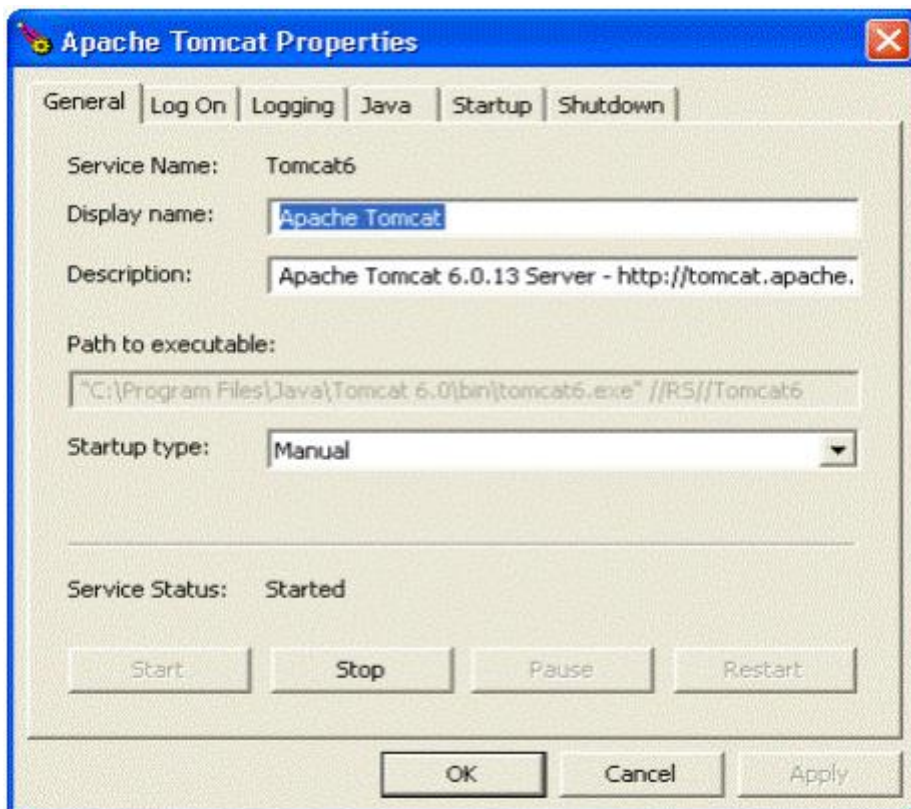

A configured window appears on the desktop. Now, just click on the Startup button. The installation process will be completed.

#### ii-) Configuration from the Control Panel

To configure the Apache Tomcat Manager, Users will have to follow the following steps:




Click on the Startup button -- select Control Panel -- Administrator Tool -- Services -- select Apache Tomcat.

The following screen displays on the monitor.

|                                                                                     |                         |                                                                                           |         |           |             |
|-------------------------------------------------------------------------------------|-------------------------|-------------------------------------------------------------------------------------------|---------|-----------|-------------|
|    | .NET Runtime Optim...   | Microsoft .NET Framework NGEN                                                             |         | Manual    | LocalSystem |
|    | Alert                   | Notifies selected users and computers of a...                                             |         | Manual    | LocalSystem |
|    | Apache Tomcat           | Apache Tomcat 5.5.26 Server - http://tom...                                               |         | Manual    | LocalSystem |
|    | Application Manage...   | Provides software installation services suc...                                            |         | Manual    | LocalSystem |
|    | Automatic Updates       | Enables the download and installation of cri...                                           | Started | Automatic | LocalSystem |
|    | Background Intellig...  | Transfers files in the background using idle ...                                          | Started | Manual    | LocalSystem |
|    | ClipBook                | Supports ClipBook Viewer, which allows pa...                                              |         | Manual    | LocalSystem |
|    | COM+ Event System       | Provides automatic distribution of events t...                                            | Started | Manual    | LocalSystem |
|    | Computer Browser        | Maintains an up-to-date list of computers o...                                            | Started | Automatic | LocalSystem |
|    | DHCP Client             | Manages network configuration by register...                                              | Started | Automatic | LocalSystem |
|    | Distributed Link Tra... | Sends notifications of files moving between...                                            | Started | Automatic | LocalSystem |
|   | Distributed Transac...  | Coordinates transactions that are distributed across two or more databases, message queue |         |           |             |
|  | DNS Client              | Resolves and caches Domain Name System...                                                 | Started | Automatic | LocalSystem |
|  | Event Log               | Logs event messages issued by programs ...                                                | Started | Automatic | LocalSystem |
|  | Fax Service             | Helps you send and receive faxes                                                          |         | Manual    | LocalSystem |
|  | FTP Publishing Service  | Provides FTP connectivity and administrati...                                             | Started | Automatic | LocalSystem |
|  | ITS Admin Service       | Allows administration of Web and FTP servi                                                | Started | Automatic | LocalSystem |

Double click on the Apache Tomcat. The window of Apache Tomcat Properties appears on the screen.

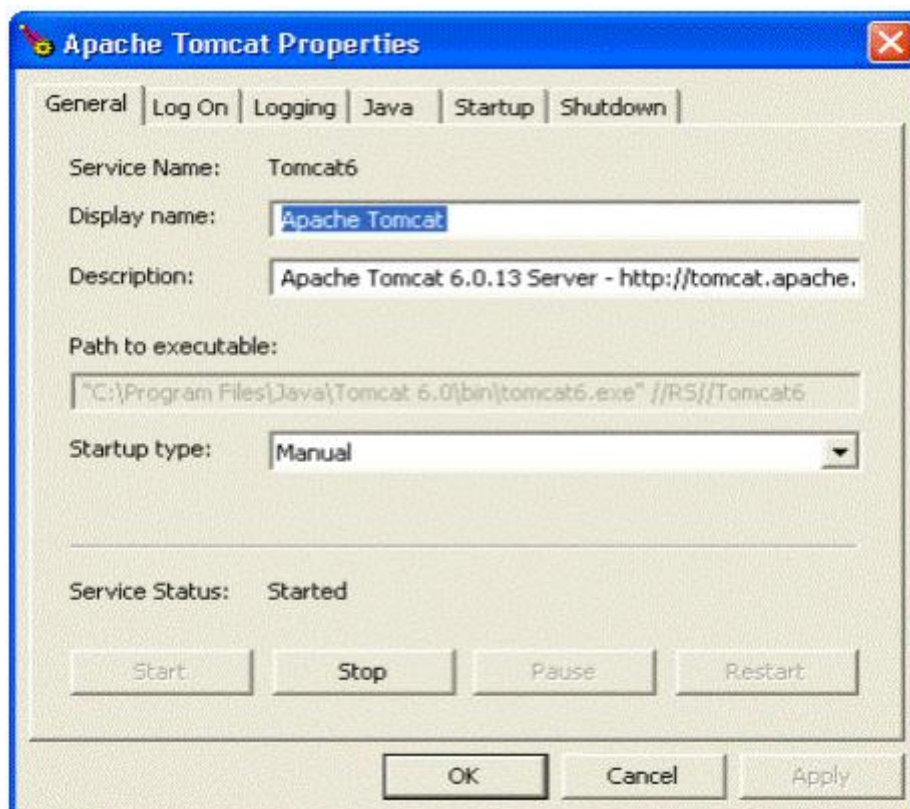

Now, Click on the start up button. The Apache Tomcat is now ready to function.

To operate it, follow the below steps of processing.

Start the Tomcat Server:


1.Start the tomcat server from the bin folder of Tomcat 6.0 directory by double clicking the "tomcat6.exe" file.

OR create a shortcut of this .exe file at your desktop.

2. Now Open web browser and type URL <http://localhost:8080> in the address bar to test the server

3. To Stop the Tomcat Server: Stop the server by pressing the "Ctrl + c" keys.

The screen of Apache Tomcat software looks like this:

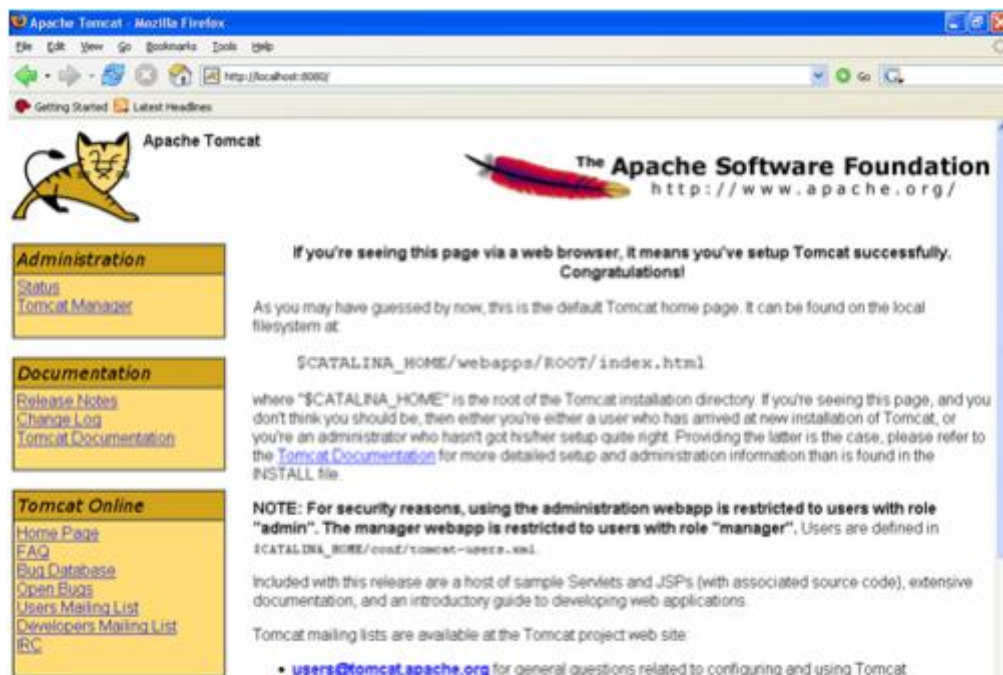




**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**


## **IIS INSTALLATION**

The following steps are needed to install IIS on Windows Xp,

1. Go to Control Panel, click Add or Remove Programs.
2. Select Add/Remove Windows Components.
3. Select Internet Information Services (IIS).

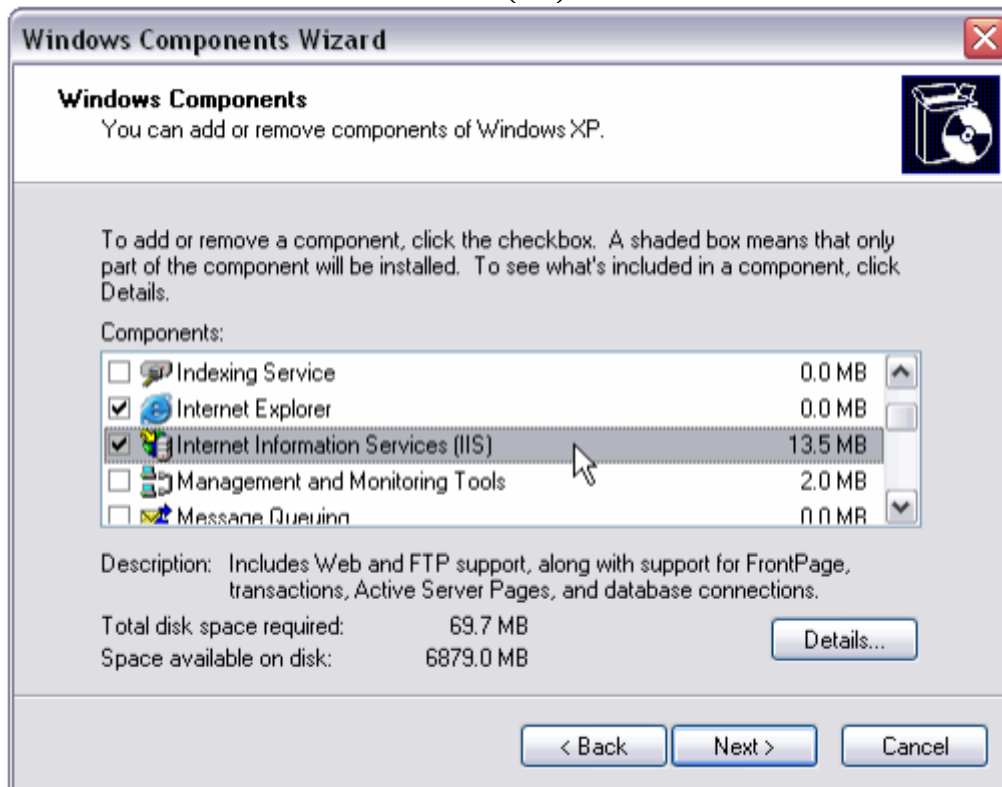

4. Click Details.
5. Uncheck the SMTP protocol.

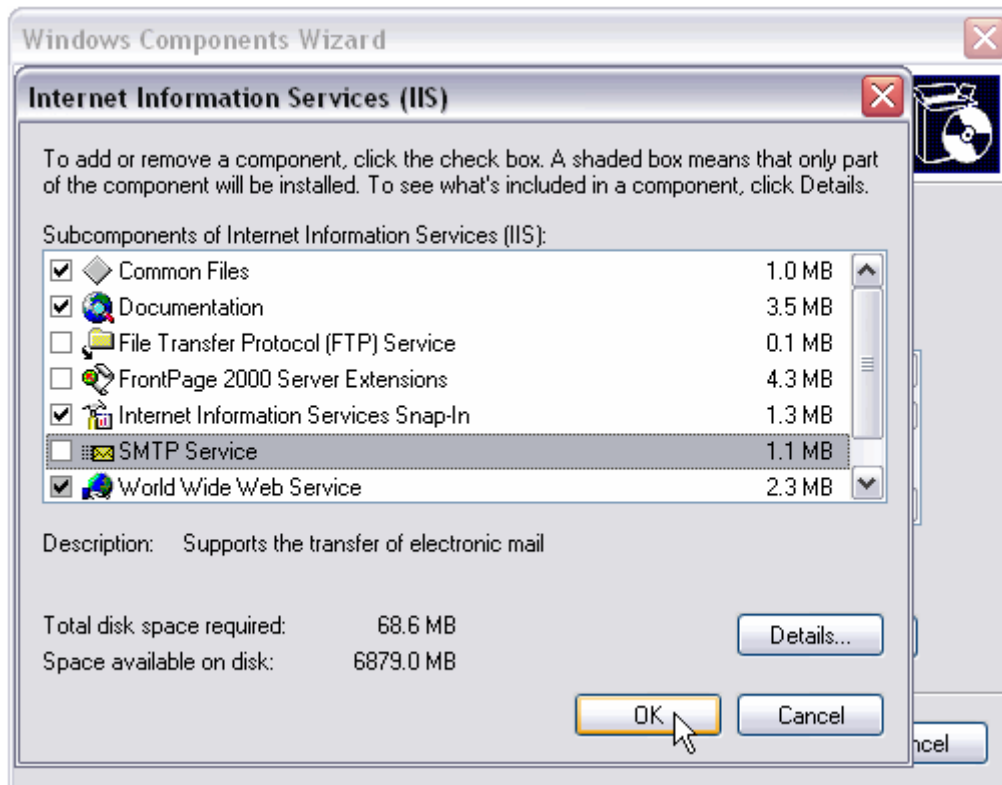


6. Click Ok then Next, and wait for the IIS installation to finish. We will need Windows XP Pro CD, or the i386 source available on the computer or on a network location.


#### Creating the Virtual Directory in IIS

Next we need to create the “Calendar” Virtual Directory in IIS.

1. Open Administrative Tools, then double click Internet Information Services.
2. Expand the view so you can see Default Web Site.
3. Right click on it and choose New -> Virtual Directory.

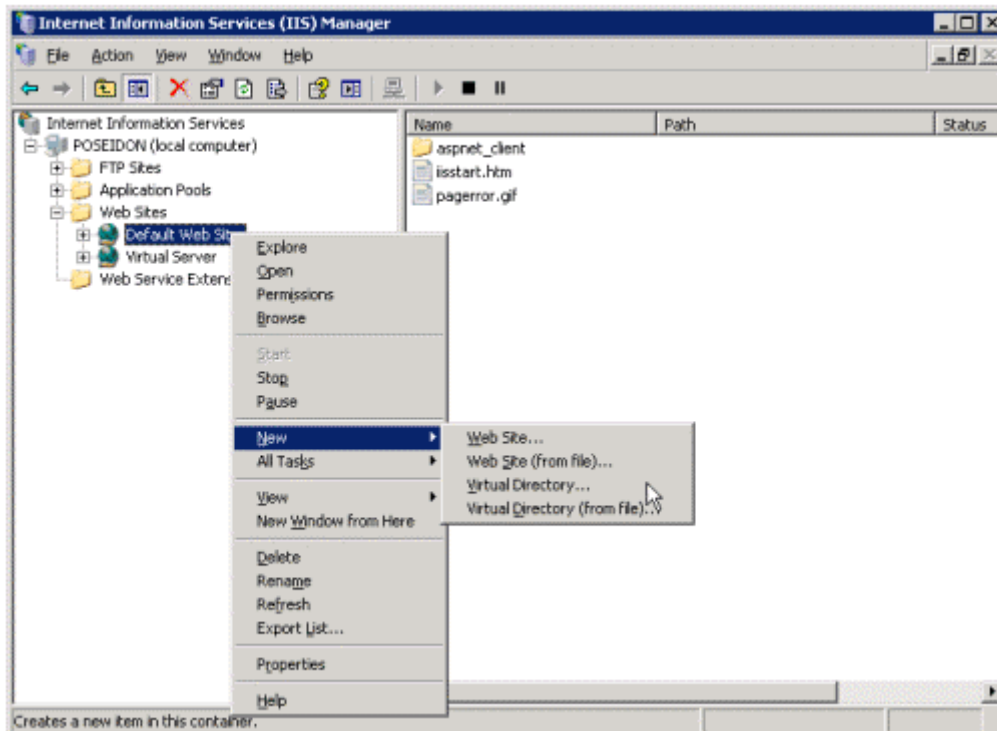


4. In the Virtual Directory wizard click Next.

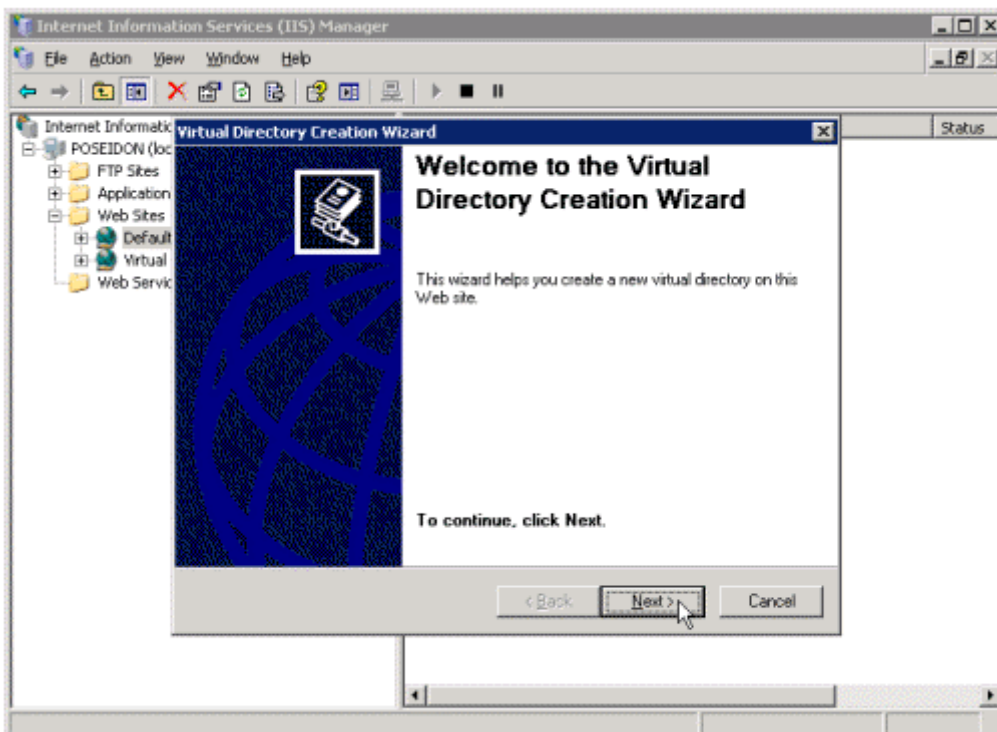


5. In the Alias box, type a descriptive name such as Calendar. We will use this name to access


the calendar virtual directory.

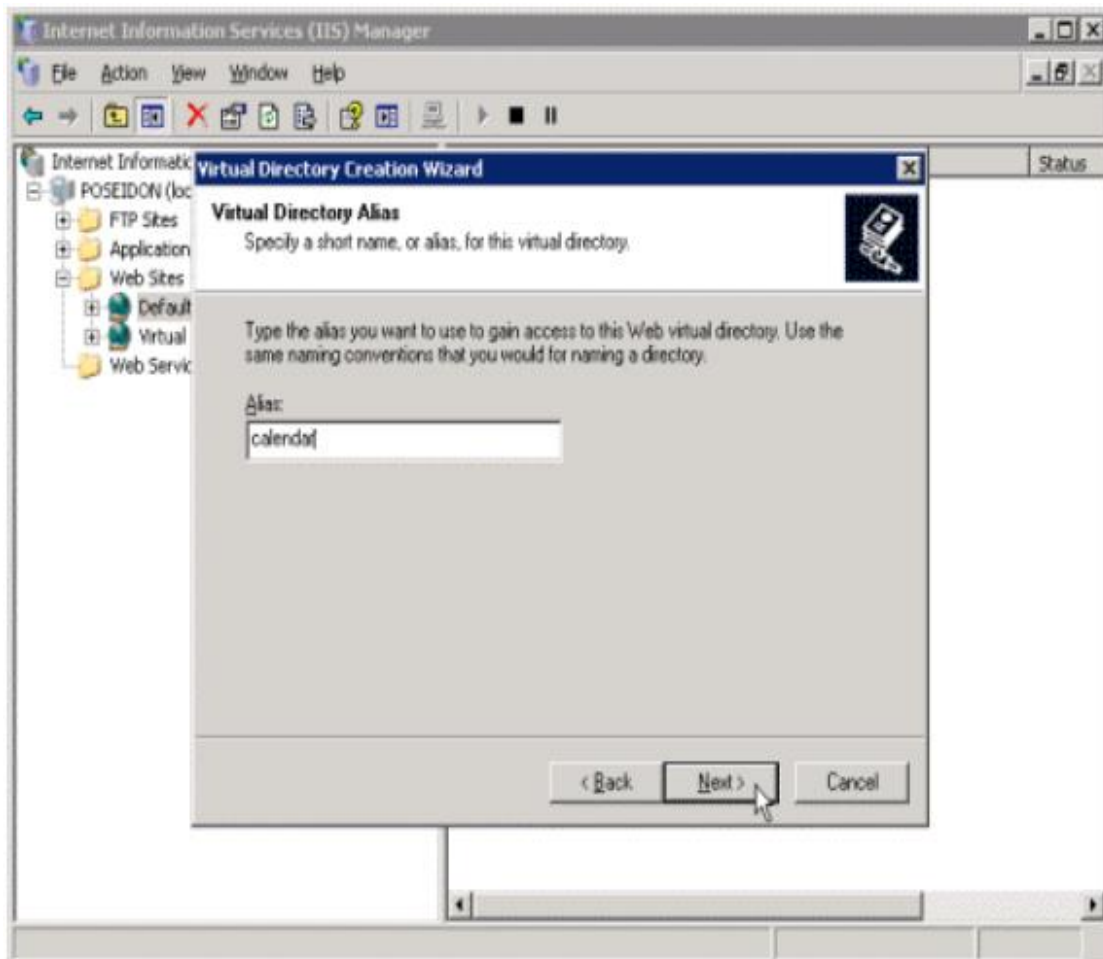


6. In the Path box enter the path to where you want to store the calendar files on the hard drive. This needs to be a folder all users will have access to - I recommend creating a folder in the root of the hard drive, such as D:\Calendar.

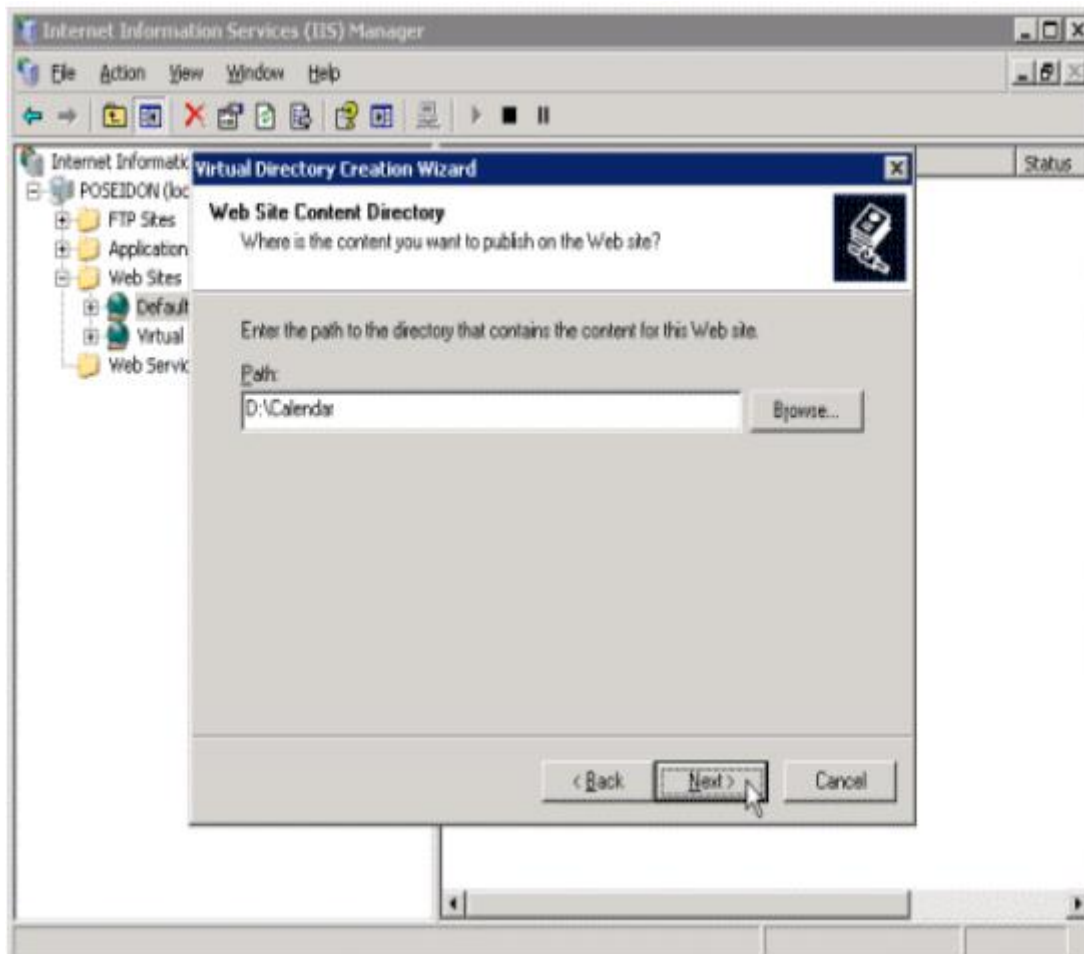

7. We need Read and Write permission on this virtual directory, so select the Write checkbox along with the Read checkbox which is already selected.

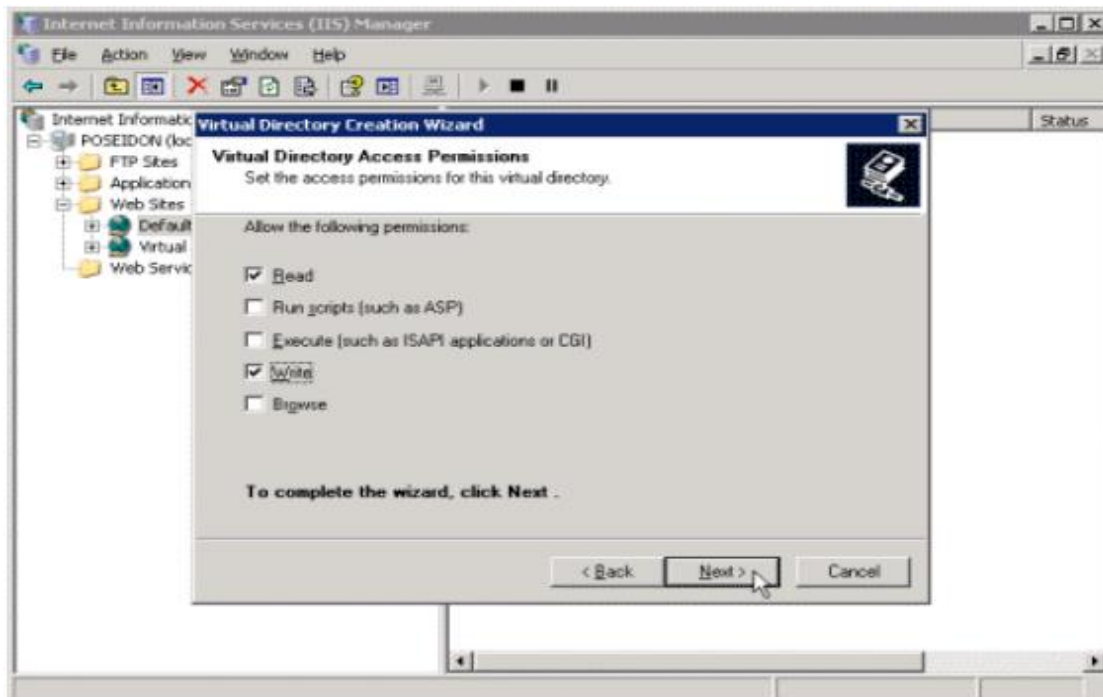

8. Click Finish.

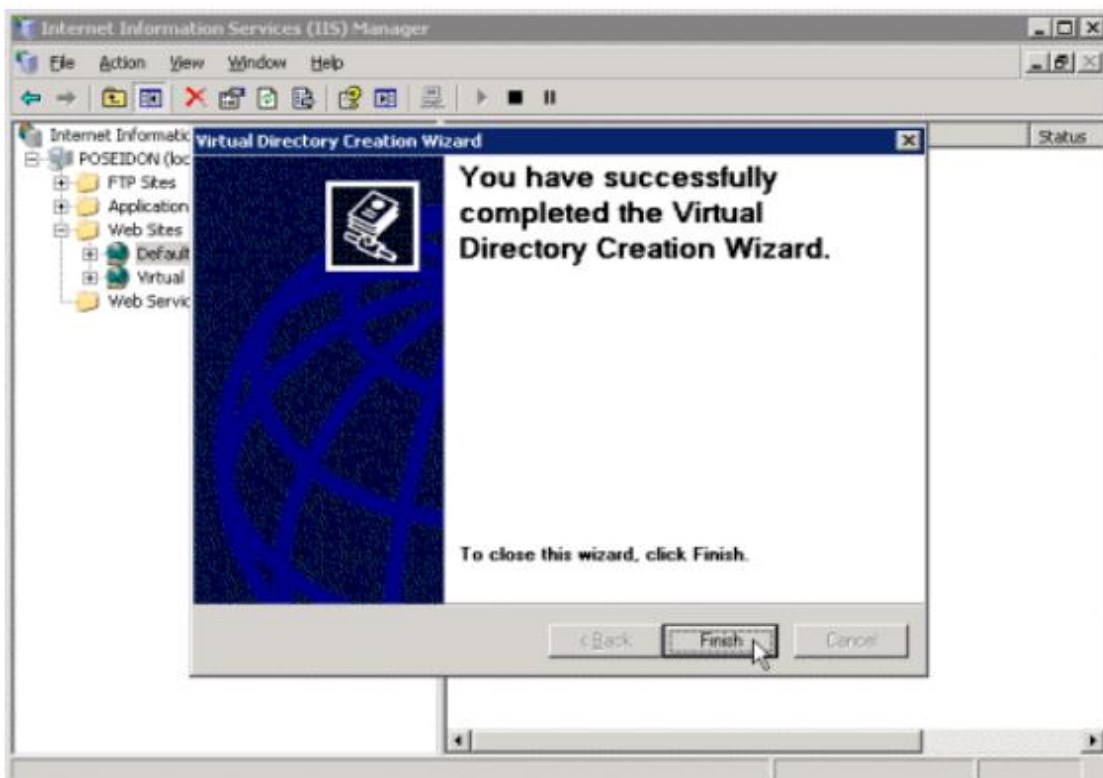

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **ACTIVEX CONTROLS IN WEB DOCUMENTS**

### **SOURCE CODE**

```
<HTML>
<HEAD>
<TITLE> The Calendar Control </TITLE>
</HEAD>
<BODY BGCOLOR="#FFFFFF">
<P><OBJECT ID="Calendar1"
WIDTH=600
HEIGHT=380
CLASSID="CLSID:8E27C92B-1264-101C-8A2F-040224009C02"
ALIGN=LEFT
HSPACE=1>
</OBJECT>
<INPUT TYPE="BUTTON" NAME="PreviousDay" VALUE="< Day">
<BR>
<INPUT TYPE="BUTTON" NAME="PreviousMonth" VALUE="<< Month">
<BR>
<INPUT TYPE="BUTTON" NAME="PreviousYear" VALUE="<<| Year">
<BR>
<INPUT TYPE="BUTTON" NAME="NextYear" VALUE="Year |>>">/P>
<BR>
<INPUT TYPE="BUTTON" NAME="NextMonth" VALUE="Month >>">
<BR>
```

<INPUT TYPE="BUTTON" NAME="NextDay" VALUE="Day >">

</P>

<SCRIPT LANGUAGE="VBScript">

<!--

Calendar1.Year = 1997

Calendar1.Month = 1

Calendar1.Day = 1

Sub PreviousDay\_OnClick

Calendar1.PreviousDay

End Sub

Sub NextDay\_OnClick

Calendar1.NextDay

End Sub

Sub PreviousMonth\_OnClick

Calendar1.PreviousMonth

End Sub

Sub NextMonth\_OnClick

Calendar1.NextMonth

End Sub

Sub PreviousYear\_OnClick

Calendar1.PreviousYear

End Sub

Sub NextYear\_OnClick

Calendar1.NextYear

End Sub

-->


</SCRIPT>

</BODY>

</HTML>



OUTPUT

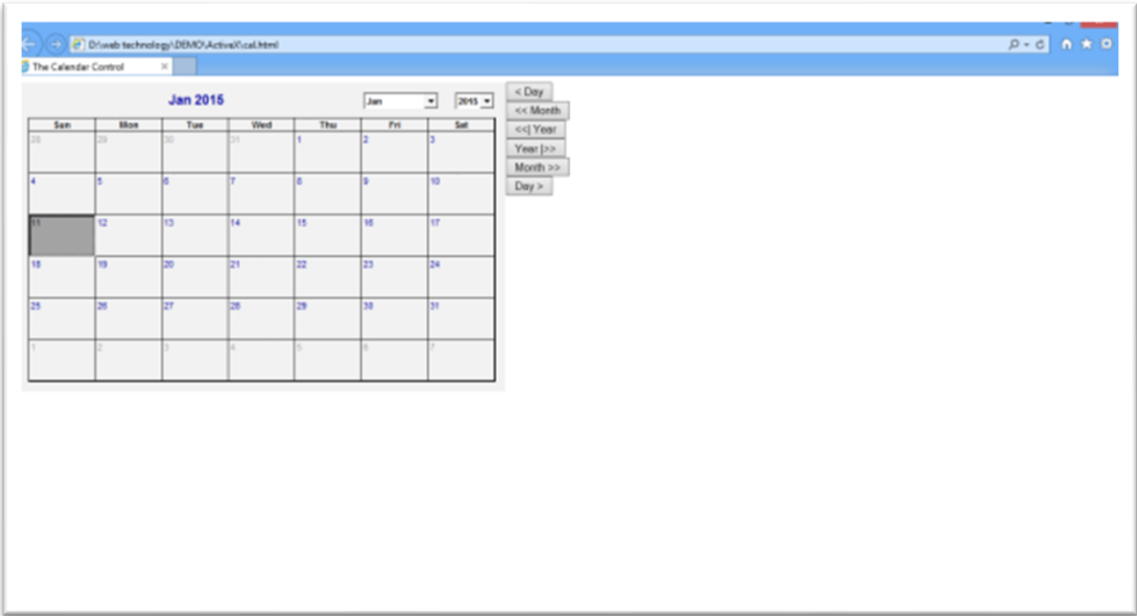

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

### **DATABASE CONNECTION USING JSP**

#### **SOURCE CODE**

##### **Insert.html**

```
<html>
<form method="post" action="http://localhost:8080/my project/insert.jsp">
<table>
<tr>
<td>Name:</td>
<td><input type="text" name="name"></td>
</tr>
<tr>
<td>Password:</td>
<td><input type="password" name="pwd"></td>
</tr>
<tr>
<td><input type="submit" value="Submit"></td>
</tr>
</table>
</form>
</html>
```

##### **Insert.jsp**

```
<%@page import="java.sql.*"%>
<%
```

```

String name=request.getParameter("name");
String pwd=request.getParameter("pwd");
Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
Connection con = DriverManager.getConnection("jdbc:odbc:student");
Statement st=con.createStatement();
int i=st.executeUpdate("insert into user (uname,pwd) values('"+name+"','"+pwd+"')");
out.println("Data is inserted successfully");
%>

```

### **Update.html**

```

<html>
<head>
<title>Update</title>
</head>
<body>
<h2>UPDATION</h2>
<form method="post" action="http://localhost:8080/my project/update.jsp">
<br>
<br>
<table border = "2">
<tr align="left" valign="top">
<td>Name:</td>
<td><input type="text" name ="name"></td>
</tr>
<tr align="left" valign="top">
<td>Role:</td>
<td><input type="text" name ="role" /></td>
</tr>
<tr align="left" valign="top">


```

```
<td></td>
<td><input type="submit" value="submit"/></td>
</tr>
</table>
</form>
</body>
</html>
```



### **Update.jsp**

```
<html><body>
<%@page language="java" import="java.sql.*"%>
<%
String name= request.getParameter("name");
String role= request.getParameter("role");
Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
Connection con = DriverManager.getConnection("jdbc:odbc:student");
Statement st = con.createStatement();
int i =st.executeUpdate("update user set role= '"+role+"' where uname='"+name+"'");
out.println("Updated successfully");
%>
</body>
</html>
```



## OUTPUT

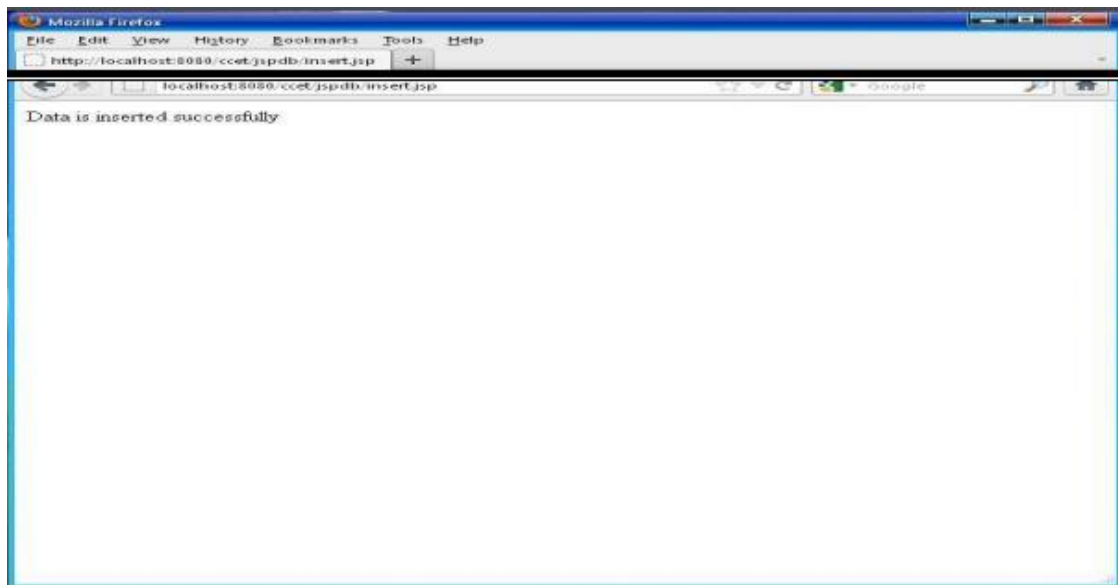


| user |                |     |               |
|------|----------------|-----|---------------|
|      | uname          | pwd | Add New Field |
|      | dhivya         | 555 |               |
|      | nasreen        | 555 |               |
|      | thenu          | 444 |               |
|      | Priya keerthan | 111 |               |
|      | suba           | 333 |               |
|      | sumi           | 222 |               |
| *    |                |     |               |

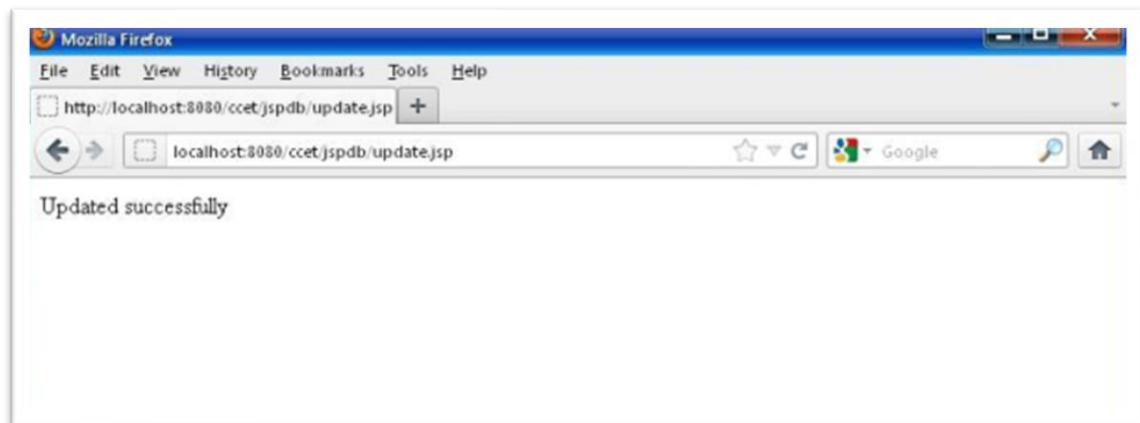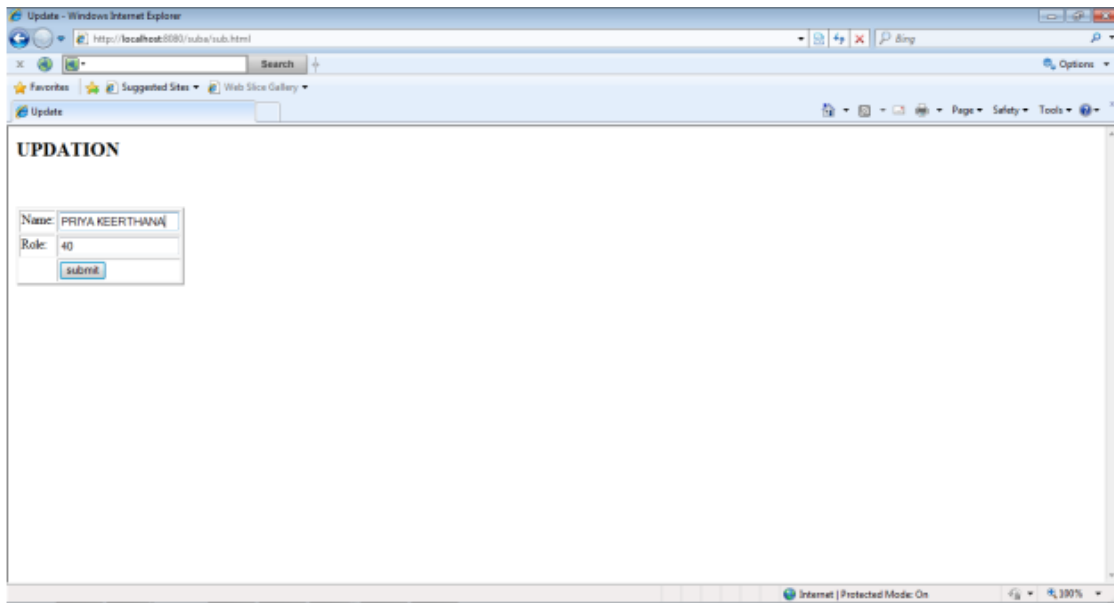

| user           |     |               |  |
|----------------|-----|---------------|--|
| uname          | pwd | Add New Field |  |
| dhivya         | 555 |               |  |
| nasreen        | 555 |               |  |
| thenu          | 444 |               |  |
| Priya keerthan | 111 |               |  |
| suba           | 333 |               |  |
| sumi           | 222 |               |  |
| *              |     |               |  |

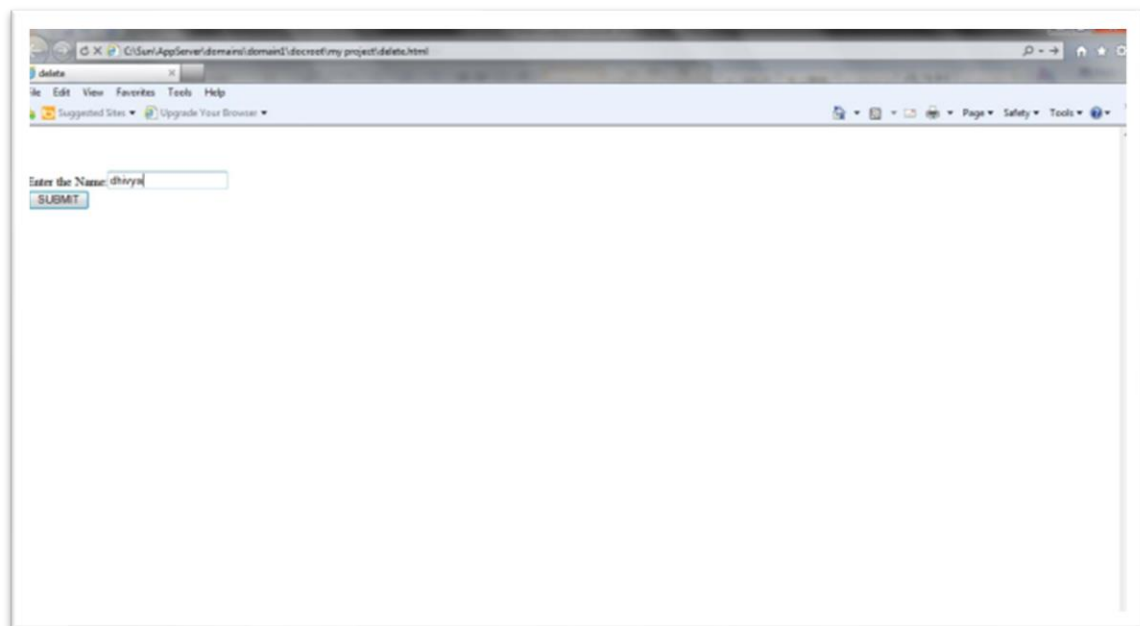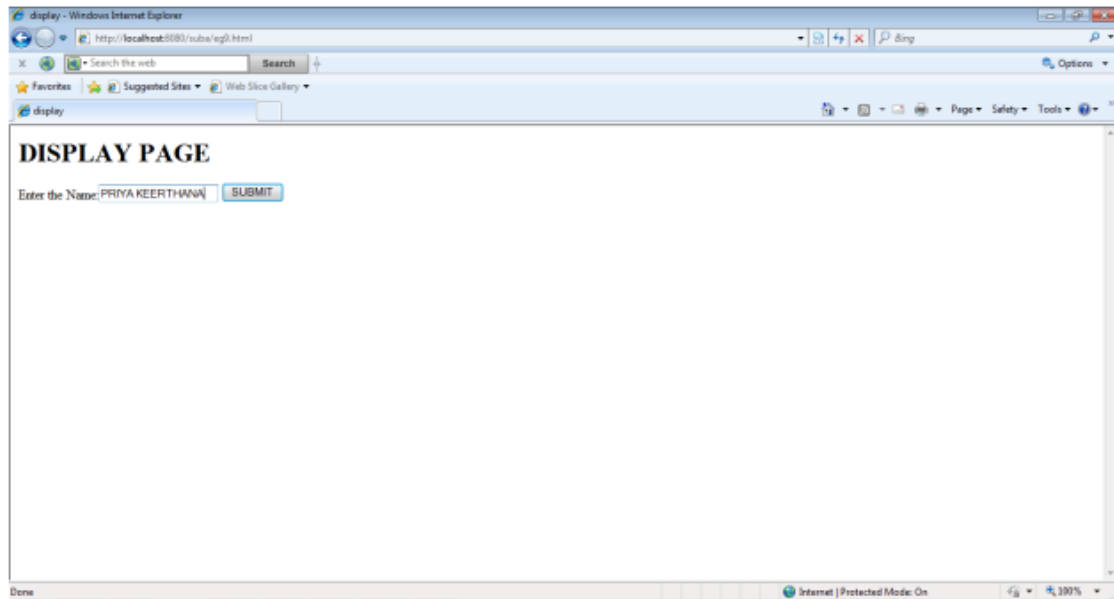

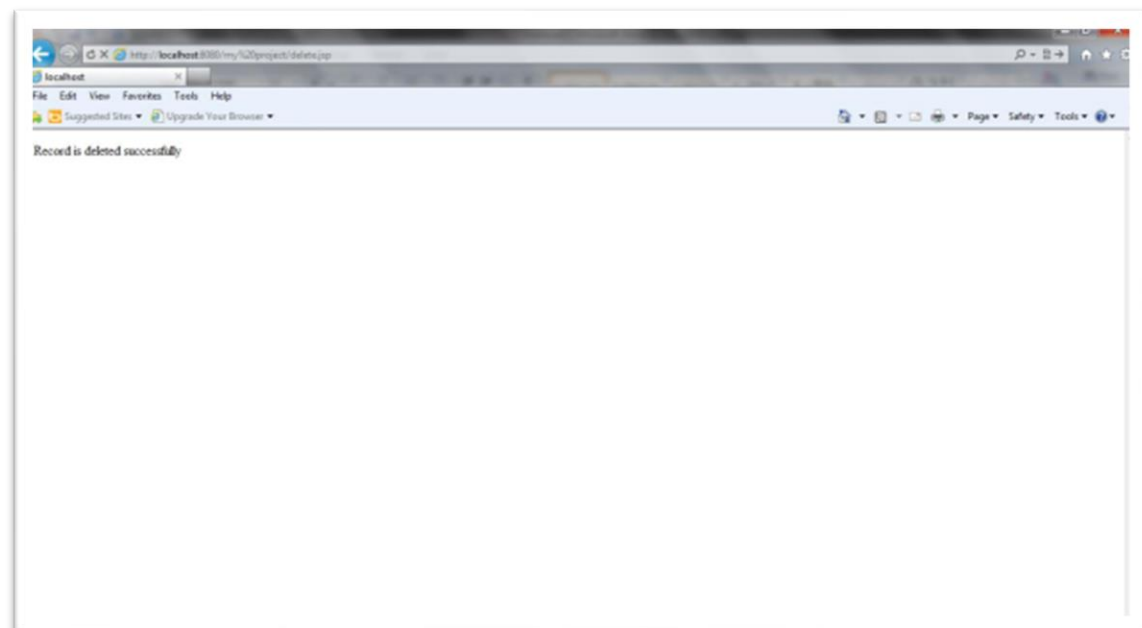

| user           |     |               |
|----------------|-----|---------------|
| uname          | pwd | Add New Field |
| nasreen        | 555 |               |
| Priya keerthan | 111 |               |
| suba           | 333 |               |
| sumi           | 222 |               |
| thenu          | 444 |               |
| *              |     |               |



**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**


### **APPLICATION OBJECT**

#### **SOURCE CODE**

##### **Applicationobject.jsp**

```
<%@ page language="java" %>
<%@ page import="java.sql.*" %>
<%
String name="anbu";
getServletContext().setAttribute("value1","welcome");
String getvalue1=(String)getServletContext().getAttribute("value1");
application.setAttribute("value2",name);
String getvalue2=(String)application.getAttribute("value2");
%>
<html>
<head>
<title>Application object in JSP</title>
</head>
<body>
<%=getvalue1%>
<%=getvalue2%>
</body>
</html>
```

## OUTPUT

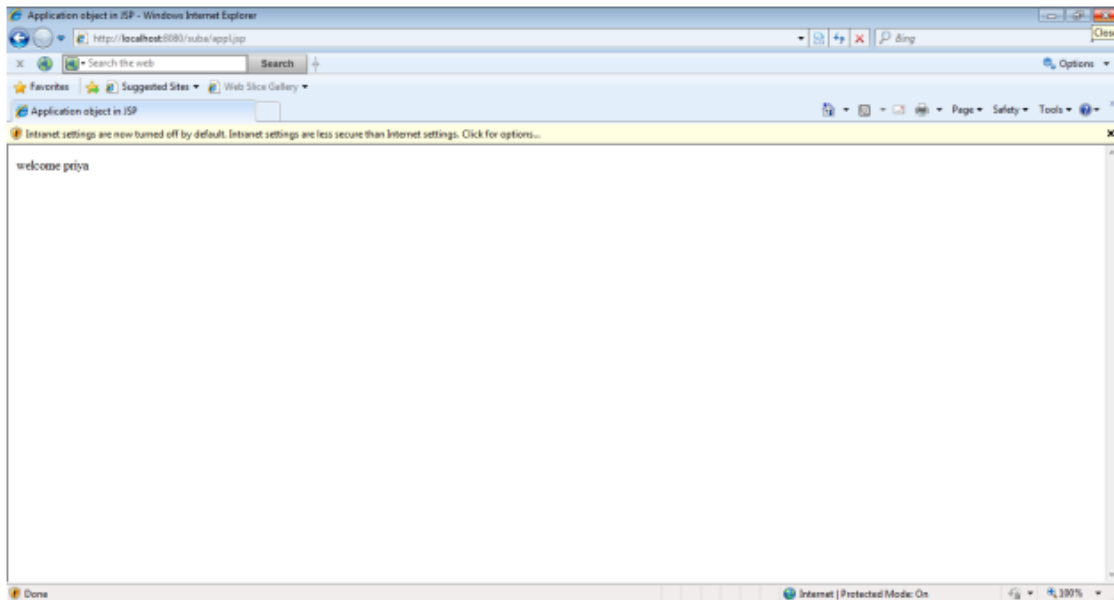

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

### **SESSION OBJECT**

#### **SOURCE CODE**

##### **Session.jsp**

```
<%@ page language="java" import="java.util.*"%>
<html>
<body>
<form name="form" method="get" action="sessionsetretrieve.jsp">
<table width="25%" border="0" cellspacing="10" cellpadding="0">
<tr>
<td>Name:
<td><input type="text" name="name">
</tr> <tr>
<td>Id:
<td><input type="text" name="id">
</tr> <tr>
<td>Mark1:
<td><input type="text" name="m1">
</tr> <tr>
<td>Mark2:
<td><input type="text" name="m2">
</tr> <tr>
<td>Mark3:
<td><input type="text" name="m3">
</tr>
```

```

<tr><td><input type="submit" name="submit" value="submit">
</tr>
</table>
</form>
</body>
</html>

```

### SessionSetRetrieve.jsp

```

<%@ page language="java" import="java.util.*"%>
<% String sessionSet1=request.getParameter("name");
session.setAttribute("MySession1",sessionSet1);
String sessionSet2=request.getParameter("id");
session.setAttribute("MySession2",sessionSet2);
String sessionSet3=request.getParameter("m1");
session.setAttribute("MySession3",sessionSet3);
String sessionSet4=request.getParameter("m2");
session.setAttribute("MySession4",sessionSet4);
String sessionSet5=request.getParameter("m3");
session.setAttribute("MySession5",sessionSet5); %>
<html> <head>
<title>Session Set Retrieve</title>
</head> <body>
NAME:<%= (String)session.getAttribute("MySession1")%><br>
ID:<%= (String)session.getAttribute("MySession2")%><br>
MARK1:<%= (String)session.getAttribute("MySession3")%><br>
MARK2:<%= (String)session.getAttribute("MySession4")%><br>
MARK3:<%= (String)session.getAttribute("MySession5")%><br>
</body>
</html>

```

## OUTPUT

The screenshot shows a web browser window with the address bar displaying `http://localhost:8080/suba/session.jsp`. The browser's search bar contains the text "Search the web". Below the search bar, there are links for "Favorites", "Suggested Sites", and "Web Slice Gallery". The main content area of the browser displays a form with the following fields and values:

| Field  | Value           |
|--------|-----------------|
| Name:  | PRIYA KEERTHANA |
| Id:    | CS006           |
| Mark1: | 98              |
| Mark2: | 99              |
| Mark3: | 100             |

Below the form fields is a button labeled "submit". The browser's status bar at the bottom indicates "Internet | Protected Mode: On" and "100%".

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **TRACKING USER SESSION**


### **SOURCE CODE**

**trackingusersession.jsp**

```
<%@ page import="java.util.*" %>
<html>
<head>
<title>tracking session</title>
</head>
<body>
<center>
<table style="background color=lightyellow" cellspacing="5" border="1">
<% Integer counter=(Integer)session.getAttribute("counter");
if(counter==null)
{
counter=1;
}
else
{
counter=counter+1;
}
session.setAttribute("counter",counter);
%>
<tr>
<th>Session Id</th>
```

```
<td><%=session.getId()%>
</tr><tr>
<th>Session Creation time</th>
<td><%= new Date(session.getCreationTime())%>
</tr>
<tr>
<th>Last Accessed Time</th>
<td><%=new Date(session.getLastAccessedTime())%>
</tr>
<tr>
<th>Visited</th>
<td><%=(Integer)session.getAttribute("counter")%> times
</tr>
</table>
</center>
</body>
</html>
```

## OUTPUT

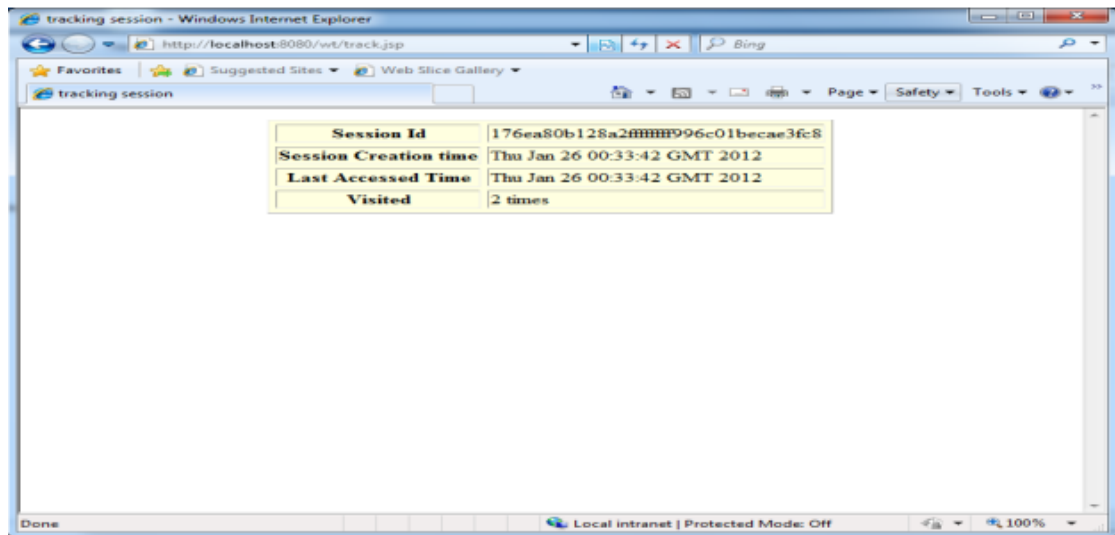



**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **FILE SYSTEM MANAGEMENT**

### **SOURCE CODE**

#### **Singlefile.jsp**

```
<%@ page language="java" %>
<Html>
<HEAD><TITLE>Display file upload form to the user</TITLE></HEAD>
<% // for uploading the file we used Encrypt type of multipart/
form-data and input of file type to browse and submit the file %>
<BODY>
<FORM ENCTYPE="multipart/form-data" ACTION="single_upload_page.jsp"
METHOD=POST>
<br><br><br>
<center>
<table border="2" >
<tr><center><td colspan="2"><p align="center"><B>PROGRAM FOR UPLOADING THE
FILE</B><center></td></tr>
<tr><td><b>Choose the file To Upload:</b>
</td>
<td><INPUT NAME="F1" TYPE="file"></td></tr>
<tr><td colspan="2">
<p align="right"><INPUT TYPE="submit" VALUE="Send File" ></p></td></tr>
<table>
</center>
</FORM>
```

</BODY>

</HTML>

### **single\_upload\_page.jsp**

```
<%@ page import="java.io.*" %>
```

```
<%
```

```
String contentType = request.getContentType();
```

```
if ((contentType != null) && (contentType.indexOf("multipart/form-data") >= 0))
```

```
{
```

```
    DataInputStream in = new DataInputStream(request.getInputStream());
```

```
    int formDataLength = request.getContentLength();
```

```
    byte dataBytes[] = new byte[formDataLength];
```

```
    int byteRead = 0;
```

```
    int totalBytesRead = 0;
```

```
    while (totalBytesRead < formDataLength)
```

```
    {
```

```
        byteRead = in.read(dataBytes, totalBytesRead, formDataLength);
```

```
        totalBytesRead += byteRead;
```

```
    }
```

```
    String file = new String(dataBytes);
```

```
    String saveFile = file.substring(file.indexOf("filename=\"") + 10);
```

```
    saveFile = saveFile.substring(0, saveFile.indexOf("\n"));
```

```
    saveFile = saveFile.substring(saveFile.lastIndexOf("\\") + 1,saveFile.indexOf("\""));
```

```
    int lastIndex = contentType.lastIndexOf("=");
```

```
    String boundary = contentType.substring(lastIndex + 1,contentType.length());
```

```
    int pos;
```



```
    pos = file.indexOf("filename=\"");
```

```
    pos = file.indexOf("\n", pos) + 1;
```

```
    pos = file.indexOf("\n", pos) + 1;
```

```
int boundaryLocation = file.indexOf(boundary, pos) - 4;
int startPos = ((file.substring(0, pos)).getBytes()).length;
int endPos = ((file.substring(0, boundaryLocation)).getBytes()).length;
FileOutputStream fileOut = new FileOutputStream(saveFile);
fileOut.write(dataBytes, startPos, (endPos - startPos));
fileOut.flush();
fileOut.close();
%><Br>
<table border="2"><tr><td><b>You have successfully upload the file by the name of:</b>
<% out.println(saveFile); %></td></tr></table> <%
}
%>
```

The screenshot shows a Mozilla Firefox browser window. The title bar reads "Display file upload form to the user - Mozilla Firefox". The address bar shows "http://localhost:8080/". The page content includes a heading "PROGRAM FOR UPLOADING THE FILE" and a form with the label "Choose the file To Upload:". The form contains a text input field and two buttons: "Browse..." and "Send File". The status bar at the bottom indicates "Done".

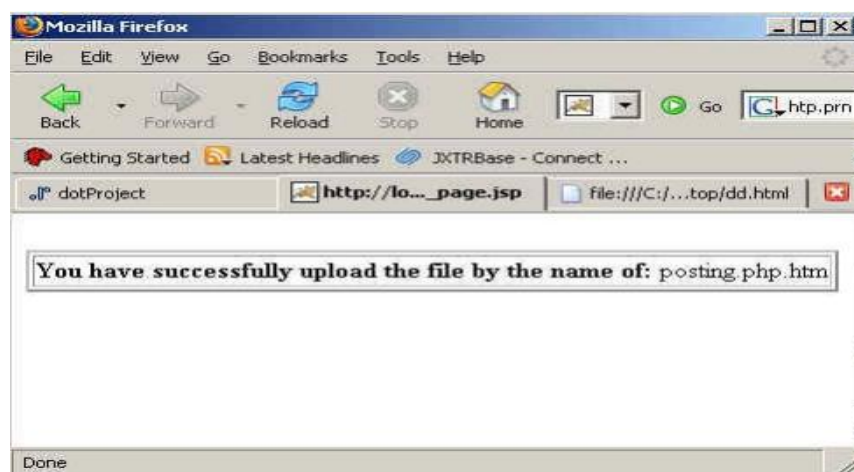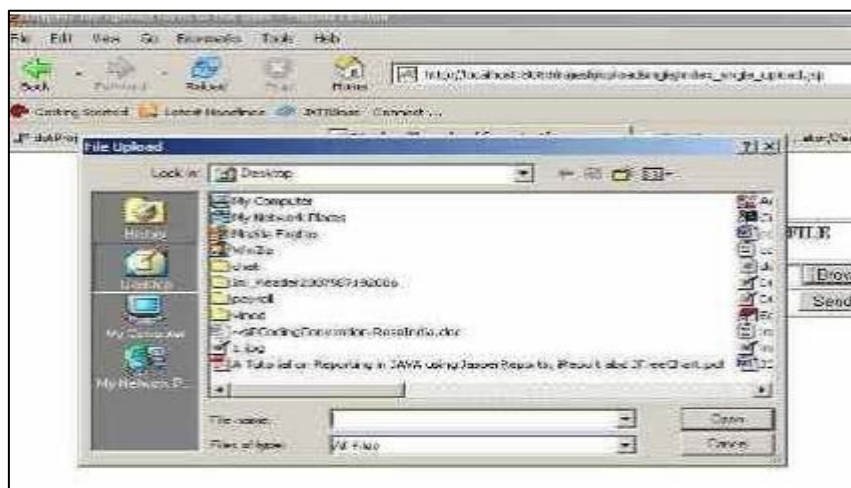

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **GUEST BOOK USING ASP**

### **SOURCE CODE**

#### **Guestbook form.html**

```
<html>
<head>
<title>Guestbook Form</title>
</head>
<body bgcolor="white" text="black">
<form name="form" method="post" action="add_to_guestbook.asp">
Name: <input type="text" name="name" maxlength="20">
<br>
Comments: <input type="text" name="comments" maxlength="60">
<input type="submit" name="Submit" value="Submit">
</form>
</body>
</html>
```

#### **\_to\_guestbook.asp**

```
<%
Dim adoCon
Dim rsAddComments
Dim strSQL
Set adoCon = Server.CreateObject("ADODB.Connection")
adoCon.Open "DRIVER={Microsoft Access Driver (*.mdb)}; DBQ=" &
```

```

Server.MapPath("guestbook.mdb")
Set rsAddComments = Server.CreateObject("ADODB.Recordset")
strSQL = "SELECT tblComments.Name, tblComments.Comments FROM tblComments;"
rsAddComments.CursorType = 2
rsAddComments.LockType = 3
rsAddComments.Open strSQL, adoCon
rsAddComments.AddNew
rsAddComments.Fields("Name") = Request.Form("name")
rsAddComments.Fields("Comments") = Request.Form("comments")
rsAddComments.Update
rsAddComments.Close
Set rsAddComments = Nothing
Set adoCon = Nothing
Response.Redirect "guestbook.asp"
%>

```

### **Guestbook.asp**



```

<html>
<head>
<title>Guestbook</title>
</head>
<body bgcolor="white" text="black">
<%
Dim adoCon
Dim rsGuestbook
Dim strSQL
Set adoCon = Server.CreateObject("ADODB.Connection")
adoCon.Open "DRIVER={Microsoft Access Driver (*.mdb)}; DBQ=" &
Server.MapPath("guestbook.mdb")

```

```
Set rsGuestbook = Server.CreateObject("ADODB.Recordset")
strSQL = "SELECT tblComments.Name, tblComments.Comments FROM tblComments;"
rsGuestbook.Open strSQL, adoCon
Do While not rsGuestbook.EOF
Response.Write ("<br>")
Response.Write (rsGuestbook("Name"))
Response.Write ("<br>")
Response.Write (rsGuestbook("Comments"))
Response.Write ("<br>")
rsGuestbook.MoveNext
Loop
rsGuestbook.Close
Set rsGuestbook = Nothing
Set adoCon = Nothing
%>
</body>
</html>
```

## OUTPUT

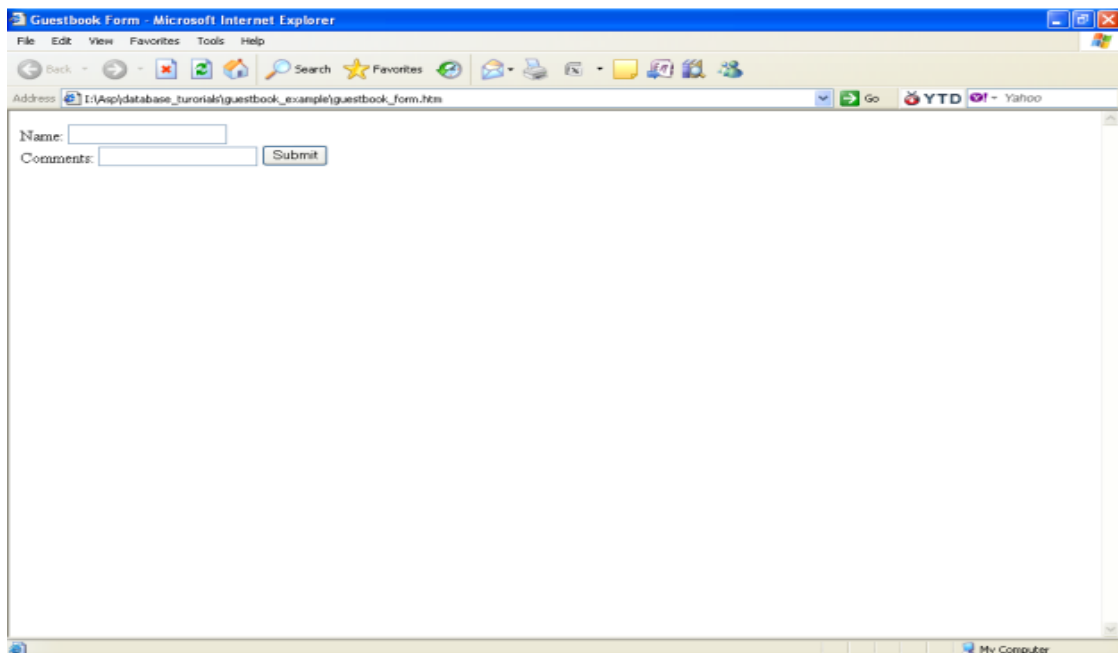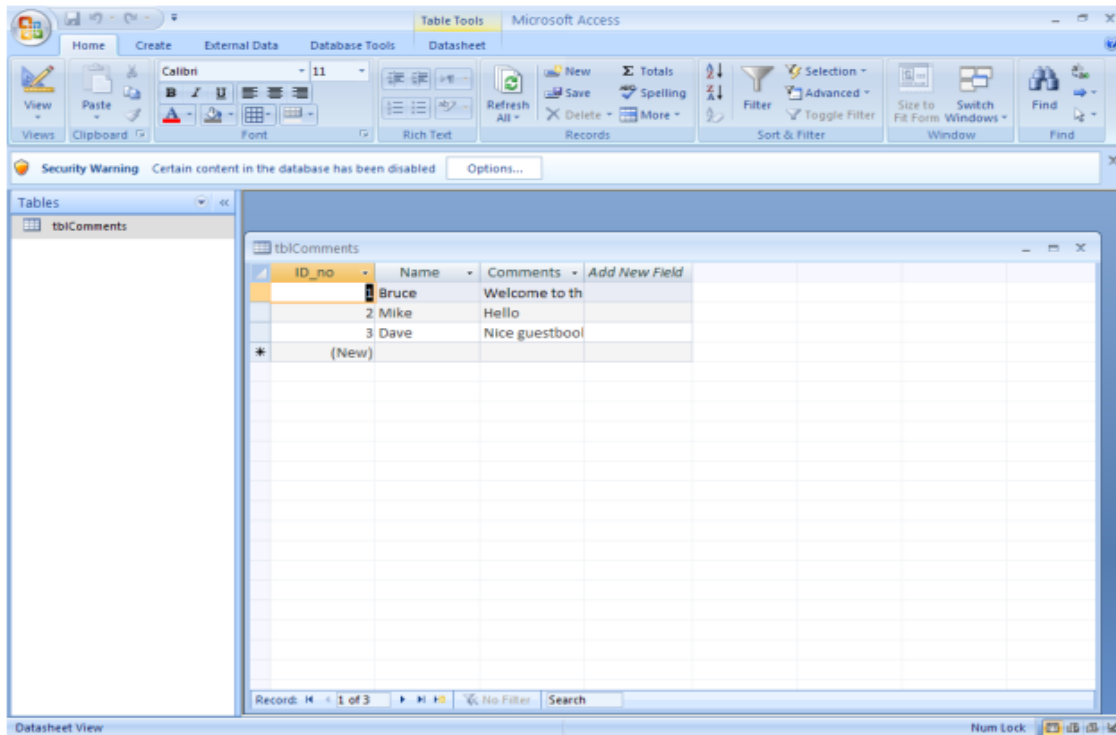



**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **JAVA SERVLET**

### **SOURCE CODE**

#### **NewServlet.java**

```
import java.io.*;
import java.net.*;
import javax.servlet.*;
import javax.servlet.http.*;

public class NewServlet extends HttpServlet {
    public void init(ServletConfig config) throws ServletException {
        super.init(config);
    }
    public void destroy() {
    }
    public String display(int mark)
    {
        if(mark>90 && mark<=100)
        {
            return "S";
        }
        else if(mark>80 && mark<=90)
        {
            return("A");
        }
        else if(mark>70 && mark<=80)
```

```

{
return("B");
}
else if(mark>60 && mark<=70)
{
return("C");
}
else if(mark>55 && mark<=60)
{
return("D");
}
else if(mark>=50 && mark<55)
{
return("E");
}
else
{
return("Re Appear");
}
}

protected void processRequest(HttpServletRequest request, HttpServletResponse response)
throws ServletException, IOException {
response.setContentType("text/html");
PrintWriter out = response.getWriter();
try {
String name, reg;
int mark,s1,s2,s3,s4,s5,s6;
name = request.getParameter("name");
reg = request.getParameter("reg");

```

```

s1 = Integer.parseInt(request.getParameter("sub1"));
s2 = Integer.parseInt(request.getParameter("sub2"));
s3 = Integer.parseInt(request.getParameter("sub3"));
s4 = Integer.parseInt(request.getParameter("sub4"));
s5 = Integer.parseInt(request.getParameter("sub5"));
s6 = Integer.parseInt(request.getParameter("sub6"));
response.setContentType("text/html");
out.println("<html>");
out.println("<head>");
out.println("<title>Mark Report Servlet<title>");
out.println("</head>");
out.println("<body>");
out.println("<center><p><h2><b>Name : " + name + "</p>");
out.println("<p><b>Reg No : " + reg + "</p>");
out.println("<p><b>Your Mark Details</p><br><br></center>");
out.println("<center><table border=2 cellpadding=5 cellspacing=5>");
out.println("<tr><th>Subjects</th><th>Mark</th><th>Grade</th></tr>");
out.println("<tr><th>Sub1</th><td>" + s1 + "</td><td>" + display(s1) + "</td></tr>");
out.println("<tr><th>Sub2</th><td>" + s2 + "</td><td>" + display(s2) + "</td></tr>");
out.println("<tr><th>Sub3</th><td>" + s3 + "</td><td>" + display(s3) + "</td></tr>");
out.println("<tr><th>Sub4</th><td>" + s4 + "</td><td>" + display(s4) + "</td></tr>");
out.println("<tr><th>Sub5</th><td>" + s5 + "</td><td>" + display(s5) + "</td></tr>");
out.println("<tr><th>Sub6</th><td>" + s6 + "</td><td>" + display(s6) + "</td></tr></table>");
out.println("</body>");
out.println("</html>");
} finally {
out.close();
}
}

```

```

protected void doGet(HttpServletRequest request, HttpServletResponse response)
throws ServletException, IOException {
    processRequest(request, response);
}

protected void doPost(HttpServletRequest request, HttpServletResponse response)
throws ServletException, IOException {
    processRequest(request, response);
}

public String getServletInfo() {
    return "Short description";
}
}

```

## **Index.html**

```

<html>

<head><title>HTML Forms and Servlet</title></head>

<body>

<h1>Enter your Details</h1>

<form action = "http://localhost:8084/WebApplication4/NewServlet">

<table>

<tr>

<td>Name

<td><input type="text" name="name"><br><br>

</tr>

<tr>

<td>Reg No

<td><input type="text" name="reg"><br><br>

</tr>

<tr>

```

```
<td>Sub1 Mark
<td><input type="text" name="sub1"><br><br>
</tr>
<tr>
<td>Sub2 Mark
<td><input type="text" name="sub2"><br><br>
</tr>
<tr>
<td>Sub3 Mark
<td><input type="text" name="sub3"><br><br>
</tr>
<tr>
<td>Sub4 Mark
<td><input type="text" name="sub4"><br><br>
</tr>
<tr>
<td>Sub5 Mark
<td><input type="text" name="sub5"><br><br>
</tr>
<tr>
<td>Sub6 Mark
<td><input type="text" name="sub6"><br><br>
</tr>
</table>
<input type="submit">
</form>
</body>
</html>
```

OUTPUT

HTML: Forms and Servlets Mozilla Firefox

File Edit View History Bookmarks Tools Help

http://localhost:8084/WEBApplication4/Servlet\_Mark

Mark Report Servlet

### Enter your Details

Name

Reg No

Sub 1 Mark

Sub 2 Mark

Sub 3 Mark

Sub 4 Mark

Sub 5 Mark

Sub 6 Mark

Done

Mark Report Servlet Mozilla Firefox

File Edit View History Bookmarks Tools Help

http://localhost:8084/WEBApplication4/Servlet\_Mark?name=abu&reg=5001&sub1=43&sub2=65&sub3=87&sub4=45&sub5=43&sub6=87

Mark Report Servlet

Name : abu

Reg No : 5001

Your Mark Details

| Subjects | Mark | Grade     |
|----------|------|-----------|
| Sub1     | 43   | Re Appear |
| Sub2     | 65   | C         |
| Sub3     | 87   | A         |
| Sub4     | 45   | Re Appear |
| Sub5     | 43   | Re Appear |
| Sub6     | 87   | A         |

Done

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **CONTACT FORM USING PHP**

### **SOURCE CODE**

#### **Form.html**

```
<html>
<head>
<title>Program</title>
</head>
<body>
<FORM ACTION="Form.php" METHOD="POST">
Name: <INPUT TYPE="text" NAME="name" > <BR>
Address 1:<INPUT TYPE="text" NAME="add1" ><BR>
Address 2:<INPUT TYPE="text" NAME="add2" ><BR>
E-mail:<INPUT TYPE="text" NAME="email" ><BR>
<INPUT TYPE=SubmitQuery>
</FORM>
</body>
</html>
```

#### **Form.php**

```
<html>
<body>
<?php
$self = $_SERVER['PHP_SELF'];
$dbh = mysql_connect("localhost","root","") or die(mysql_error());
```

```

mysql_select_db("sug") or die(mysql_error());
if(isset($_POST['name']))
{
    $nme = $_POST['name'];
    $ad1 = $_POST['add1'];
    $ad2 = $_POST['add2'];
    $eml = $_POST['email'];
    if($nme != "" && $ad1 != "")
    {
        $query = "INSERT INTO contact VALUES('$nme', '$ad1', '$ad2', '$eml')";
        $result = mysql_query($query) or die(mysql_error());
    }
    Else
    echo "one of the field is empty";
}
mysql_close($dbh);
?>

<FORM ACTION="<?=$self?>" METHOD="POST">
<P>
Name: <INPUT TYPE=text NAME="name" value=""> <BR>
Address 1:<INPUT TYPE=text NAME="add1" value=""><BR>
Address 2:<INPUT TYPE=text NAME="add2" value=""><BR>
email:<INPUT TYPE=text NAME="email" value=""><BR>
<INPUT TYPE=submit>
</FORM>
</body>
</html>

```



### **Display.html**

```
<html>
<head>
<title>Display</title>
</head>
<body>
<form action="Display.php" method="post">Enter Name of the person <input type="text"
name="name">
<input type=submit>
</form>
</body>
</html>
```

### **Display.php**

```
<head>
<title>Search Result </title>
</head>
<body>
<h3>Search Result</h3>
<hr>
<?php
$link=mysql_connect("localhost","root","");
mysql_select_db("sug");
$name=$_POST["name"];
print "Entered Name is $name \n";
$var=mysql_query("SELECT * FROM contact WHERE name like '%$name%'");
echo"<table border size=1>";
echo"<tr><th>Name</th>
<th>Address 1</th>
```

```
<th>Address 2</th>
<th>E-mail</th></tr>";
while ($arr=mysql_fetch_row($var))
{
echo "<tr><td>$arr[0]</td>
<td>$arr[1]</td>
<td>$arr[2]</td>
<td>$arr[3]</td> </tr>";
}
echo"</table>";
mysql_free_result($var);
mysql_close($link);
?>
<hr>
<form action="Display.html">
<input type="submit" value="Back">
</form>
</body>
</html>
```

OUTPUT



**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDDEEN**

**YEAR/SEM/SEC: Y3/S6/B**


### **SESSION USING PHP**

#### **SOURCE CODE**

##### **Session.php**

```
<?php
session_start();session_register("count");
if (!isset($_SESSION))
{
$_SESSION["count"] = 0;
echo "<p>Counter initialized</p>\n";
}
else
{
$_SESSION["count"]++;
}echo "<p>The counter is now <b>$_SESSION[count]</b></p>".
<p>reload this page to increment</p>";
?>
```

## OUTPUT

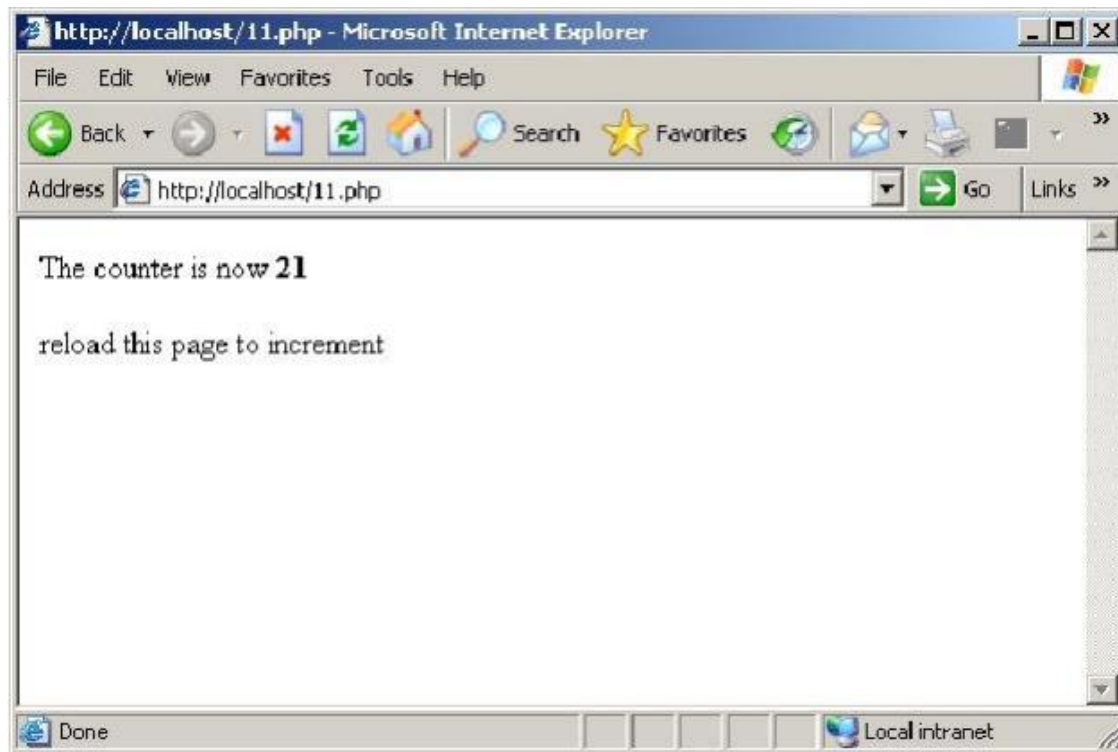

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **AJAX**

### **SOURCE CODE**

#### **Register.html**

```
<html>
<head>
<title>Ajax Registration Program</title>
<script language="javascript">
function postRequest(strURL)
{
var xmlhttp;
if(window.XMLHttpRequest)
{
var xmlhttp=new XMLHttpRequest();
}
else if(window.ActiveXObject)
{
var xmlhttp=new ActiveXObject("Microsof.XMLHTTP");
}
xmlhttp.open('POST', strURL, true);
xmlhttp.setRequestHeader('Content-Type', 'application/x-www-form-urlencoded');
xmlhttp.onreadystatechange=function()
{
if(xmlhttp.readyState==4)
{
```

```
updatepage(xmlHttp.responseText);
}
}
xmlHttp.send(strURL);
}
function updatepage(str)
{
if(str=="no")
{
alert("Invalid Id/Password! Please fill Current Id/Password");
}
else
{
alert("Welcome for Register!");
}
}
function call_register()
{
var login_id=document.reg.uid.value;
var password=document.reg.passwd.value;
var url="Register.php?loginid="+login_id+"&password="+password+"";
postRequest(url);
}
</script>
</head>
<body>
<center>
<form name="reg">
<table border="1" width="30%">
```

```

<tr>
<td align="center" colspan="2"><font face="Monotype" size="5">Registration</font></td>
</tr>
<tr>
<td>Login Id:</td><td><input type="text" name="uid" size="20"></td>
</tr>
<tr>
<td>Password:</td><td><input type="password" name="passwd" size="20"></td>
</tr>
<tr>
<td align="center" colspan="2"><input type="submit" value="Register" OnClick="return
call_register()"
style="background-color:#FFE9D2; color:#0000FF; border-color:#99CC33"></td>
</tr>
</table>
</form>
</body>
</html>

```

### Register.php


```

<?
$loginid=$_GET["loginid"];
$password=$_GET["password"];
if($password=="m"||$loginid=="m"||($loginid=="m"&&$password=="m")){
echo "no";
}
else{
echo "yes";
}
?>

```



OUTPUT

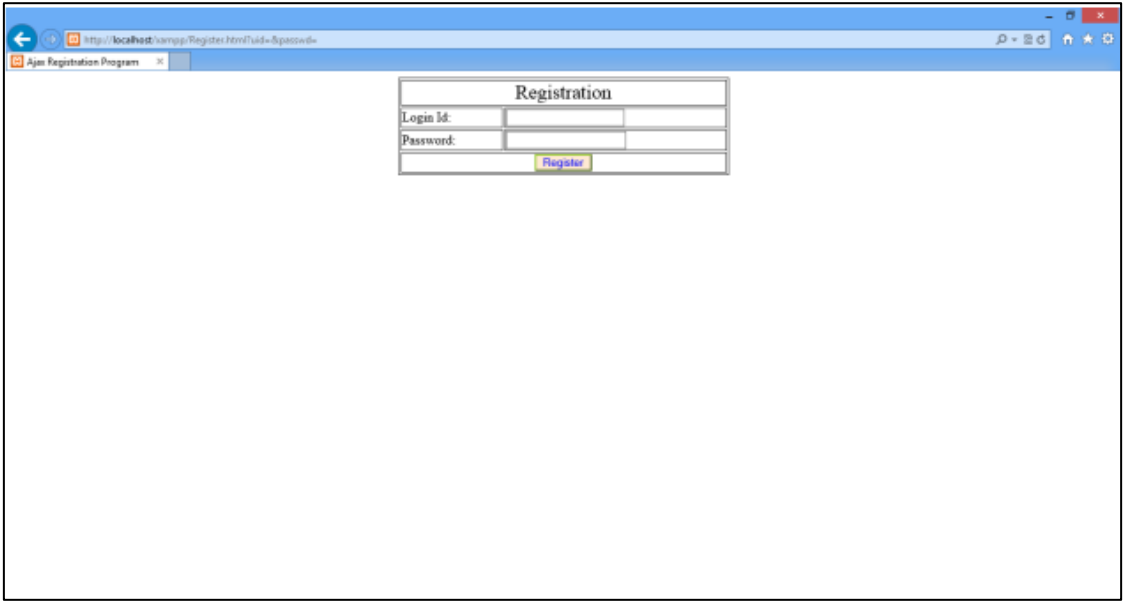

**REG NO: 22TD0053 NAME: MOHAMED B SIRAJUDEEN**

**YEAR/SEM/SEC: Y3/S6/B**

## **XML**

### **SOURCE CODE**

#### **Simplexml.xml**

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-stylesheet type="text/xsl" href="student.xsl"?>
<student>
  <Person_Info>
    <Name>Barath</Name>
    <Address>Chennai</Address>
    <class>Second</class>
    <Subject>Mathematics</Subject>
    <Marks>100</Marks>
  </Person_Info>
  <Person_Info>
    <Name>Ananth</Name>
    <Address>Pune</Address>
    <class>Fifth</class>
    <Subject>English</Subject>
    <Marks>80</Marks>
  </Person_Info> <Person_Info>
    <Name>Babu</Name>
    <Address>Dhaka</Address>
    <class>Tenth</class>
    <Subject>English</Subject>
```

<Marks>90</Marks>

</Person\_Info>

</student>

### **Student.xsl**

<?xml version="1.0" encoding="ISO-8859-1"?>

<xsl:stylesheet version="1.0" xmlns:xsl="http://www.w3.org/1999/XSL/Transform">

<xsl:template match="/">

<html>

<body>

<h2>Student Database</h2>

<table border="5" cellspacing="10" cellpadding="10">

<tr bgcolor="gray">

<th>Name</th>

<th>Address</th>

<th>class</th>

<th>Subject</th>

<th>Marks</th> </tr>

<xsl:for-each select="student/Person\_Info">

<tr bgcolor="pink">

<td><xsl:value-of select="Name"/></td>

<td><xsl:value-of select="Address"/></td>

<td><xsl:value-of select="class"/></td>

<td><xsl:value-of select="Subject"/></td>

<td><xsl:value-of select="Marks"/></td> </tr>


</xsl:for-each>

</table> </body> </html>

</xsl:template>

</xsl:stylesheet>

## OUTPUT

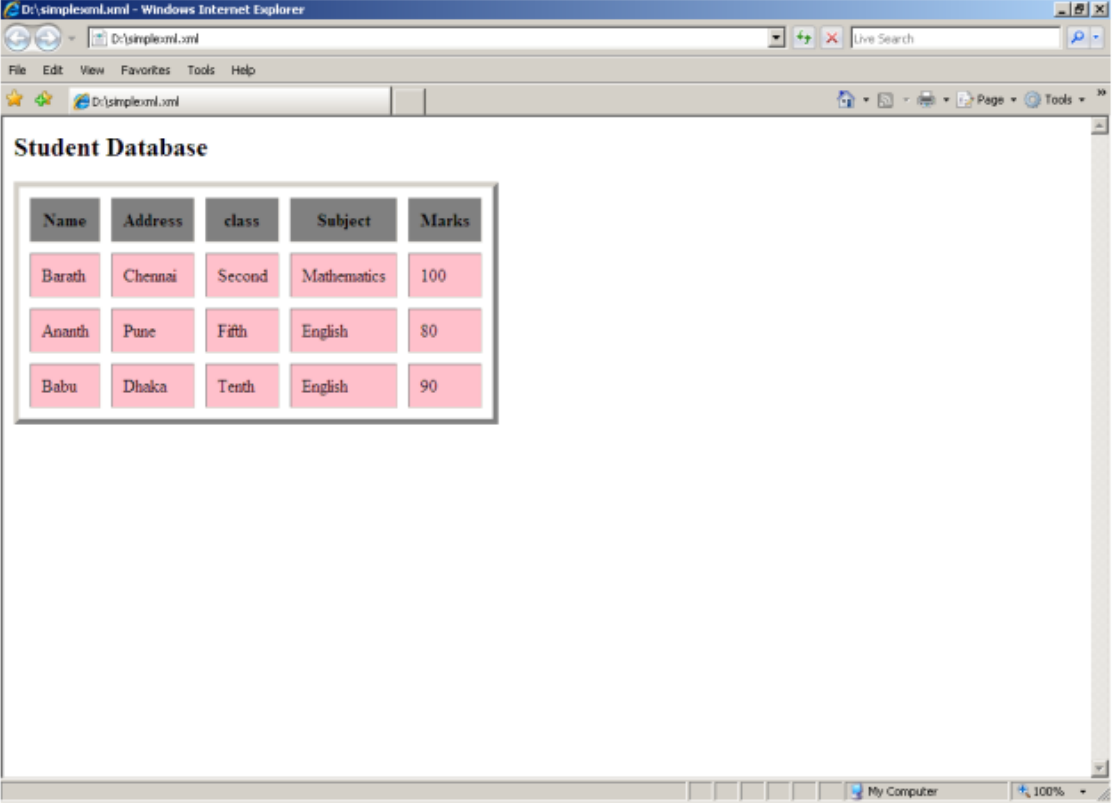

The screenshot shows a Windows Internet Explorer browser window with the address bar displaying 'D:\simplexml.xml'. The page content is titled 'Student Database' and contains a table with the following data:

| Name   | Address | class  | Subject     | Marks |
|--------|---------|--------|-------------|-------|
| Barath | Chennai | Second | Mathematics | 100   |
| Ananth | Pune    | Fifth  | English     | 80    |
| Babu   | Dhaka   | Tenth  | English     | 90    |

The browser's taskbar at the bottom shows 'My Computer' and a zoom level of '100%'.