

RAJIV GANDHI COLLEGE OF ENGINEERING AND TECHNOLOGY
KIRUMAMPAKKAM, PUDUCHERRY-607403.
(Approved by AICTE and Affiliated to Pondicherry University)
(ISO 9001:2015)



DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

LAB COURSE FILE

Staff Name : Mrs. S. SRI SAYE LAKSHMI

Designation : ASSISTANT PROFESSOR (STAGE II)

Academic Year : 2023-2024 (EVEN SEM)

Course : B. TECH (CSE)


Lab Subject & Code : WEB TECHNOLOGY LAB (CS P63)

RAJIV GANDHI COLLEGE OF ENGINEERING AND TECHNOLOGY

(Approved by AICTE and Affiliated to Pondicherry University)

Pondy – Cuddalore Main Road, Kirumampakkam, Puducherry – 607 403.

DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING



WEB TECHNOLOGY LABORATORY

[CS P63]

Lab Manual

CONTENTS

Sl.NO	NAME OF THE EXPERIMENT
	STUDY OF HTML
1.	CREATION OF HTML FILE
	STUDY OF JAVA SCRIPT
2.	USER REGISTRATION FORM VALIDATION USING JAVASCRIPT
	STUDY OF VBSCRIPT
3.	USER REGISTRATION FORM VALIDATION USING VB SCRIPT
4.	EMPLOYEE PAYROLL USING VBSCRIPT
5	APACHE TOMCAT SERVER
6.	IIS INSTALLATION
7.	DATABASE CONNECTION USING JSP
8.	APPLICATION OBJECT
9.	SESSION OBJECT
10	TRACKING USER SESSION
11	FILE SYSTEM MANAGEMENT
12	GUEST BOOK USING ASP
13	JAVA SERVLET
14	CONTACT FORM USING PHP
15	SESSION USING PHP
16	AJAX
17	XML

STUDY OF HTML

Aim:-

To study about the basic **HTML** tags.

HTML:-

Hyper Text Markup Language is how a web browser displays its multimedia documents. The documents themselves are plain text files (ASCII) with special "tags" or codes that a browser knows how to interpret and display on your screen.

HTML Tags :-

a) Basics Tags:-

i. <html> </html>

The basic tag for every page. This tells the browser that the file being loaded is a HTML document.

ii. <head> </head>

Head - defines the head of your page. Includes the **<title> </title>** tag.

iii. <title> </title>

Title - allows you to display a title at the top of the browser.

iv. <Meta>

Meta Tags - allows the owner to display certain information to the browser without the page seeing it. Here are some examples:

<meta name="description" content="This is my page description."> - describe your page
<meta name="keywords" content="word1, word2, word3, word4"> - enter keywords for your page.

<meta HTTP-EQUIV="refresh" content="10; url=index2.html"> - reloads the page after 10 seconds to index2.html

<meta HTTP-EQUIV="text" content="This is my page description."> - another text tag

v. <body> </body>

Allows you to define the body arguments. This can include:

- background="file.gif"
- bgcolor="#rgbcode"
- text="#rgbcode"
- link="#rgbcode"
- vlink="#rgbcode"
- topmargin=*n* - defines the top of the margin for the body.
- leftmargin=*n*
- rightmargin=*n*

b) Text Control and Tags:-

i. <h1> </h1>

Header - this allows you to change the size of the letter or words it's surrounding. Covers H1 - H6, H1 being the biggest and H6 being the smallest.

ii. <center> </center>

Center - allows you to display the text in the center of the page.

iii. <ins> </ins>

Inserted Text - allows you to insert text.

iv. <person> </person>

Person's Name - allows you to distinguish someone's name, like Shpank.

v. <q> </q>

Quotation - set certain text as a quote.

vi. <big> </big> <small> </small>

Big - makes the text bigger than the rest.

Small - makes the text smaller than the rest.

**vii. **

Subscript - allows you to make the text look like _{this}.

**viii. **

Superscript - gives ^{superscript} effect to your text.

ix. <abbrev> </abbrev>

Abbreviation - abbreviate certain text.

**x. **

Deleted Text

**xi. **

Font - allows you to control different aspects of the text.

Includes: -

size=*n* (+1 - +5) (-1 - -5)

color=#*rgbcode* - defines the color

face="*name*" - defines the font face. Could be Helvetica, Arial, etc.

**xii. **

Bold - makes a word or group of words **bold**. bold.

**xiii. **

Strong - basically the same as **bold**, just longer code. `<strong>>bold</strong>`

xiv. `<i> </i>`

Italics - italicizes a word or *group of words*.

xv. `<em> </em>`

Emphasis - basically the same as *italics*.

xvi. `<u> </u>`

Underline - underlines a word or group of words. But does not work with all browsers.

xvii. `<tt> </tt>`

Typewriter Type - makes a fixed width font.

xviii. `<address> </address>`

Address – another italics tag

xix. `<blockquote> </blockquote>`

Block Quote - indents the left and right-hand sides of the text.

xx. `<dfn> </dfn>`

Definition - allows emboldening or italicizing a word or *group of words*.

xxii. `<kbd> </kbd>`

Keyboard - another fixed width font.

xxiii. `<var> </var>`

Italics - another way to italics word or *group of words*.

xxiv. `<pre> </pre>`

Preformatted - allows the text to appear in the browser as it does on the page.

Lists:-

`<dl> </dl>`

Descriptive List - another way to list things.

`<dt> </dt>`

Defines the topic of the descriptive list.

`<dd> </dd>`

The Descriptive Description. This indented part that is displayed.

`<ol> </ol>`

Ordered List - a way to group items into a list.

`<li></li>`

Line item tag defines the list items with a number or a dot. Includes the following:

- start=*n*
 - type="A/a/I/i" for upper or lower case and Roman numerals.
- **

Unordered List - another way to list items. Also uses the tags to define the list items with a bullet instead of a number. Includes the following options:

- type="DISC/CIRCLE/SQUARE"

Page Breaks and Lines :-

<hr>

Horizontal Rule - allows you to divide a page with a line. Includes the following options:

- width=pixels/percentage
- align=left/right/center
- size=*n* noshade - takes away the shading inside.

**
**

Break - allows the text to break without a full paragraph. The options are:

- clear=left/right/all
- <nobr> </nobr>**

No Breaks - allows the test to continue without breaking.

Frames, Tables, and Forms :-

<table> </table>

Tables - these tags allow you to insert tables into your page like all of mine. It has the following options:

- width=*n*
- height=*n*
- border=*n*
- cellpadding=*n*
- cellspacing=*n*

It also includes the following tags with their associated options:

- <tr></tr>
 - <td></td>
 - <th> </th>
 - align=left/middle/right
 - valign=top/middle/bottom
 - color=#rgbcode
 - colspan=*n*
 - rowspan=*n*
- <frameset> </frameset>**

Frameset - allows you to setup frames on your page. Includes the following:

- rows="pixels/percentage"
- cols="pixels/percentage"
- frameborder=*n*
- framewidth=*n*
- marginheight=*n*
- marginwidth=*n*

Also includes the frame tag to establish content. These include:

- marginheight=*n*
- marginwidth=*n*
- name="name"
- noresize
- src="file.html/file.gif/file.jpg"
- scrolling="yes/no/auto"

The **<noframes>** tag for those browsers who can't handle frames or they won't get bunk.

<frame>

Frame - includes the frame tag to establish content. These include:

- marginheight=*n*
- marginwidth=*n*
- name="name"
- noresize
- src="file.html/file.gif/file.jpg"
- scrolling="yes/no/auto"

<form> </form>

Form - this allows you to insert forms onto your page. It includes the following options:

- method=POST/GET
- action="file/script"

Also, you can use the following to add checkbox's, text box's, and more. They include:

- `<input type="text/hidden/checkbox/radio/submit/reset size="n" maxlength="n" name="name" value="file/URL">`
- `<select name="name" size="n">`
- `<option value="value1">Value1</option>`

<multicol> </multicol>

Multicolumns - allows almost the same effect as tables. It has the following options:

1. cols="*n*"
2. gutter="*n*"
3. width="pixels/percentage"

Images and Links:-

** **

Hypertext Anchor - this allows you to make certain text or picture a link to another page or graphic not on the page. It can include the following options:

- target="frame name"

Image - this allows you to insert a .jpg or .gif image into your web page. It has the following options:

- src="file.gif"/src="file.jpg"
- height=*n*
- width=*n*
- lowsrc="file.gif"/lowsrc="file.jpg"
- alt="text"
- usemap="#mapname"
- ismap
- align="left/right/middle/bottom/top/absmiddle/textop/absbottom"
- border=*n*

<map> </map>

Image Map - used to define the areas and coordinates of an image map.

Applets, JavaScript, and Other Tags :-

<applet> </applet>

Java Applet - allows you to insert a Java applet directly into your page. It includes:

- code="java.class"
- codebase="/dir/to/applet"
- height="n"
- width="n"

<script> </script>

Javascript - allows a JavaScript to load within the page. This tag usually appears after the </title> and before the </head> tag.

```
<title>Title</title>
```

```
<script language="JavaScript">
```

```
Script goes here.
```

```
</script>
```

```
</head>
```

<!-- text -->

Allows text to appear invisible on the page. This is used if you would like to save comments on the page, but not have them load on the page.

<marquee> </marquee>

Marquee - an IE only tag, so only IE users will see it. It allows scrolling text in the browser. Includes:

- behavior=slide/alternative
- width=pixels/percentage
- hspace=*n*

- `vspave=n`
- `loop=n/-1/infinite`
- `bgcolor=#rgbcode`
- `scrollamount=n`
- `scrolldelay=n`

RESULT:-

Thus the basic **HTML** tags were studied.


Ex: 1

CREATION OF HTML FILES

AIM:

To create a web page using HTML.

HOME PAGE:

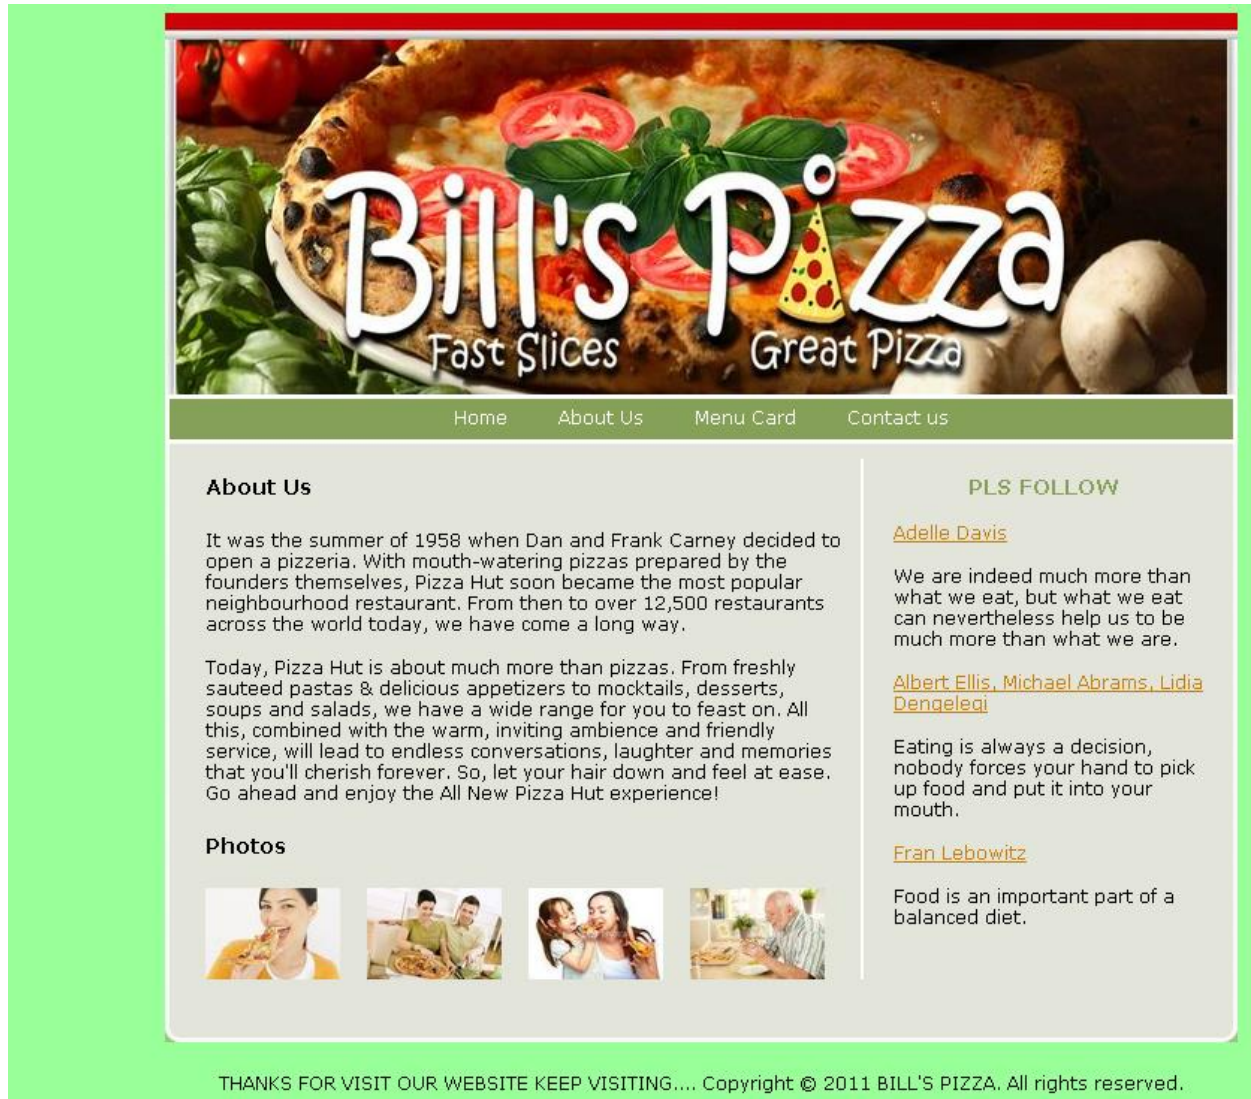

CODING:

```
<html>

<head>

<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />

<link href="style.css" rel="stylesheet" type="text/css" />

<title>Pizza huts template</title>

</head>

<body>

<div id="container">

<div id="header">

<div id="logo_w1"></div>

<div id="logo_w2"></div>

<div id="header_text">

<a href="#"></a>

</div>

<ul>

<li><a href="index.html">Home</a></li>

<li><a href="Aboutus.html">About Us</a></li>

<li><a href="Menu.html">Menu Card</a></li>

<li><a href="Contact.html">Contact us</a></li>

</ul>

</div>

<div id="content">

<div id="left">

<h1>Welcome to our Bill's pizza</h1>

<p>Pizza Hut is one of the flagship brands of Yum! Brands, Inc., which also has KFC, Taco Bell, A&W and Long John Silver's under its umbrella. Pizza Hut is the world's largest pizza chain with over 12,500 restaurants across 91 countries.</p><p>In India, Pizza Hut has 140 restaurants across 34 cities, including Delhi, Mumbai, Bangalore, Chennai, Kolkata, Hyderabad, Pune, and Chandigarh amongst others. Yum! is in the process of opening Pizza Hut restaurants at many more locations to service a larger customer base across the country.</p>

<h1>Photos</h1>

<div id="photos">
```


</div>

</div>

<div id="right">

<h2>QUOTES</h2>

Jim Davis

<p>Vegetables are a must on a diet. I suggest carrot cake, zucchini bread, and pumpkin pie. </p>

Adelle Davis

<p>Eat breakfast like a king, lunch like a prince, and dinner like a pauper.</p>

Elizabeth Berry

<p>Shipping is a terrible thing to do to vegetables. They probably get jet-lagged, just like people.</p>

</div>

<div id="footerline"></div>

</div>

<div id="footer">THANKS FOR VISIT OUR WEBSITE KEEP VISITING....

Copyright © 2011 BILL'S PIZZA.All rights reserved.</div>

</div>

</body>

</html>

ABOUT US:

[Home](#)[About Us](#)[Menu Card](#)[Contact us](#)

About Us

It was the summer of 1958 when Dan and Frank Carney decided to open a pizzeria. With mouth-watering pizzas prepared by the founders themselves, Pizza Hut soon became the most popular neighbourhood restaurant. From then to over 12,500 restaurants across the world today, we have come a long way.

Today, Pizza Hut is about much more than pizzas. From freshly sauteed pastas & delicious appetizers to mocktails, desserts, soups and salads, we have a wide range for you to feast on. All this, combined with the warm, inviting ambience and friendly service, will lead to endless conversations, laughter and memories that you'll cherish forever. So, let your hair down and feel at ease. Go ahead and enjoy the All New Pizza Hut experience!

Photos



PLS FOLLOW

[Adelle Davis](#)

We are indeed much more than what we eat, but what we eat can nevertheless help us to be much more than what we are.

[Albert Ellis, Michael Abrams, Lidia Dengelegi](#)

Eating is always a decision, nobody forces your hand to pick up food and put it into your mouth.

[Fran Lebowitz](#)

Food is an important part of a balanced diet.

THANKS FOR VISIT OUR WEBSITE KEEP VISITING.... Copyright © 2011 BILL'S PIZZA. All rights reserved.

CODING:

```
<html>

<head>

<link href="style.css" rel="stylesheet" type="text/css" />

<title>Pizza hut template</title>

</head>

<body>

<div id="container">

<div id="header">

<div id="logo_w1"></div>

<div id="logo_w2"></div>

<div id="header_text">

<a href="#"></a>

</div>

<ul>

<li><a href="index.html">Home</a></li>

<li><a href="Aboutus.html">About Us</a></li>

<li> <a href="Menu.html">Menu Card</a></li>

<li><a href="Contact.html">Contact us</a></li>

</ul>

</div>

<div id="content">

<div id="left">

<h1>Contact Details</h1>

<p>BILL'S PIZZA<br />

Houghton Street<br />

City of France, Greater France, <br />

020 7995 7686<br />

</p>

<h1>Photos</h1>

<div id="photos">
```


</div>

</div>

<div id="right">

<h2>Quotes of the day</h2>

Robert Orben

<p>I take my children everywhere, but they always find their way back home.</p>

John F. Kennedy

<p>Forgive your enemies, but never forget their names.</p>

George Bernard Shaw

<p>Hell is full of musical amateurs.</p>

</div>

<div id="footerline"></div>

</div>

<div id="footer">THANKS FOR VISIT OUR WEBSITE KEEP VISITING....

Copyright © 2011 BILL'S PIZZA.All rights reserved.</div>

</div>

</body>

</html>

MENU CARD:



[Home](#) [About US](#) [Menu Card](#) [Contact us](#)

OUR PRICES

ITEMS	PRICE
Hot n Spicypanner	Rs.500
Chicken Skewers	Rs.400
Chicken Sings	Rs.450
Tuscani Singles	Rs.300
Costco	Rs.200

Motivation

[Edward Gibbon](#)

We improve ourselves by victories over ourself. There must be contests, and you must win.

[Oprah Winfrey](#)

I define joy as a sustained sense of well-being and internal peace - a connection to what matters.

[Jef Mallett](#)

Mach-S, the speed at which stress can't keep up, is simply forward motion. But it has to be self- propelled. Note that people in cars are still stressed.

Photos



THANKS FOR VISIT OUR WEBSITE KEEP VISITING.... Copyright © 2011 BILL'S PIZZA. All rights reserved.

CODING:

```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<link href="style.css" rel="stylesheet" type="text/css" />
<title>Make a donation</title>
</head>
<body>
```

```
<div id="container">

<div id="header">

<div id="logo_w1"></div>

<div id="logo_w2"></div>

<div id="header_text">

<a href="#"></a>

</div>

<ul>

<li><a href="index.html">Home</a></li>

<li><a href="AboutUs.html">About US</a></li>

<li> <a href="Menu.html">Menu Card</a></li>

<li><a href="Contact.html">Contact us</a></li>

</ul>

</div>

<div id="content">

<div id="left">

<h1> OUR PRICES</h1>

<table border=0 cellspacing="20" cellpadding="20">

<tr>

<th>ITEMS</th>

<th>PRICE</th>

</tr>

<tr>

<td>Hot n Spicypanner</td>

<td> Rs.500</td>

</tr>

<tr>

<td>Chiken Skewers</td>

<td>Rs.400</td>

</tr>

<tr>
```

<td>Chiken Sings</td>

<td>Rs.450</td></tr>

<tr>

<td>Tuscani Singles</td>

<td>Rs.300</td></tr>

<tr>

<td>Costco</td>

<td>Rs.200</td>

</tr>

</table>

<h1>Photos</h1>

<div id="photos">

</div>

</div>

<div id="right">

<h2>Motivation</h2>

Edward Gibbon

<p>We improve ourselves by victories over ourself. There must be contests, and you must win. </p>

Oprah Winfrey

<p>I define joy as a sustained sense of well-being and internal peace - a connection to what matters.</p>

Jef Mallett,

<p>Mach-S, the speed at which stress can't keep up, is simply forward motion. But it has to be self- propelled. Note that people in cars are still stressed.</p>

</div>

<div id="footerline"></div>

</div>

<div id="footer">THANKS FOR VISIT OUR WEBSITE KEEP VISITING....

Copyright © 2011 BILL'S PIZZA. All rights reserved.</div>

</div>

</body>

</html>

CONTACT US:



Home About Us Menu Card Contact us

Contact Details

BILL'S PIZZA
Houghton Street
City of France, Greater France,
020 7995 7686

Photos



Quotes of the day

[Robert Orben](#)
I take my children everywhere,
but they always find their way
back home.

[John F. Kennedy](#)
Forgive your enemies, but never
forget their names.

[George Bernard Shaw](#)
Hell is full of musical amateurs.

THANKS FOR VISIT OUR WEBSITE KEEP VISITING..... Copyright © 2011 BILL'S PIZZA.All rights reserved.

CODING:

```
<html>

<head>

<link href="style.css" rel="stylesheet" type="text/css" />

<title>Pizza hut template</title>

</head>

<body>

<div id="container">

<div id="header">

<div id="logo_w1"></div>

<div id="logo_w2"></div>

<div id="header_text">

<a href="#"></a>

</div>

<ul>

<li><a href="index.html">Home</a></li>

<li><a href="Aboutus.html">About Us</a></li>

<li><a href="Menu.html">Menu Card</a></li>

<li><a href="Contact.html">Contact us</a></li>

</ul>

</div>

<div id="content">

<div id="left">

<h1>Contact Details</h1>

<p>BILL'S PIZZA<br />

Houghton Street<br />

City of France, Greater France, <br />

020 7995 7686<br />
```

```

        </p>

<h1>Photos</h1>

<div id="photos">

<a href="#"></a>

<a href="#"></a>

<a href="#"></a>

<a href="#"></a>

</div>

</div>

<div id="right">

<h2>Quotes of the day</h2>

<a href="#">Robert Orben</a>

        <p>I take my children everywhere, but they always find their way back home.</p>

<a href="#">John F. Kennedy</a>

        <p>Forgive your enemies, but never forget their names.</p>

<a href="#">George Bernard Shaw</a>

        <p>Hell is full of musical amateurs.</p>

</div>

<div id="footerline"></div>

</div>

<div id="footer">THANKS FOR VISIT OUR WEBSITE KEEP VISITING....

Copyright © 2011 BILL'S PIZZA.All rights reserved.</div>

</div>

</body>

</html>

```

CASCADING STYLE SHEET:

```

body {

    background-color:#99ff99;

    color:#000000;

    font-family: Verdana, Arial, Helvetica, sans-serif;

    font-size: 12px;

```

```
        margin: 10px 10px;
        padding: 0px;
    }
.clear{clear:both;}
* {
    margin: 0px;
    padding: 0px;
}
#container {
    margin: 0px auto;
    text-align: left;
    width: 717px;
}
a{
    font-size:12px;
}
p{
    margin: 15px 0px;
}
/* Header */
#header {
    margin: 0px 0px 0px 0px;
    background-image:url(images/header.jpg);
    width:717px;
    height:288px;
    position:relative;
}
#header ul{
    background-color:#85a157;
    width:711px;
    border: 3px solid #FFFFFF;
```

```
        display:block;
        top:255px;
        position:absolute;
        margin: 0px 0px 0px 0px;
        height:22px;
        padding:5px 0px 0px 0px;
        text-align:center;
    }
```

```
#header li{
    display:inline;
}
```

```
#header ul a{
    text-decoration:none;
    color:#FFFFFF;
    margin: 0px 15px;
}
```

```
#header ul a:hover{
    text-decoration:underline;
    color:#28556b;
}
```

```
#logo_w1,#logo_w2 {
    font-size: 24px;
    font-style:italic;
    color:#FFFFFF;
    position:absolute;
}
```

```
#logo_w1{
    top:15px;
    left:70px;
}
```

```
#logo_w2{
```



```
        top:44px;
        left:94px;
    }
    #header_text {
        top:90px;
        left:43px;
        width:230px;
        position:absolute;
    }
    #header_text p{
        font-size: 18px;
        color:#FFFFFF;
    }
    #header_text a{color:#28556b;}
    #header_text a:hover{color:#c77e0c;}

    /* Content */
    #content {
        background-image:url(images/content_bg.gif);
        width:717px;
    }
    img{
        border-width:0px;
    }
    h1{
        color:#000000;
        font-size:14px;
        margin: 20px 0px 20px 0px;
    }

    h2{
```

```
        color:#85a157;

        font-size:14px;

        text-align:center;

        width:200px;

        margin: 10px 0px 15px 0px;

    }

    #left {

        float:left;

        width:428px;

        margin-left:27px;

        padding: 0px 10px 30px 0px;

        display:inline;

    }

    #left a{color:#28556b;}

    #left a:hover{color:#c77e0c;}

    #photos a{

        margin-right:14px;

    }

    #right {

        float:right;

        width:210px;

        padding: 0px 20px 20px 20px;

        margin-top:10px;

        border-left: #FFF 2px solid;

    }

    #right a{

        color:#c77e0c;

    }

    #right a:hover{

        color:#85a157;
```

```
}  
  
/* Footer */  
  
#footerline {  
clear:both;  
background-image:url(images/footer_bg.gif);  
font-size:1px;  
height:10px;  
}  
  
#footer {  
width:717px;  
text-align:center;  
padding: 20px 0px;  
}
```

RESULT:

Thus the web page was created successfully and output was verified.

STUDY OF JAVA SCRIPT

JavaScript:-

Data Types:-

- Number

4.5, 8.2, 7

Any number either it's a positive, negative or zero or decimal

- Boolean

true, false

A logical true or false

- String

“Center”, “Ship!”

Any string inside the quotation marks. Special characters are also allowed.

- Object

Car, book

Any “thing” that has got methods and properties

- Function

alert(), confirm()

Definition of a function

Variables:-

- Variables can be created using var keyword

var temp

var onemoretemp, strtemp

- Assigning values to variables

temp = 45

onemoretemp = temp

strtemp= "temp value"

Operators:-

▪ Addition (+) ▪ Subtraction (-) ▪ Multiplication (*) ▪ Division (/) ▪ Modulus (%) ▪ String concatenation operator is "+" ▪ Pre-increment operator and post-increment operators (++) ▪ Pre-decrement and post-decrement operators (--) ▪ NOT (!)	▪ Bit wise XOR (^) ▪ AND (&&) ▪ Shift Left (<<) ▪ OR () ▪ Shift Right Zero fill (>>>) ▪ Bit wise AND (&) ▪ Shift Right with Sign (>>) ▪ Bit wise OR () ▪ Identity (===) ▪ Bit wise NOT (~) ▪ Non identity (!=)
--	--

Arrays:-

- Used to store multiple data, based on an index, in one storage structure
- The index starts from zero

```
var k=new Array();
```

```
var t=new Array("rama", "rahim", "Robert",5,8);
```

```
document.write(t[0]);
```

- JavaScript supports multi-dimensional arrays also.

Data Type Conversions:-

- JavaScript is a dynamically typed language

```
var answer = 42
```

```
answer = "Thanks for all the fish..."
```

- We can convert a number in to string and vice versa.

- parseInt method - used to convert a string value, which is holding a number data type

```
temp = parseInt("42")
```

```
anoth = parseInt("54.34")
```

```
Str="" + 2500;
```

```
Str="" + temp;
```

- Simply adding an empty quote to a number value will convert a number into string data type.

Sample JavaScript Program:-

Program to print "Hello World" in browser

```
<html>
```

```
<head>
```

```
<title>Hello World</title>
```

```
</head>
```

```
<body>
```

```
<script language="JavaScript">
```

```
document.write("Hello World");
```

```
</script>
```

```
</body>
```

```
</html>
```

User Interactivity through JavaScript:-

- Functions used to interact with the client

```
alert()
```

```
prompt()
```

- The alert method displays a dialog box in the browser with the text string passed as an argument

- The prompt method is used to get some information from the user
 - It displays a prompt dialog box and captures the value entered by the user.
 - We can store the value entered by the user in a variable

```
<script language="JavaScript">
```

```
    alert("Welcome How was the day ! ");
```

```
    user=prompt("Enter Your Name","Type ur name");
```

```
    document.write("Welcome to JavaScript World<br>");
```

```
    document.write("Your name is:- "+user);
```

```
</script>
```

Decision Constructs:-

If...else

If (condition)

```
{
```

statements, if it is true

```
}
```

else

```
{
```

statements if it is false

```
}
```

For Multiple Conditions

if(condition)

```
{
```

Statements

```
}  
  
else if (condition)  
  
{  
  
statements  
  
}
```

Switch...case

- Used for multiple conditions

```
switch(type)  
  
{  
  
case "type1": Statement 1; break;  
  
case "type2": Statement 2; break;  
  
default: Default Statement;  
  
}
```

Loops

- The while and for statements are used to execute a block of code for as long as a certain condition is valid

```
while(expression)  
  
{  
  
Statements  
  
}
```

```
for(initialization; condition; increment/decrement)  
  
{
```


one or more statements

}

- The break statement is used to exit a loop such as from for or while blocks

Functions or Methods:-

- Group of code that handles actions invoked by event handlers (more on this, later) or by simple statements
- reduces the writing of the code again and we can reuse the same
- Two types:- built-in functions and user-defined functions
- Built-in functions - functions which are already existing in the language itself
- E.g., parseInt, alert, prompt etc.,
- User-defined functions - written by the user to make our scripts scalable
- Syntax for a function is as follows.

```
function functionname(arg1,arg2....)
```

```
{
```

Body

```
}
```

Confirm () Method:-

- Similar to the alert method
- Displays a dialog box and asks the user to proceed further or not
- Returns either TRUE or FALSE based on the selection during the method call
- Method brings up a dialog box that prompts the user to select either 'o.k.' or 'cancel', the first returning TRUE and the latter, FALSE.

Events & Event Handlers:-

- JavaScript is based on event-driven model
- Predetermined events and event handlers that deal with those events
- Event handlers fire those events whenever that event happens.

Events

Blur : Occurs when the focus is removed

Focus : Occurs when the user gives input or focus to an element in the form

Change : ccurs when the user changes some value of a field

Click : Arises when the user clicks on a link or an element in the form

Double Click : Occurs when the user double clicks

Key Down : Occurs when the key makes its first contact

Key Up : When the contact with the key is released

Load : Occurs when the page is loaded

UnLoad : Occurs when the current window is cleared from view

Error : Occurs when there is a transfer error

Mouse Down : Occurs when the user presses any of the buttons of a mouse

Mouse Up : Occurs when the user releases the button.

Mouse Over : Occurs whenever the cursor rolls into the rectangular space of the object in the screen

Mouse Out : Occurs when the cursor is moved outside the rectangle space

Submit : When the user submits a form of a page

Reset : Whenever the form is reset

Select : Occurs when the option is selected

Resize : If the user resizes the window


JavaScript Object Model:-

- Models HTML documents in a very consistent and intuitive way
- Provides an interface to access, navigate, and manipulate web page
- DOM allows you to access and update the content, structure, and style of a document
- To provide more interactive content on the Web
- DOM allows HTML to be manipulated dynamically

- Each HTML tag can be accessed and manipulated via its ID and NAME attributes
- Each object has its own properties, methods, and events
- The Object Model allows you to navigate along the document tree, up and down, and to the sides
 - You can use the child, parent, and sibling relationships to go from a particular point to any other point on your page tree
- Model is divided into three sub-groups
 - Language objects
 - Form-field objects
 - Browser objects
- Browser Objects
 - navigator
 - window
 - document
 - location
 - history
 - anchor
 - link
 - frame
 - image
- Form-Field Objects
 - Button
 - Checkbox
 - Radio
 - Text
 - Reset
 - Text Area
 - Password
 - Select
 - Submit
 - Hidden
- Language Objects
 - Date
 - Array

- Math
- String

JavaScript Document Object Model:-

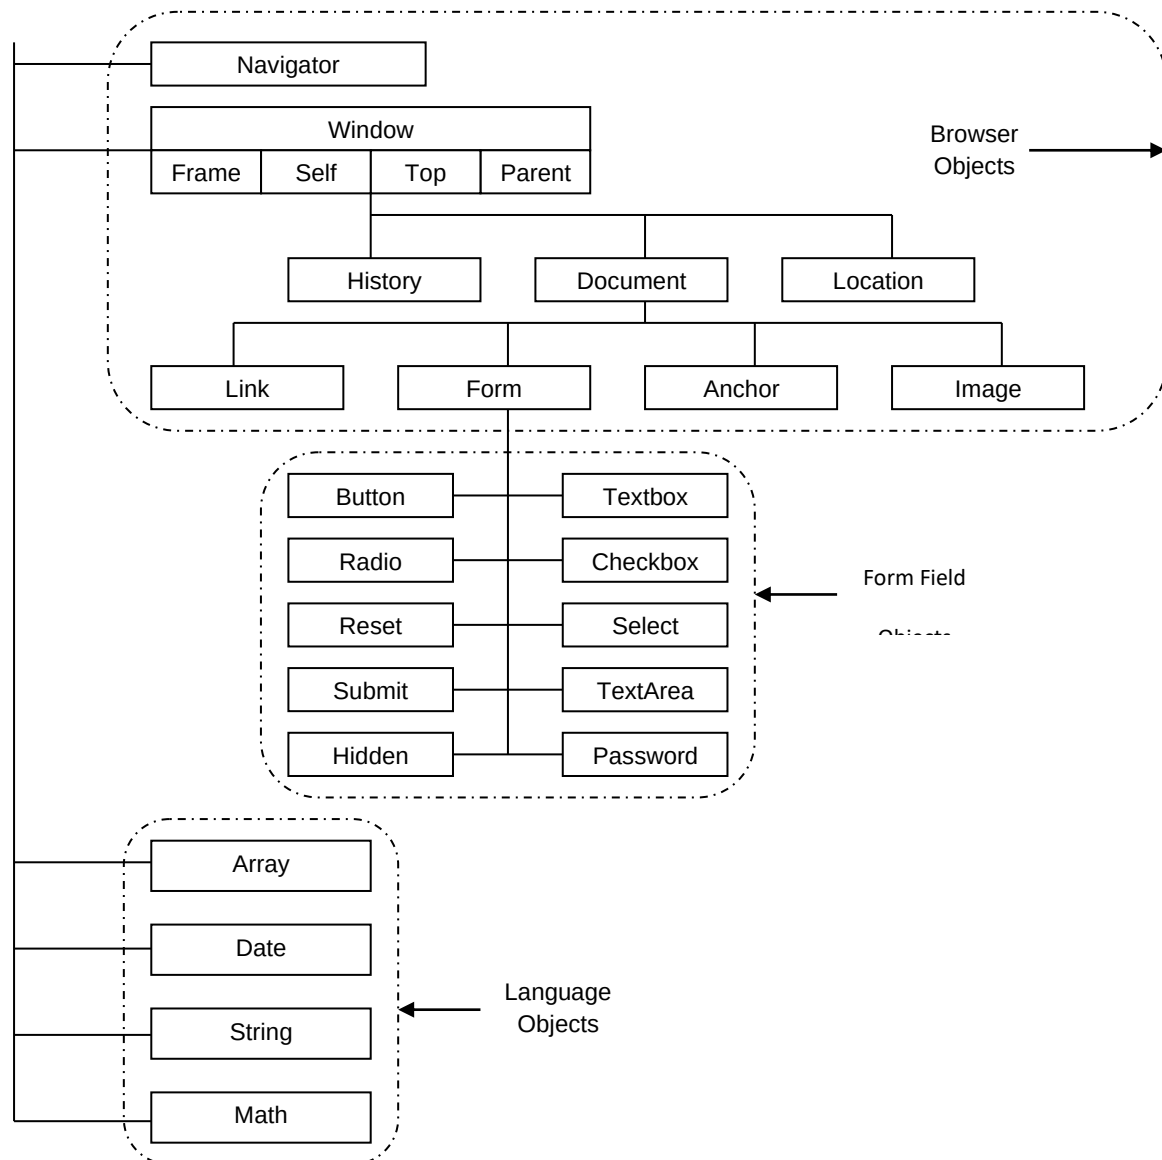

Language Objects:-

The Date Object

- All information related to date and time can be accessed
- Built-in methods of JavaScript allow us to access the date and time values that are stored in a date object

- **getDate()** Gets the number of the day (between 1 and 31)
- **getDay()** Gets the day of the week (0 through 6, 0 is for Sunday)
- **getMonth()** Gets the number of the month (0 through 11, 0 is for January)
- **getYear()** Returns the year part of the date object.
- **getSeconds()** Returns the seconds portion of the date object
- **getminutes()** Gets the number of minutes (0 through 59)
- **getHours()** Returns the hour part of the Date object
- **goGMTString()** Returns the string in representing the universal date time of date object.
- **goLocalString()** Returns the date in the local system's format
- **setDate(), setMonth(), setYear(), setHours(), setMinutes(), setSeconds() and setTime()** methods to assign values to the Date object

The Math Object

- Commonly used methods of the Math object
- **abs(number)** -- Returns the absolute value
- **ceil(numb)** -- Returns the smallest integer greater than or equal to the number
- **floor(number)** -- Returns a largest number less than or equal to the number
- **sin(numb)** -- Returns the sine of the number
- **cos(numb)** -- Returns the cosine of the number
- **tan(number)** -- Returns the tangent of the number
- **acos(number)** -- Returns arccosine of the number
- **asin(number)** -- Returns arcsine of the number
- **atan(number)** -- Returns arctangent of the number
- **sqrt(number)** -- Returns the square root of the number
- **round()** -- Returns a number to its nearest integer
- **max(num1,num2)** -- Returns the largest of two arguments
- **min(num1,num2)** -- Returns the smallest of two arguments
- **log(num)** -- Returns the natural logarithm(base E) of the number
- **exp(num)** -- Returns exponential value of the number
- **random()** -- Returns a random number between 0 and 1
- **pow(x,y)** -- Returns the x to the power of y value

The String Object

- Although JavaScript is not a “strongly typed” language, we still need to be aware of their impact on the way we work in the Forms
- Length is the main property of the String object
 - It gives us the total number of characters in the string.

Commonly used methods of the String object

- `charAt(index)` -- Returns one-character from the string based on the specified index
- `lastIndexOf(searchstring)` -- Returns the index value of the last character within the string where the searchstring begins
- `indexOf(searchstring)` -- Returns the index value of the first occurrence of the searchstring
- `concat(string)` -- Returns the combined string
- `replace(expression, replacestr)` -- Replaces all that matched expressions with the replacestr and returns the replaced string
- `search(expression)` -- Returns the offset integer of the matching expression
- `slice(startindex)` -- To extract a portion of one string and to create a new string as a result (without modifying the original string)
- `split(delimiter)` -- Splits the string based on the delimiter specified and return an array of delimited items.
- `substring(i1,i2)` -- To extract a copy of a substring starting from index i1 till i2 from the original string.
- `toLowerCase(),toUpperCase()` -- Converts the string to lowercase and uppercase characters.

Methods used to format the strings in JavaScript

- `String.bold()` -- Makes the string in to bold face
- `String.fontcolor(color)` -- Converts the string to the color specified
- `String italics()` -- Makes the string italicized
- `String.big(),String.small()` -- Increases or decreases the weight of the font
- `String.fontSize(number)` -- Converts the string with the font number specified
- `String.link(URL)` -- Links the string to the specified URL

Browser Objects:-

Location Object

- Represents the URL loaded into the window
- Used to navigate to a page in our own site or any other page in the Internet

`location.href = "http://mail.yahoo.com"`

`newwin.location.href = "./bankbalance.asp"`

History Object

- Every time we visit a page, it will get stored in the history list
- Whenever we press the forward or back buttons in our browser we are accessing the `history.back()` and `history.forward()` methods of the history object
- **forward()**
 - Sends the user to the next page, according to the history list
- **back()**
 - Sends the user to the previous page, according to the history list

Document Object

- The document object we can access each and every element inside the HTML page
- Methods of the document Object
 - **write()** Writes the text of content to the document
 - **clear()** Clears the document window

Image Object

- We can manipulate the properties of the images using this object
- All the images inside a particular document are stored in the images array
- `document.images[0].src="first.jpg"`

Form Object

- Provides us an opportunity to access the forms inside a document
- All the forms are contained in an array, which starts from 0
- We can give the form name itself as a parameter to access a particular form
- `document.forms("myform")` or `document.forms(0)`

Form-Field Objects:-

Accessing Form Fields

- To access a form object, we can refer it either by its name or by its index number in the form elements array
 - document.forms[0].elements[0].value or
 - document.myform.userid.value
- The form array will hold all the elements in the form including submit and reset button, if available

Example Program:-

Example1:-

<html>

<head>

<body>

CIT

<script language="javascript">

i=0;

do

{

i++;

document.write(i+"
");

}


while(i<10);

</script>

</body>

</head>

</html>

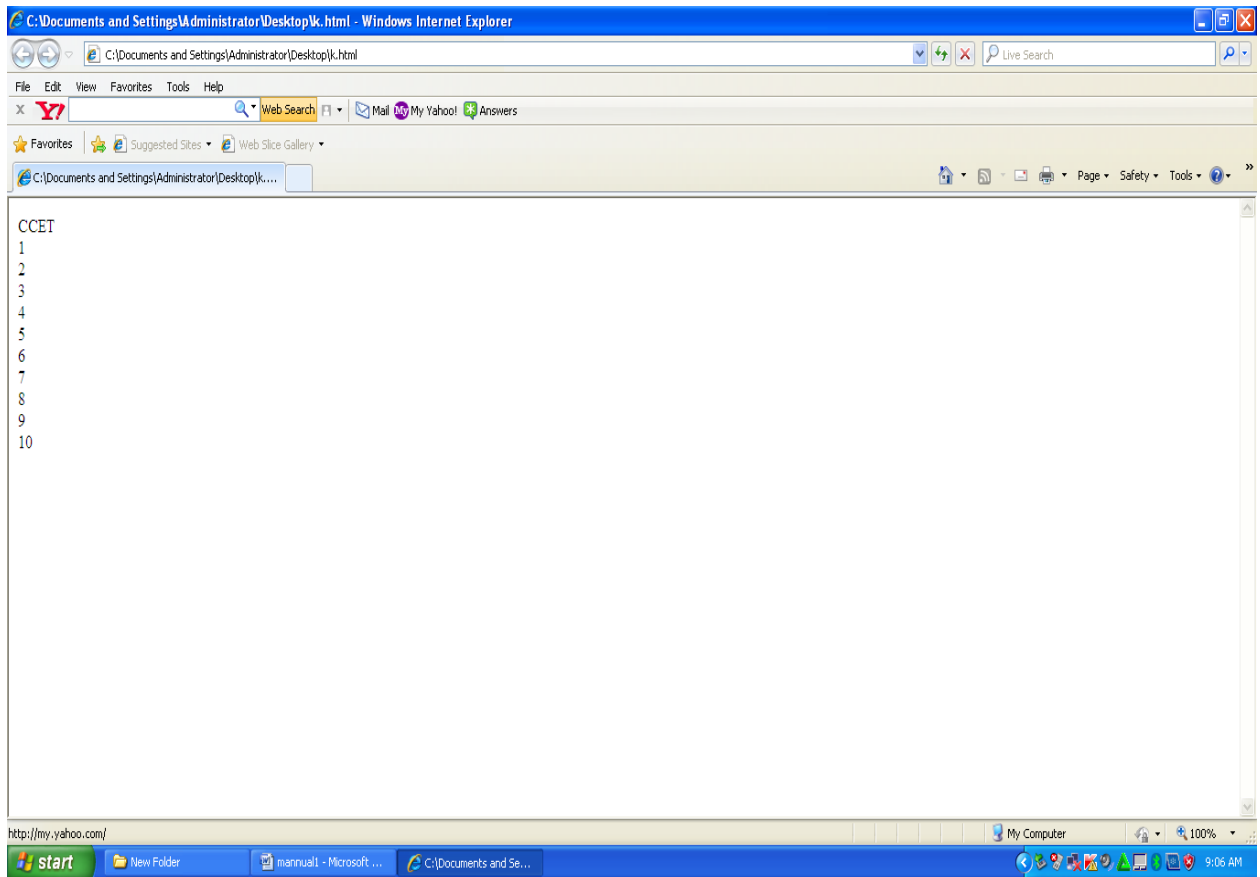

Example2:-

<html>

<head>

<body>

<form name="example">

<input type="text" size="20" name="calculator">

<input type="button" name="b1" value="calculate" onclick="cal()">

<input type="reset" name="b2" value="reset">


Answer: <input type="text" size="20" name="answer">

</form>

<script>

function cal()

```
{  
  
document.example.answer.value=eval (document.example.calculator.value)  
  
}  
  
</script>  
  
</body>  
  
</head>  
  
</html>
```

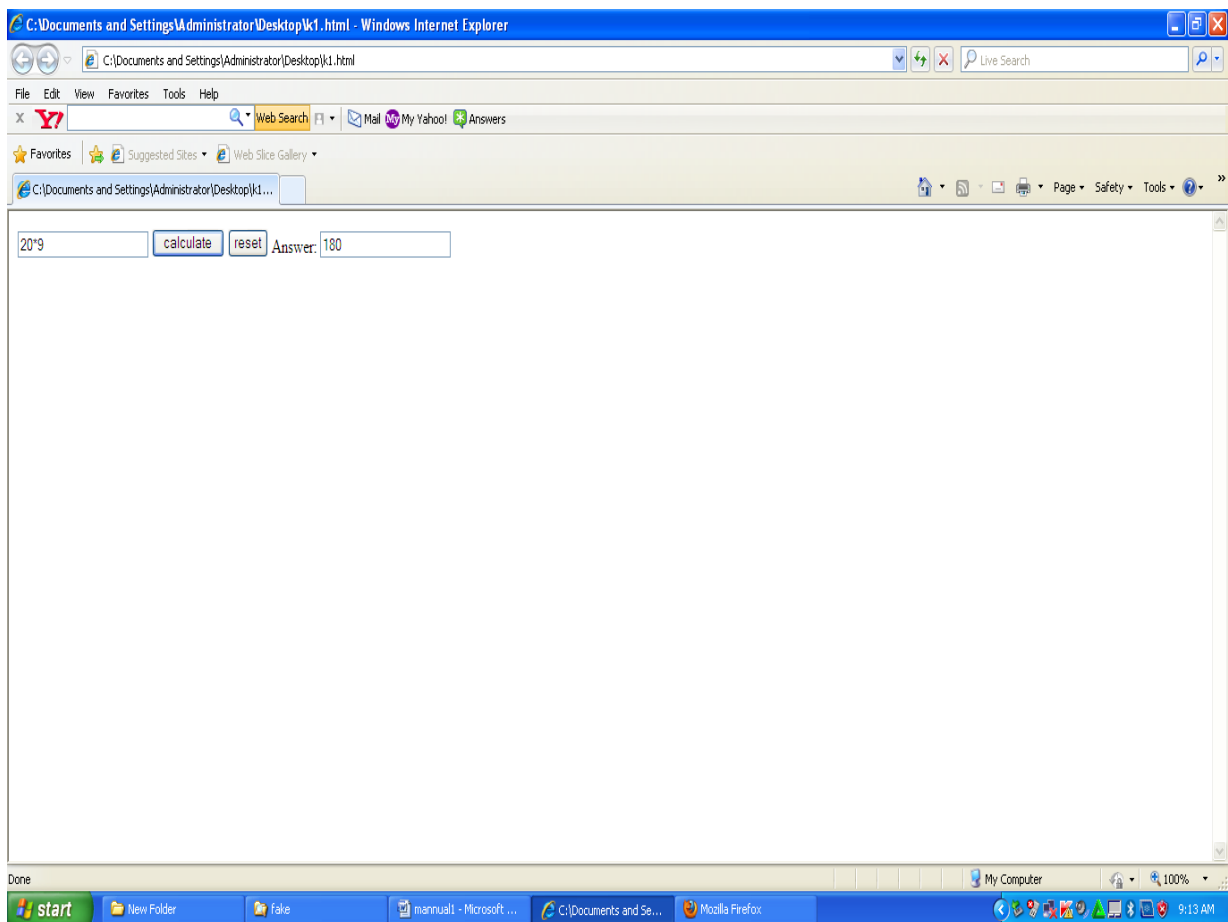

RESULT

Thus the basic concepts of JavaScript were studied.

Ex: No: 2.1(a) User Registration Form Validation Using JavaScript

Aim:

To perform user validation for the inputs given through HTML using JavaScript.

Algorithm:

1. Design the html form to get the inputs form the user.
2. Specify the scripting language in JavaScript.
3. Check if the values are entered in the input boxes by retrieving the data using document.formname.textboxname
4. If the data is no entered alert the user with the message that the data is not entered.

Program:

```
<html>
<head>
<title>user registration form</title>
</head>
<body>
<center>
<script type='text/javascript'>
function validate()
{
var g,c,chk1;
g="";
c="";
chk1="";
for(i=0;i<document.reg.gen.length;i++)
{
if(document.reg.gen[i].checked)
g=document.reg.gen[i].value;
}
for(i=0;i<document.reg.cou.length;i++)
{
if(document.reg.cou[i].selected)
c=document.reg.cou[i].value;
}
for(i=0;i<document.reg.chk1.length;i++)
{
if(document.reg.chk1[i].checked)
chk1=document.reg.chk1[i].value;
}
```


```
if(document.reg.n.value=="")
{
alert("enter your name")
document.reg.n.focus();
}
else if(document.reg.addr.value=="")
{
alert("enter your address")
document.reg.addr.focus();
}
else if(document.reg.ph.value=="")
{
alert("enter your phone number")
document.reg.ph.focus();
}
else if(g=="")
{
alert("Select your gender")
document.reg .gen.focus();
}
else if(document.reg.id.value=="")
{
alert("enter your mail id ")
document.reg.id.focus();
}
else if(c=="")
{
alert("select your country")
document.reg .cou.focus();
}
else if(chk1=="")
{
alert("Check your hobbies")
document.reg .chk1.focus();
}
else
{
alert("Registration Successful")
}
}
</script>
<form name="reg" method="post">
<center><strong>
<font color="voilet"> USER REGISTRATION FORM VALIDATION </font>
</strong></center>
<hr><table width="30%" cellspacing="15" cellpadding="0" border="0">
```

```

<tr>
<td>
<b>Name:<td><input type="text" name="n">
</tr>
<tr>
<td><b>Address:<td><textarea rows="4" columns="4" name="addr">
</textarea>
</tr>
<tr>
<td><b>Phone:<td><input type="text" size="15" name="ph">
</tr>
<tr>
<td><b>Gender:<td><input type="radio" name="gen" value="ml">male
<input type="radio" name="gen" value="fl">female
</tr>
<tr>
<td><b>E-mail:<td><input type="text" name="id" size="20">
</tr>
<tr>
<td><b>Country:<td><select name="cou">
<option><option value=India> India
<option><option value= Pakistan>Pakistan
<option><option value= Australia>Australia
</select>
</tr>
<tr>
<td><b>Hobbies:
<td><br><br><input type="checkbox" name="chk1" value="sing">Sing
<br><input type="checkbox" name="chk1" value="Play">Play
<br><input type="checkbox" name="chk1" value="Read">Read
<br><br>
</tr>
<tr>
<td><center><input type="button" value="Register" OnClick=validate()></center>
<td><center><input type="reset" value="Reset Me"></center>
</tr>
</center>
</table>
</form>
</body>
</html>

```

Output:

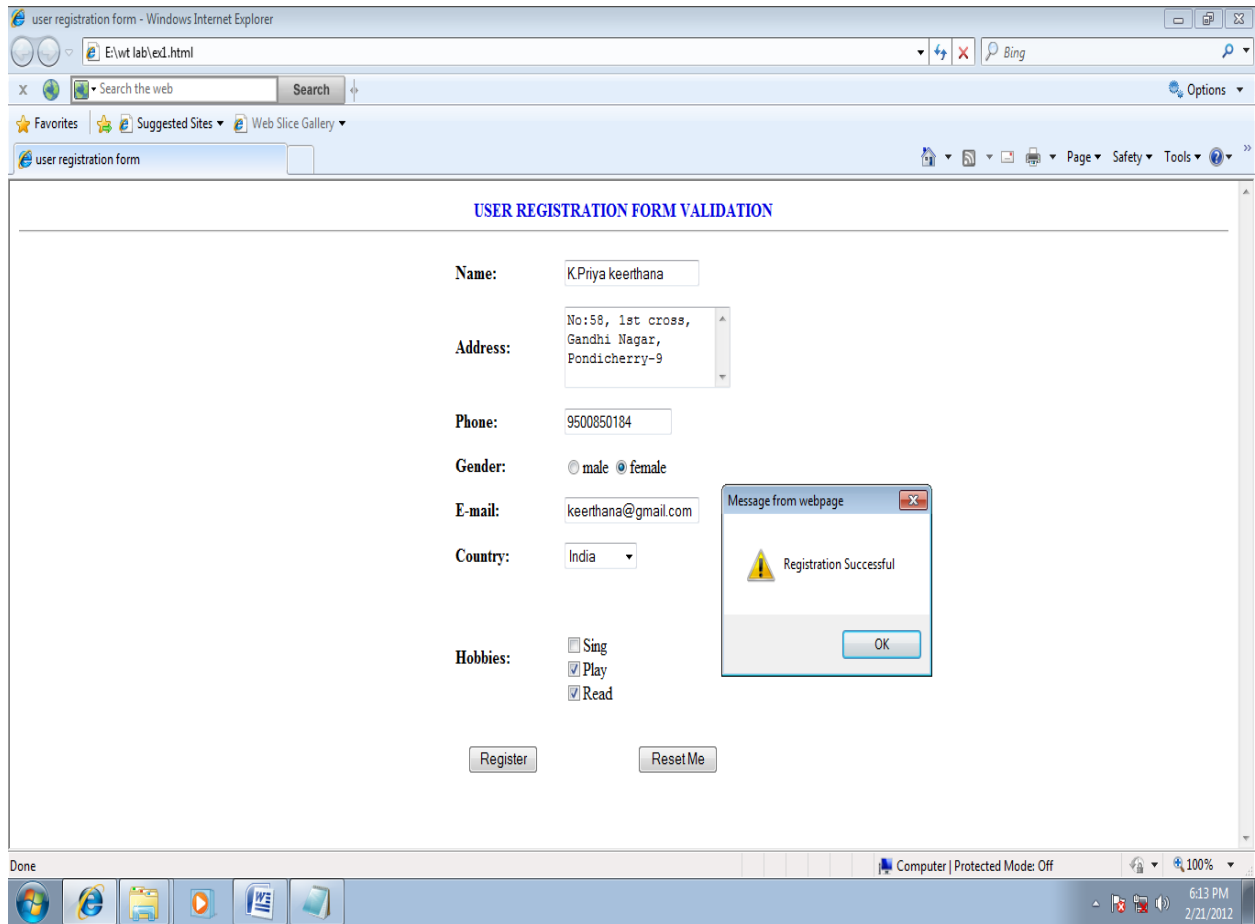

RESULT:

Thus the user registration form validation has been executed and the output is verified successfully.

Aim:

To perform user validation for the inputs given through HTML using JavaScript.

Algorithm:

1. Design the html form to get the inputs form the user.
2. Specify the scripting language in JavaScript.
3. Check if the values are entered in the input boxes by retrieving the data using ValidateContactForm
4. If the data is no entered alert the user with the message that the data is not entered.

Validation.html

```
<html>
<head>
<title>Form Validation Example</title>
<script>
function ValidateContactForm()
{
    var name = document.ContactForm.Name;
    var email = document.ContactForm.Email;
    var phone = document.ContactForm.Telephone;
    var nocall = document.ContactForm.DoNotCall;
    var what = document.ContactForm.Subject;
    var comment = document.ContactForm.Comment;

    if (name.value == "")
    {
        window.alert("Please enter your name.");
        name.focus();
        return false;
    }

    if (email.value == "")
    {
        window.alert("Please enter a valid e-mail address.");
        email.focus();
        return false;
    }
    if (email.value.indexOf("@", 0) < 0)
    {
        window.alert("Please enter a valid e-mail address.");
        email.focus();
    }
}
```

```

        return false;
    }
    if (email.value.indexOf(".", 0) < 0)
    {
        window.alert("Please enter a valid e-mail address.");
        email.focus();
        return false;
    }

    if ((nocall.checked == false) && (phone.value == ""))
    {
        window.alert("Please enter your telephone number.");
        phone.focus();
        return false;
    }

    if (what.selectedIndex < 1)
    {
        alert("Please tell us how we can help you.");
        what.focus();
        return false;
    }

    if (comment.value == "")
    {
        window.alert("Please provide a detailed description or comment.");
        comment.focus();
        return false;
    }
    return true;
}

function EnableDisable(chkbox)
{
    if(chkbox.checked == true)
    {
        document.ContactForm.Telephone.disabled = true;
    }
    else
    {
        document.ContactForm.Telephone.disabled = false;
    }
}
</script>
</head>

```



```

<body>
<center><font color="blue" size="5"><h1>Validation Form</h1></font></center>
<hr>
<br>
<form method="post" action="mailto:paul@drsjspaulmcet.edu.in"
name="ContactForm" onsubmit="return ValidateContactForm();">
<center>
<table>
<tr><td>Name: </td>
<td><input type="text" size="65" name="Name"></td>
</tr>
<tr><td>E-mail Address: </td>
<td><input type="text" size="65" name="Email"></td>
</tr><tr><td>Telephone: </td>
<td><input type="text" size="65" name="Telephone"></td>
</tr>
<tr><tr><td colspan="2"><input type="checkbox" name="DoNotCall"
onclick="EnableDisable(this);"> Please do not call me.</td>
</tr>
<tr><td>What can we help you with? </td>
<td><select type="text" value="" name="Subject">
<option></option>
<option>Customer Service</option>
<option>Question</option>
<option>Comment</option>
<option>Consultation</option>
<option>Other</option>
</select></td>
</tr>
<tr><td>Comments: </td>
<td><textarea cols="55" name="Comment"></textarea></td>
</tr>
<tr><td><input type="submit" value="Send" name="submit"></td>
<td><input type="reset" value="Reset" name="reset"></td>
</tr>
</table>
</center>
</form>
</body>
</html>

```

OUTPUT

The screenshot shows a Microsoft Internet Explorer window titled "Form Validation Example - Microsoft Internet Explorer". The address bar displays "C:\Documents and Settings\Administrator\Desktop\Java Record\Java Record\validation.html". The page content features a "Validation Form" with the following fields and controls:

- Name: [Empty text box]
- E-mail Address: [Empty text box]
- Telephone: [Empty text box]
- ☐ Please do not call me.
- What can we help you with?: [Empty dropdown menu]
- Comments: [Empty text box]
- Buttons: "Send" and "Reset"

A modal error message box is displayed over the form, titled "Microsoft Internet Explorer", with a yellow warning icon and the text "Please enter your name." and an "OK" button.

The screenshot shows the same Microsoft Internet Explorer window. The "Name" field now contains the text "Ram". The "E-mail Address" field contains the text "ram007gmail.com". The "Telephone" field remains empty. The modal error message box is still present, but the text has changed to "Please enter a valid e-mail address." with an "OK" button.

The screenshot shows a Microsoft Internet Explorer window titled "Form Validation Example - Microsoft Internet Explorer". The address bar displays the path "C:\Documents and Settings\Administrator\Desktop\Java Record\Java Record\validation.html". The form, titled "Validation Form", contains the following fields and controls:

- Name:
- E-mail Address:
- Telephone:
- ☐ Please do not call me.
- What can we help you with?
- Comments:
-

The status bar at the bottom shows "Done" and "My Computer".

RESULT:

Thus the user registration form validation has been executed and the output is verified successfully.

STUDY OF VB SCRIPT

Aim:-

To study the basic concepts of scripting languages like VBScript and JavaScript.

VBScript:-

- VBScript is a scripting language
- A scripting language is a lightweight programming language
- VBScript is a light version of Microsoft's programming language Visual Basic

When a VBScript is inserted into a HTML document, the Internet browser will read the HTML and interpret the VBScript. The VBScript can be executed immediately, or at a later event.

VBScript Code in an HTML Document:-

```
<html>
```

```
<head>
```

```
</head>
```

```
<body>
```

```
<script type="vbscript">
```

```
document.write("Hello from VBScript!")
```

```
</script>
```

```
</body>
```

```
</html>
```

To insert a script in an HTML document, <script> tag is used. Use the type attribute to define the scripting language.

```
<script type="vbscript">
```

VBScript:-

The command for writing some text on a page is **document. Write:**

document. Write ("Hello from VBScript!")

Variable

A variable is a "container" for information you want to store. A variable's value can change during the script. You can refer to a variable by name to see its value or to change its value. In VBScript, all variables are of type *variant*, that can store different types of data.

Rules for Variable Names:

- Must begin with a letter
- Cannot contain a period (.)
- Cannot exceed 255 characters

Declaring Variables

You can declare variables with the Dim, Public or the Private statement.

```
dim name
```

```
name=some value
```

Now you have created a variable. The name of the variable is "name".

However, the last method is not a good practice, because you can misspell the variable name later in your script, and that can cause strange results when your script is running. This is because when you misspell for example the "name" variable to "name" the script will automatically create a new variable called "name". To prevent your script from doing this you can use the Option Explicit statement. When you use this statement you will have to declare all your variables with the dim, public or private statement. Put the Option Explicit statement on the top of your script.

```
Option explicit
```

```
dim name
```

```
name=some value
```

Array Variables

The declaration of an array variable uses parentheses () following the variable name.

```
dim names(2)
```

The number shown in the parentheses is 2. We start at zero so this array contains 3 elements. .
Multiple dimensions are declared by separating the numbers in the parentheses with commas.

```
dim table(4, 6)
```

Conditional Statements:-

In VBScript we have three conditional statements:

if...then...else statement - use this statement if you want to select one of two sets of lines to execute

if...then...elseif statement - use this statement if you want to select one of many sets of lines to execute

select case statement - use this statement if you want to select one of many sets of lines to execute

If....Then.....Else

```
if i=10 then
```

```
    msgbox "Hello"
```

```
else
```

```
    msgbox "Goodbye"
```

```
end If
```

If....Then.....Elseif

```
if payment="Cash" then
```

```
    msgbox "You are going to pay cash!"
```

```
elseif payment="Visa" then
```

```
    msgbox "You are going to pay with visa."
```

```
elseif payment="AmEx" then
```

```
    msgbox "You are going to pay with American Express."
```

```
else
```

msgbox "Unknown method of payment."

end If

Select Case

select case payment

case "Cash"

msgbox "You are going to pay cash"

case "Visa"

msgbox "You are going to pay with visa"

case "AmEx"

msgbox "You are going to pay with American Express"

case Else

msgbox "Unknown method of payment"

end select

Looping Statements:-

In VBScript we have four looping statements:

For...Next statement - runs statements a specified number of times.

For Each...Next statement - runs statements for each item in a collection or each element of an array

Do...Loop statement - loops while or until a condition is true

While...Wend statement - Do not use it - use the Do...Loop statement instead

For...Next

For i=1 to 10

some code

Next

You can exit a For...Next statement with the Exit For keyword.

For Each...Next

A **For Each...Next** loop repeats a block of code for each item in a collection, or for each element of an array.

The **For Each...Next** statement looks almost identical to the For...Next statement. The difference is that you do not have to specify the number of items you want to loop through.

```
dim names(2)
```

```
names(0)="Tove"
```

```
names(1)="Jani"
```

```
names(2)="Hege"
```

```
For Each x in names
```

```
document.write(x & "<br />")
```

```
Next
```

Do...Loop

```
Do While i>10
```

```
some code
```

```
Loop
```

```
Do
```

```
some code
```

```
Loop While i>10
```

```
Do Until i=10
```


some code

Loop

Do

some code

Loop Until i=10

Do Until i=10

i=i-1

If i<10 Then Exit Do

Loop

VBScript Procedures:-

We have two kinds of procedures:

The Sub procedure

The Function procedure.

A Sub procedure

It is a series of statements, enclosed by the Sub and End Sub statements. It can perform actions, but **does not return** a value.

Sub mysub()

some statements

End Sub

or

Sub mysub(argument1,argument2)

some statements

End Sub

A Function procedure

It is a series of statements, enclosed by the Function and End Function statements. It can perform actions and **can return** a value. It returns a value by assigning a value to its name .

Function myfunction()

some statements

myfunction=some value

End Function

or

Function myfunction(argument1,argument2)

some statements

myfunction=some value

End Function

Call a Sub or Function Procedure

When you call a Function in your code, you do like this:

name = findname()

Here you call a Function called "findname", the Function returns a value that will be stored in the variable "name".

When you call a Sub procedure you can use the Call statement, like this:

Call MyProc(argument)

Or, you can omit the Call statement, like this:

MyProc argument

Example Program:-

Example1:-

```
<html>

<head>

<script type="text/vbscript">

option explicit

dim name

dim age

name="Keerthi"

age=20


document.write("Firstname:"&name)

document.write(" Age:"&age)

</script>

</head>

</html>
```

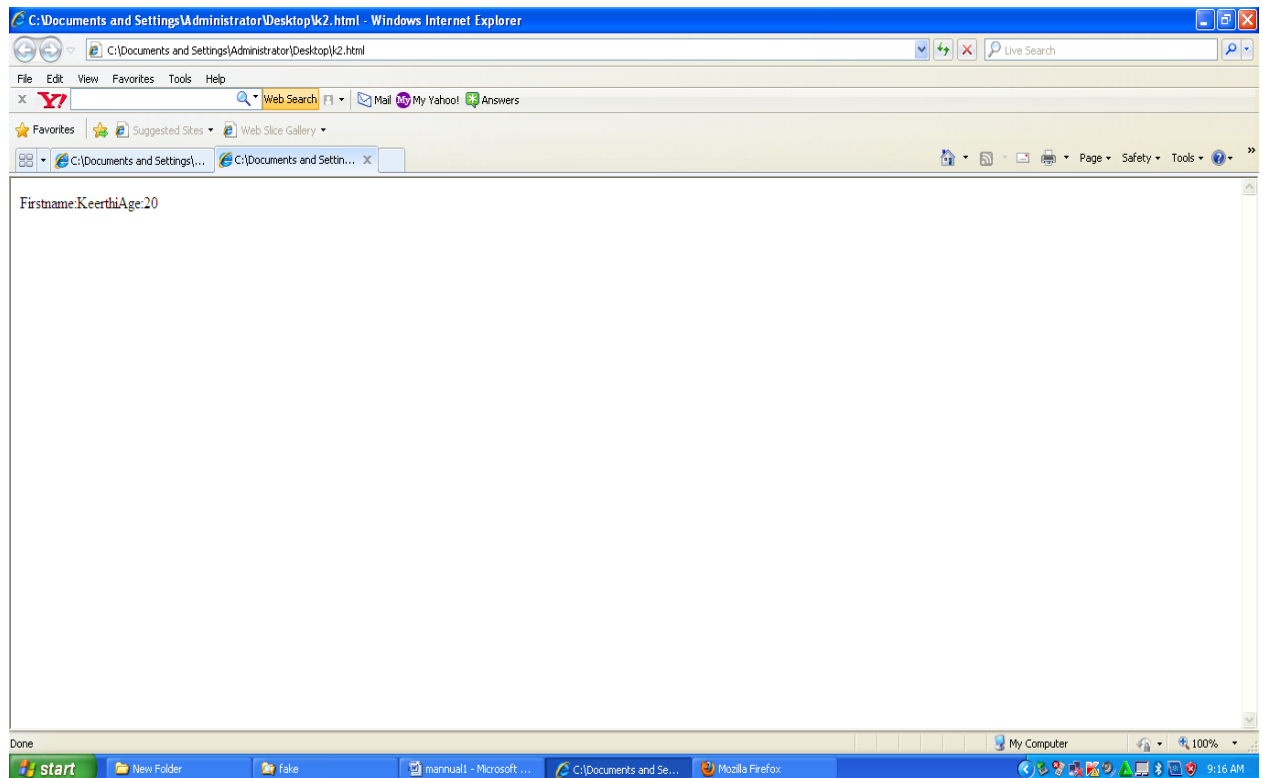

Example2:-

```
<html>

<head>
```

```
<script type="text/vbscript">
```

```
Dim haircolor
```

```
Haircolor="black"
```

```
If haircolor="black" then
```


```
Document.write("Same color as my dog!")
```

```
Endif
```

```
</script>
```

```
</head>
```

```
</html>
```

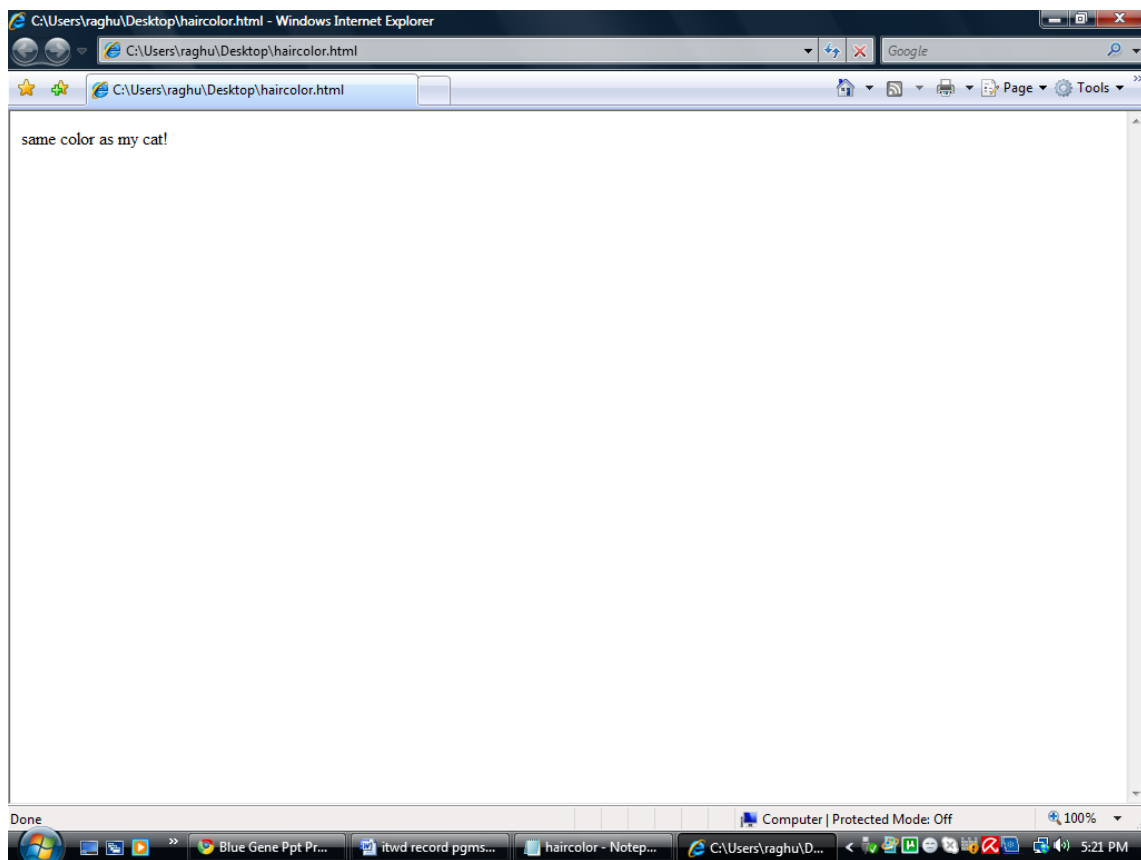

RESULT: Thus the VBScript concepts were studied

Ex: 2.2 (a)**User Registration Form Validation Using VBScript****Aim:**

To perform user validation for the inputs given through HTML using VBScript.

Algorithm:

1. Design the html form to get the inputs form the user.
2. Specify the scripting language in VBScript.
3. Check if the values are entered in the input boxes by retrieving the data using document.formname.textboxname
4. If the data is no entered alert the user with the message that the data is not entered.

Program:

```
<html>
<head>
<script language="vbscript">

function radiogroupvalid(radgroup)
dim radno
radiogroupvalid=false
for radno=0 to radgroup.length-1
if radgroup(radno).checked=true then
radiogroupvalid=true
end if
next
end function
function countryvalid(cgroup)
dim cno
countryvalid=false
for cno=0 to cgroup.length-1
if cgroup(cno).selected=true then
countryvalid=true
end if
next
end function
function checkboxvalid(checkgroup)
dim checkno
checkboxvalid=false
for checkno=0 to checkgroup.length-1
```

```

if checkgroup(checkno).checked=true then
checkboxvalid=true
end if
next
end function
sub cmduserinfo_OnClick()
if len(form.txtname.value)<2 or IsNumeric(form.txtname.value) then
msgbox("type a valid name")
form.txtname.focus
form.txtname.select
elseif len(form.txtage.value) ="" or Not IsNumeric(form.txtage.value) then
msgbox("type a valid age")
form.txtage.focus
form.txtage.select
elseif len(form.txtph.value) ="" or Not IsNumeric(form.txtph.value) then
msgbox("type a valid phone number")
form.txtph.focus
form.txtph.select
elseif not radiogroupvalid(form.gender)then
msgbox("enter the gender")
elseif (form.txtmail.value = "") then
msgbox("enter the valid email")
form.txtmail.focus
form.txtmail.select
elseif instr(form.txtmail.value,"@") =0 then
msgbox("type a valid email")
form.txtmail.focus
elseif not countryvalid(form.country)then
msgbox("select your country")
elseif not checkboxvalid(form.hob)then
msgbox("check your hobbies")
else
msgbox("Registration Successful!!!")
end if
end sub
</script>
</head>
<body>
<form name="form" method="post">
<center>
<center><strong> <font color="voilet">USER REGISTRATION FORM VALIDATION
using VBSCRIPT</font></strong></center>
<hr>


```

```

<table width="30%" cellpadding="35" cellspacing="0" border="0"
<tr>
<td>
<b>Name:</b><td><input type="text" name="txtname">
</tr>
<tr>
<td><b>Age:</b><td><input type="text" name="txtage">
</tr>
<tr>
<td><b>Phone:</b><td><input type="text" size="15" name="txtph">
</tr>
<tr><td><b>Gender:</b><td><input type="radio" name="gender">Male
<input type="radio" name="gender">Female
</tr>
<tr>
<td><b>E-mail:<td><input type="text" name="txtmail">
</tr>
<tr>
<td><b>Country:<td><select name="country" size="3">
<option><option value="India"> India
<option><option value="Pakistan">Pakistan
<option><option value="Australia">Australia
</select>
</tr>
<tr>
<td><b>Hobbies:</b>
<td><input type="checkbox" name="hob" value="read">read
<input type="checkbox" name="hob" value="sing">sing
<input type="checkbox" name="hob" value="play">play</tr>
<td><center><input type="button" name="cmduserinfo" value="Register"></center>
<td><center><input type="reset" value="Reset Me"></center>
</tr>
</table>
</center>
</form>
</body>
</html>

```

Output:

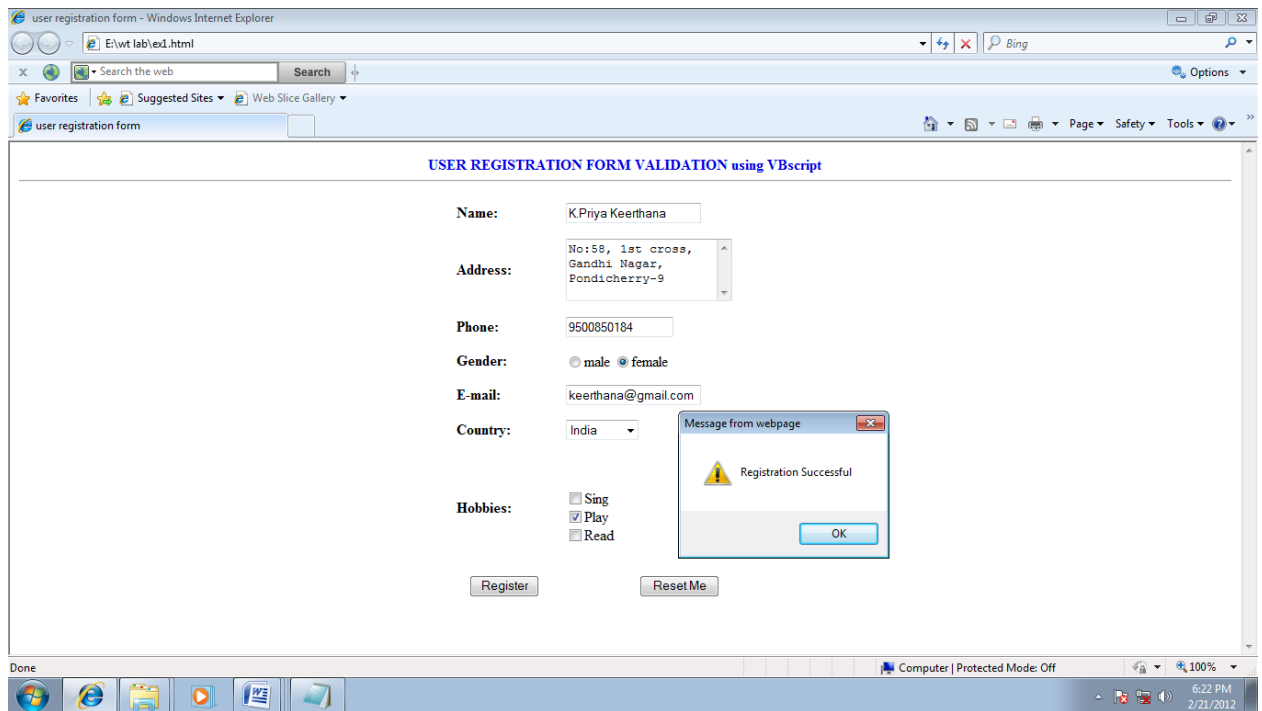

RESULT:

Thus the user registration form validation has been executed and the output is verified successfully.

Ex: No: 2.2(b) Employee Payroll Using VBScript

Aim:

To perform Employee payroll for the inputs given through HTML using VBScript.

Algorithm:

1. Design the html form to get the inputs form the user.
2. Specify the scripting language in VBScript.
3. Check if the values are entered in the input boxes by retrieving the data using document formname textboxname.
4. If the data is no entered alert the user with the message that the data is not entered.

Program:

```
<html>

<head>

<Script Language="VBScript">

<!--

Sub GiveFocus

    Document.EmployeesPayroll.txtFirstName.Focus()

End Sub

Function GetFullName()

    Dim FirstName, LastName

    FirstName = Document.EmployeesPayroll.txtFirstName.Value

    LastName = Document.EmployeesPayroll.txtLastName.Value

    GetFullName = LastName & ", " & FirstName

End Function

Function CalculateWeeklySalary(HourlySalary, WeeklyHours, OverTimeHours)

dim OverTimeSalary

OverTimeSalary=OverTimeHours*1.5*HourlySalary

WeeklyHours=WeeklyHours-OverTimeHours

    CalculateWeeklySalary = (HourlySalary * WeeklyHours)+OverTimeSalary
```

End Function

Sub ProcessPayroll()

Dim dMon, dTue, dWed, dThu, dFri, dSat, dSun, TotalHours, OverTimeHours

Dim HourlySalary, WeeklySalary

Dim FullName

dMon = CDbI(Document.EmployeesPayroll.txtMon.Value)

dTue = CDbI(Document.EmployeesPayroll.txtTue.Value)

dWed = CDbI(Document.EmployeesPayroll.txtWed.Value)

dThu = CDbI(Document.EmployeesPayroll.txtThu.Value)

dFri = CDbI(Document.EmployeesPayroll.txtFri.Value)

dSat = CDbI(Document.EmployeesPayroll.txtSat.Value)

dSun = CDbI(Document.EmployeesPayroll.txtSun.Value)

HourlySalary = Document.EmployeesPayroll.txtHourlySalary.Value

TotalHours = dMon + dTue + dWed + dThu + dFri + dSat + dSun

if (TotalHours > 56) then

OverTimeHours = TotalHours - 56

else

OverTimeHours = 0

end if

WeeklySalary = CalculateWeeklySalary(HourlySalary, TotalHours, OverTimeHours)

FullName = GetFullName()

PayrollResults.txtFullName.Value = FullName

PayrollResults.txtWeeklyEarnings.Value = "\$" & WeeklySalary

End Sub

-->

</Script>

<title>Employees Payroll</title>

</head>

<body OnLoad="GiveFocus()">

<h1>Employees Payroll</h1>

<form name="EmployeesPayroll" method="POST">

```
<table border="0" width="548">
```

```
<tr>
```

```
<td width="104">First Name:</td>
```

```
<td width="430"><input type="text" name="txtFirstName" size="20"></td>
```

```
</tr>
```

```
<tr>
```

```
<td width="104">LastName:</td>
```

```
<td width="430"><input type="text" name="txtLastName" size="20"></td>
```

```
</tr>
```

```
</table>
```

```
<table border="0" width="548">
```

```
<tr>
```

```
<td width="104">Hourly Salary</td>
```

```
<td width="428"><input type="text" name="txtHourlySalary" size="10" value="0.00"></td>
```

```
</tr>
```

```
</table>
```

```
<table border="0" width="563">
```

```
<tr>
```

```
<td width="124">Weekly Hours</td>
```

```
<td width="62" align="center">Mon</td>
```

```
<td width="62" align="center">Tue</td>
```

```
<td width="62" align="center">Wed</td>
```

```
<td width="62" align="center">Thu</td>
```

```
<td width="62" align="center">Fri</td>
```

```
<td width="62" align="center">Sat</td>
```

```
<td width="62" align="center">Sun</td>
```

```
</tr>
```

```
<tr>
```

```
<td width="124"></td>
```

```
<td width="62" align="center"><input type="text" name="txtMon" size="6" value="0.00"></td>
```

```
<td width="62" align="center"><input type="text" name="txtTue" size="6"  
value="0.00"></td>  
  
<td width="62" align="center"><input type="text" name="txtWed" size="6"  
value="0.00"></td>  
  
<td width="62" align="center"><input type="text" name="txtThu" size="6"  
value="0.00"></td>  
  
<td width="62" align="center"><input type="text" name="txtFri" size="6"  
value="0.00"></td>  
  
<td width="62" align="center"><input type="text" name="txtSat" size="6"  
value="0.00"></td>  
  
<td width="62" align="center"><input type="text" name="txtSun" size="6"  
value="0.00"></td>  
  
</tr>  
  
</table>  
  
<table border="0" width="558">  
  
<tr>  
  
<td width="104"></td>  
  
<td width="440">  
  
<p><input type="button" value="Process" name="btnProcess"  
OnClick="ProcessPayroll()">  
  
&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~  
<br/><input type="reset" value="Reset" name="B2">  
  
</p>  
  
</td>  
  
</tr>  
  
</table>  
  
</form>  
  
<hr>  
  
<form name="PayrollResults">  
  
<table border="0" width="546">  
  
<tr>  
  
<td width="113">Full Name:</td>  
  
<td width="419"><input type="text" name="txtFullName" size="20"></td>  
  
</tr>
```

```

</table>

<table border="0" width="545">

  <tr>

    <td width="112">Weekly Earnings:</td>

    <td width="419"><input type="text" name="txtWeeklyEarnings" size="20"
value="$0.00"></td>

  </tr>

</table>

</form>

</body>

</html>

```

OUTPUT

Employees Payroll

file:///D:/Staff%20Datas/MSug/MSug/III%20labPrograms/Copy%20of%20payroll.html

For quick access, place your bookmarks here on the bookmarks bar. [Import bookmarks now...](#)

Employees Payroll

First Name:

Last Name:

Hourly Salary:

Weekly Hours	Mon	Tue	Wed	Thu	Fri	Sat	Sun
	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Full Name:

Weekly Earnings:

Start | D:\Staff Datas\MSug\MS... | Employees Payroll - G... | 12:16 PM

RESULT:

Thus the employee payroll using VBscript has been executed and the output is verified successfully.

Ex: 3.1

APACHE TOMCAT SERVER

AIM:

To install the Apache Tomcat server.

Step 1:

Installation of JDK:

Before beginning the process of installing Tomcat on your system, ensure first the availability of JDK on your system program directory. Install it on your system if not already installed (because any version of tomcat requires the Java 1.6 or higher versions) and then set the class path (environment variable) of JDK. To set the **JAVA_HOME Variable:** you need to specify the location of the java run time environment to support the Tomcat else Tomcat server cannot run.

This variable contains the path of JDK installation directory.

set JAVA_HOME=C:\Program Files\Java\jdk1.6

Note: it should not contain the path up to bin folder. Here, we have taken the URL path according to our installation convention.

For Windows OS, go through the following steps:

Start menu->Control Panel->System->Advanced tab->Environment Variables->New->

set the Variable name = JAVA_HOME and variable value = C:\Program Files\Java\jdk1.6

Now click on all the subsequent ok buttons one by one. It will set the JDK path.

Step 2:

For setting the class path variable for JDK, do like this:

Start menu->Control Panel->System->Advanced tab->Environment Variables->New->

Set PATH="C:\Program Files\Java\jdk1.6\bin"; %PATH%

OR

First, right click on the


My Computer->properties->advance->Environment Variables->path.

Now, set bin directory path of JDK in the path variable

Step 3:

The process of installing Tomcat 6.0 begins here from now. It takes various steps for installing and configuring the Tomcat 6.0.


For Windows OS, Tomcat comes in two forms: .zip file and .exe file (the Windows installer file). Here we are exploring the installation process by using the .exe file. First unpack the zipped file and simply execute the '.exe' file.

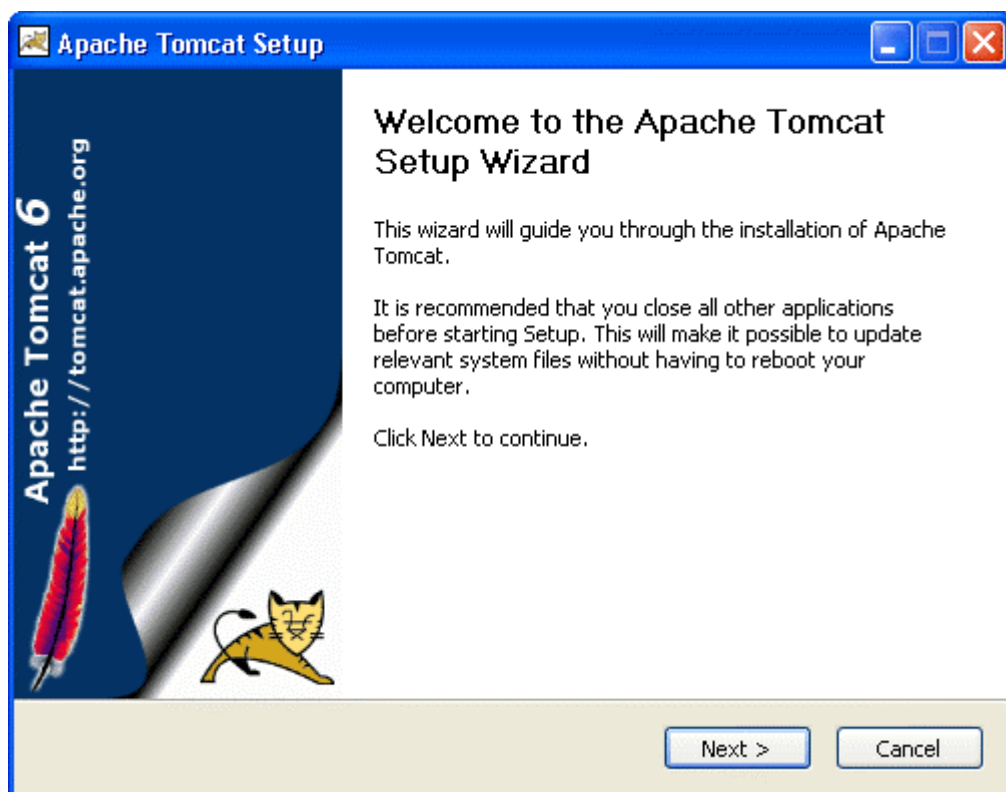

A Welcome screen shot appears that shows the beginning of installation process. Just click on the 'Next' button to proceed the installation process.

Steps 4:


A screen of 'License Agreement' displays.

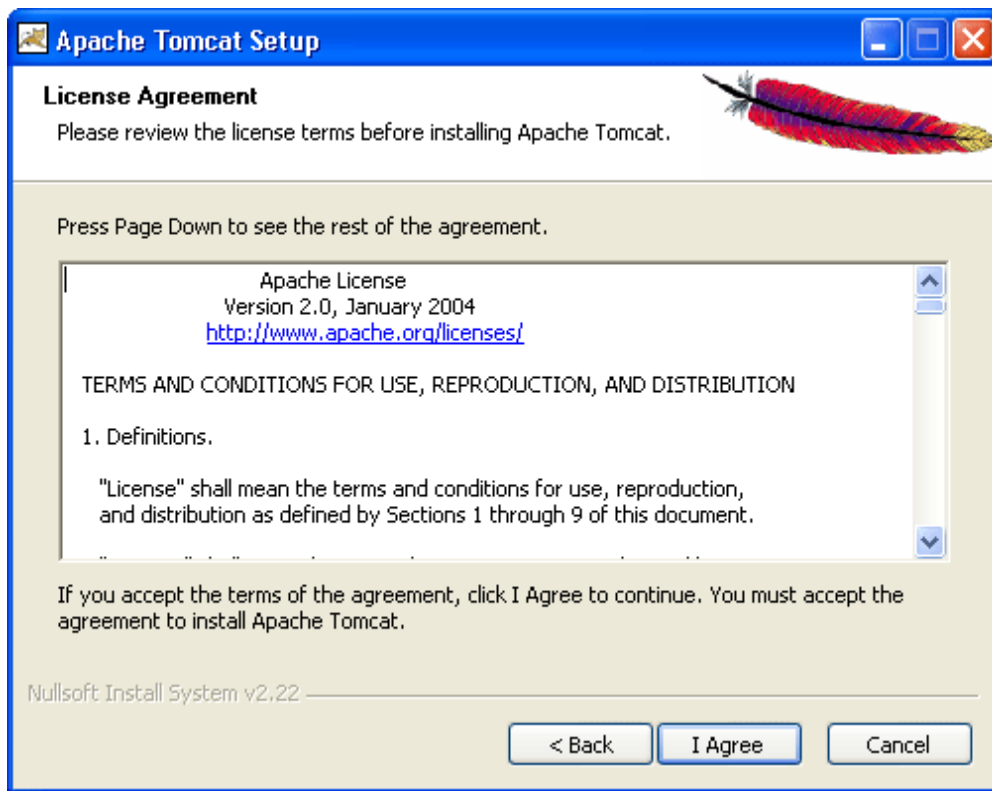

Click on the 'I Agree' button.

Step 5:


A screen shot appears asking for the 'installing location'

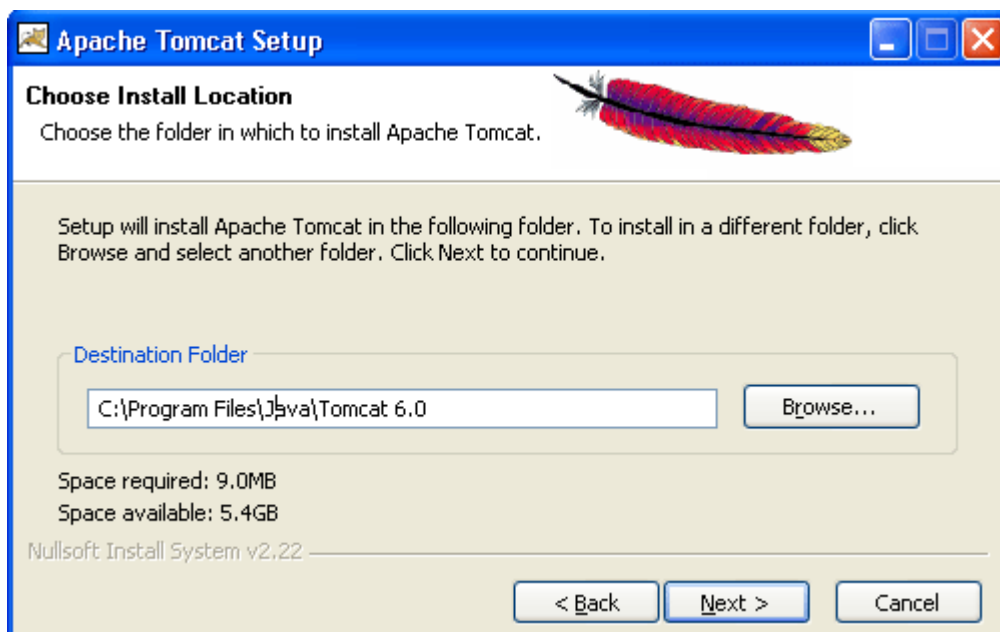

Choose the default components and click on the 'Next' button.

Step 6:

A screen shot of 'Configuration Options' displays on the screen. Choose the location for the Tomcat files as per your convenience. You can also opt the default Location

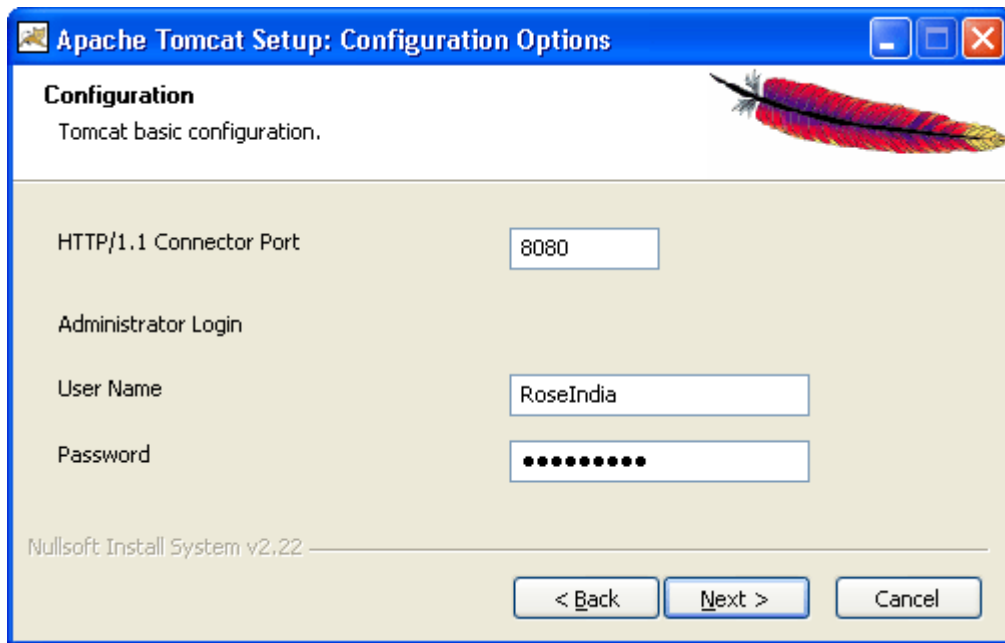


The port number will be your choice on which you want to run the tomcat server. The port number 8080 is the default port value for tomcat server to proceed the HTTP requests. The user can also change the 'port number' after completing the process of installation; for this, users have to follow the following tips.

Go to the specified location as " **Tomcat 6.0 \conf \server.xml** ". Within the server.xml file choose "Connector" tag and change the port number.

Now, click on the 'Next' button to further proceed the installation process.

Step 7:


A Window of Java Virtual Machine displays on the screen

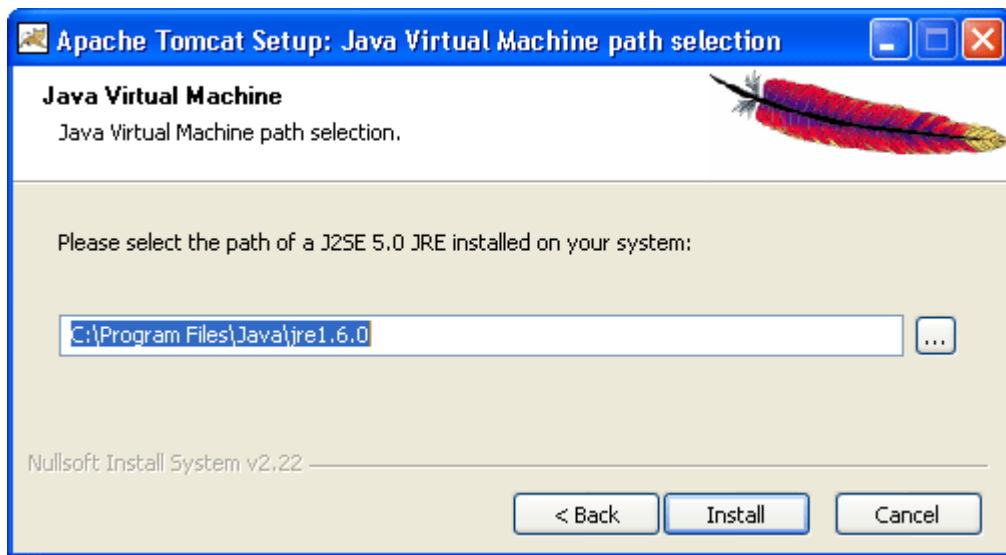

This window asks for the location of the installed Java Virtual Machine. Browse the location of the JRE folder and click on the Install button. This will install the Apache tomcat at the specified location.

Step 8:


A processing window of installing displays on the screen.

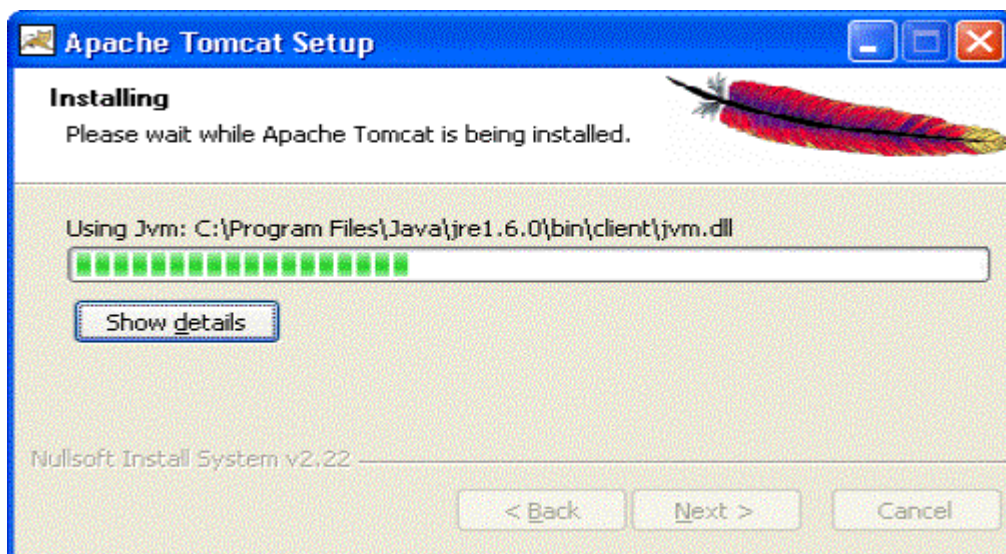

To get the information about installer click on the "Show details" button

Step 9:


A screen shot of 'Tomcat Completion' displays on the screen.

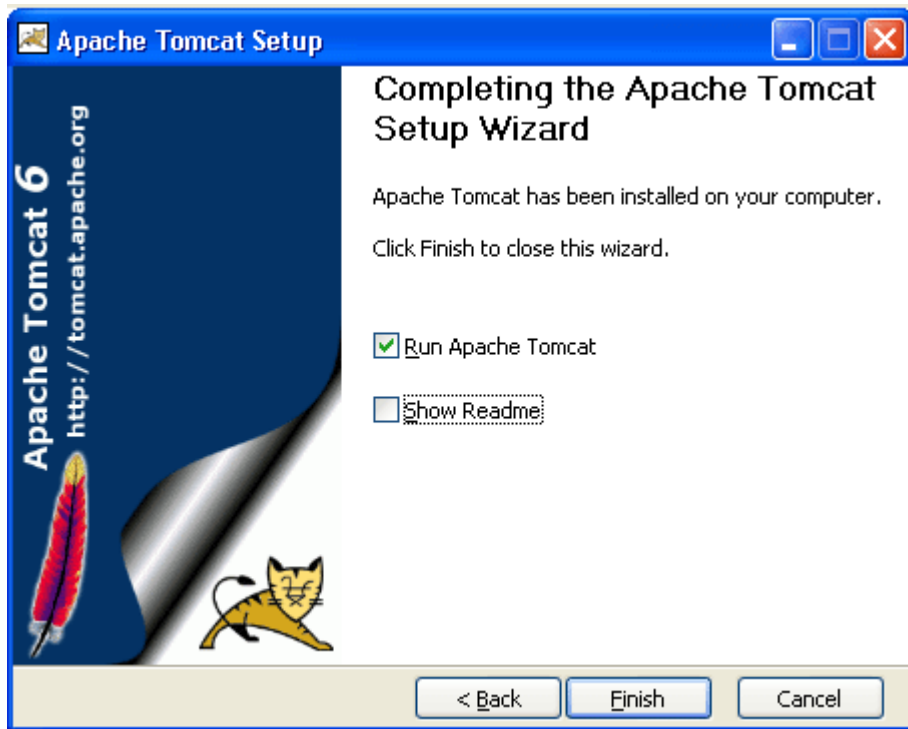

Click on the 'Finish' button.

Step 10:

A window of Apache Service Manager appears with displaying the running process.

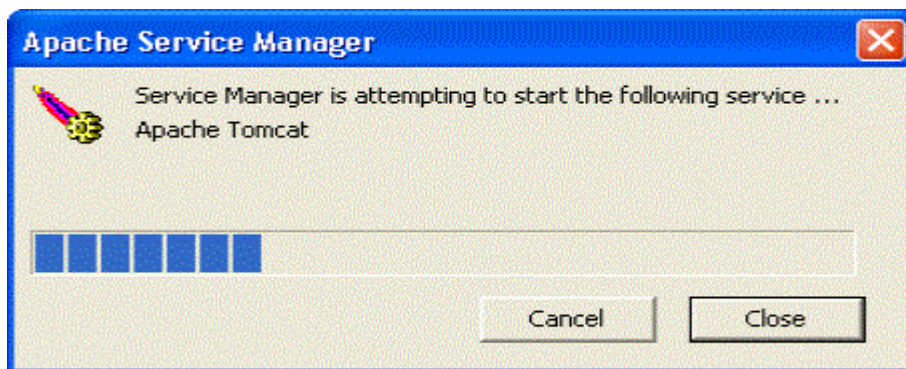

Let the running process goes on.

Step 11:

After completing the installation process, the Apache Tomcat Manager appears on the toolbar panel like shown in the below picture.




Apache Tomcat Manager

Configuring Tomcat Manager

To Configure the Tomcat Manager, there are two ways; either user can configure Tomcat directly from the toolbar panel or can configure it from Control Panel Section.

i-) Configuring from toolbar Panel

To Configure Apache Tomcat web server from the toolbar panel, you have to press 'double click' on the appeared icon.

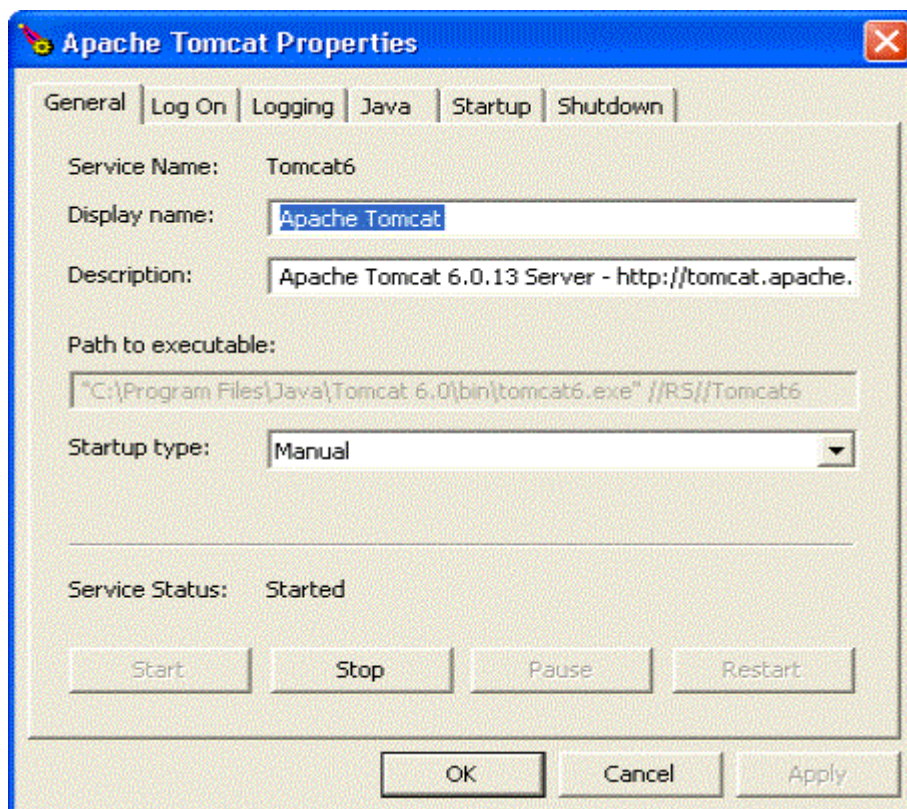

A configured window appears on the desktop. Now, just click on the Startup button. The installation process will be completed.

ii-) Configuration from the Control Panel


To configure the Apache Tomcat Manager, Users will have to follow the following steps:

Click on the Startup button -- select Control Panel -- Administrator Tool -- Services -- select Apache Tomcat.

The following screen displays on the monitor.

	.NET Runtime Optim...	Microsoft .NET Framework NGEN		Manual	LocalSystem
	Alerter	Notifies selected users and computers of a...		Manual	LocalSystem
	Apache Tomcat	Apache Tomcat 5.5.26 Server - http://tom...		Manual	LocalSystem
	Application Manage...	Provides software installation services suc...		Manual	LocalSystem
	Automatic Updates	Enables the download and installation of cri...	Started	Automatic	LocalSystem
	Background Intellig...	Transfers files in the background using idle ...	Started	Manual	LocalSystem
	ClipBook	Supports ClipBook Viewer, which allows pa...		Manual	LocalSystem
	COM+ Event System	Provides automatic distribution of events t...	Started	Manual	LocalSystem
	Computer Browser	Maintains an up-to-date list of computers o...	Started	Automatic	LocalSystem
	DHCP Client	Manages network configuration by register...	Started	Automatic	LocalSystem
	Distributed Link Tra...	Sends notifications of files moving between...	Started	Automatic	LocalSystem
	Distributed Transac...	Coordinates transactions that are distributed across two or more databases, message queue			
	DNS Client	Resolves and caches Domain Name System...	Started	Automatic	LocalSystem
	Event Log	Logs event messages issued by programs ...	Started	Automatic	LocalSystem
	Fax Service	Helps you send and receive faxes		Manual	LocalSystem
	FTP Publishing Service	Provides FTP connectivity and administrati...	Started	Automatic	LocalSystem
	ITS Admin Service	Allows administration of Web and FTP servi	Started	Automatic	LocalSystem

Double click on the Apache Tomcat. The window of Apache Tomcat Properties appears on the screen.

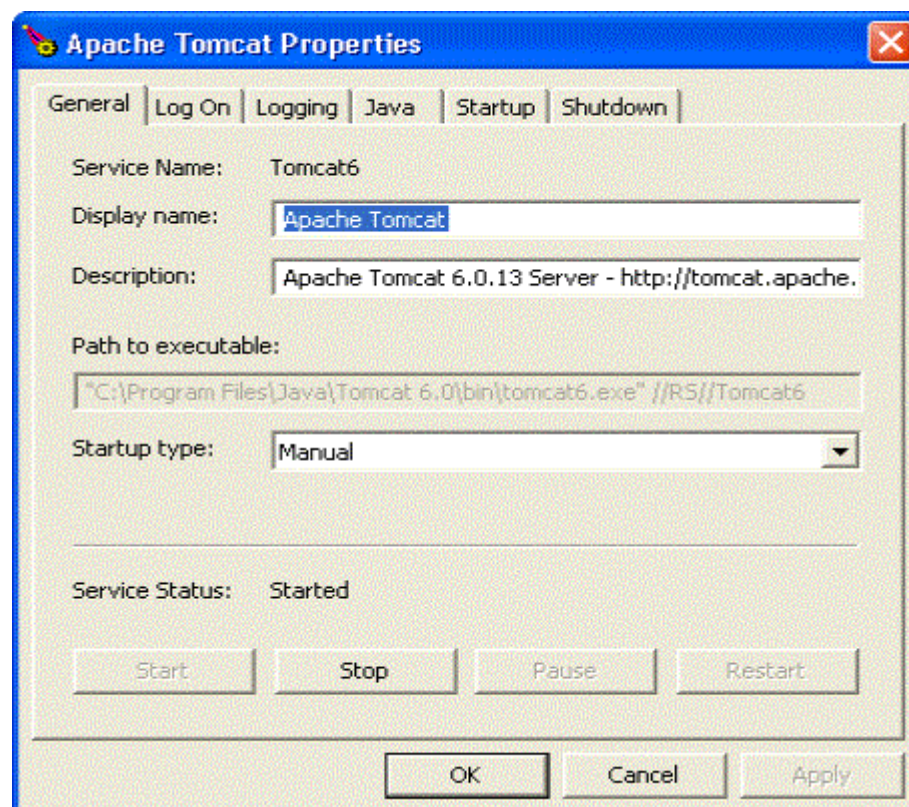

Now, Click on the start up button. The Apache Tomcat is now ready to function.

To operate it, follow the below steps of processing.

Start the Tomcat Server:


1.Start the tomcat server from the bin folder of Tomcat 6.0 directory by double clicking the "tomcat6.exe" file.

OR create a shortcut of this .exe file at your desktop.

2. Now Open web browser and type URL <http://localhost:8080> in the address bar to test the server

3. To Stop the Tomcat Server: Stop the server by pressing the "Ctrl + c" keys.

The screen of Apache Tomcat software looks like this:

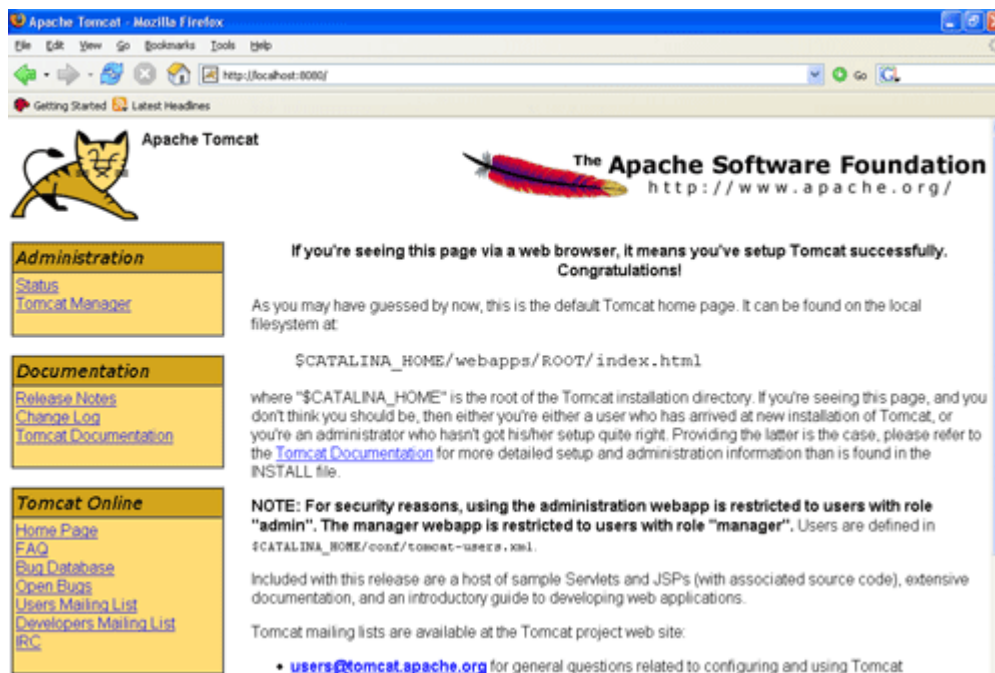

RESULT:

Thus the Apache Tomcat Server was installed successfully.

Ex: 3.2


IIS INSTALLATION

AIM:


To Install Internet Information Server (IIS) on window xp.

The following steps are needed to install IIS on Windows Xp,

1. Go to **Control Panel**, click **Add or Remove Programs**.
2. Select **Add/Remove Windows Components**.
3. Select **Internet Information Services (IIS)**.

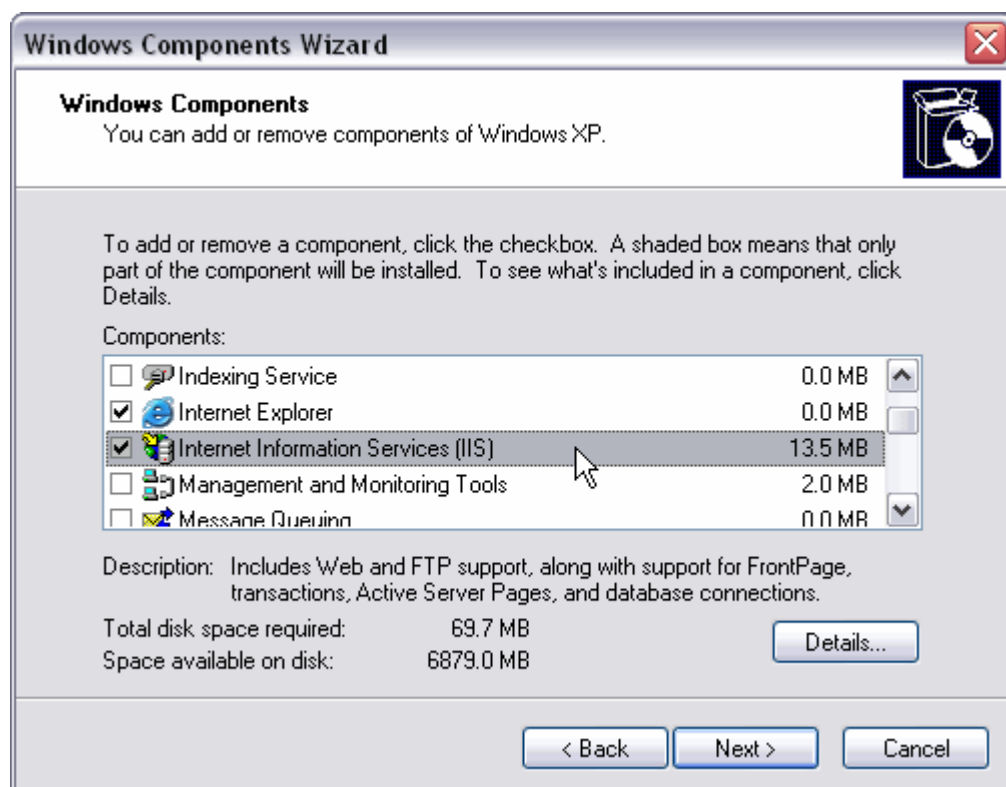

4. Click **Details**.
5. Uncheck the **SMTP protocol**.

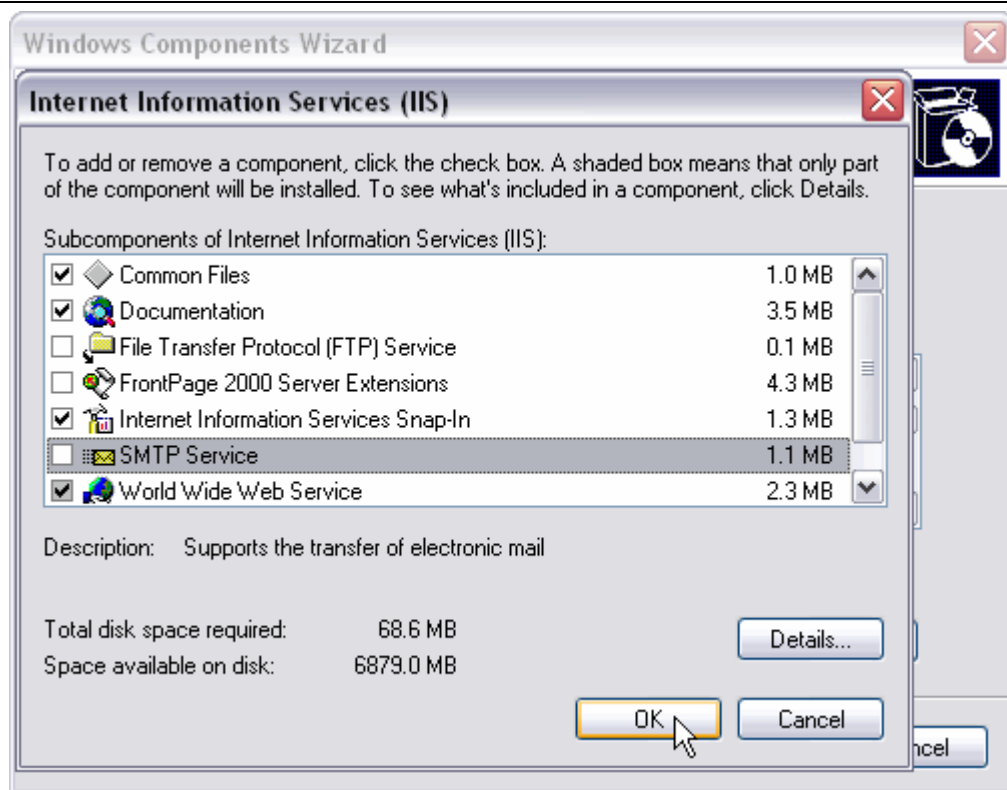


6. Click **Ok** then **Next**, and wait for the IIS installation to finish. We will need Windows XP Pro CD, or the i386 source available on the computer or on a network location.


Creating the Virtual Directory in IIS

Next we need to create the “Calendar” Virtual Directory in IIS.


1. Open **Administrative Tools**, then double click **Internet Information Services**.
2. Expand the view so you can see **Default Web Site**.
3. Right click on it and choose **New -> Virtual Directory**.

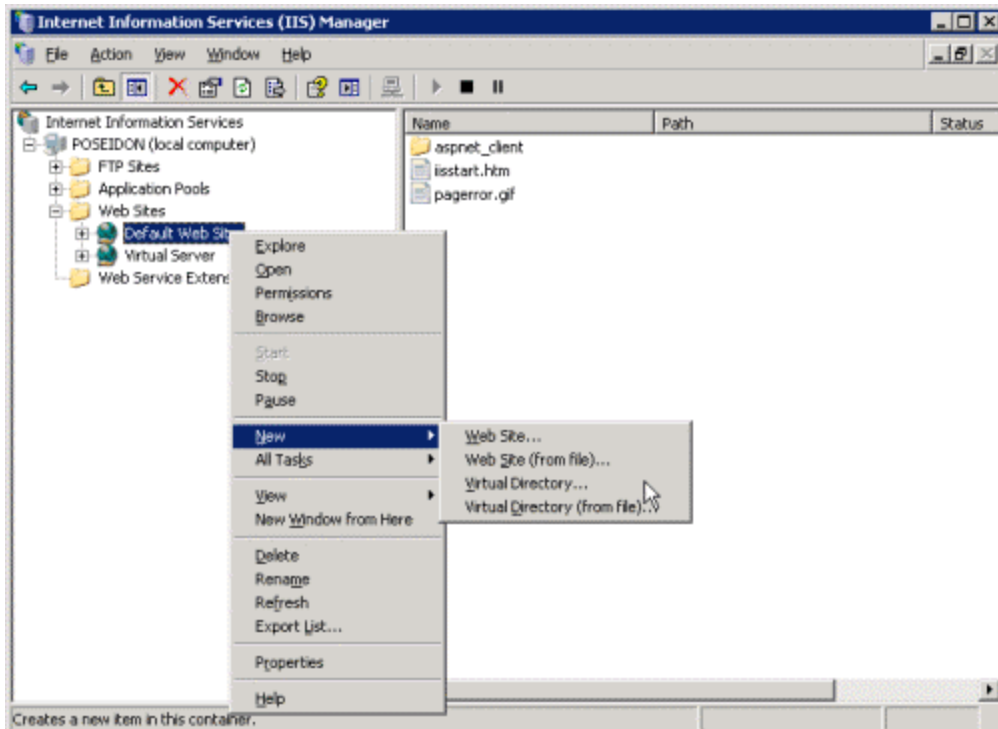


4. In the Virtual Directory wizard click **Next**.

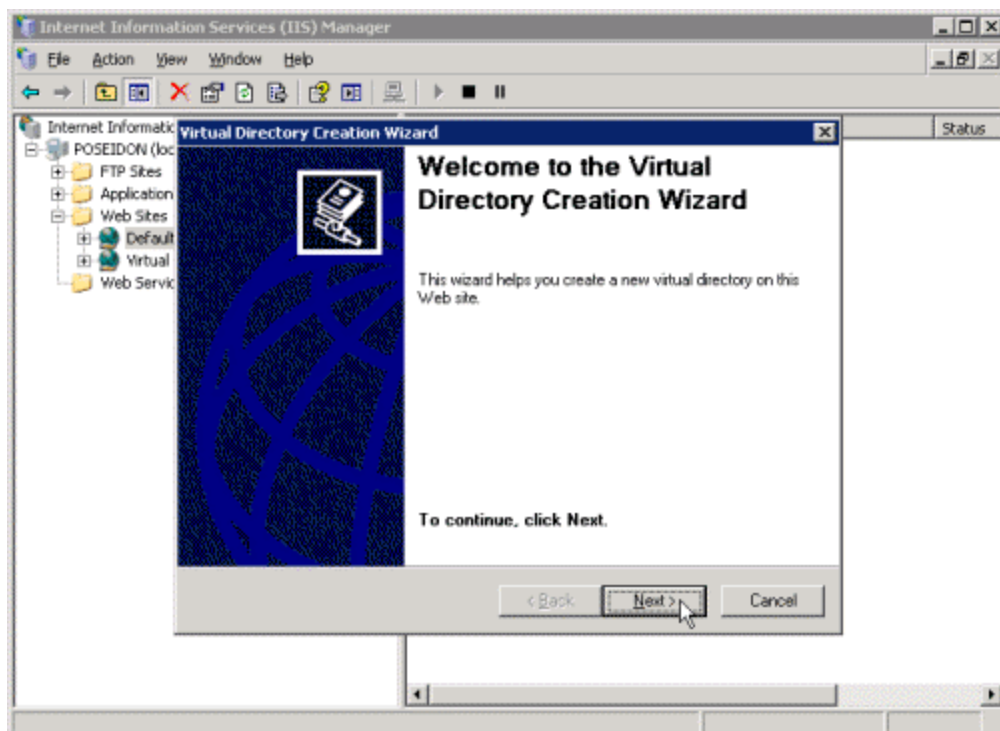


5. In the Alias box, **type a descriptive name** such as Calendar. We will use this name to access the calendar virtual directory.

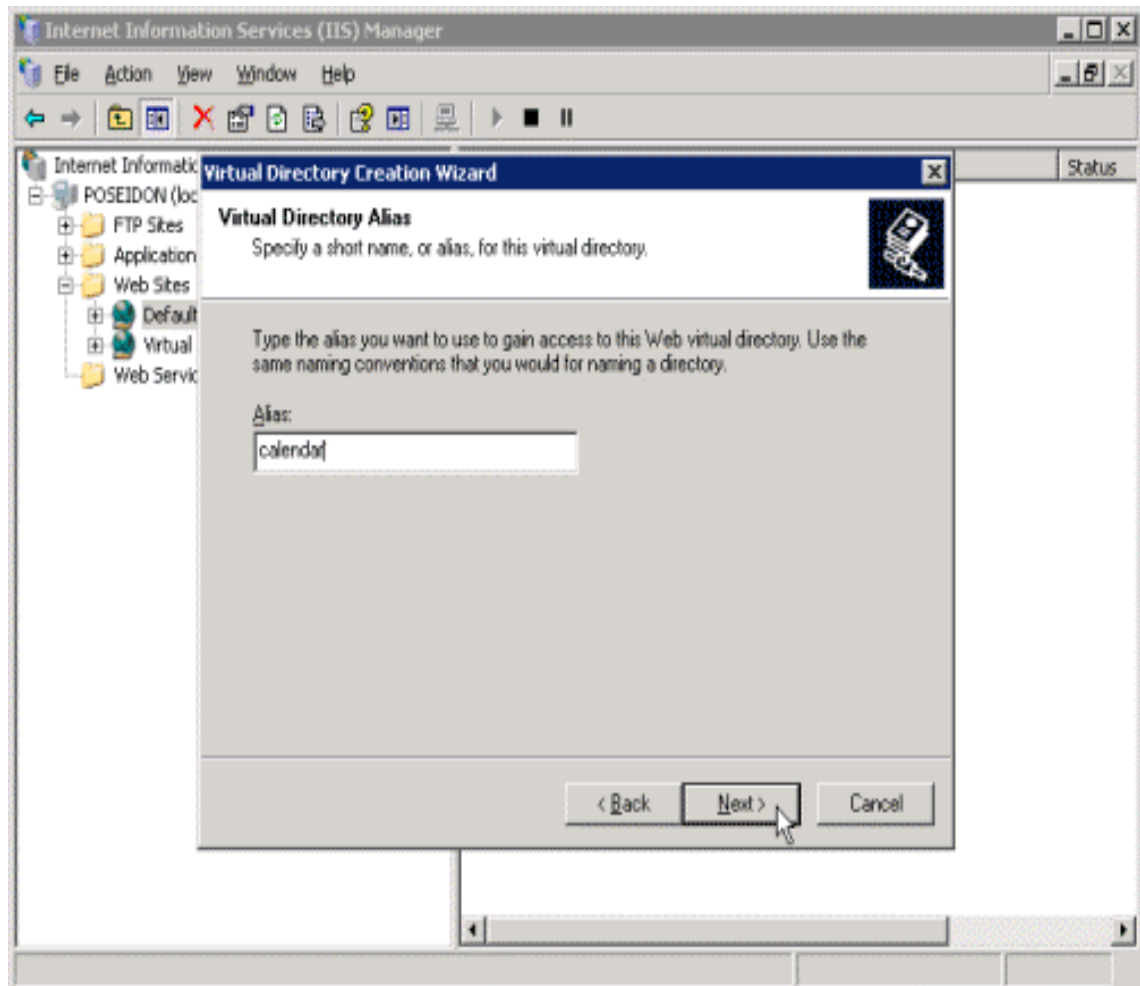


6. In the Path box enter the **path** to where you want to store the calendar files on the hard drive. This needs to be a folder all users will have access to - I recommend creating a folder in the root of the hard drive, such as D:\Calendar.

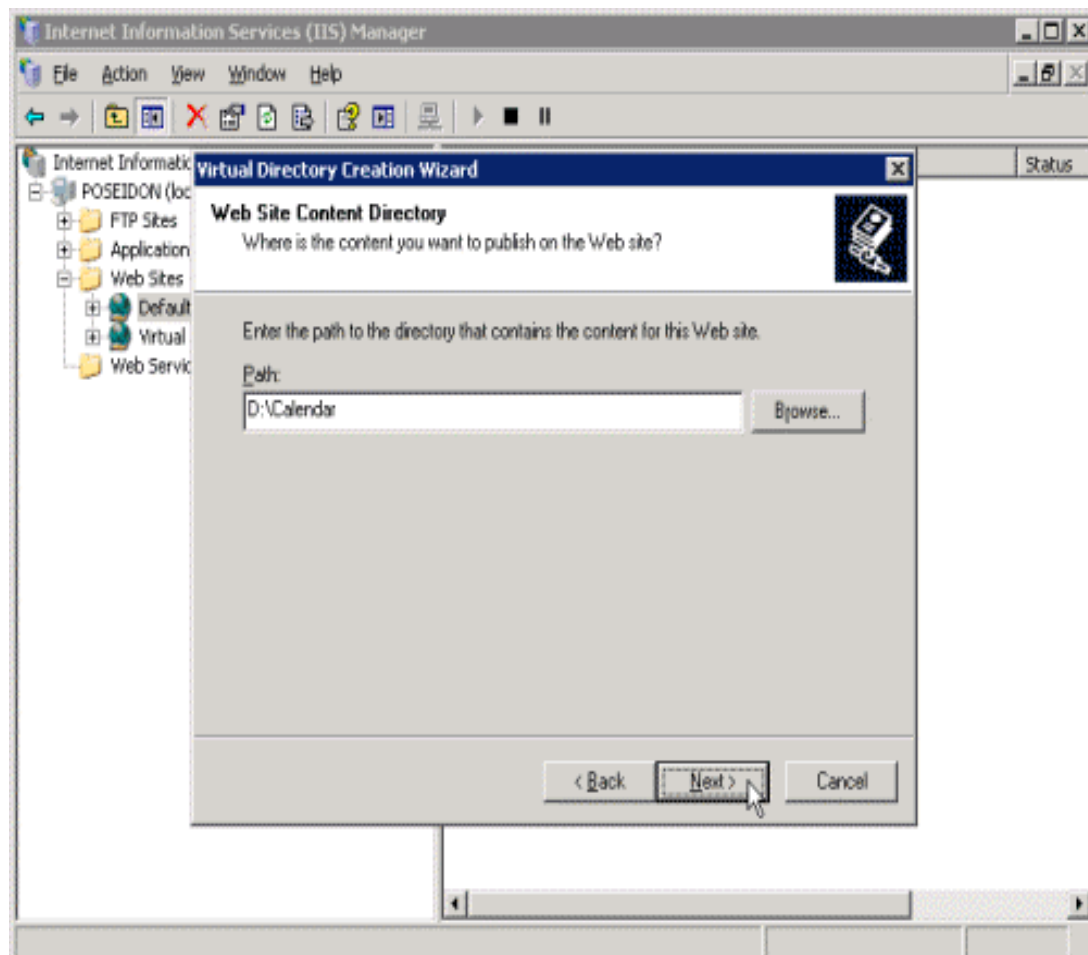

7. We need Read and Write permission on this virtual directory, so select the Write checkbox along with the Read checkbox which is already selected.

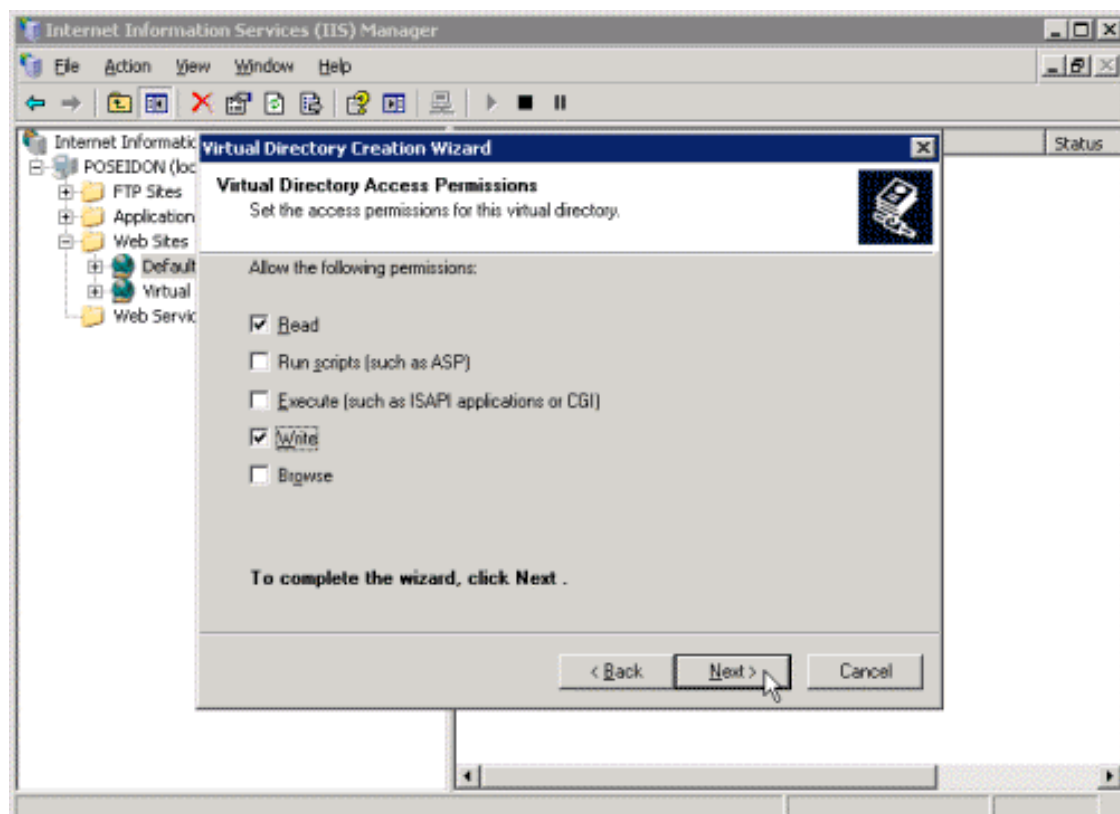

8. Click **Finish**.

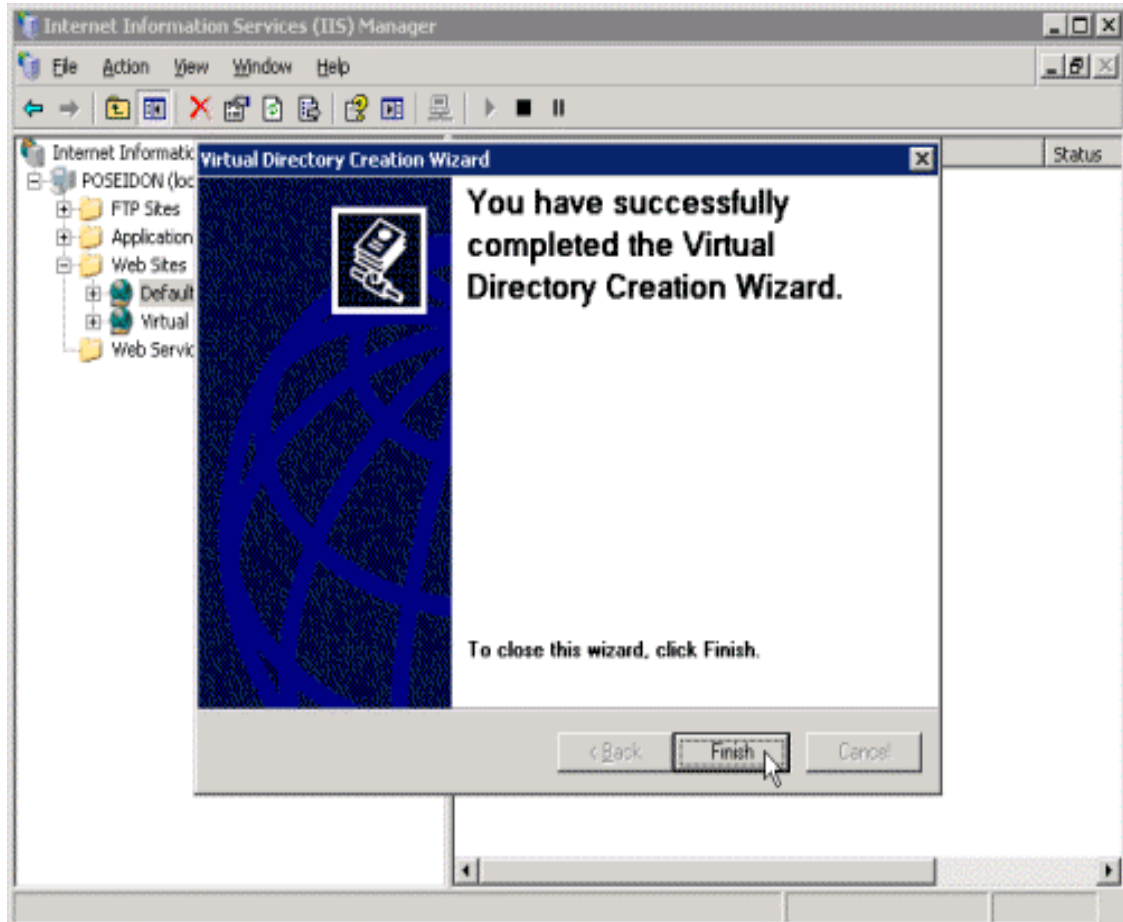

RESULT:

Thus the Internet Information Server (IIS) was installed successfully.

Ex: 4**ACTIVEX CONTROLS IN WEB DOCUMENTS****Aim:**

To perform ActiveX controls in a web documents using VBScript.

Program:

```
<HTML>

<HEAD>

<TITLE> The Calendar Control </TITLE>

</HEAD>

<BODY BGCOLOR="#FFFFFF">

<P><OBJECT ID="Calendar1"

    WIDTH=600

    HEIGHT=380

    CLASSID="CLSID:8E27C92B-1264-101C-8A2F-040224009C02"

    ALIGN=LEFT

    HSPACE=1>

</OBJECT>

<INPUT TYPE="BUTTON" NAME="PreviousDay" VALUE="< Day">

<BR>

<INPUT TYPE="BUTTON" NAME="PreviousMonth" VALUE="<< Month">

<BR>

<INPUT TYPE="BUTTON" NAME="PreviousYear" VALUE="<<| Year">

<BR>

<INPUT TYPE="BUTTON" NAME="NextYear" VALUE="Year |>>"></P>

<BR>

<INPUT TYPE="BUTTON" NAME="NextMonth" VALUE="Month >>">

<BR>

<INPUT TYPE="BUTTON" NAME="NextDay" VALUE="Day >">

</P>

<SCRIPT LANGUAGE="VBScript">

<!--

    Calendar1.Year = 1997
```

Calendar1.Month = 1

Calendar1.Day = 1

Sub PreviousDay_OnClick

Calendar1.PreviousDay

End Sub

Sub NextDay_OnClick

Calendar1.NextDay

End Sub

Sub PreviousMonth_OnClick

Calendar1.PreviousMonth

End Sub

Sub NextMonth_OnClick

Calendar1.NextMonth

End Sub

Sub PreviousYear_OnClick

Calendar1.PreviousYear

End Sub

Sub NextYear_OnClick

Calendar1.NextYear

End Sub


-->

</SCRIPT>

</BODY>

</HTML>

OUTPUT

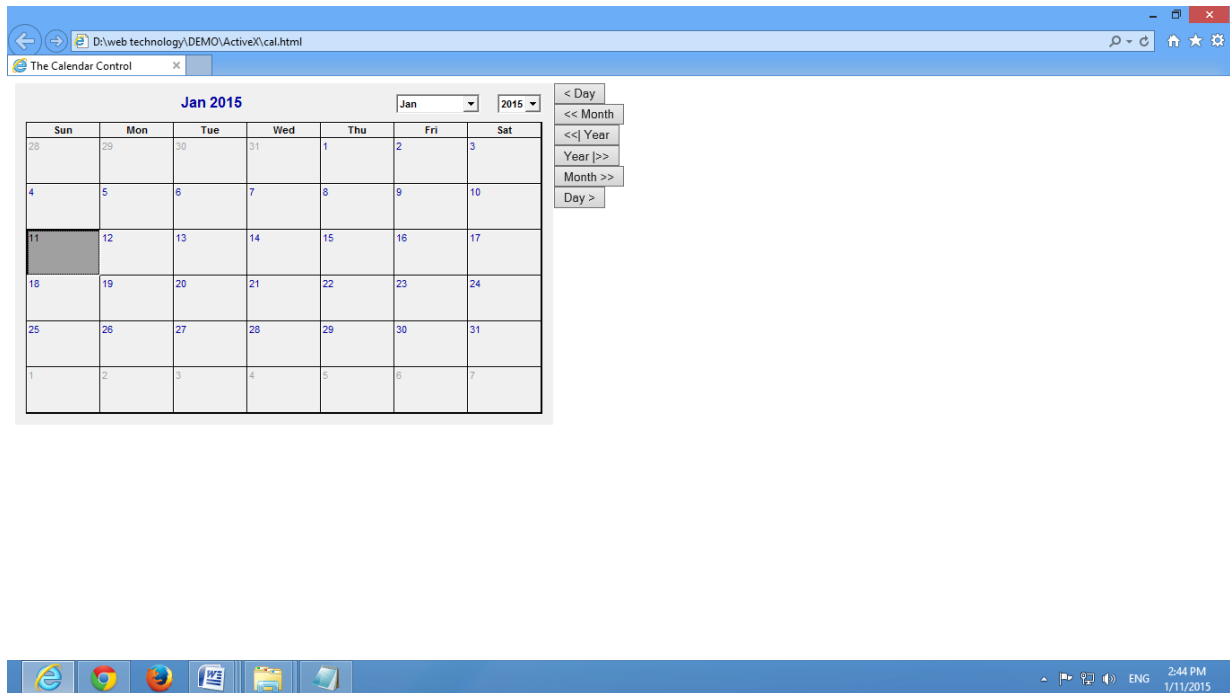

RESULT

Thus the ActiveX control in web documents has been implemented and the output is executed successfully.

AIM:

To establish database connection using jsp

ALGORITHM:


- 1.Install the Apache Tomcat server.
- 2.Save the html files and jsp files in c:\Program File\Apache Software Foundation\ tomcat 7.0.25\WebApps\Root.
- 3.Start the default server
- 4.Open the browser and give <http://localhost:8080> in the address bar to get to the home page of Apache Tomcat server
- 5.Create the html and jsp files for your application
- 6.To load the html page that you created, append the name of html file with the above Address.
- 7.When you submit the file it goes to the corresponding jsp file as mentioned in the html file and returns to the output.
- 8.Stop the server after running the application.

DESCRIPTION ABOUT THE DATABASE**TABLE**

user(username,password,role)

Program:**Insert.html**

```
<html>
<form method="post" action="http://localhost:8080/my project/insert.jsp">
<table>
<tr>
<td>Name:</td>
<td><input type="text" name="name"></td>
</tr>
<tr>
<td>Password:</td>
<td><input type="password" name="pwd"></td>
</tr>
<tr>
<td><input type="submit" value="Submit"></td>
</tr>
</table>
</form>
</html>
```

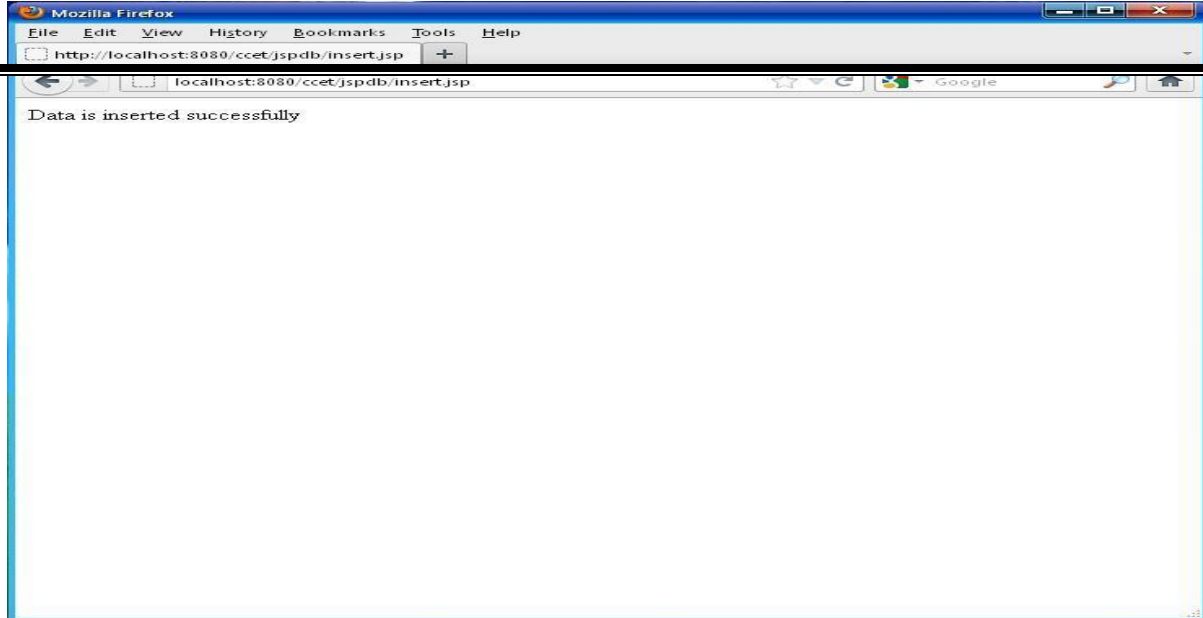Insert.jsp

```
<%@page import="java.sql.*"%>
<%
String name=request.getParameter("name");
String pwd=request.getParameter("pwd");
Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
Connection con = DriverManager.getConnection("jdbc:odbc:student");
Statement st=con.createStatement();
int i=st.executeUpdate("insert into user (uname,pwd) values('"+name+"','"+pwd+"')");
out.println("Data is inserted successfully");
%>
```

OUTPUT:

user		
uname	pwd	Add New Field
dhivya	555	
nasreen	555	
thenu	444	
Priya keerthan	111	
suba	333	
sumi	222	
*		

Update.html

```
<html>
<head>
<title>Update</title>
```

```

</head>
<body>
<h2>UPDATION</h2>
<form method="post" action="http://localhost:8080/my project/update.jsp">
<br>
<br>
<table border = "2">
<tr align="left" valign="top">
<td>Name:</td>
<td><input type="text" name ="name"></td>
</tr>
<tr align="left" valign="top">
<td>Role:</td>
<td><input type="text" name ="role" /></td>
</tr>
<tr align="left" valign="top">
<td></td>
<td><input type="submit" value="submit"/></td>
</tr>
</table>
</form>
</body>
</html>

```


Update.jsp


```

<html><body>
<%@page language ="java" import="java.sql.*"%>
<%
String name= request.getParameter("name");
String role= request.getParameter("role");
Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
Connection con = DriverManager.getConnection("jdbc:odbc:student");
Statement st = con.createStatement();
int i =st.executeUpdate("update user set role= '"+role+"' where uname='"+name+"'");
out.println("Updated successfully");
%>
</body>
</html>

```

OUTPUT:

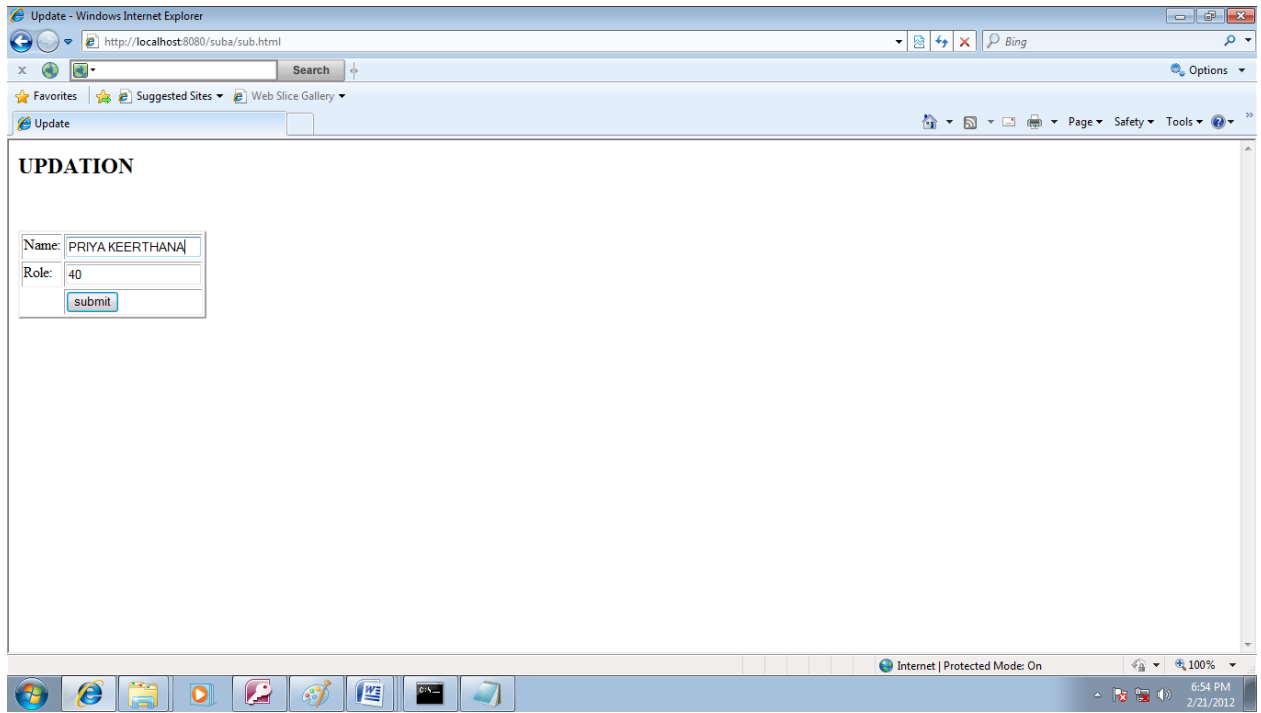

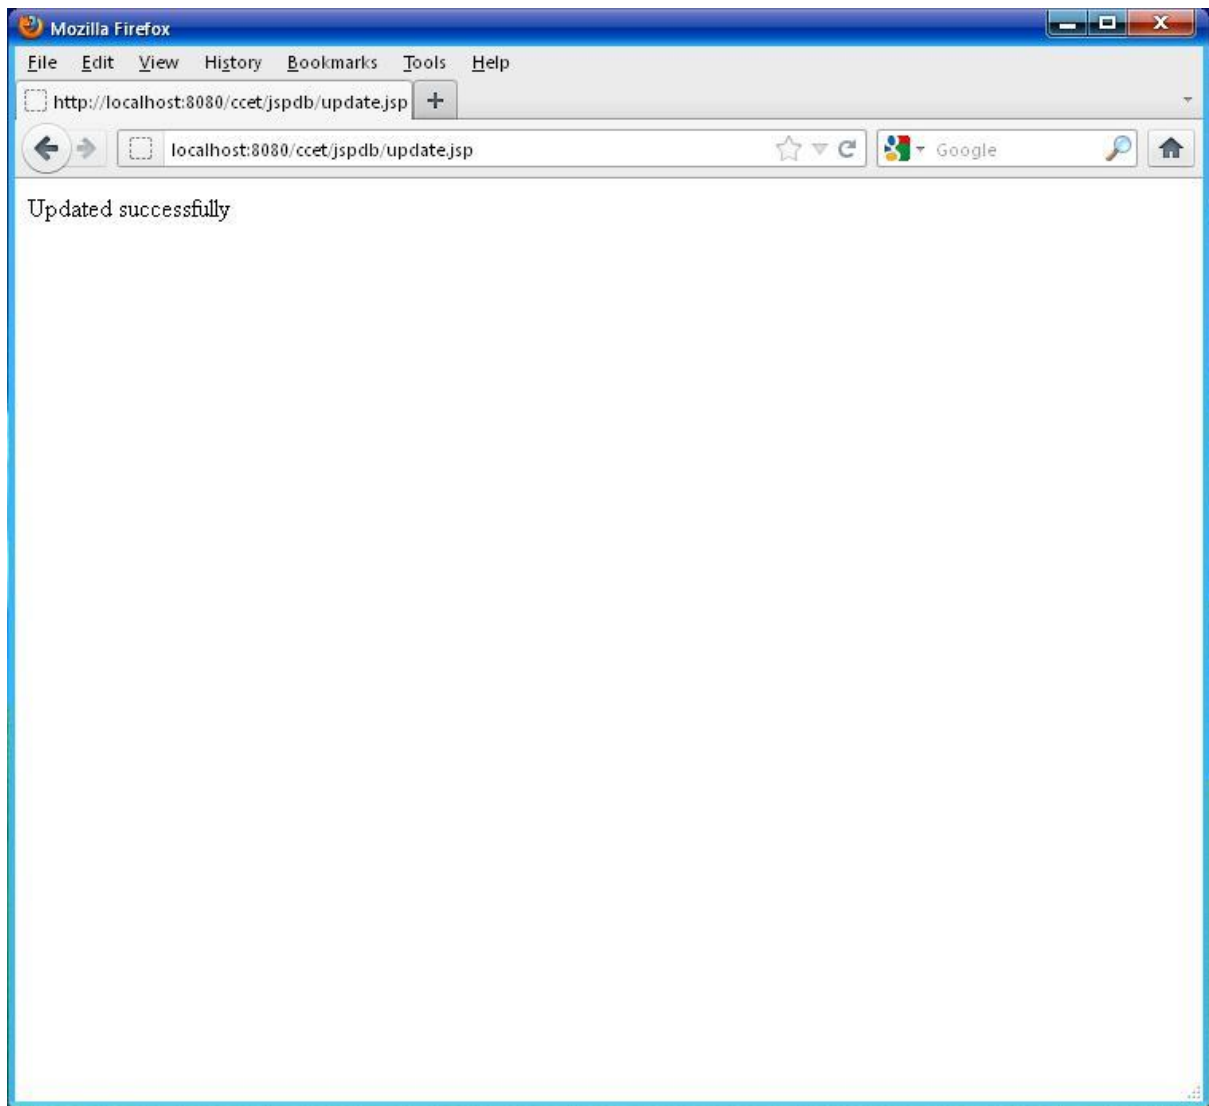

user			
	uname	pwd	Add New Field
	dhivya	555	
	nasreen	555	
	thenu	444	
	Priya keerthan	111	
	suba	333	
	sumi	222	
*			

Display.html



```
<html><head>
<title>display</title>
</head><body>
<h1>DISPLAY PAGE</h1>
<form method="post" action=" display.jsp">
Enter the Name:<input type="text" name="name">
```

```
<input type="submit" value="SUBMIT">
</form>
</body></html>
```

Display.jsp

```
<html><body>
<%@page language="java" import="java.sql.*"%>
<% String name = request.getParameter("name");
Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
Connection con = DriverManager.getConnection("jdbc:odbc:student");
Statement st = con.createStatement();
int f=0;
try{
ResultSet rs =st.executeQuery("select * from user where uname='"+name+"'");
while(rs.next())
{
String pwd=rs.getString(2);
out.println("Name:"+name);
out.println("<br>");
out.println("Pwd:"+pwd);
out.println("<br>");
f=1;
out.println("DISPLAYED SUCCESSFULLY");
}
if(f==0)
{
out.println("sorry record was not found");
}
}
catch(Exception e)
{
out.println(e);
} %>
</body></html>
```

OUTPUT:

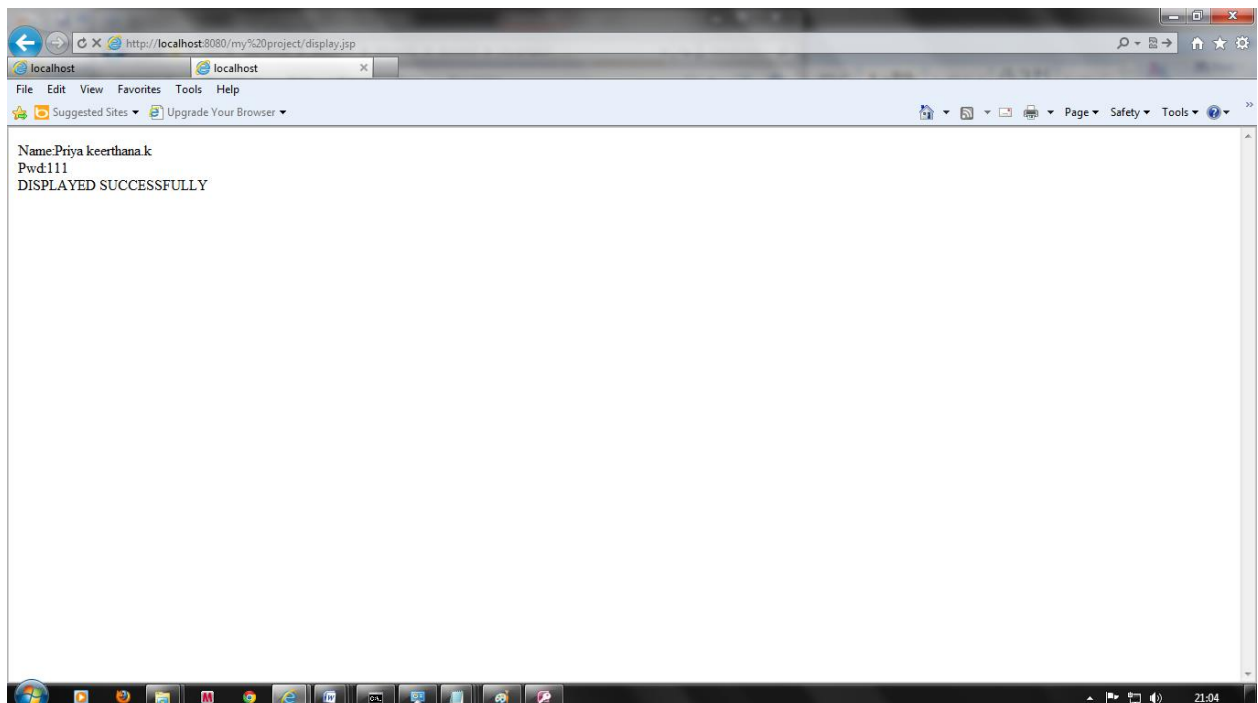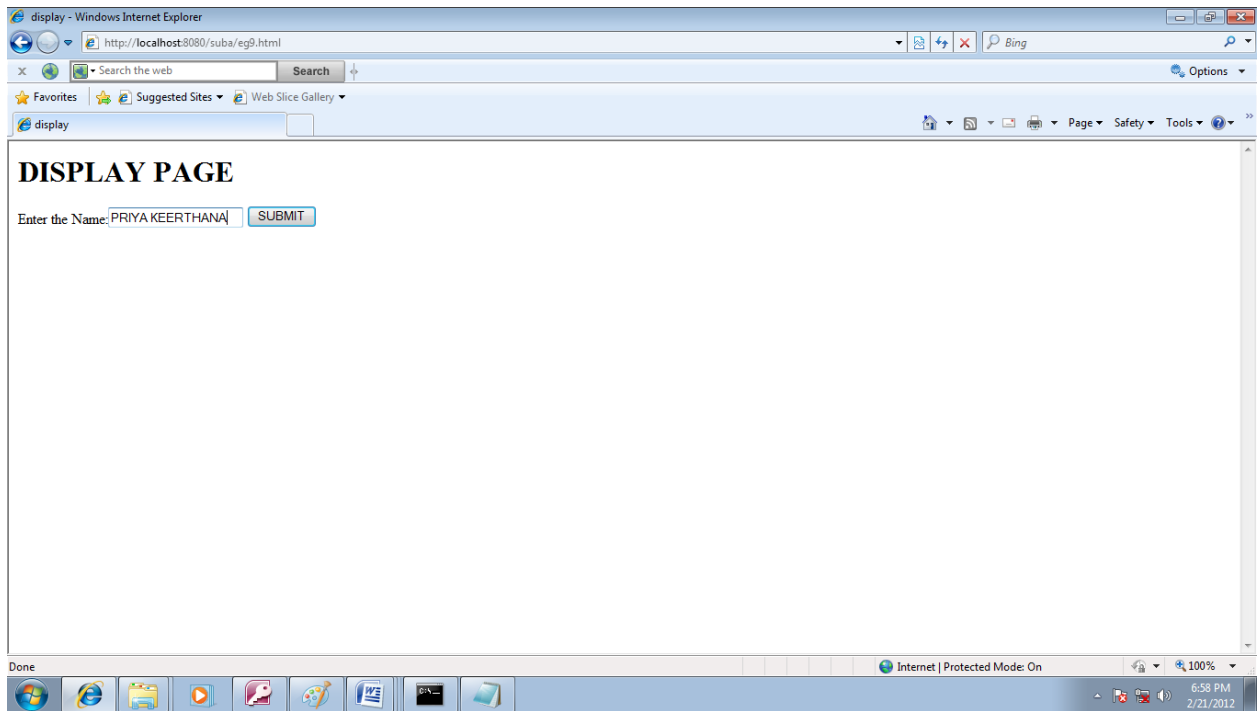

Delete.html

<html>


<head>


```
<title>delete</title>
</head>
<body>
<form method="post" action="delete.jsp">
<br>
<br>
Enter the Name:<input type="text" name="name"><br>
<input type="submit" value="SUBMIT">
</form>
</body>
</html>
```

Delete.jsp

```
<%@ page language = "java" import = "java.sql.*"%>
<%
String name = request.getParameter("name");
Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
Connection con = DriverManager.getConnection("jdbc:odbc:student");
Statement st = con.createStatement();
int i=st.executeUpdate("delete from user where uname='"+name+"'");
out.println("Record is deleted successfully");
%>
```

OUTPUT:

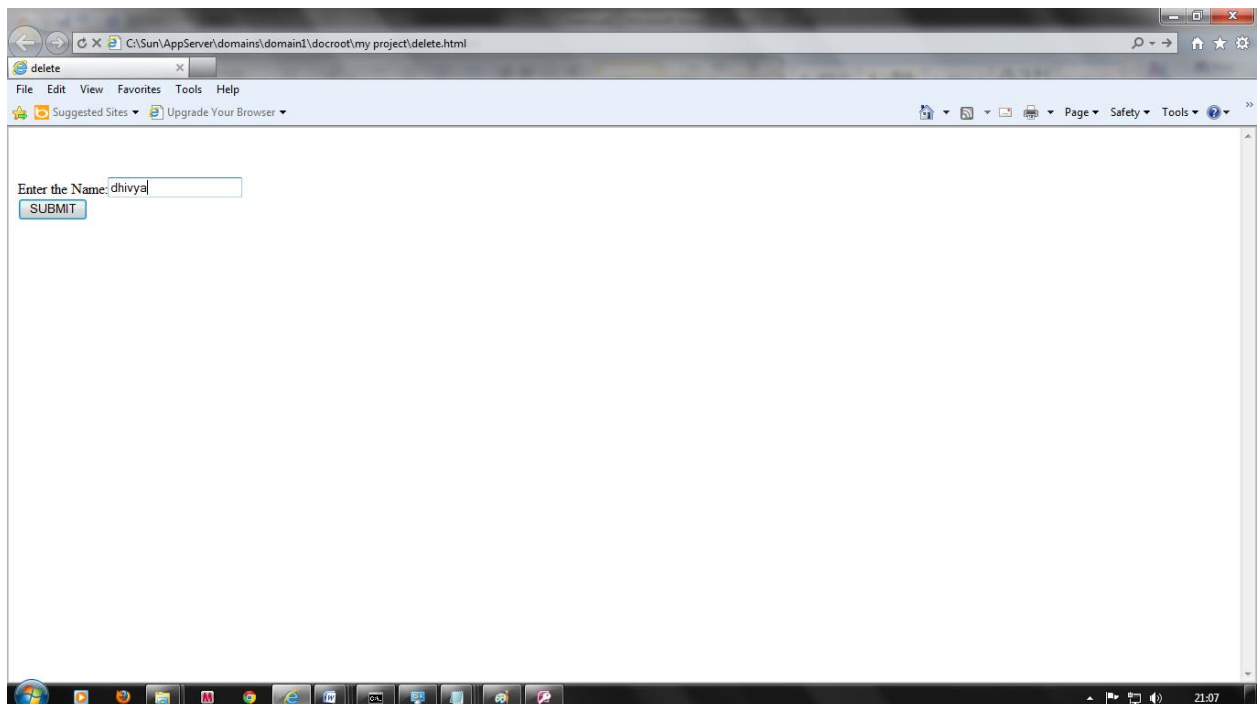

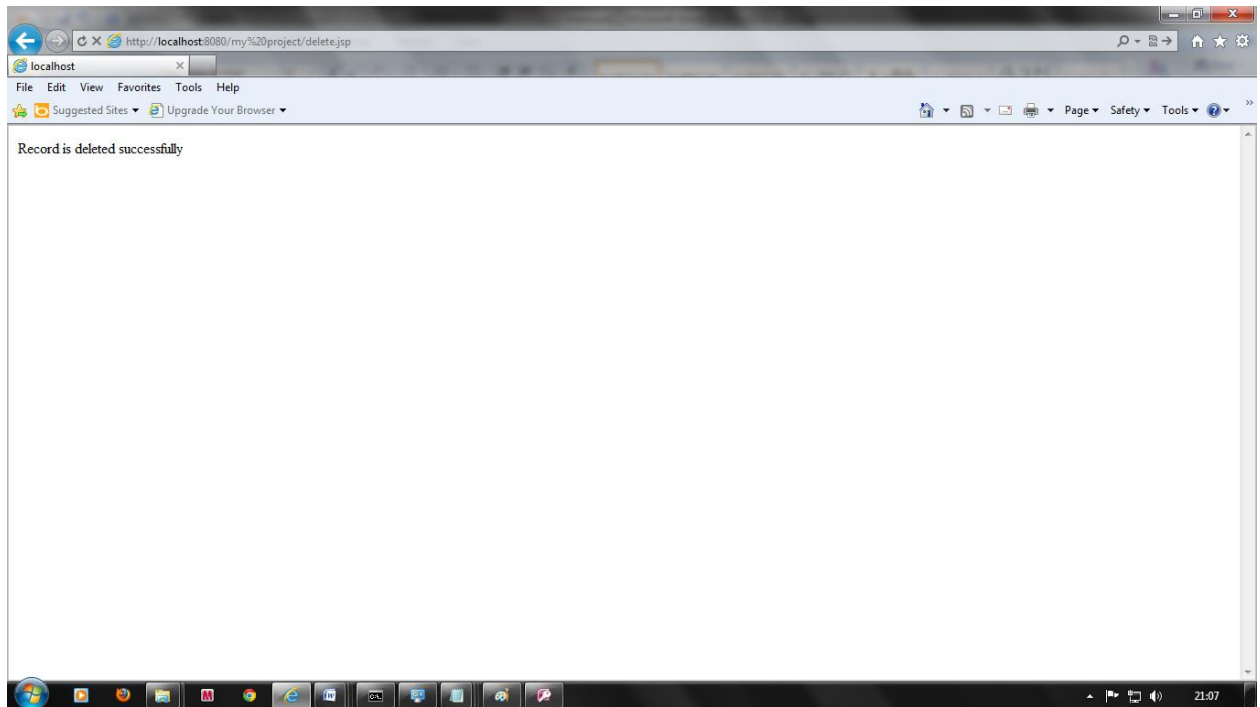

user			
	uname	pwd	Add New Field
	nasreen	555	
	Priya keerthan	111	
	suba	333	
	sumi	222	
	thenu	444	
*			

RESULT:

Thus the database connection was established using jsp

Ex: No: 5.2(a)**Application Object****Aim:**

To write a program to store and retrieve the value using JSP Application object.


Algorithm:

1. Install the Apache Tomcat server.
2. Design the required html files and jsp pages required for the application and save them in c:\Program File\Apache Software Foundation\ tomcat 7.0.25\WebApps\Root.
3. Start the default server.
- 4 .Open internet explorer and give <http://localhost:8080> in the address bar to get the home page of the Apache Tomcat server.
5. The jsp files get and retrieve the value is designed and implemented.
6. Stop the default server after running the application.

Program:**Applicationobject.jsp**

```
<%@ page language="java" %>
<%@ page import="java.sql.*" %>
<%
String name="anbu";
getServletContext().setAttribute("value1","welcome");
String getvalue1=(String)getServletContext().getAttribute("value1");
application.setAttribute("value2",name);
String getvalue2=(String)application.getAttribute("value2");
%>
<html>
<head>
<title>Application object in JSP</title>
</head>
<body>
<%=getvalue1%>
<%=getvalue2%>
</body>
</html>
```

OUTPUT:

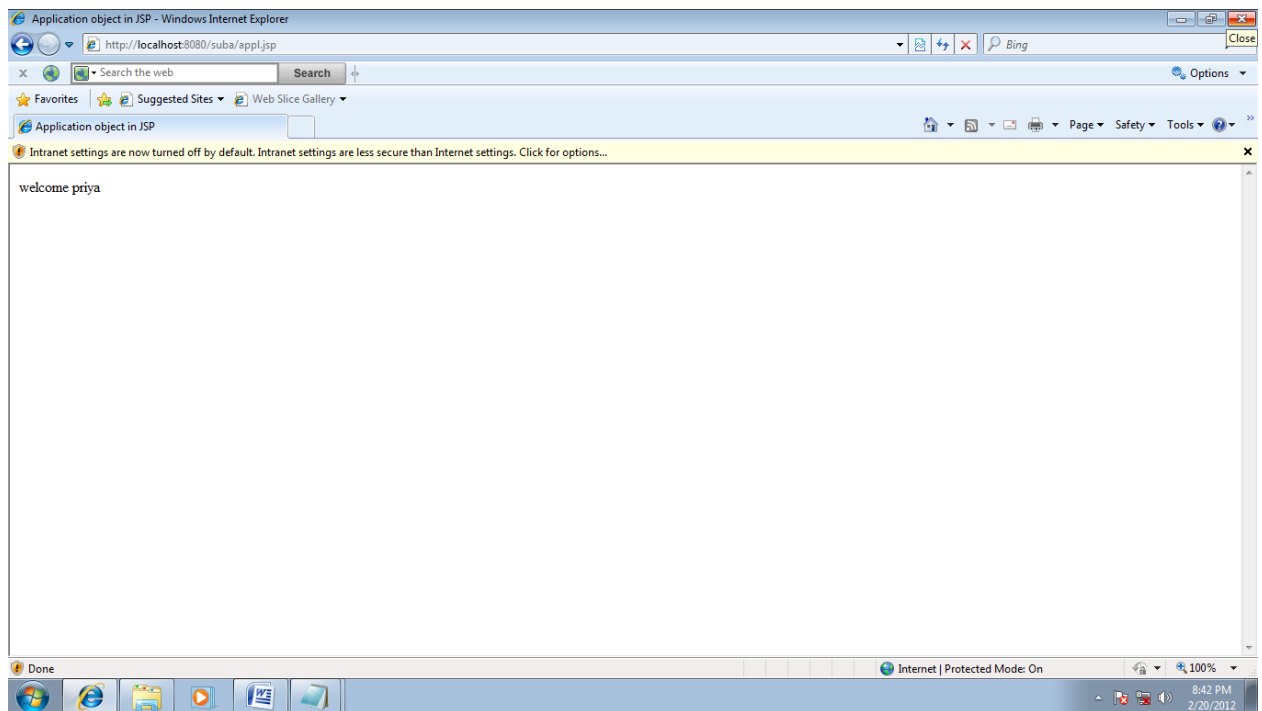

RESULT:

Thus the given program to store and retrieve the value using JSP Application object has been executed and the output is verified successfully.

Aim:

To write a program to transfer contents of one page to another using JSP Session Object.

Algorithm:

1. Install the Apache Tomcat server.
2. Design the required html files and jsp pages required for the application and save them in c:\Program File\Apache Software Foundation\ tomcat 7.0.25\WebApps\Root.
3. Start the default server.
- 4 .Open internet explorer and give <http://localhost:8080> in the address bar to get the home page of the Apache Tomcat server.
5. Design the first html page to get values from the user.
6. In the second page, use request object to get the values and session object to store & display these values.
7. Stop the default server after running the application.

Program:**Session.jsp**


```
<%@ page language="java" import="java.util.*"%>
<html>
<body>
<form name="form" method="get" action="sessionsetretrieve.jsp">
<table width="25%" border="0" cellspacing="10" cellpadding="0">
<tr>
<td>Name:
<td><input type="text" name="name">
</tr>
<tr>
<td>Id:
<td><input type="text" name="id">
</tr>
<tr>
<td>Mark1:
<td><input type="text" name="m1">
</tr>
<tr>
<td>Mark2:
<td><input type="text" name="m2">
</tr>
<tr>
<td>Mark3:
```

```
<td><input type="text" name="m3">
</tr>
<tr><td><input type="submit" name="submit" value="submit">
</tr>
</table>
</form>
</body>
</html>
```

SessionSetRetrieve.jsp

```
<%@ page language="java" import="java.util.*"%>
<%
String sessionSet1=request.getParameter("name");
session.setAttribute("MySession1",sessionSet1);
String sessionSet2=request.getParameter("id");
session.setAttribute("MySession2",sessionSet2);
String sessionSet3=request.getParameter("m1");
session.setAttribute("MySession3",sessionSet3);
String sessionSet4=request.getParameter("m2");
session.setAttribute("MySession4",sessionSet4);
String sessionSet5=request.getParameter("m3");
session.setAttribute("MySession5",sessionSet5);
%>
<html>
<head>
<title>Session Set Retrieve</title>
</head>
<body>
NAME:<%= (String)session.getAttribute("MySession1")%><br>
ID:<%= (String)session.getAttribute("MySession2")%><br>
MARK1:<%= (String)session.getAttribute("MySession3")%><br>
MARK2:<%= (String)session.getAttribute("MySession4")%><br>
MARK3:<%= (String)session.getAttribute("MySession5")%><br>
</body>
</html>
```

OUTPUT:

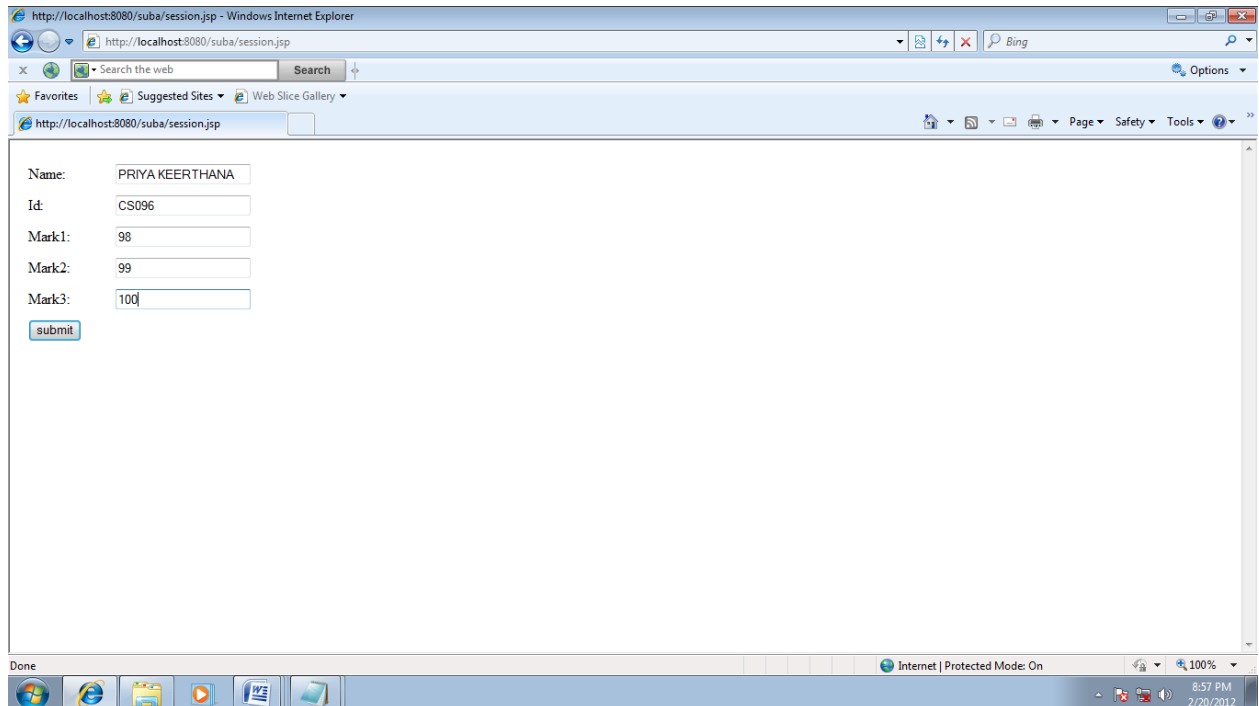

RESULT:

Thus the program to transfer contents of one page to another using JSP Session Object has been executed and the output is verified successfully.

Aim:

To write a program to perform tracking user session using JSP.

Algorithm:

1. Install the Apache Tomcat server.
2. Design the required html files and jsp pages required for the application and save them in c:\Program File\Apache Software Foundation\tomcat 7.0.25\WebApps\Root.
3. Start the default server.
4. Open internet explorer and give <http://localhost:8080> in the address bar to get the home page of the Apache Tomcat server.
5. Get and print the session id of the system using getId() method.
6. Get and print the session creation time using getCreationTime() method.
7. Get and print the last accessed time using getLastAccessedTime() method.
8. Get and print number of times webpage is visited using getAttribute().
9. Stop the default server after running the application.

Program:**trackingusersession.jsp**


```
<%@ page import="java.util.*" %>
<html>
<head>
<title>tracking session</title>
</head>
<body>
<center>
<table style="background color=lightyellow" cellspacing="5" border="1">
<% Integer counter=(Integer)session.getAttribute("counter");
if(counter==null)
{
counter=1;
}
else
{
counter=counter+1;
}
session.setAttribute("counter",counter);
%>
```

```

</tr>
<th>Session Id</th>
<td><%=session.getId()%>
</tr><tr>
<th>Session Creation time</th>
<td><%= new Date(session.getCreationTime())%>
</tr>
<tr>
<th>Last Accessed Time</th>
<td><%=new Date(session.getLastAccessedTime())%>
</tr>
<tr>
<th>Visited</th>
<td><%= (Integer)session.getAttribute("counter")%> times
</tr>
</table>
</center>
</body>
</html>

```

OUTPUT:

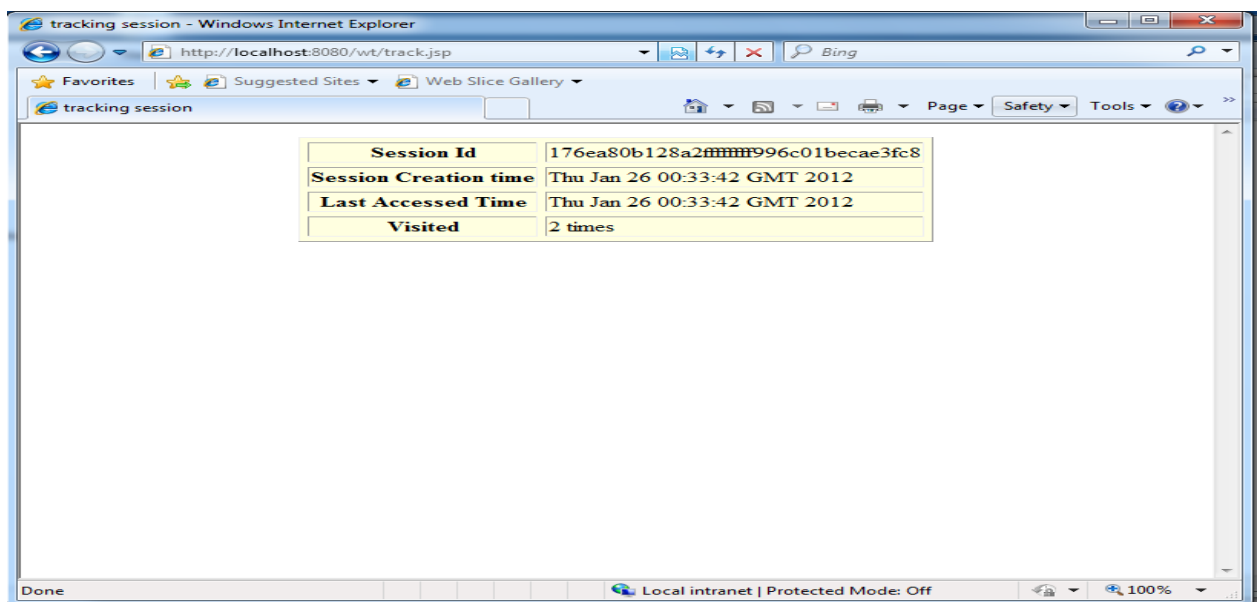

RESULT:

Thus the Tracking User Session program has been executed and the output is verified successfully.

Aim:

To write a program to perform File System Management

Algorithm:

1. Install the Apache Tomcat server.
2. Design the required html files and jsp pages required for the application and save them in c:\Program File\Apache Software Foundation\ tomcat 7.0.25\WebApps\Root.
3. Start the default server.
- 4 .Open internet explorer and give <http://localhost:8080> in the address bar to get the home page of the Apache Tomcat server.
5. Design the first html page to get values from the user.
6. In the second page, the files are browsed and the textbox shows the file name.
7. Stop the default server after running the application.

Singlefile.jsp

```
<%@ page language="java" %>
<HTml>
<HEAD><TITLE>Display file upload form to the user</TITLE></HEAD>
<% // for uploading the file we used Encrypt type of multipart/
form-data and input of file type to browse and submit the file %>
<BODY>
<FORM ENCTYPE="multipart/form-data" ACTION="single_upload_page.jsp"
METHOD=POST>
<br><br><br>
<center>
<table border="2" >
<tr><center><td colspan="2"><p align="center"><B>PROGRAM FOR UPLOADING THE
FILE</B><center></td></tr>
<tr><td><b>Choose the file To Upload:</b>
</td>
<td><INPUT NAME="F1" TYPE="file"></td></tr>
<tr><td colspan="2">
<p align="right"><INPUT TYPE="submit" VALUE="Send File" ></p></td></tr>
<table>
</center>
</FORM>
```


</BODY>

</HTML>

single_upload_page.jsp

```
<%@ page import="java.io.*" %>
```

```
<%
```

```
    String contentType = request.getContentType();
```

```
    if ((contentType != null) && (contentType.indexOf("multipart/form-data") >= 0))
```

```
{
```

```
    DataInputStream in = new DataInputStream(request.getInputStream());
```

```
    int formDataLength = request.getContentLength();
```

```
    byte dataBytes[] = new byte[formDataLength];
```

```
    int byteRead = 0;
```

```
    int totalBytesRead = 0;
```

```
    while (totalBytesRead < formDataLength)
```

```
{
```

```
    byteRead = in.read(dataBytes, totalBytesRead, formDataLength);
```

```
    totalBytesRead += byteRead;
```

```
}
```

```
    String file = new String(dataBytes);
```

```
    String saveFile = file.substring(file.indexOf("filename=\"") + 10);
```

```
    saveFile = saveFile.substring(0, saveFile.indexOf("\n"));
```

```
    saveFile = saveFile.substring(saveFile.lastIndexOf("\"") + 1, saveFile.indexOf("\""));
```

```
    int lastIndex = contentType.lastIndexOf("=");
```

```
    String boundary = contentType.substring(lastIndex + 1, contentType.length());
```

```
    int pos;
```

```
    pos = file.indexOf("filename=\"");
```

```
    pos = file.indexOf("\n", pos) + 1;
```

```
    pos = file.indexOf("\n", pos) + 1;
```

```
    int boundaryLocation = file.indexOf(boundary, pos) - 4;
```

```
    int startPos = ((file.substring(0, pos)).getBytes()).length;
```

```
    int endPos = ((file.substring(0, boundaryLocation)).getBytes()).length;
```


```
    FileOutputStream fileOut = new FileOutputStream(saveFile);
```

```

fileOut.write(dataBytes, startPos, (endPos - startPos));
fileOut.flush();
fileOut.close();
%><Br>
<table border="2"><tr><td><b>You have successfully upload the file by the name of:</b>
<% out.println(saveFile); %></td></tr></table> <%
}
%>

```

OUTPUT

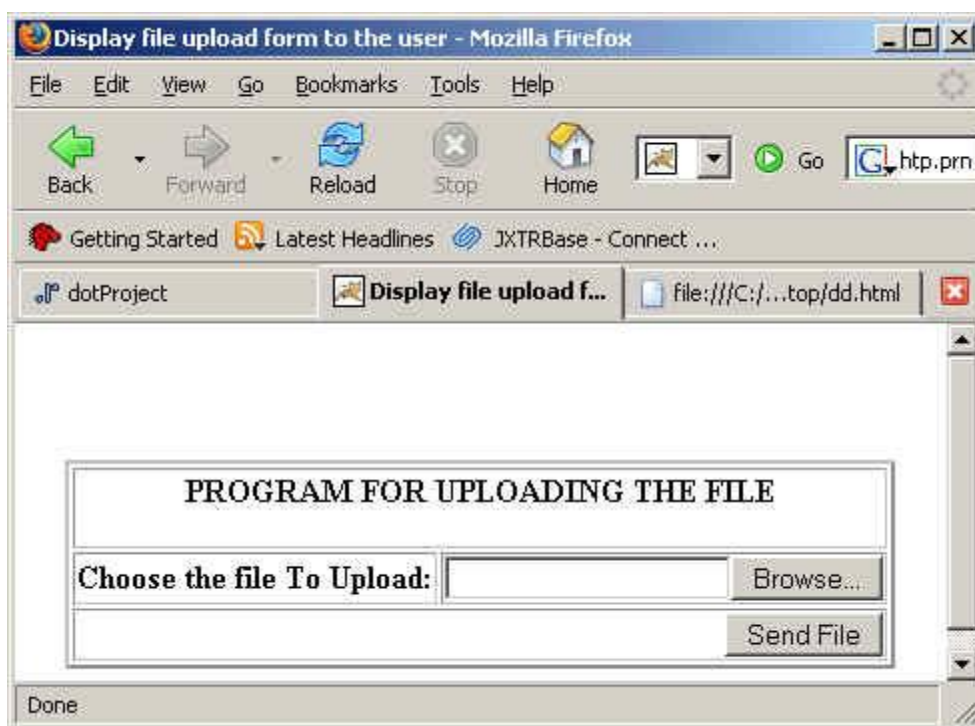

Ex: No: 6.1

GUEST BOOK USING ASP

Aim:

To write a program to transfer contents of the page to another using ASP.

Algorithm:

1. Install the IIS.
2. Design the required html files and ASP pages required for the application and save them in c:\Inetpub\WWWroot\.
3. Start the default server.
- 4 .Open internet explorer and give <http://localhost:guestbook> in the address bar.
5. Design the first html page to get values from the user.
6. Separate the value is stored in access.
7. Stop the default server after running the application.

Guestbook form.html

```
<html>

<head>

<title>Guestbook Form</title>

</head>

<body bgcolor="white" text="black">

<form name="form" method="post" action="add_to_guestbook.asp">

    Name: <input type="text" name="name" maxlength="20">

    <br>

    Comments: <input type="text" name="comments" maxlength="60">

    <input type="submit" name="Submit" value="Submit">

</form>

</body>

</html>
```

to guestbook.asp

```
<%  
  
Dim adoCon  
  
Dim rsAddComments  
  
Dim strSQL  
  
Set adoCon = Server.CreateObject("ADODB.Connection")  
  
  
adoCon.Open "DRIVER={Microsoft Access Driver (*.mdb)}; DBQ=" &  
Server.MapPath("guestbook.mdb")  
  
Set rsAddComments = Server.CreateObject("ADODB.Recordset")  
  
strSQL = "SELECT tblComments.Name, tblComments.Comments FROM tblComments;"  
  
rsAddComments.CursorType = 2  
  
rsAddComments.LockType = 3  
  
rsAddComments.Open strSQL, adoCon  
  
rsAddComments.AddNew  
  
rsAddComments.Fields("Name") = Request.Form("name")  
  
rsAddComments.Fields("Comments") = Request.Form("comments")  
  
rsAddComments.Update  
  
rsAddComments.Close  
  
Set rsAddComments = Nothing  
  
Set adoCon = Nothing  
  
Response.Redirect "guestbook.asp"  
  
%>
```

Guestbook.asp

```
<html>  
  
<head>  
  
<title>Guestbook</title>  
  
</head>
```

```
<body bgcolor="white" text="black">

<%

Dim adoCon

Dim rsGuestbook

Dim strSQL

Set adoCon = Server.CreateObject("ADODB.Connection")

adoCon.Open "DRIVER={Microsoft Access Driver (*.mdb)}; DBQ=" &
Server.MapPath("guestbook.mdb")

Set rsGuestbook = Server.CreateObject("ADODB.Recordset")

strSQL = "SELECT tblComments.Name, tblComments.Comments FROM tblComments;"

rsGuestbook.Open strSQL, adoCon

Do While not rsGuestbook.EOF

    Response.Write ("<br>")

    Response.Write (rsGuestbook("Name"))

    Response.Write ("<br>")

    Response.Write (rsGuestbook("Comments"))

    Response.Write ("<br>")

    rsGuestbook.MoveNext

Loop

rsGuestbook.Close

Set rsGuestbook = Nothing


Set adoCon = Nothing


%>

</body>

</html>
```

OUTPUT

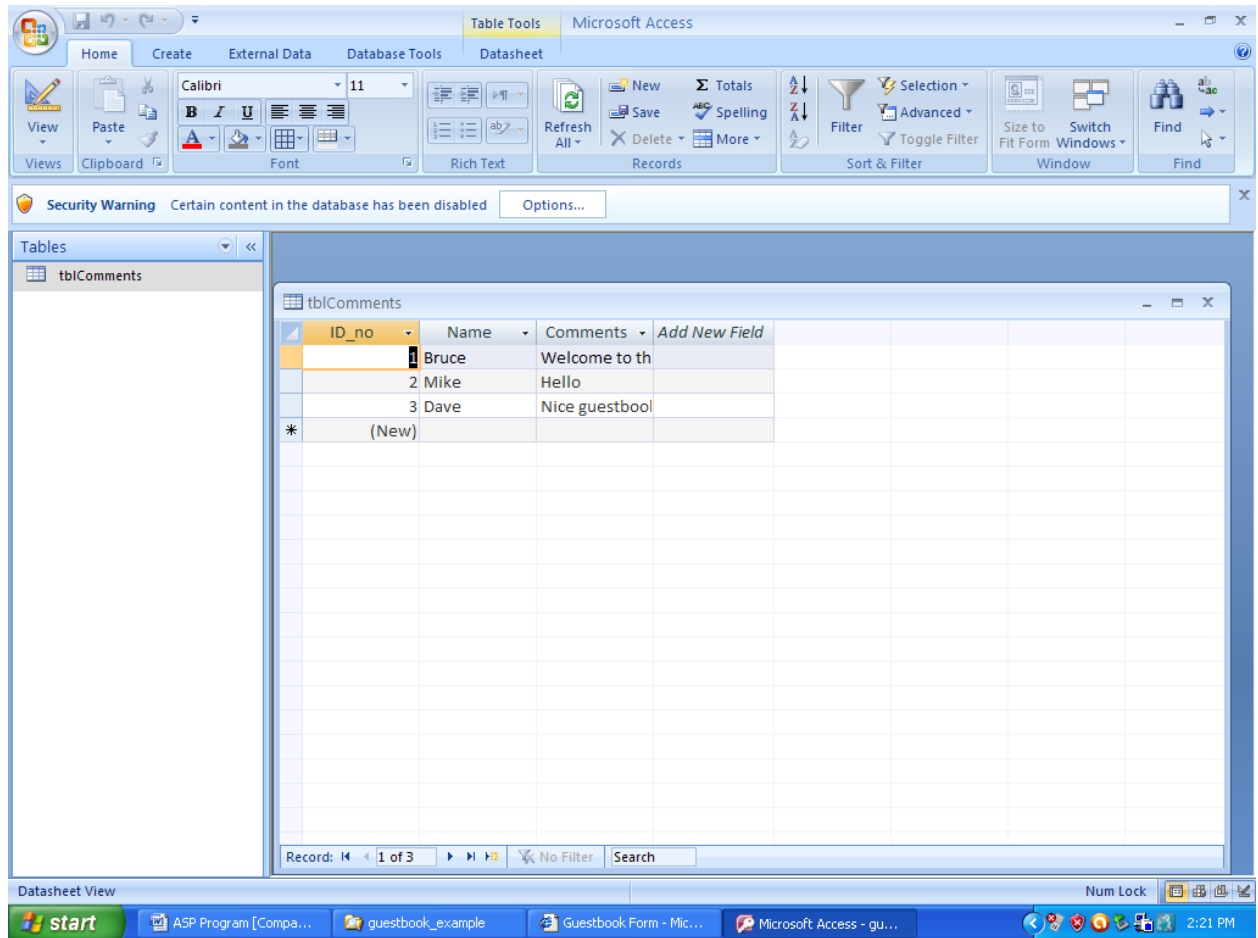

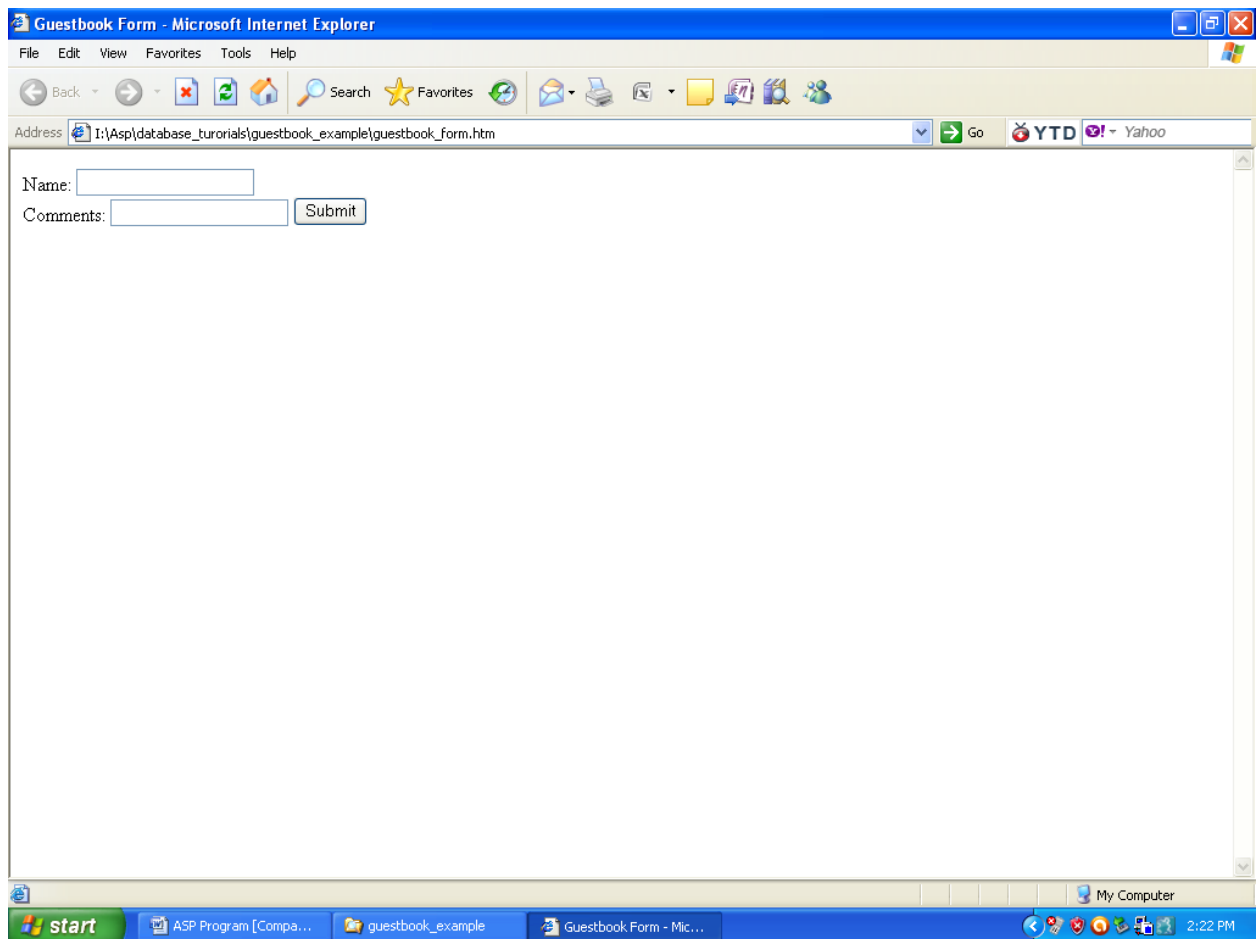

RESULT:

Thus the program has been executed successfully.

Ex: No: 6.2**JAVA SERVLET****Aim:**

To write a program to invoke java servlet from HTML form.

Algorithm:

1. Install the net bean.
2. Create a new web project.
3. Create java application logic that represents the java servlet.
4. Create the web page for the web application.
5. Package the web application.
6. Display the package to the J2EE application server.
7. Test the web application.

NewServlet.java

```
import java.io.*;
import java.net.*;
import javax.servlet.*;
import javax.servlet.http.*;

public class NewServlet extends HttpServlet {

    public void init(ServletConfig config) throws ServletException {
        super.init(config);
    }

    public void destroy() {
    }

    public String display(int mark)
    {
        if(mark>90 && mark<=100)
        {
            return "S";
        }
        else if(mark>80 && mark<=90)
        {
            return("A");
        }
    }
}
```

```

else if(mark>70 && mark<=80)
{
return("B");
}
else if(mark>60 && mark<=70)
{
return("C");
}
else if(mark>55 && mark<=60)
{
return("D");
}
else if(mark>=50 && mark<55)
{
return("E");
}
else
{
return("Re Appear");
}
}

protected void processRequest(HttpServletRequest request, HttpServletResponse response)
throws ServletException, IOException {
response.setContentType("text/html");
PrintWriter out = response.getWriter();
try {
String name, reg;
int mark,s1,s2,s3,s4,s5,s6;
name = request.getParameter("name");
reg = request.getParameter("reg");
s1 = Integer.parseInt(request.getParameter("sub1"));
s2 = Integer.parseInt(request.getParameter("sub2"));
s3 = Integer.parseInt(request.getParameter("sub3"));
s4 = Integer.parseInt(request.getParameter("sub4"));
s5 = Integer.parseInt(request.getParameter("sub5"));
s6 = Integer.parseInt(request.getParameter("sub6"));

```

```

response.setContentType("text/html");
out.println("<html>");
out.println("<head>");
out.println("<title>Mark Report Servlet<title>");
out.println("</head>");
out.println("<body>");
out.println("<center><p><h2><b>Name : " + name + "</p>");
out.println("<p><b>Reg No : " + reg + "</p>");
out.println("<p><b>Your Mark Details</p><br><br></center>");
out.println("<center><table border=2 cellpadding=5 cellspacing=5>");
out.println("<tr><th>Subjects</th><th>Mark</th><th>Grade</th></tr>");
out.println("<tr><th>Sub1</th><td>" + s1 + "</td><td>" + display(s1) + "</td></tr>");
out.println("<tr><th>Sub2</th><td>" + s2 + "</td><td>" + display(s2) + "</td></tr>");
out.println("<tr><th>Sub3</th><td>" + s3 + "</td><td>" + display(s3) + "</td></tr>");
out.println("<tr><th>Sub4</th><td>" + s4 + "</td><td>" + display(s4) + "</td></tr>");
out.println("<tr><th>Sub5</th><td>" + s5 + "</td><td>" + display(s5) + "</td></tr>");
out.println("<tr><th>Sub6</th><td>" + s6 + "</td><td>" + display(s6) + "</td></tr></table>");
out.println("</body>");
out.println("</html>");
    } finally {
        out.close();
    }
}

protected void doGet(HttpServletRequest request, HttpServletResponse response)
throws ServletException, IOException {
    processRequest(request, response);
}

protected void doPost(HttpServletRequest request, HttpServletResponse response)
throws ServletException, IOException {
    processRequest(request, response);
}

public String getServletInfo() {
    return "Short description";
}
}


```


Index.html

```
<html>
<head><title>HTML Forms and Servlet</title></head>
<body>
  <h1>Enter your Details</h1>
  <form action = "http://localhost:8084/WebApplication4/NewServlet">
    <table>
      <tr>
        <td>Name
        <td><input type="text" name="name"><br><br>
      </tr>
      <tr>
        <td>Reg No
        <td><input type="text" name="reg"><br><br>
      </tr>
      <tr>
        <td>Sub1 Mark
        <td><input type="text" name="sub1"><br><br>
      </tr>
      <tr>
        <td>Sub2 Mark
        <td><input type="text" name="sub2"><br><br>
      </tr>
      <tr>
        <td>Sub3 Mark
        <td><input type="text" name="sub3"><br><br>
      </tr>
      <tr>
        <td>Sub4 Mark
        <td><input type="text" name="sub4"><br><br>
      </tr>
      <tr>
        <td>Sub5 Mark
        <td><input type="text" name="sub5"><br><br>
      </tr>
```

```
<tr>
<td>Sub6 Mark
<td><input type="text" name="sub6"><br><br>
</tr>
</table>
<input type="submit">
</form>
</body>
</html>
```

OUTPUT

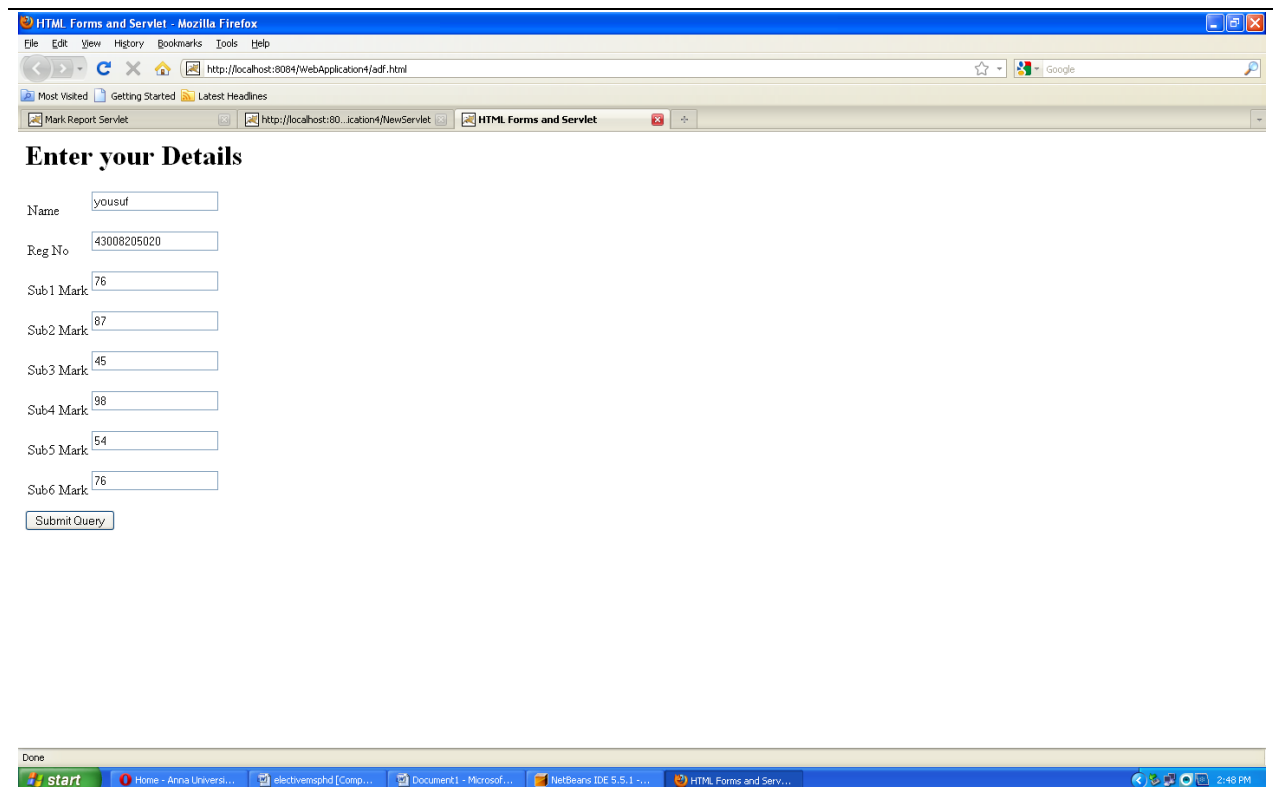

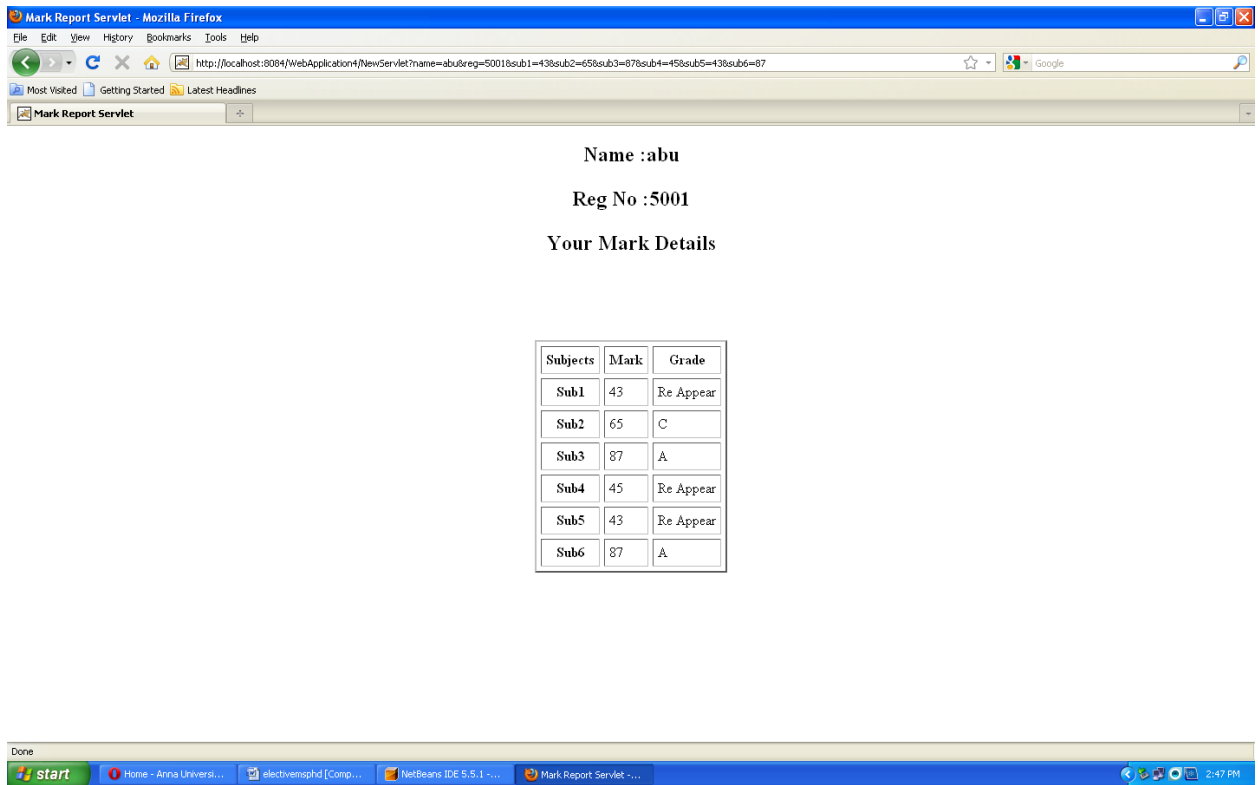

RESULT

Thus the java servlet program from HTML form has been executed and the output is verified.

Aim:

To write a program to transfer contents of one page to another using PHP.
Object.

Algorithm:

1. Install the Xampp server.
2. Design the required html files and save them in c:\sample\htdocs\xampp
3. Start the default server.
4. Open internet explorer and give http://localhost:9999/xampp in the address bar.
5. Enter the values in the column and the data's are displayed.
6. Stop the default server after running the application

Form.html

```
<html>
<head>
<title>Program</title>
</head>
<body>
<FORM ACTION="Form.php" METHOD="POST">
Name: <INPUT TYPE="text" NAME="name" > <BR>
Address 1:<INPUT TYPE="text" NAME="add1" ><BR>
Address 2:<INPUT TYPE="text" NAME="add2" ><BR>
E-mail:<INPUT TYPE="text" NAME="email" ><BR>
<INPUT TYPE=Submit Query>
</FORM>
</body>
</html>
```

Form.php

```
<html>
<body>
<?php
$self = $_SERVER['PHP_SELF'];
$dbh = mysql_connect("localhost","root","") or die(mysql_error());
mysql_select_db("sug") or die(mysql_error());
```

```

if(isset($_POST['name']))
{
$name = $_POST['name'];
$ad1 = $_POST['add1'];
$ad2 = $_POST['add2'];
$eml = $_POST['email'];
if($name != '' && $ad1 != '')
{
$query = "INSERT INTO contact VALUES('$name', '$ad1', '$ad2', '$eml')";
$result = mysql_query($query) or die(mysql_error());
}
Else
echo "one of the field is empty";
}
mysql_close($dbh);
?>
<FORM ACTION="php=$_self?" METHOD="POST">
<P>
Name: <INPUT TYPE="text" NAME="name" value=""> <BR>
Address 1:<INPUT TYPE="text" NAME="add1" value=""><BR>
Address 2:<INPUT TYPE="text" NAME="add2" value=""><BR>
email:<INPUT TYPE="text" NAME="email" value=""><BR>
<INPUT TYPE="submit">
</FORM>
</body>
</html>

```

Display.html

```

<html>
<head>
<title>Display</title>
</head>
<body>
<form action="Display.php" method="post">Enter Name of the person <input type="text" name="name">
<input type="submit">

```


</form>

</body>

</html>

Display.php

<head>

<title>Search Result </title>

</head>

<body>

<h3>Search Result</h3>

<hr>

<?php

\$link=mysql_connect("localhost","root","");

mysql_select_db("sug");

\$n=\$_POST["name"];

print "Entered Name is \$n \n";

\$var=mysql_query("SELECT * FROM contact WHERE name like '%\$n%'");

echo"<table border size=1>";

echo"<tr><th>Name</th>

<th>Address 1</th>

<th>Address 2</th>

<th>E-mail</th></tr>";

while (\$arr=mysql_fetch_row(\$var))

{

echo "<tr><td>\$arr[0]</td>

<td>\$arr[1]</td>

<td>\$arr[2]</td>

<td>\$arr[3]</td> </tr>";

}

echo"</table>";

mysql_free_result(\$var);

mysql_close(\$link);

?>

<hr>

<form action="Display.html">

<input type="submit" value="Back">

</form>


</body>

</html>

OUTPUT





A screenshot of a web browser window displaying a form at the URL `http://localhost/xampp/Form.html`. The form contains four input fields labeled "Name:", "Address 1:", "Address 2:", and "E-mail:", followed by a "Submit Query" button. The fields are currently empty.

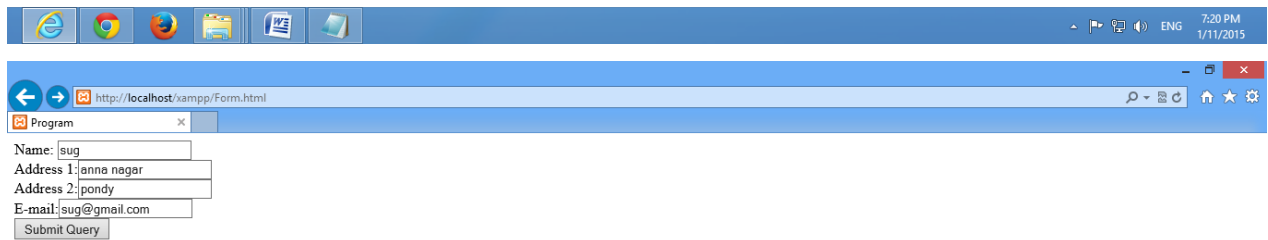

A screenshot of a web browser window displaying the same form at the URL `http://localhost/xampp/Form.html`. The form is now filled with the following data: "Name: sug", "Address 1: anna nagar", "Address 2: pondy", and "E-mail: sug@gmail.com". The "Submit Query" button is still present at the bottom.



A screenshot of a web browser window displaying the same form at the URL `http://localhost/xampp/Form.html`. The form is filled with the same data as the previous screenshot: "Name: sug", "Address 1: anna nagar", "Address 2: pondy", and "E-mail: sug@gmail.com". The "Submit Query" button is still present at the bottom.

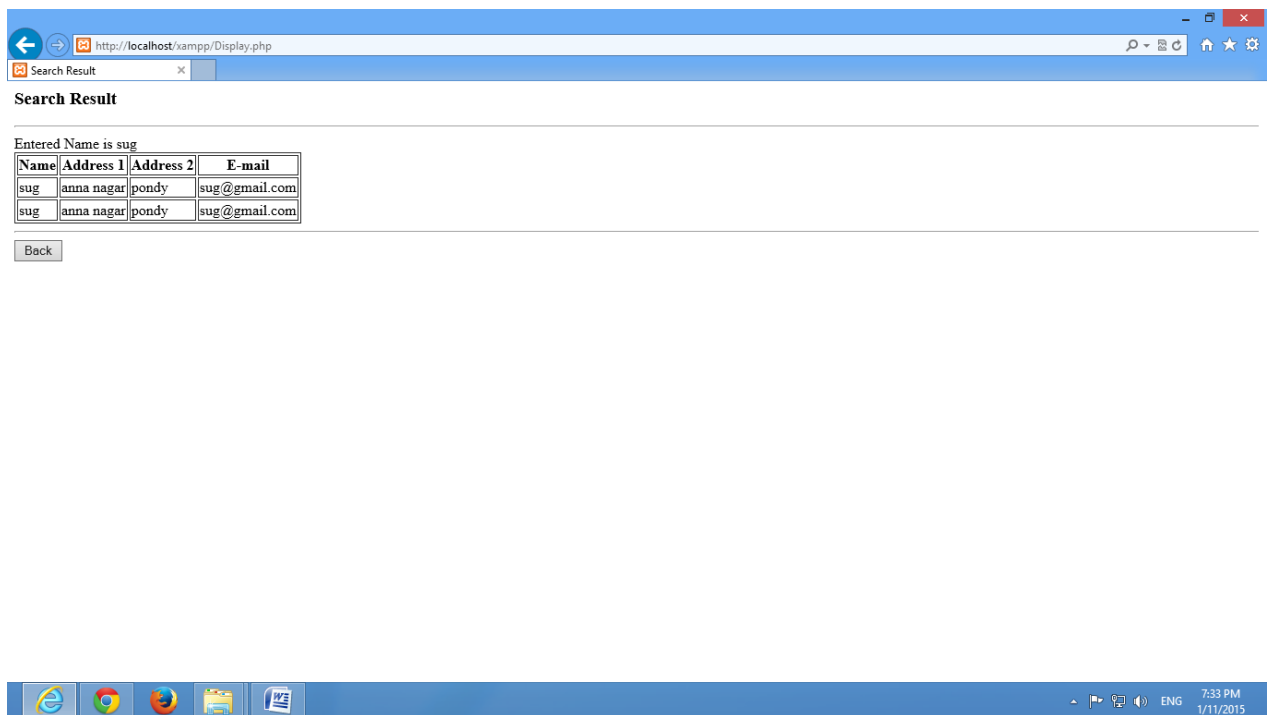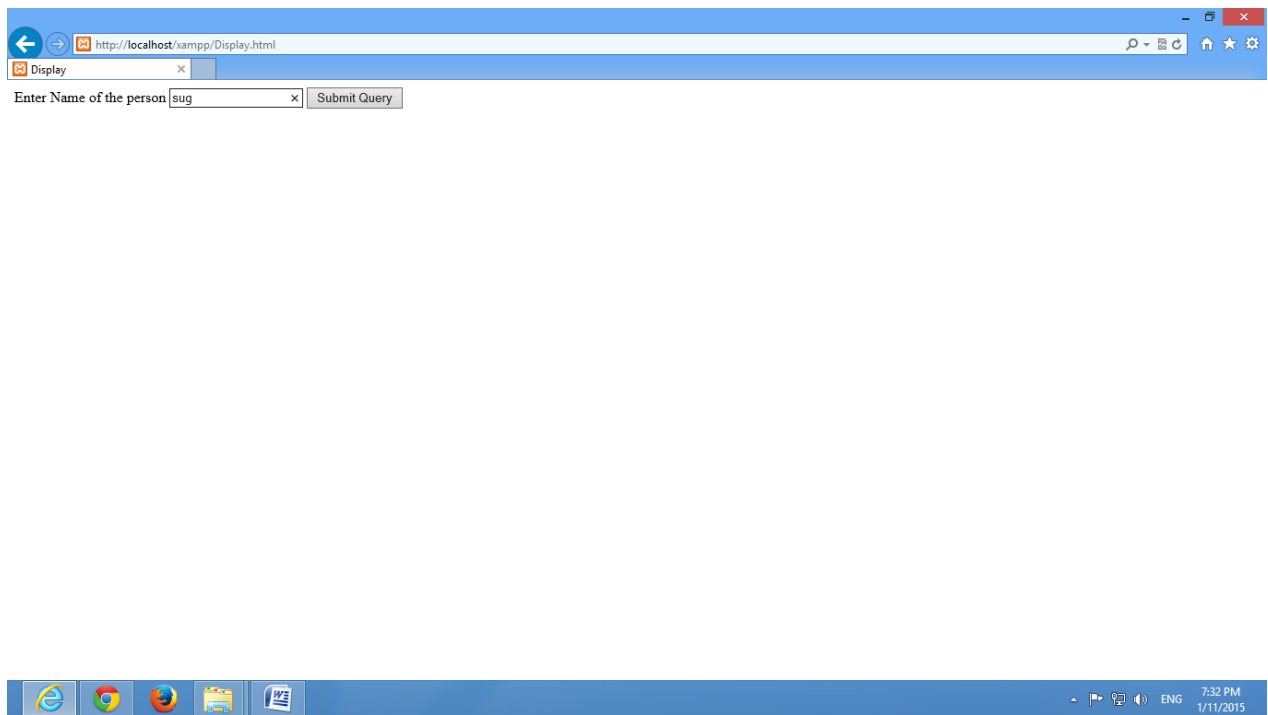

RESULT

Thus the program to transfer the content from one page to another using PHP has been executed successfully.

Ex.No: 6.3(b)**SESSION USING PHP****Aim:**

To write a program to perform session operation using PHP.
Object.

Algorithm:

1. Install the Xampp server.
2. Design the required html files and save them in c:\sample\htdocs\xampp
3. Start the default server.
4. Open internet explorer and give http://localhost:9999/xampp in the address bar.
5. Enter the values in the column and the data's are displayed.
6. Stop the default server after running the application.

Session.php

```
<?php
session_start();session_register("count");
if (!isset($_SESSION))
{
$_SESSION["count"]=0;
echo "<p>Counter initialized</p>\n";
}
else
{
$_SESSION["count"]++;
}echo "<p>The counter is now <b>$_SESSION[count]</b></p>".
<p>reload this page to increment</p>";
?>
```

OUTPUT



RESULT

Thus the session program has been executed successfully.

Ex.No:7

AJAX

AIM

Develop a enterprise program using AJAX.

ALGORITHM

- Use Javascript to initialize the XML HTML request object.
- Use PHP to create areas for user input and output.
- Use Javascript to send the user inputs to a server.
- Process the data on a server.
- Use Javascript to process any response from the server and display the result.

Register.html

```
<html>
<head>
<title>Ajax Registration Program</title>
<script language="javascript">
function postRequest(strURL)
{
var xmlhttp;
if(window.XMLHttpRequest)
{
var xmlhttp=new XMLHttpRequest();
}
else if(window.ActiveXObject)
{
var xmlhttp=new ActiveXObject("Microsof.XMLHTTP");
}
xmlhttp.open('POST', strURL, true);
```

```
xmlHttp.setRequestHeader('Content-Type', 'application/x-www-form-urlencoded');
xmlHttp.onreadystatechange=function()
{
if(xmlHttp.readyState==4)
{
updatepage(xmlHttp.responseText);
}
}
xmlHttp.send(strURL);
}
function updatepage(str)
{
if(str=="no")
{
alert("Invalid Id/Password! Please fill Current Id/Password");
}
else
{
alert("Welcome for Register!");
}
}
function call_register()
{
var login_id=document.reg.uid.value;
var password=document.reg.passwd.value;
var url="Register.php?loginid="+login_id+"&password="+password+"";
postRequest(url);
}
</script>
</head>
<body>
```

```

<center>

<form name="reg">

<table border="1" width="30%">

<tr>

<td align="center" colspan="2"><font face="Monotype" size="5">Registration</font></td>

</tr>

<tr>

<td>Login Id:</td><td><input type="text" name="uid" size="20"></td>

</tr>

<tr>

<td>Password:</td><td><input type="password" name="passwd" size="20"></td>

</tr>

<tr>

<td align="center" colspan="2"><input type="submit" value="Register" OnClick="return
call_register()"

style="background-color:#FFE9D2; color:#0000FF; border-color:#99CC33"></td>

</tr>

</table>

</form>

</body>

</html>

```

Register.php

```

<?
$loginid=$_GET["loginid"];
$password=$_GET["password"];
if($password=="m"||$loginid=="m"||($loginid=="m"&&$password=="m")){
echo "no";
}
else{
echo "yes";
}


```



```
}
```

```
?>
```

OUTPUT

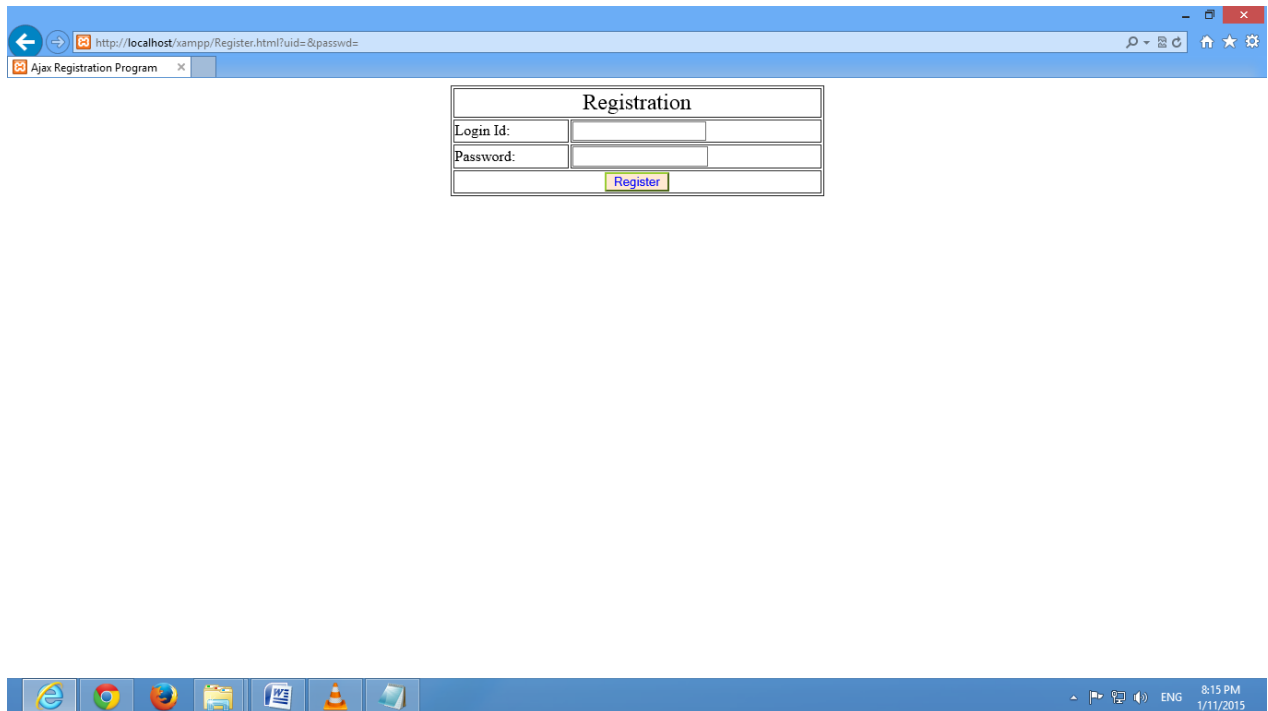

RESULT

Thus the ajax program is executed successfully.

Ex.No:8

XML

AIM

Programs using XML – Schema – XSLT/XSL

ALGORITHM

- The xsl:output element specifies how to display the result tree.
- The XSL processor produces the output result tree.
- It should be specifies by xsl:output element.
- The method attributes of xsl:output specifies the overall process to produce the result tree.
- The HTML output method results the tree as HTML document.

Simplexml.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-stylesheet type="text/xsl" href="student.xsl"?>
<student>
  <Person_Info>
    <Name>Barath</Name>
    <Address>Chennai</Address>
    <class>Second</class>
    <Subject>Mathematics</Subject>
    <Marks>100</Marks>
  </Person_Info>
  <Person_Info>
    <Name>Ananth</Name>
    <Address>Pune</Address>
    <class>Fifth</class>
    <Subject>English</Subject>
```

```

<Marks>80</Marks>

</Person_Info>

<Person_Info>

<Name>Babu</Name>

<Address>Dhaka</Address>

<class>Tenth</class>

<Subject>English</Subject>

<Marks>90</Marks>

</Person_Info>

</student>

```

Student.xsl

```

<?xml version="1.0" encoding="ISO-8859-1"?>
<xsl:stylesheet version="1.0" xmlns:xsl="http://www.w3.org/1999/XSL/Transform">
<xsl:template match="/">
<html>
<body>
<h2>Student Database</h2>
<table border="5" cellspacing="10" cellpadding="10">
<tr bgcolor="gray">
<th>Name</th>
<th>Address</th>
<th>class</th>
<th>Subject</th>
<th>Marks</th>
</tr>
<xsl:for-each select="student/Person_Info">
<tr bgcolor="pink">
<td><xsl:value-of select="Name"/></td>
<td><xsl:value-of select="Address"/></td>
<td><xsl:value-of select="class"/></td>
<td><xsl:value-of select="Subject"/></td>


```

```

<td><xsl:value-of select="Marks"/></td>
</tr>
</xsl:for-each>
</table>
</body>
</html>
</xsl:template>
</xsl:stylesheet>

```

OUTPUT

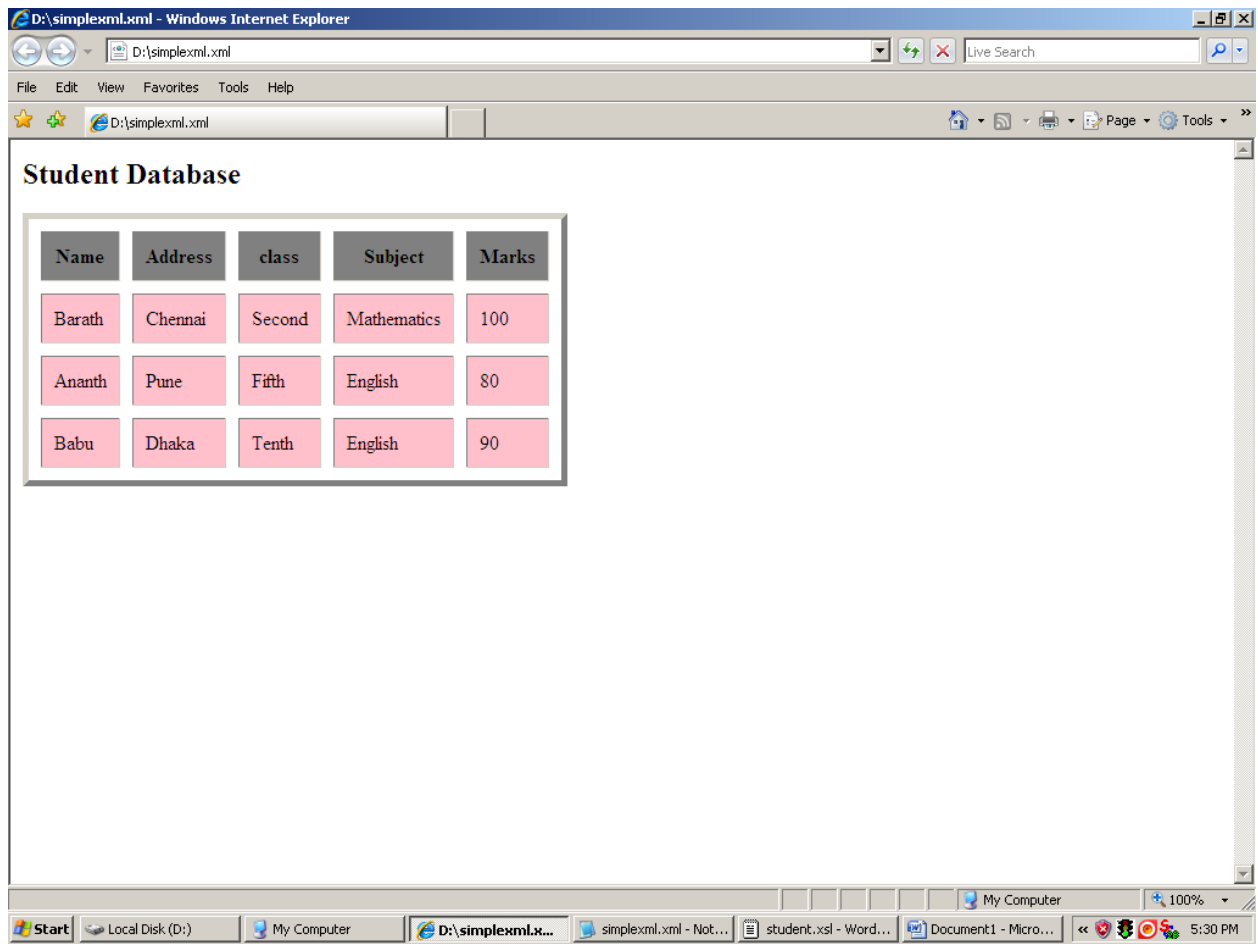

RESULT:

Thus the XML program was executed successfully.